

modernruler Package Documentation

Kosei Kawaguchi a.k.a. KKT_εX

Version 2.0.0 (2026/02/06)

目次

1 Outline 3

2 Acknowledgements / Credits 3

3 Note 4

4 Installation 4

5 Commands 4

 5.1 \mruleth, \mruletv 4

 5.1.1 Basic Usage 4

 5.1.2 Advanced usage: Use Like Phantom 6

 5.2 \undernote 7

 5.2.1 Basic Usage 7

 5.2.2 Additional Description 10

6 License 11

7 Version History 11

1 Outline

This package provides modern hrule (`\mruleh`), vrule (`\mruletv`), and `\undernote` internally


Used like this!
It is the main function
provided by this pack-
age.


uses the two commands.

Input


```
1 % normal rule
2 \mruleh[height=1pt, width=5cm, color=blue]
3
4 % dashed rule
5 \mruleh[height=2pt, width=8cm, color=red, dash=true, dash-len=5pt, gap-len=3
  pt]
6
7 % inline rule
8 This is \mruletv[height=\zw, depth=1.5\zw, width=1pt, color=green] a modern
  vrule.
9
10 % inline dashed rule
11 This is \mruletv[height=2\zw, width=1.5pt, color=orange, dash=true, dash-len
   =2pt, gap-len=1pt] a dashed modern vrule.
12
13 % undernote
14 This is under note. This uses \undernote{these commands}{\texttt{\textbackslash
   \mruleh} and \texttt{\textbackslash \mrulev}} internally and
   enables make flexible outputs.
```

Output

This is  a modern vrule.

This is  a dashed modern vrule.

This is under note. This uses these commands internally and enables make flexible out-puts.



2 Acknowledgements / Credits

This package was inspired by discussions on TeX Forum concerning undernote-like constructions using rules.

An improved approach was later presented by Mr. Yusuke Terada, which clarified several implementation details.

The present package is a complete reimplement and extension, introducing a generalized rule-based engine, redesigned control flow, and additional features such as modern ruler integration and `tcolorbox`-based abstractions.

Any remaining errors or design decisions are entirely the responsibility of the author.

3 Note

This package only supports LuaLaTeX.

In this package, a unit `\zw` is used in many parts. It is Japanese standard unit, but it's not normal outside of Japan. When you encounter `\zw` in documentations, please understand it as `1em`. In detail, `\zw` and `1em` is different when you use Japanese characters. But only when you use alphabetic characters and numbers, the difference doesn't matter.

4 Installation

Input

```
\usepackage[<options>]{modernruler}
```

Detailed information regarding the options will be provided in a later section, specifically during the explanation of the `\undernote` command.

5 Commands

5.1 `\mruleth`, `\mruletv`

5.1.1 Basic Usage

In the first place, `\mruleth` and `\mruletv` are extended `\hrule` and `\vrule`. You can use them like this:

Input

```
1 \mruleth[<keyvaloptions>]
2 \mruletv[<keyvaloptions>]
```

These commands share the same keys.

| Key | Type | Default | Description |
|-----------|------|---------|----------------------------------|
| width | dim | 0pt | Width of the rule |
| height | dim | 0pt | Height above the baseline |
| depth | dim | 0pt | Depth below the baseline |
| color | tl | black | Color of the rule |
| gap-color | tl | white | Color of the gap segments |
| dash | bool | false | Enables dashed line if true |
| dash-len | dim | 3pt | Length of the dash segment |
| gap-len | dim | 2.5pt | Length of the gap between dashes |


The outputs are as follows:

Input

```
1 \fboxsep=0pt\fboxrule=.1pt%
2
3 % horizontal rule
4 \fbox{\mruleth[height=1pt, width=55pt, color=blue]}
5 \fbox{\mruleth[height=1pt, width=55pt, color=blue, dash=true]}
6 \fbox{\mruleth[height=1pt, width=57pt, color=blue, dash=true]}
7 \fbox{\mruleth[height=1pt, width=59pt, color=blue, dash=true]}
8
9 % vertical rule
10 \fbox{\mruletv[width=1pt, height=55pt, color=blue]}
11 \fbox{\mruletv[width=1pt, height=55pt, color=blue, dash=true]}
12 \fbox{\mruletv[width=1pt, height=57pt, color=blue, dash=true]}
13 \fbox{\mruletv[width=1pt, height=59pt, color=blue, dash=true]}\bigskip
14
15 % Horizontal: Alternating Black and Cyan segments
16 \mruleth[width=120pt, height=2pt, dash=true, dash-len=6pt, gap-len=6pt, color
  =black, gap-color=cyan]\bigskip
17
18 % Vertical: Warning Pattern (Yellow and Black)
```

```
19 \mruletv[width=3pt, height=50pt, dash=true, dash-len=8pt, gap-len=4pt, color=
    yellow, gap-color=black]
```

Output

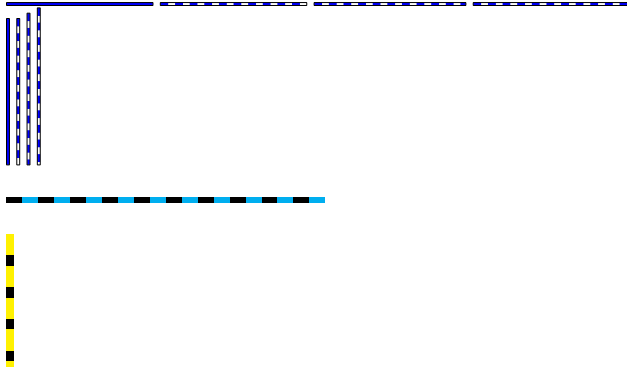

5.1.2 Advanced usage: Use Like Phantom

By setting the width to zero, these commands can be used as “phantoms” that provide arbitrary height and depth. In a traditional way to set a phantom, you use `\vphantom` or `\hphantom`. However, the total-height or width depends on the argument. So, I recommend you to use the modern-rulers as a flexible phantom.

Input

```
1 % To visualize
2 \fboxrule=.1pt\fboxsep=0pt
3
4 % modern-vphantom
5 abc\fbox{\mruleth[height=2em, depth=.5em, width=0pt]def}ghi
6
7 % modern-hphantom
8 jkl\fbox{\mruletv[height=0pt, width=2em]mno\mruletv[height=0pt, width=1em]}
   pqr
```

Output



The diagram illustrates the horizontal overlap detection mechanism for undernotes. It shows two lines of text: "abcdefghi" on the first line and "jklmno pqr" on the second line. A vertical line is drawn under the 'd' in "abcdefghi". A horizontal line is drawn under the 'm' in "jklmno pqr". The intersection of these two lines is highlighted with a small square, indicating the point of overlap.

5.2 \undernote

5.2.1 Basic Usage

This command provides underlined annotation. There are some optional parameters which adjust the position of the annotation text.

Like this.

Input

```
1 % grammar
2 \undernote<star option>[<number of lines to shift the note downward>]{<the
   target phrase>}{<annotation>}
3
4 % example
5 In this single paragraph, we deliberately place many annotated terms to
6 stress-test the undernote mechanism, starting with a
7 \undernote{concept}{A brief explanation of the main concept}
8 that appears early in the line, followed closely by another\
9 \undernote{idea}{A slightly longer explanatory note that is expected to
10 interact with nearby notes} to encourage horizontal overlap detection.
11 As the sentence continues, we insert a fixed-level annotation such as
12 \undernote[2]{method}{This note is forced onto the second vertical level}
13 to verify that manual level assignment overrides automatic stacking,
14 and later a short
15 \undernote{term}{Short note}
16 next to a much longer
17 \undernote*(expression){This is a considerably longer explanatory note
18 designed to increase the occupied width and push subsequent notes
19 downward in the vertical stacking algorithm}.
20 Near the end of the paragraph, we add one more fixed example,
21 \undernote[3]{result}{A third-level note used to confirm deep stacking},
22 followed immediately by an automatic one,
23 \undernote*(observation){This final note should be placed at a safe
```

```

24 vertical distance determined by the collision analysis performed
25 during the previous compilation run}.

```

Output

In this single paragraph, we deliberately place many annotated terms to stress-test the undernote mechanism, starting with a concept that appears early in the line, followed

└ A brief explanation of the main concept

closely by another

idea to encourage horizontal overlap detection. As the sentence continues, we insert a

└ A slightly longer explanatory note that is expected to interact with nearby notes

fixed-level annotation such as method to verify that manual level assignment overrides

└ This note is forced onto the second vertical level

automatic stacking, and later a short term next to a much longer expression. Near the

└ Short note

└ This is a considerably longer explanatory note designed to increase the occupied width and push subsequent notes downward in the vertical stacking algorithm

end of the paragraph, we add one more fixed example, result, followed immediately by an

└ A third-level note used to confirm deep stacking

automatic one, observation.

└ This final note should be placed at a safe vertical distance determined by the collision analysis performed during the previous compilation run

As the example above shows, the star option puts the annotation text in a parabox. So when you include a long description in the fourth argument of the `\undernote`, the option is the best way to avoid overflow.

Regarding the second argument, “number of lines to shift the note downward” is always determined automatically if you don’t specify it. I recommend using this option only when annotations are too close to each other.

Of course, this package provides some package options for adjustments.

| Key | Type | Default | Description |
|-------------------|-------|----------------------------|---|
| notesize | tl | <code>\footnotesize</code> | Font size of the note text |
| notepos | dim | 3mm | Minimum vertical length of the line to the note |
| noteshift | dim | 4mm | Vertical shift amount per level for overlapping notes |
| noterulethickness | dim | .4pt | Thickness of the rule used in the note |
| noterulehshift | dim | 1.5mm | Horizontal offset of the vertical line from the underline start |
| noterulehsize | dim | 1.5mm | Length of the horizontal line extending to the note |
| notesep | dim | 0em | Minimum horizontal distance to prevent note overlap |
| noteoverhang | dim | 5em | Extension length of the note parbox (starred version) |
| noteparstyle | int | 0 | Border style (0: none, 1: solid, 2: dashed) |
| notelinecolor | color | black | Color of the the underline and the vertical line |

When you want to change some settings in the middle of the document, you can use `\SetUNote`. It takes a keyvalue-style options like this:

Input

```

1 \SetUNote[noteparstyle=1, notelinecolor=blue]
2
3 LaTeX is a \undernote{versatile}{Abundant package that can be used for free.}
  typesetting system \undernote*{that excels at producing high-quality
  documents}{I think LaTeX is the most flexibly customizable typesetting
  software.}, especially those containing complex mathematical formulas or
  technical structures.
```

Output

LaTeX is a versatile typesetting system that excels at producing high-quality documents,

I think LaTeX is the most flexibly customizable typesetting software.

Abundant package that can be used for free.

especially those containing complex mathematical formulas or technical structures.

These are all the keys provided for it.

| Key | Type | Default | Description |
|--------------------------------|-------|----------------------------|---|
| <code>notesize</code> | tl | <code>\footnotesize</code> | Font size of the note text. |
| <code>notepos</code> | dim | — | Minimum vertical length of the line connecting to the note. |
| <code>noteshift</code> | dim | — | Vertical shift amount per level for overlapping notes. |
| <code>noterulethickness</code> | dim | — | Thickness of the rules used in the note structure. |
| <code>noterulehshift</code> | dim | — | Horizontal offset of the vertical line from the start of the underline. |
| <code>noterulehsize</code> | dim | — | Length of the horizontal line extending towards the note. |
| <code>notesep</code> | dim | — | Minimum horizontal distance to prevent overlap between notes. |
| <code>noteoverhang</code> | dim | — | Extra horizontal extension for the note's parbox (used in starred version). |
| <code>noteparstyle</code> | int | 0 | Border style for the note (0: none, 1: solid, 2: dashed). |
| <code>notelinecolor</code> | color | black | Color of the underline and the connected vertical lines. |

5.2.2 Additional Description

You can use the command in mathmode.

Input

```

1 \[
2 \undernote {%
3   a + b
4 }{In the equation envriomnemt.}
5 -
6 \undernote*{%
7   x^5 + 4x^3 + \int_{c}^{\frac{d}{e}}\sum_{k=1}^n {}_n\mathrm{C}_k x^k +
8   12

```

```

8   }{Even the argument includes an expression with large depth, they doesn't
    overlap the other texts.}
9   = \undernote{\frac{a}{b+\frac{x}{6}}}{No problem.}
10  \]

```

Output

$$\frac{a+b}{x^5+4x^3+\int_c^{\frac{d}{e}}\sum_{k=1}^nC_kx^k+12}=\frac{a}{b+\frac{x}{6}}$$

└ No problem.

└ Even the argument includes an expression with large depth, they doesn't overlap the other texts.

└ In the equation envriomnemnt.

6 License

Released under the MIT License.

7 Version History

- **v1.0.0–1.1.0** — Initial public release, and add a fallback for `\zw` and `\tjgetparameter`.
- **v1.3.1 (2026/01/26)** — Fixed a bug which occurs when `\undernote` command is used in mathmode. The bug was caused my misreplacement of `\@elt`.
- **v2.0.0 (2026/02/06)** — In this update, I made changes in the following two points:
 - Fixed a bug where the arguments of the `\undernote` with large depth caused text overlap.
 - Modernized the internal implementation by migrating from TeX primitives to the expl3 framework.