


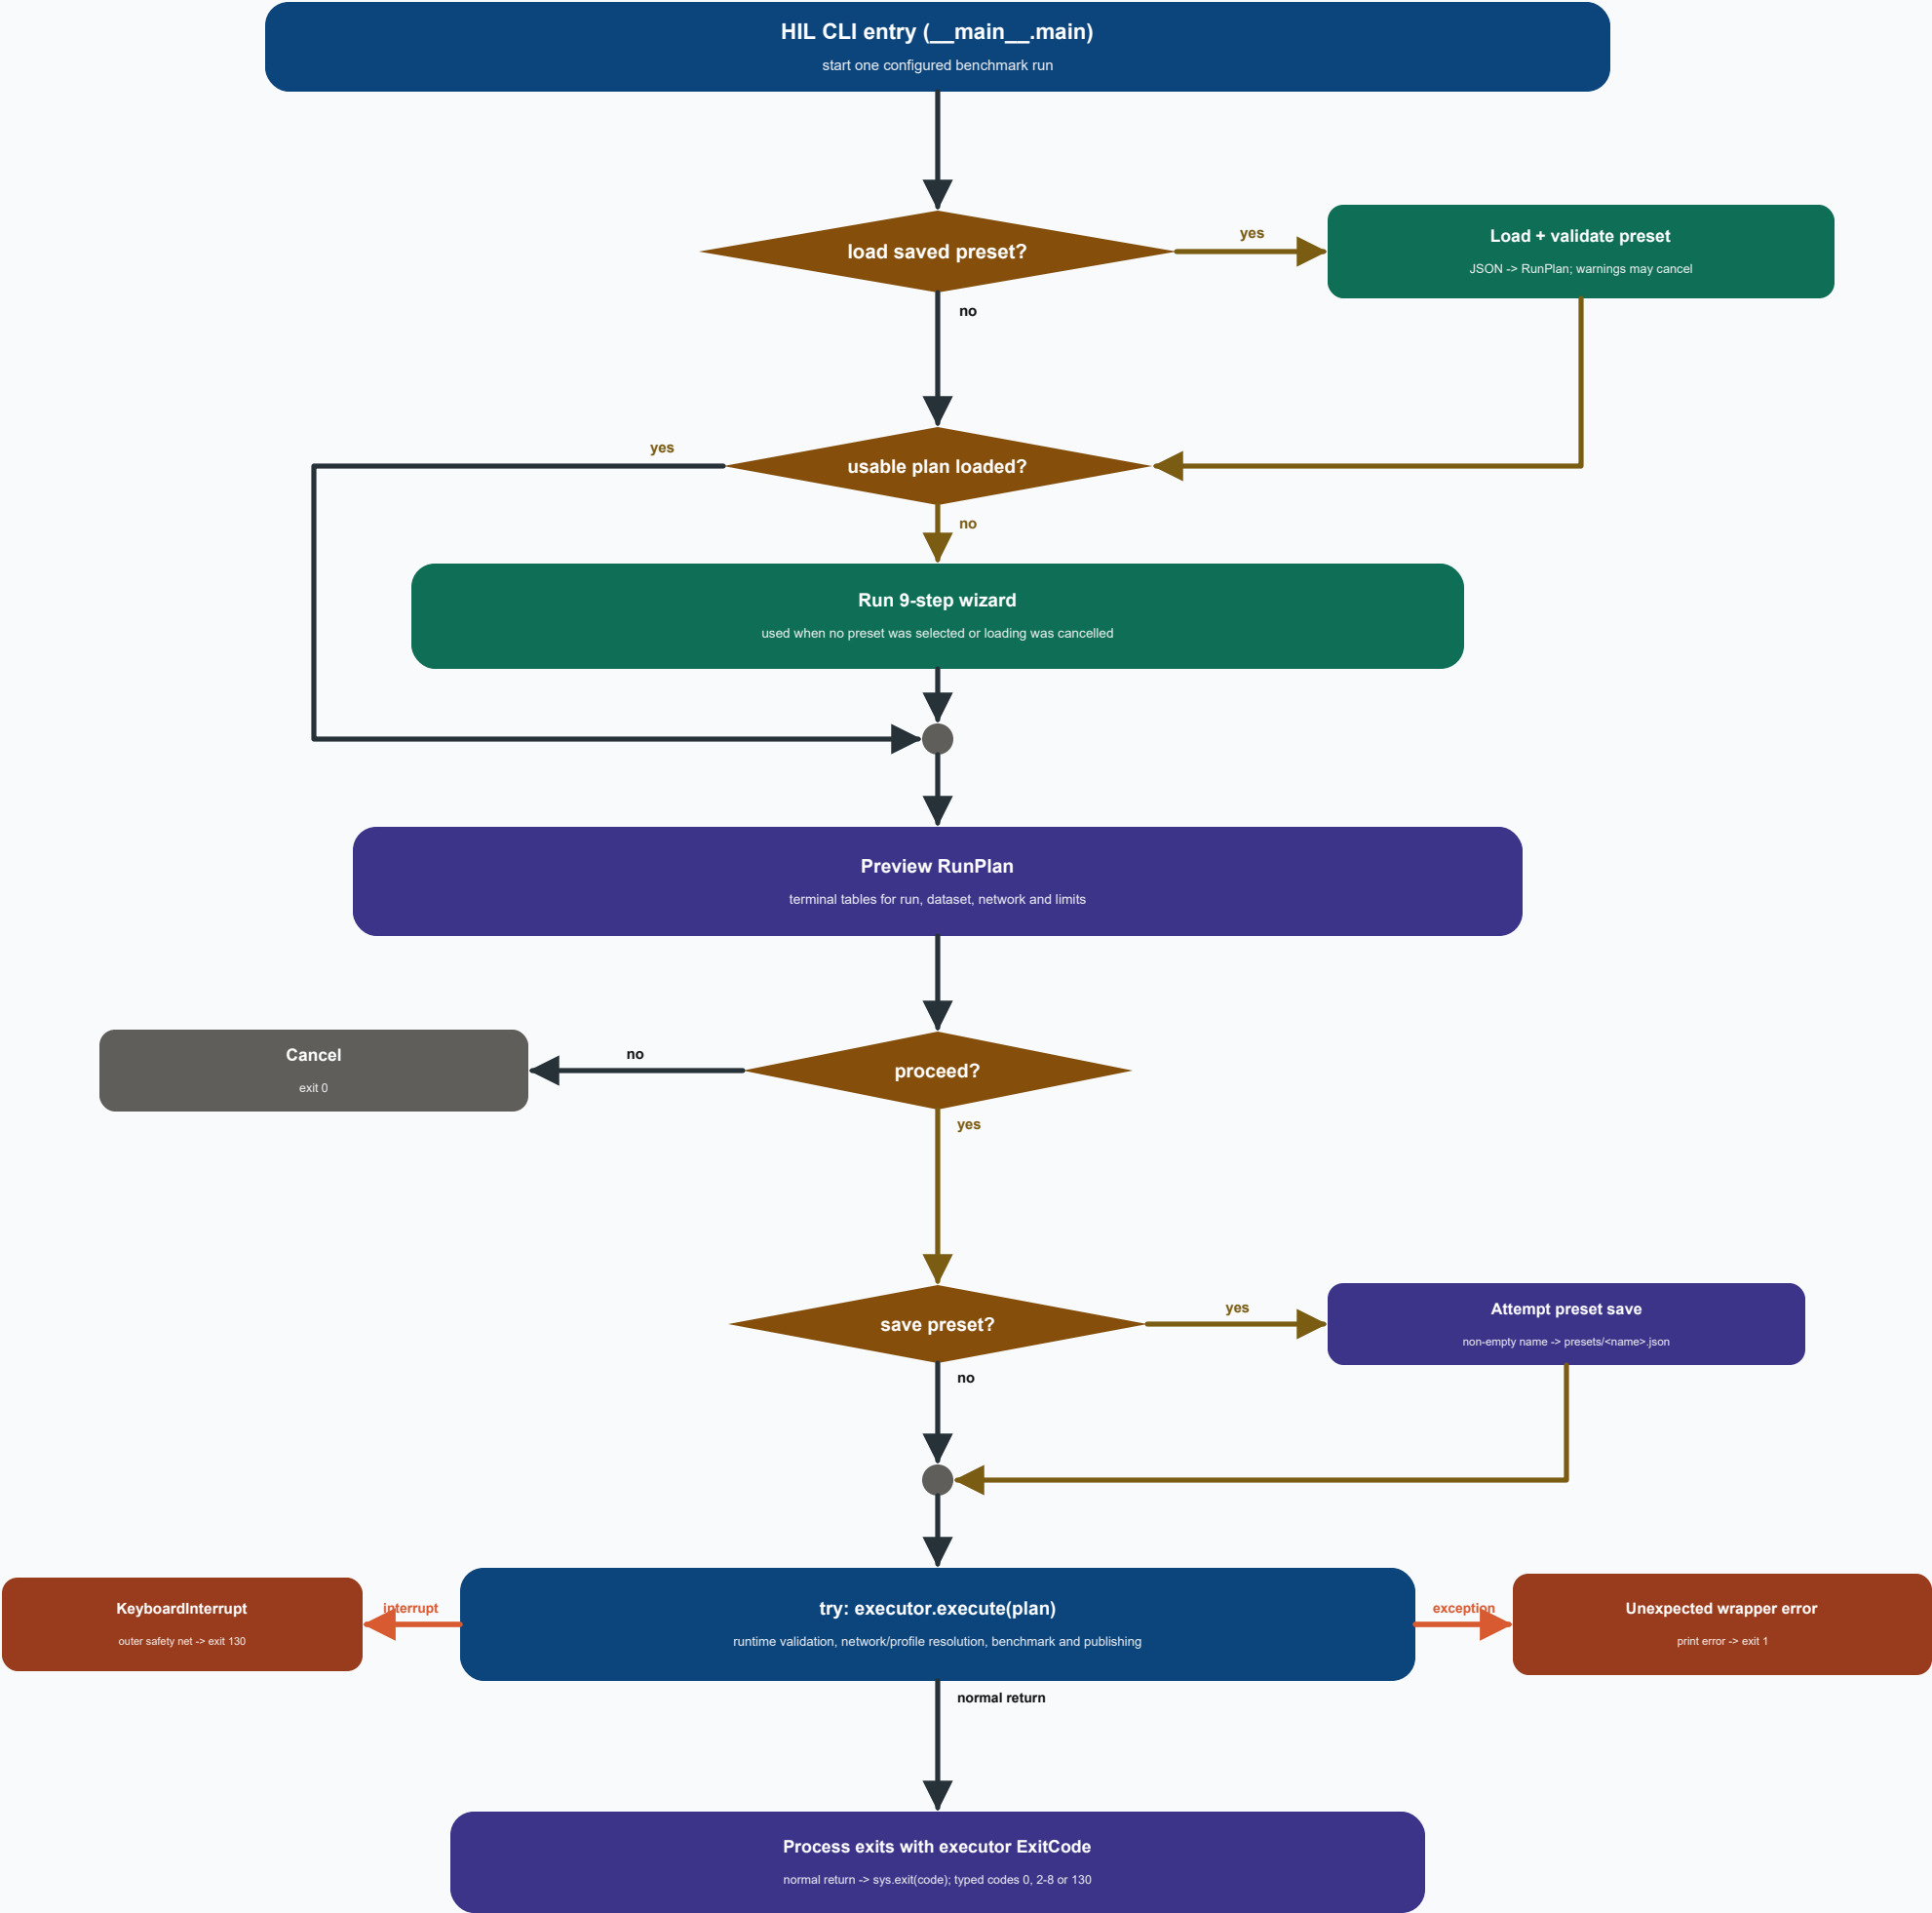

RunPlan acquisition

The CLI can reconstruct a saved RunPlan or collect a new one interactively through the wizard.

Saved presets are structurally rebuilt with `RunPlan.from_dict` and then checked against the current network/plugin paths.

A rejected, missing or unreadable preset does not terminate the CLI; control falls back to the wizard.

The RunPlan is the single configuration object passed into the executor.

Confirmation and persistence

The selected configuration is rendered as terminal tables before any network or profile loading occurs.

The user can cancel with exit code 0 or continue to execution.

Saving a preset is optional; an empty preset name simply leaves the RunPlan unsaved.

Runtime reproducibility is additionally handled by the executor, which writes a copy of the RunPlan into the run output directory.

Executor boundary

`__main__` delegates runtime work to `executor.execute(plan)` rather than loading networks or running scenarios itself.

A normal executor return is passed directly to `sys.exit`, preserving the executor's typed process status.

KeyboardInterrupt caught by the outer safety net exits with 130; an unexpected wrapper-layer exception is reported and exits with 1.