


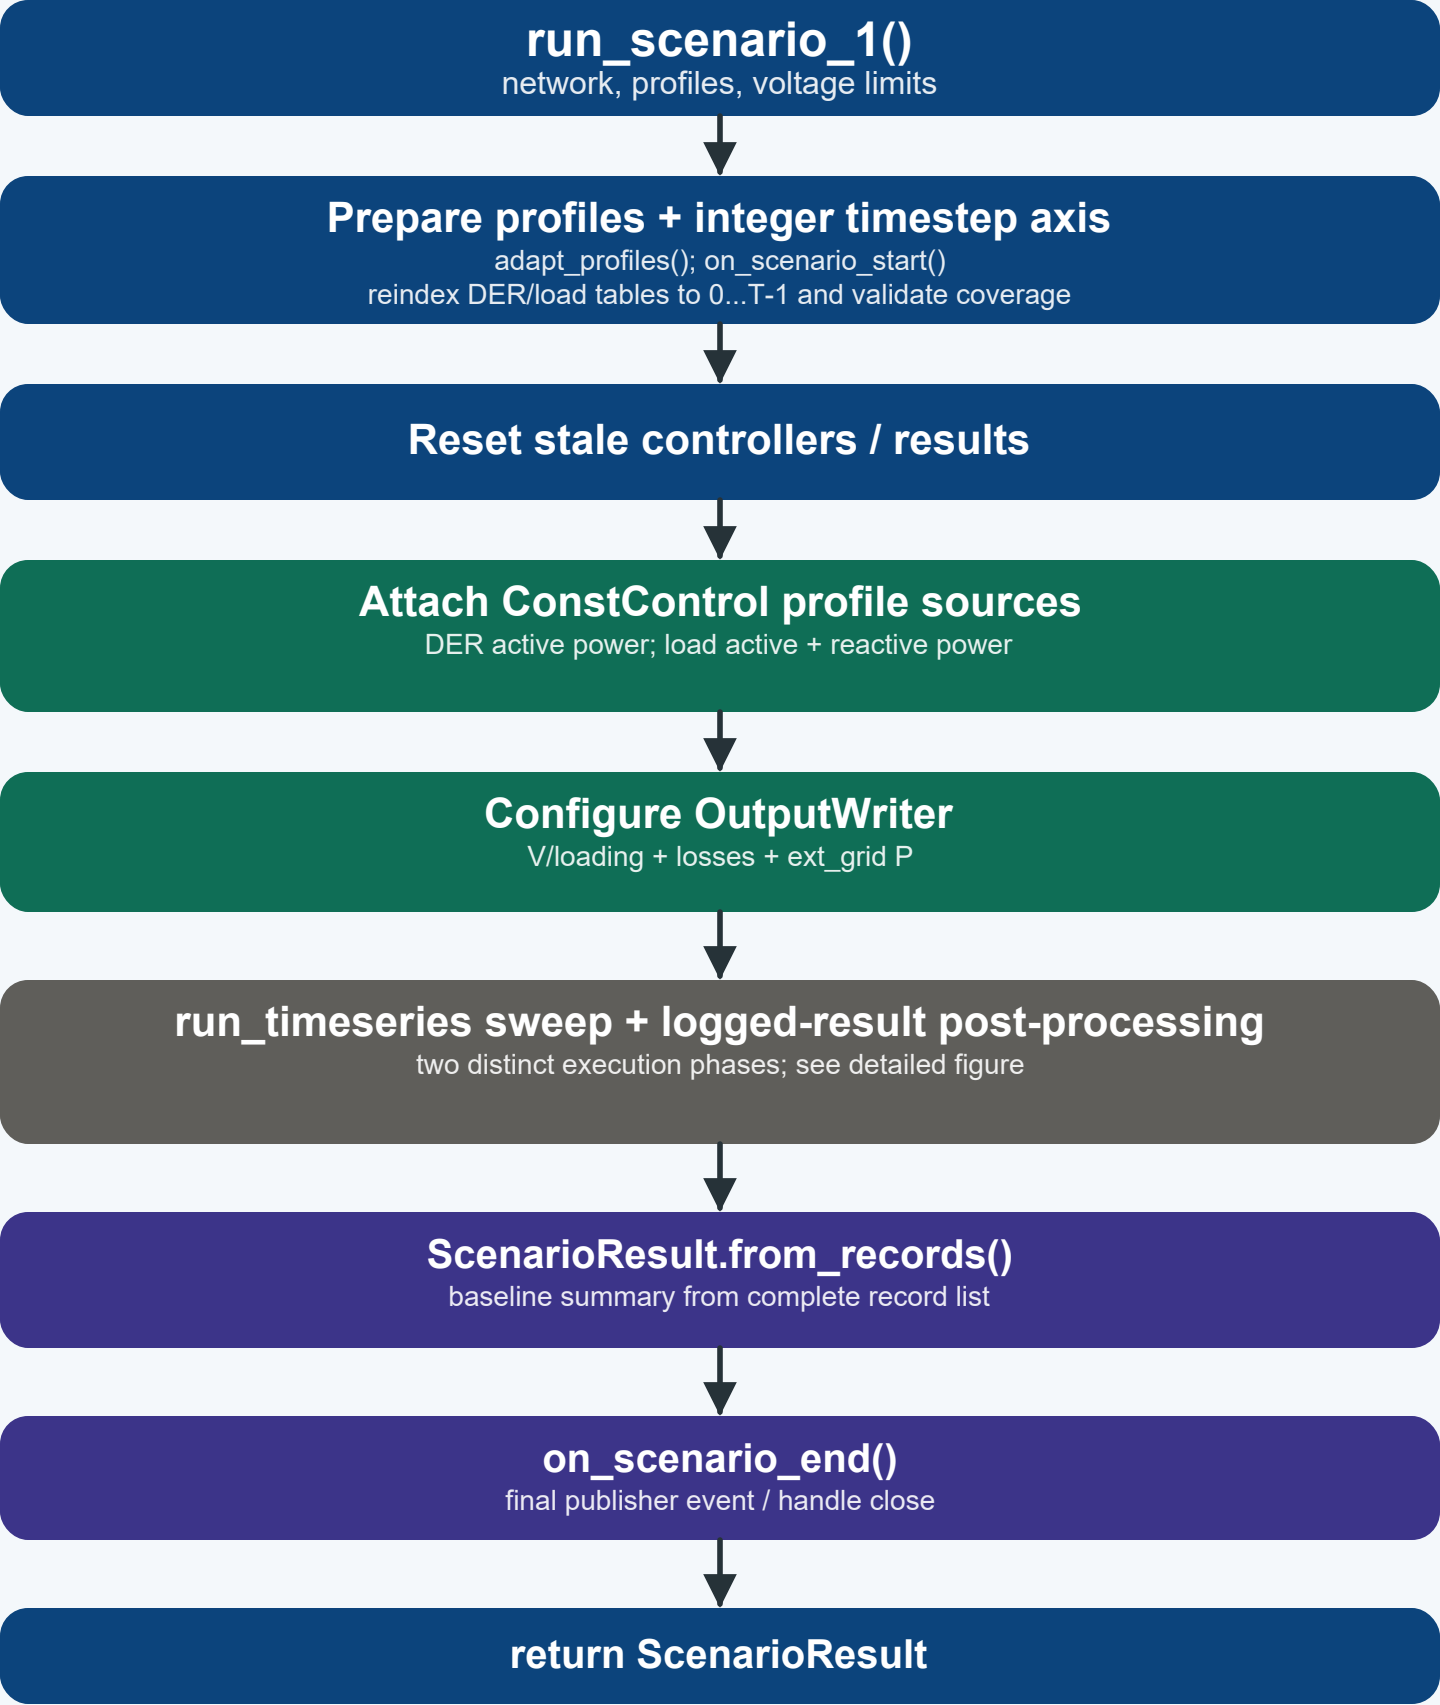

Baseline execution contract

No manual control loop, OLTC, SVC, Volt-Var, OPF, curtailment, or hardware path.

`run_timesteps()` owns the annual power-flow sweep through pandapower controllers.

Violation detection is deliberately deferred until after the entire sweep.

`continue_on_divergence=True` allows later timesteps to run after an individual PF failure.

The runner controls DER p_mw only; it does not explicitly overwrite sgen q_mvar.

Publisher / checkpoint semantics

`enable_checkpointing` and `live_csv_rewrite_fn` are accepted but not used for resume/progress logic.

Scenario 1 never calls `get_resume_records()`, so a prior checkpoint cannot skip or resume the sweep.

`on_timestep()` is called only while post-processing converged logged timesteps.

A non-converged logged timestep is appended directly and therefore is not sent to `on_timestep()`.

`PublishHandle` may still write checkpoint lines during post-processing, but this runner will not consume them on restart.

Data and timing semantics

`DFData/ConstControl` use integer timestep rows and actual element indices as profile columns.

`OutputWriter` logs vm_pu, line/trafo loading, line/trafo losses, and ext_grid p_mw.

`_timed_runpp()` records runpp wall time keyed by `OutputWriter.time_step`.

Source comment says the timing map is cleared per call, but the supplied runner does not call `_RUNPP_TIMING.clear()`.

That discrepancy is an implementation note, not silently changed by the diagram.