

QA Strategy and Execution Document

Project: MindBridge — Shareable Content Feature

Your name

Kirill Kirilin

Date

September 23, 2026

Jira project name

ProjectK (Jira key: PROJ)

Complete all four sections below. Use the section structure exactly as provided — the graded assignment that follows this lab looks for information in these specific sections. When finished, export this document as a single PDF for submission.

Section 1: Architecture and RACI Matrix

For each application layer, assign a role to the QA Team and the Dev Team. Use one of: **R** (Responsible), **A** (Accountable), **C** (Consulted), or **I** (Informed). Do not leave any cell blank.

Layer	QA Team Role	Dev Team Role
UI	R	A
API	C	R
DB	I	A

Section 2: STLC Strategy and Environments

In a few bullet points, explain which techniques you will use and where you will test. Your strategy must name **at least one static technique**, **at least one dynamic technique**, and **the test environment**.

Static testing technique(s):

- Requirement and BDD-scenario review — walk through the Given-When-Then acceptance criteria with Dev and Product before coding starts, to catch ambiguity early
- Peer code review — Dev reviews the share-link generation and rate-limiting logic before merge; QA checks the review against the acceptance criteria

Dynamic testing technique(s):


- Functional (black-box) testing — manually execute all three BDD scenarios (happy path, edge case, error condition) against the built feature
- Integration testing — verify the UI “Generate share link” button correctly calls the API and renders the returned link or error message

Test environment:

- Staging — a pre-production environment that mirrors production configuration and uses seeded test data, so BDD scenarios can be executed safely before release

Section 3: BDD Acceptance Criteria

After editing the Jira user story to add your three Given-When-Then scenarios (a happy path, an edge case, and an error condition), take a screenshot of the updated ticket and insert it below. All three scenarios must be clearly visible in the description field.

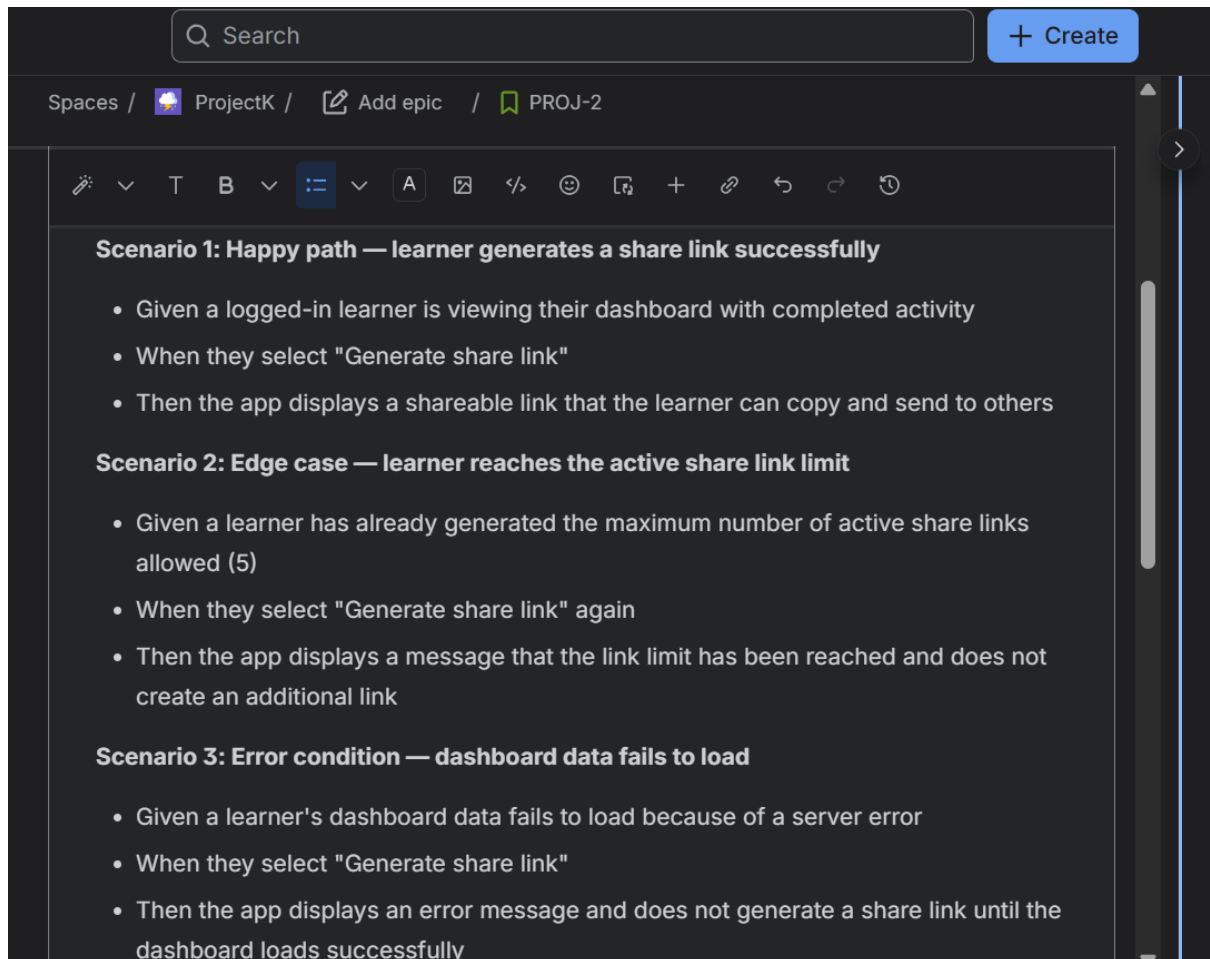

*Ticket PROJ-2 has been updated with all three scenarios:
kirilinkiril279.atlassian.net/browse/PROJ-2*

Section 4: Defect Log and Execution Evidence

Document the seeded defect you found while executing your BDD scenarios against the staging environment.

Defect	Description	Steps to reproduc	Expected result	Actual result	Severity

title		e			
[API] Empty share note triggers HTTP 500 (unhandled server error)	Selecting “Generate share link” with an empty note field does not show a validation message. Instead, the request to the share-link API fails with a server-side error, visible in the Network tab.	1. Open the Dashboard and clear the share note field so it is empty 2. Open DevTools → Network tab 3. Select “Generate share link”	The app validates the empty note (client-side, or the API returns a 4xx response) and shows a message asking the learner to enter a note. No server error should occur.	The fetch request to /api/dashboard/share-link returns HTTP 500. No error message is shown to the learner — the request simply fails silently in the UI.	High — unhandled server-side exception on a core action, not just a missing validation message
[UI]	On the	1. Open	The	The link	Medium


Share link text overflows container at narrow viewport widths	Dashboard, after selecting “Generate share link,” the confirmation banner displays the full share URL on a single line. At a 400px viewport width, the URL is cut off by the right edge of the banner instead of wrapping or truncating gracefully.	the Dashboard at localhost:3000/dashboard 2. Set the browser viewport to 400px width (DevTools device toolbar) 3. Select “Generate share link”	share link text wraps to a new line, or is truncated with an ellipsis and a “Copy” button, so the full banner remains readable within the container.	text overflows the banner and is cut off by the container edge; part of the URL is not visible or accessible to the user.	— the feature still functions (the link is generated), but the user cannot read or reliably copy the full URL at this viewport width, which is a usability/responsive-design issue rather than a functional failure
---	---	--	--	---	---

Insert a screenshot that clearly shows evidence of the defect (any one of the defects):

Name	Status	Type	Initiator	Size	Time
✖ share-link	500	fetch	index-mnv12rfu.	0.3 kB	18 ms

http://localhost:3000/api/dashboard/share-link

Screenshot evidence for defect: Share link text overflows container at narrow viewport widths:

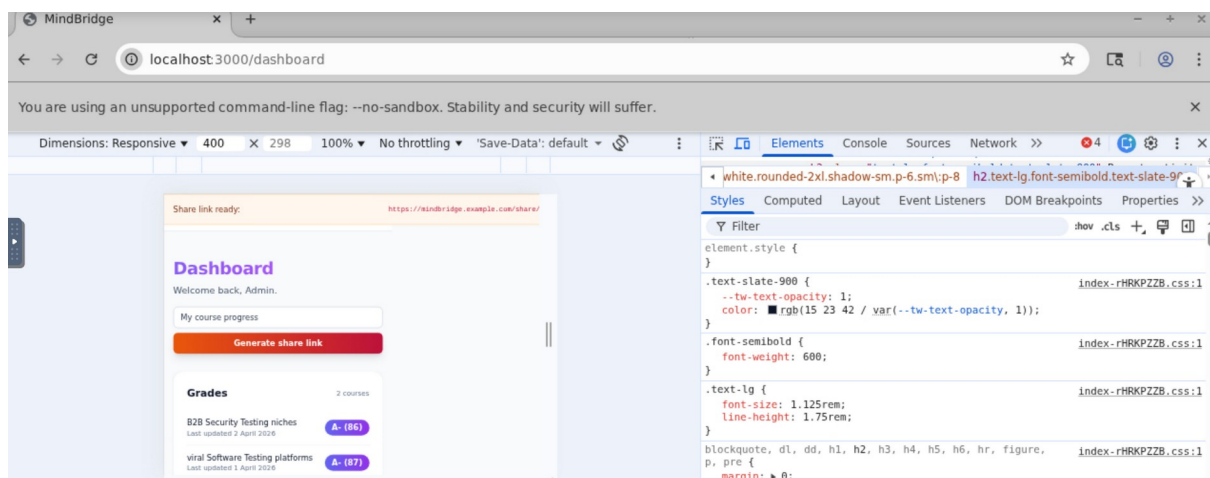

DevTools responsive view at 400px width — the share link banner cuts off the URL instead of wrapping