

# Algorithms and datastructures Exercises

Kristoffer Klokke

2022

# Contents

<b>5</b>	<b>Week</b>	<b>6</b>
5.1	For each function $f(n)$ and time $t$ in the following table, determine the largest size $n$ of a problem that can be solved in time $t$ , assuming that the algorithm to solve the problem takes $f(n)$ 1 nanosecond . . . . .	6
5.2	Show that in a puzzle where two peices is switched with $n$ pieces in all wrong positions, it requires at minimum of $n/2$ switches to solve the puzzle . . . . .	6
5.3	Create a puzzle with 4 pieces, and find a sequence of switches, but where not every switch moves at least one piece to its correct position . . . . .	6
5.4	Create an algorithm which can find cycles in a given puzzle . .	7
5.5	Use the algorithm implementation to calculate statistic over the amount of cycles in a 16 long permutation . . . . .	7
5.6	Write insertion sort pseudo code . . . . .	7
<b>6</b>	<b>Week</b>	<b>8</b>
6.1	What is the average and worst case run time og linear search aglorithm with the element placed randomly . . . . .	8
6.2	Let an inversion be that in an array if $i < j$ and $A[i] > A[j]$ .	8
6.2.a	Find inversion pairs in $\{2, 3, 8, 6, 1\}$ . . . . .	8
6.2.b	For which array will it have the most inverse pairs and how many in an array of length $n$ . . . . .	8
6.2.c	What is the relation between inversion pairs and insertion sort . . . . .	8
6.3	Analyse the run time of insertion sort, in best case, worst case and random case . . . . .	8
6.4	Find an algorithm which for a array with integers if there exists a pair which sum is equal to $x$ . . . . .	9
6.5	Illustrate merge sort using the array $A = \{3, 41, 52, 26, 38, 57, 9, 49\}$	9
6.6	Show that for $f(n) = 0.1n^2 + 5n + 25$ that $f(n) = \Theta(n^2)$ and $f(n) = o(n^3)$ . . . . .	9
6.7	Prove that $\max(f(n), g(n)) = \Theta(f(n) + g(n))$ . . . . .	10
6.8	Draw binary search, write pseudo code and then code . . . . .	10
6.9	How can binary search be used to optimize linear search to $O(n \log_2 n)$ ? . . . . .	11
6.10	Is $2^{n+1} = O(2^n)$ ? Is $2^{2n} = O(2^n)$ ? . . . . .	11
6.11	Prove $\log(n!) = \Theta(n \log n)$ . . . . .	11
6.12	Prove $n! = \omega(2^n)$ . . . . .	11

6.13	Prove $n! = o(n^n)$ . . . . .	11
<b>7</b>	<b>Week</b>	<b>11</b>
7.1	Rank the function speed from fastest growing to slowing . . .	11
7.2	If $f_1(n) \in O(g_1(n))$ and $f_2(n) \in O(g_2(n))$ which statements is true . . . . .	12
7.3	Describe an algorithm which find the number of tuples in an array which has a lower value than another element but higher index in the run time $n \log_2 n$ . . . . .	13
7.4	Which of the following statements are true . . . . .	13
<b>8</b>	<b>Week</b>	<b>13</b>
8.1	Illustrate the partitioning in quick sort on the following array	13
8.2	In an array with only the same value, where will quick sort return the middle value . . . . .	14
8.3	What is the run time of quick sort on the array of the same value . . . . .	14
8.4	Is an sorted array a min-heap . . . . .	14
8.5	Is the following array a max-heap? . . . . .	15
8.6	Insert 9 into the following max-heap tree . . . . .	15
8.7	Insert 2 into the following min-heap . . . . .	15
8.8	Illustrate Max-Heapify( $A, 2$ ) on the following array . . . . .	15
8.9	Use Heap-Extract-Max( $A$ ) on the following array . . . . .	16
8.10	Where in a max heap will the smallest element reside . . . . .	16
8.11	Find all mini-heaps with the elements 1,2,3,4 . . . . .	16
8.12	Prove that the childrens index relative to the parent is index times two and index times two plus 1 . . . . .	17
8.13	Analysis if d-ary heap . . . . .	17
8.13.a	What would be the array representation . . . . .	17
8.13.b	What is the height of a tree with n elements with d children . . . . .	17
8.13.c	Rewrite heap sort such it works with d-ary heaps . . .	17
<b>9</b>	<b>Week</b>	<b>18</b>
9.1	Show that the worst-case running time of Heapsort is $\Omega(n \log n)$	18
9.2	Illustrate counting sort . . . . .	18
9.3	In the following code for counting sort, will it still work if line 9 got switched such it went from 1 to $A.length$ . . . . .	18
9.4	Make an algorithm which in constant time can answer amount of elements in a range, with a preprocess time of $\Theta(n + k)$ . .	19

9.5	Which of the following sorting algorithms are stable and unstable, and how could they be stable . . . . .	19
9.5.a	Insertion sort . . . . .	19
9.5.b	Merge sort . . . . .	19
9.5.c	Heapsort . . . . .	20
9.5.d	Quicksort . . . . .	20
9.6	Perform radix sort on the following inputs . . . . .	20
9.6.a	Numbers . . . . .	20
9.6.b	Letters . . . . .	21
9.7	Tail recursive quicksort . . . . .	21
9.7.a	Argue that the given version works . . . . .	21
9.7.b	Describe how the stack amount could be $n$ . . . . .	21
9.7.c	How could the stack call be less . . . . .	21
<b>10</b>	<b>Week</b>	<b>22</b>
10.1	In the following formula, what is the best sequence such its as close to $w$ when $w = 7$ . . . . .	22
10.2	Which of these are not a possible search sequence for 363 in a binary tree of 1 to 1000 . . . . .	22
10.2.a	2, 252, 401, 398, 330, 344, 397, 363 . . . . .	22
10.2.b	924, 220, 911, 244, 898, 258, 362, 363 . . . . .	22
10.2.c	925, 202, 911, 240, 912, 245, 363 . . . . .	22
10.3	Write code to find the predecessor / ordered node before . . .	22
10.4	Draw a red black tree insert of 36 . . . . .	22
10.5	What is the worst run time of an unbalanced tree, for a sorted list . . . . .	23
10.6	What is the worst run time of a balanced red-black tree, for a sorted list . . . . .	24
10.7	Argue that sorting $n$ elements with binary tree will take $\Omega(n \log n)$	24
10.8	What is the difference between binary search tree and min-heap	24
10.9	Describe a range search for the binary tree, with the run time $\Theta(m + \log n)$ . . . . .	24
<b>11</b>	<b>Week</b>	<b>24</b>
11.1	Insert 18 and 26 into the given hashtable with linear opening .	24
11.2	Insert 5,28,19,15,20,33,12,17,10 into a hash table with 9 slots and $h(x) = x \bmod 9$ , as a chain . . . . .	25
11.3	Perform hashing function on 10,22,31,4,15 with linear,quadratic, and double hashing, on mod 11 table . . . . .	25

<b>12 Week</b>	<b>26</b>
12.1 In a tree which stores the number of children, how to find the $i$ successor to a node? . . . . .	26
12.2 Find the number of occurrences of $i < j$ and $A[i] > A[j]$ in a given array in $O(n \log n)$ . . . . .	26
12.3 For the following factorial code which invariants are true . . .	26
12.4 Solve the recursion using the master theorem . . . . .	27
12.4.a $T(n) = 4 \cdot T(n/3) + n$ . . . . .	27
12.4.b $T(n) = T(n/2) + n^2$ . . . . .	27
12.4.c $T(n) = 16 \cdot T(n/2) + n^4 + n^2$ . . . . .	27
<b>13 Week</b>	<b>27</b>
13.1 Solve the recursion using the master theorem . . . . .	27
13.1.a $T(n) = 2 \cdot T(n/4) + 1$ . . . . .	27
13.1.b $T(n) = 2T(n - 1) + n$ . . . . .	27
13.2 Rethink insertion sort as a recursive algorithm and find run time . . . . .	27
13.3 Use strassens algorithm on the following two matrices . . . . .	28

## 5 Week

**5.1** For each function  $f(n)$  and time  $t$  in the following table, determine the largest size  $n$  of a problem that can be solved in time  $t$ , assuming that the algorithm to solve the problem takes  $f(n)$  1 nanosecond

	1s	1hour	1year	1 century
$n$	$10^9$	$6 \cdot 10^{10}$	$3.2 \cdot 10^{16}$	$3.2 \cdot 10^{18}$
$n \log_2 n$	$4 \cdot 10^7$	$10^{9\frac{1}{s}} \cdot 3600s = n \cdot \log_2(n) \rightarrow n = 9.8 \cdot 10^{10}$	$6.4 \cdot 10^{14}$	$5.6 \cdot 10^{16}$
$n^2$	31622	$1.8 \cdot 10^6$	$1.7 \cdot 10^8$	$1.8 \cdot 10^9$
$n^3$	$10^3$	15326	316010	$1.4 \cdot 10^6$
$2^n$	30	41.7	54.8	61.5

**5.2** Show that in a puzzle where two pieces is switched with  $n$  pieces in all wrong positions, it requires at minimum of  $n/2$  switches to solve the puzzle

For a puzzle with no correct positions in advance, the lowest amounts of move will be in the scenario where every piece's correct position has to piece of its current position. Which therefore will result in  $n/2$  amounts of moves is needed.

**5.3** Create a puzzle with 4 pieces, and find a sequence of switches, but where not every switch moves at least one piece to its correct position

4	1
2	3

$$4 \rightarrow 2, 3 \rightarrow 2, 1 \rightarrow 2$$

As seen here this method does not use the greedy method but it still use the same amount of moves.

## 5.4 Create an algorithm which can find cycles in a given puzzle

The algorithm takes a list, and creates a variable counter for the amount of cycles.

It then goes through every entry, if the entry is not -1 then it calls a recursive function with the entry index and list.

The list then check if the given entry is -1 if not then set the entry to -1 and then calls itself with the entries last index and the list.


When the function returns it add 1 to the cycle.

Then it returns the amount of cycles

This algorithm will run at  $O(2n)$  if the cycle is 1 and it then has to move every entry and go through the rest of the list.

## 5.5 Use the algorithm implementation to calculate statistic over the amount of cycles in a 16 long permutation

Cycles	Amount	Chance of occurrence
1	6249	6%
2	20716	21%
3	29600	30%
4	24131	24%
5	13038	13%
6	4721	5%
7	1252	1%
8	256	0%
9	29	0%
10	7	0%
11	1	0%
12	0	0%
13	0	0%
14	0	0%
15	0	0%
16	0	0%

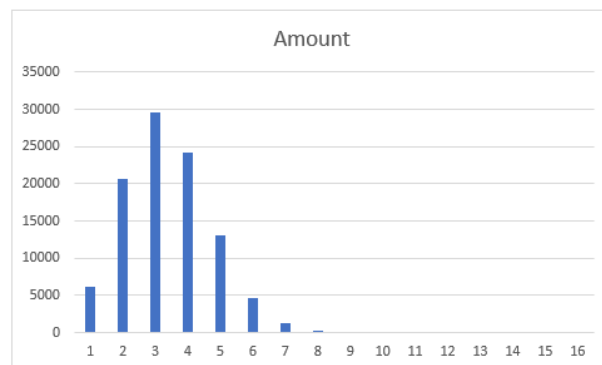

Average	3.37675
---------	---------

Figure 1: Statistic from puzzleSolve/data.csv

## 5.6 Write insertion sort pseudo code

- 1: Linear search( $A, v$ )
- 2:  $i = 0$
- 3: **while**  $i < A.length$  &&  $A[i] \neq v$  **do**

```

4:      $i++$ 
5: end while
6: return  $i$ 

```

## 6 Week

### 6.1 What is the average and worst case run time of linear search algorithm with the element placed randomly

Average: on average the run time will be  $n/2$

Worst: if the element is at the end of the list it will be  $n$

### 6.2 Let an inversion be that in an array if $i < j$ and $A[i] > A[j]$

#### 6.2.a Find inversion pairs in $\{2, 3, 8, 6, 1\}$

$(2, 1), (3, 1), (8, 1), (8, 6), (6, 1)$

#### 6.2.b For which array will it have the most inverse pairs and how many in an array of length $n$

The backwards sorted array, which will have  $\frac{n^2-n}{2}$  pairs.

#### 6.2.c What is the relation between inversion pairs and insertion sort

The relation is that insertion sort uses the same amount of operations in the worst case scenario as inverse pairs.

### 6.3 Analyse the run time of insertion sort, in best case, worst case and random case

Here 1000 arrays were used from which random length of arrays was used. Here are the results of the time divided by length average.

- Best -  $4.31 \cdot 10^{-6}$
- Worst - 0.016



- Random - 0.008

As seen the random is closest to the worst case.

#### 6.4 Find an algorithm which for a array with integers if there exists a pair which sum is equal to $x$

This is done by using a sort like merge sort which takes  $n \cdot \log_2 n$  then two pointers where one is at the start and one at the end.

If the two pointers integer sum exceeds  $x$  the end moves to the left if less than  $x$  the start pointer moves to the right.

This will take  $n$  time and therefore the time will still just be  $O(n \cdot \log_2 n)$

#### 6.5 Illustrate merge sort using the array $A = \{3, 41, 52, 26, 38, 57, 9, 49\}$

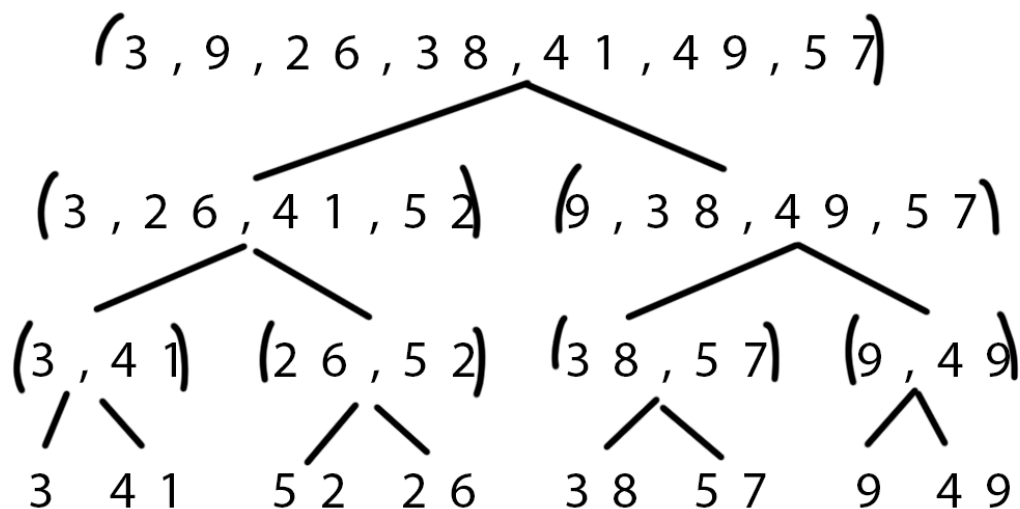


Figure 2: Illustration of merge sort

#### 6.6 Show that for $f(n) = 0.1n^2 + 5n + 25$ that $f(n) = \Theta(n^2)$ and $f(n) = o(n^3)$

$$\lim_{n \rightarrow \infty} \frac{0.1n^2 + 5n + 25}{n^2} = 0.1$$

$$\lim_{n \rightarrow \infty} \frac{0.1n^2 + 5n + 25}{n^3} = 0$$

Due to the first being bigger than 0 it means that  $f(n) = \Theta(n^2)$  and due to the other being zero means that  $f(n) = o(n^3)$

### 6.7 Prove that $\max(f(n), g(n)) = \Theta(f(n) + g(n))$

Due to the max function the highest result  $g(n)$  can maximally be equal to  $f(n)$ .

Therefore if  $f(n) = n^2$   $g(n)$  can maximally be  $n^2$  and therefore the addition will result in the same run time.

### 6.8 Draw binary search, write pseudo code and then code

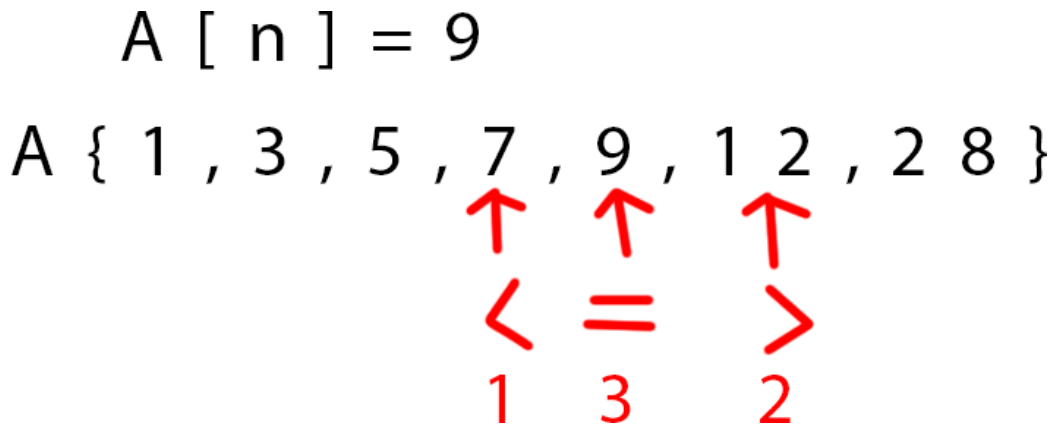


Figure 3: Illustration of binary search

```

1: Binary search(A, v)
2: i = A.length/2
3: j = A.length/2 + A.length%2
4: while iA[i] != v || j == 0 do
5:     j = j/2 + j%2
6:     if A[i] < v then
7:         i = i + j
8:     else
9:         i = i - j
10:    end if
11: end while
12: return i

```

## 6.9 How can binary search be used to optimize linear search to $O(n \log_2 n)$ ?

By instead of linearly going down and finding a number which the current is lower than, a binary search can be done to a number which is lower.

By this every entry will be performed a binary search upon an such the run time will be  $n \log_2 n$

## 6.10 Is $2^{n+1} = O(2^n)$ ? Is $2^{2n} = O(2^n)$ ?

$2^{n+1} = 2^n \cdot 2^1$  therefore  $2^{n+1} = O(2^n)$

$\lim_{n \rightarrow \infty} \frac{2^n}{2^{2n}} = 0$  therefore  $2^n = o(2^{2n})$

## 6.11 Prove $\log(n!) = \Theta(n \log n)$

$\lim_{n \rightarrow \infty} \frac{\log(n!)}{n \log(n)} = 1$  therefore  $\log(n!) = \Theta(n \log n)$

## 6.12 Prove $n! = \omega(2^n)$

$\lim_{n \rightarrow \infty} \frac{2^n}{n!} = 0$  therefore  $2^n = o(n!) \rightarrow n! = \omega(2^n)$

## 6.13 Prove $n! = o(n^n)$

$\lim_{n \rightarrow \infty} \frac{n!}{n^n} = 0$  therefore  $n! = o(n^n)$

# 7 Week

## 7.1 Rank the function speed from fastest growing to slowing

$$\sqrt{n}, 2^n, \log_{10}^2 n, \log_2 n$$

$$\lim_{n \rightarrow \infty} \frac{f(x)}{g(x)}$$

$g(n) \setminus f(n)$	$\sqrt{n}$	$2^n$	$\log_{10}^2 n$	$n$	$\log_2 n$
$\sqrt{n}$	1	$\infty$	0	$\infty$	0
$2^n$	0	1	0	0	0
$\log_{10}^2 n$	$\infty$	$\infty$	1	$\infty$	0
$n$	0	$\infty$	0	1	0
$\log_2 n$	$\infty$	$\infty$	$\infty$	$\infty$	1

This can be rearranged from a clear order is made.  
This is therefore the order of fastest growing to slowest  $2^n, n, \sqrt{n}, \log_{10}^2 n, \log_2 n$

$g(n) \setminus f(n)$	$2^n$	$n$	$\sqrt{n}$	$\log_{10}^2 n$	$\log_2 n$
$2^n$	1	0	0	0	0
$n$	$\infty$	1	0	0	0
$\sqrt{n}$	$\infty$	$\infty$	1	0	0
$\log_{10}^2 n$	$\infty$	$\infty$	$\infty$	1	0
$\log_2 n$	$\infty$	$\infty$	$\infty$	$\infty$	1

## 7.2 If $f_1(n) \in O(g_1(n))$ and $f_2(n) \in O(g_2(n))$ which statements is true

1.  $f_1(n) + f_2(n) \in O(g_1(n) + g_2(n))$
2.  $g_1(n) + g_2(n) \in \Omega(f_1(n) + f_2(n))$
3.  $\frac{f_1(n)}{f_2(n)} \in O(\frac{g_1(n)}{g_2(n)})$

The first statement is true due to if  $f_1(n) \Omega f_2(n)$  then  $g_2(n)$  will simply be a constant when added to  $g_2(n)$ , which also account for the other way around.  
The second is true due to being the inverse of the first statement.  
The third is not true, in the following assignment  $f_1(n) = n^2, f_2(n) = n^2, g_1(n) = n^2, g_2(n) = n^n$  in this scenario the left will go towards 1 and the other will to 0.

**7.3 Describe an algorithm which find the number of tuples in an array which has a lower value than another element but higher index in the run time  $n \log_2 n$**

This could be done with merge sort. Here when comparing two elements if an element is chosen from the array which comes first then a tuple exists with every element left in the other array.

**7.4 Which of the following statements are true**

1.  $n^2 \in \Omega(n)$
2.  $n \in \Theta(n^2)$
3.  $n \log n \in o(n^2)$
4.  $\log n \in O(\sqrt{n})$
5.  $n! \in \omega(2^n)$

$$\lim_{n \rightarrow \infty} \frac{n^2}{n} = \infty \quad (1)$$

$$\lim_{n \rightarrow \infty} \frac{n^2}{n \log_2 n} = \infty \quad (2)$$

$$\lim_{n \rightarrow \infty} \frac{\sqrt{n}}{\log_2 n} = \infty \quad (3)$$

$$\lim_{n \rightarrow \infty} \frac{n!}{2^n} = \infty \quad (4)$$

The first statement is true according to (1) and the second is false due to (1) not being equal 1.

The third is true according to (2), likewise the fourth is true according to (3)

The fifth is also true according to (4).

## **8 Week**

**8.1 Illustrate the partitioning in quick sort on the following array**

$$A = \{13, 19, 9, 5, 12, 8, 7, 4, 21, 2, 6, 11\}$$

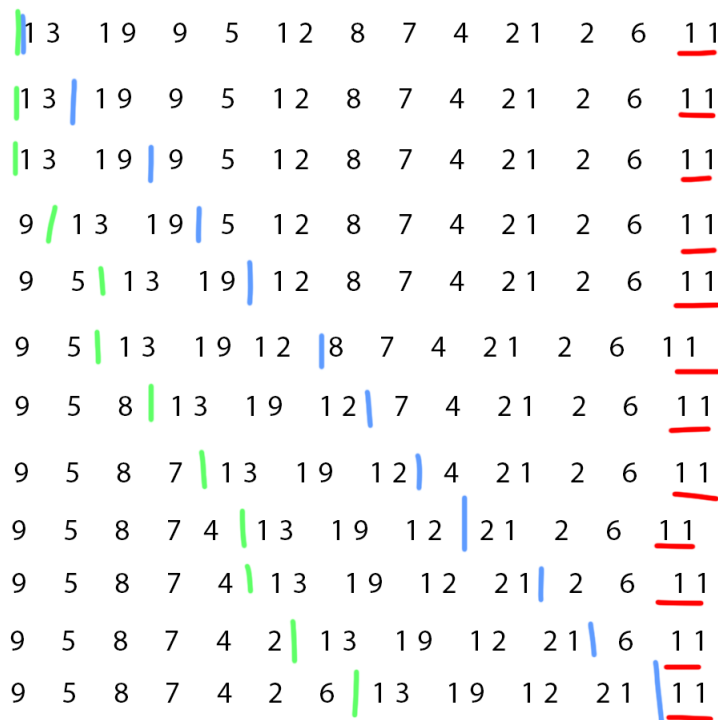


Figure 4: Quick sort partitioning on an array

## 8.2 In an array with only the same value, where will quick sort return the middle value

The returned placement will then be the length of the array -1 / the last element in the array.

## 8.3 What is the run time of quick sort on the array of the same value

This will either be the best case or worst case for the algorithm. This is due to if left partition is  $\leq$  nothing is moved. Whereas if the right partition is  $\geq$  it will have to move every element.

## 8.4 Is an sorted array a min-heap

Yes due to in a sorted array  $2i$  and  $2i + 1$  will always be lower or equal

### 8.5 Is the following array a max-heap?

$\langle 23, 17, 14, 6, 13, 10, 1, 5, 7, 12 \rangle$

It is not a valid max-heap due to 6's children is 5 and 7 which is not smaller.

### 8.6 Insert 9 into the following max-heap tree

$\langle 10, 8, 6, 3, 7, 4, 5, 1, 2 \rangle$

by inserting it on index 3 the following tree is made

$\langle 10, 8, 9, 3, 7, 4, 5, 1, 2 \rangle$

This can then be checked

$10 > 8, 9$

$8 > 3, 7$

$9 > 4, 5$

$3 > 1, 2$

It is therefore a valid max-heap

### 8.7 Insert 2 into the following min-heap

$\langle 1, 3, 5, 4, 10, 13, 7, 6, 17 \rangle$

$\langle 1, 2, 3, 5, 4, 10, 13, 7, 6, 17 \rangle$

$1 < 2, 3$

$2 < 5, 4$

$3 < 10, 13$

$5 < 7, 6$

$10 < 17$

### 8.8 Illustrate Max-Heapify( $A, 2$ ) on the following array

$\langle 27, 17, 3, 16, 13, 10, 1, 5, 7, 12, 4, 8, 9, 0 \rangle$

$\langle 27, 17, \textcolor{red}{2}, 3, 16, 13, 10, 1, 5, 7, 12, 4, 8, 9, 0 \rangle$

$2 > 13, 10$

$\langle 27, 17, 13, 16, 13, \textcolor{red}{2}, 10, 1, 5, 7, 12, 4, 8, 9, 0 \rangle$

$2 > 4, 8$

$\langle 27, 17, 3, 16, 13, 8, 10, 1, 5, 7, 12, 4, \textcolor{red}{2}, 9, 0 \rangle$

### 8.9 Use Heap-Extract-Max(A) on the following array

< 21, 18, 10, 12, 8, 9, 4, 7, 5, 2 >

< 2, 18, 10, 12, 8, 9, 4, 7, 5, 21 >  
< 18, 2, 10, 12, 8, 9, 4, 7, 5, 21 >  
< 18, 12, 10, 2, 8, 9, 4, 7, 5, 21 >  
< 18, 12, 10, 7, 8, 9, 4, 2, 5, 21 >  
< 5, 12, 10, 7, 8, 9, 4, 2, 18, 21 >  
< 12, 5, 10, 7, 8, 9, 4, 2, 18, 21 >  
< 12, 8, 10, 7, 5, 9, 4, 2, 18, 21 >  
< 2, 8, 10, 7, 5, 9, 4, 12, 18, 21 >  
< 10, 8, 2, 7, 5, 9, 4, 12, 18, 21 >  
< 10, 8, 9, 7, 5, 2, 4, 12, 18, 21 >  
< 4, 8, 9, 7, 5, 2, 10, 12, 18, 21 >  
< 9, 8, 4, 7, 5, 2, 10, 12, 18, 21 >  
< 2, 8, 4, 7, 5, 9, 10, 12, 18, 21 >  
< 8, 2, 4, 7, 5, 9, 10, 12, 18, 21 >  
< 8, 7, 4, 2, 5, 9, 10, 12, 18, 21 >  
< 5, 7, 4, 28, 9, 10, 12, 18, 21 >  
< 7, 5, 4, 28, 9, 10, 12, 18, 21 >  
< 2, 5, 47, 8, 9, 10, 12, 18, 21 >  
< 5, 2, 47, 8, 9, 10, 12, 18, 21 >  
< 4, 25, 7, 8, 9, 10, 12, 18, 21 >  
< 24, 5, 7, 8, 9, 10, 12, 18, 21 >  
< 2, 4, 5, 7, 8, 9, 10, 12, 18, 21 >

### 8.10 Where in a max heap will the smallest element reside

Due to the trees nature, a specific index is not known rather just it is at a leaf in the tree

### 8.11 Find all mini-heaps with the elements 1,2,3,4

< 4, 3, 2, 1 >  
< 4, 2, 3, 1 >  
< 4, 3, 1, 2 >



## 8.12 Prove that the childrens index relative to the parent is index times two and index times two plus 1

For a parent the position can be divided to the sum of the current height and the index of the level.

Ex the parent 13 can be written as  $(8+5)$  where 8 is the height index and 5 is the offset.

The child index will then be on the next height therefore the double height index, and the offset will then be the double due to every sibling to the parent having 2 children.

Therefore in the example the parents child will be  $2(8+5)$  therefore two times index, and the other child will have the offset of plus 1.

## 8.13 Analysis if d-ary heap

d-ary heaps have d children instead of two

### 8.13.a What would be the array representation

This would be the same but instead of children being at  $2i$  and  $2i+1$  it would be  $3i$  and  $3i+1$

### 8.13.b What is the height of a tree with n elements with d children

A level consist of  $3^n$  where  $n$  is the height.

Therefore for a level it will be the sum of all previous level.

That series can be condensed to  $\frac{3^n-1}{2}$

### 8.13.c Rewrite heap sort such it works with d-ary heaps

First of when referencing the children it will be  $di$  and  $di + 1$

When moving keys around there will then be  $d$  checks for the largest value.

It can here be noted that the height of the tree was  $\frac{3^n-1}{2}$  therefore making the run time  $O(3^n \cdot n)$  due  $n$  exchanges being done at each level.

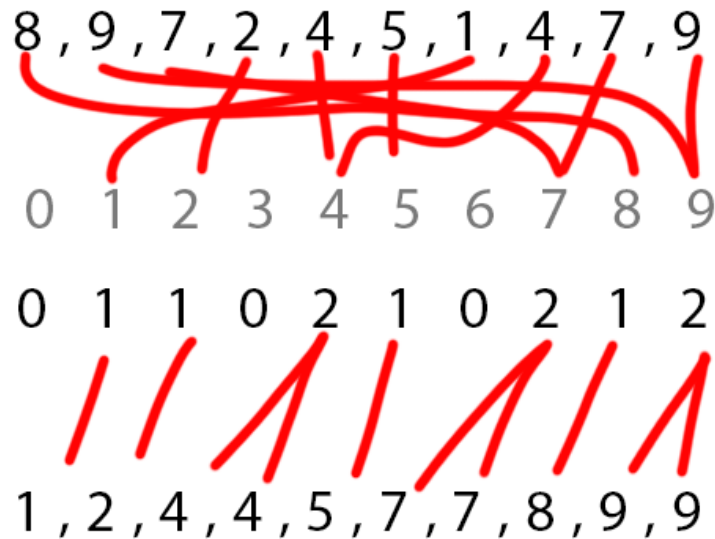


Figure 5: Counting sort illustration

## 9 Week

### 9.1 Show that the worst-case running time of Heapsort is $\Omega(n \log n)$

Heap sort is based upon the a binary tree which height with  $n$  nodes will be  $\log n$ . Therefore in the worst case the element os moved through out the whole tree height  $n$  times. Therefore making the run time  $n \log n$ .

### 9.2 Illustrate counting sort

### 9.3 In the following code for counting sort, will it still work if line 9 got switched such it went from 1 to $A.length$

```

1: Count search( $A, B, k$ )
2:  $C = \text{new Array}()\{0,0,0,... k \text{ times}\};$ 
3: for  $j = 1$  to  $A.length$  do
4:    $C[A[j]] ++$ 
5: end for
6: for  $i = 1$  to  $k$  do

```

```

7:   C[i] = C[i] + C[i + 1]
8: end for
9: for j = A.length to 1 do
10:   B[C[A[j]]] = A[j]
11:   C[A[j]] = C[A[j]] - 1
12: end for

```

For it to work the element is simply out in at index  $j$  the amount of times of the value of  $A[j]$ . This also eliminates the before hand for loop on line 6.

#### 9.4 Make an algorithm which in constant time can answer amount of elements in a range, with a pre-process time of $\Theta(n + k)$

```

1: CountElementsBefore(A, k)
2: C = new Array(){0,0,0,... k times};
3: for j = 1 to A.length do
4:   C[A[j]] ++
5: end for
6: for i = 1 to k do
7:   C[i] = C[i] + C[i + 1]
8: end for
9: ElementsInRange(A, k, s, e)
10: B = CountElementsBefore(A, k)
11: return B[e] - B[s]

```

Here the range must be between 0 and  $k$

#### 9.5 Which of the following sorting algorithms are stable and unstable, and how could they be stable

##### 9.5.a Insertion sort

Insertion sorts will be stable, due to the sorting starting from 0 and when moving it will move as long it is smaller but not equal.

##### 9.5.b Merge sort

Insertion sort will be stable, due to if elements are equal it should take from the same array and otherwise pairs will have same order.

9.5.c Heapsort

Heap sort is not stable. A clear example is 3(a), 3(b), 2, 1 first 3(a) is choosen 3(b), 2, 1, 3(a), then 3(b) is choosen 2, 1, 3(b), 3(a).

To make it stable a MIN heap sort could be used. It would get so complication in the array range, so a list would be needed or move every element.

9.5.d Quicksort

The quick sort will be unstable due to in the case of 1, 3, 4, 8(a), 8(b), 5, 7, when at the 5 it would be switched with 8(a) and therfore change the order. To make it stable to array list could be created and elements could be moved to each such that no switching in between is needed.

9.6 Perform radis sort on the following inputs

747, 765, 544, 754, 431, 231, 222

COW,DOG,SEA,RUG,ROW,MOB,BOX,TAB

9.6.a Numbers

747	765	754	431	231	222				
0	1	2	3	4	5	6	7	8	9
	431	222		754	765		747		
	231								
431	231	222	754	765	747				
0	1	2	3	4	5	6	7	8	9
		222	431	754		765			
			231	747					
222	431	231	754	747	765				
0	1	2	3	4	5	6	7	8	9
							754		
		222		431			747		
		231					765		
222	231	431	754	747	765				

COW	DOG	SEA	ROW	MOB	BOX	TAB						
A	B	C	D	E	G	M	O	R	S	T	W	X
SEA	MOB TAB				DOG						COW ROW	BOX
SEA	MOB	TAB	DOG	COW	ROW	BOX						
A	B	C	D	E	G	M	O MOB DOG COW ROW BOX	R	S	T	W	X
TAB				SEA								
TAB	SEA	MOB	DOG	COW	ROW	BOX						
A	B BOX	C COW	D DOG	E	G	M MOB	O	R ROW	S SEA	T TAB	W	X
BOX	COW	DOG	MOB	ROW	SEA	TAB						

### 9.6.b Letters

## 9.7 Tail recursive quicksort

The following exercises is about the following pseudo version of quicksort, which uses tail recursion.

- 1: **while**  $p < r$  **do**
- 2:      $q = \text{Partition}(A, p, r)$
- 3:     Tail-Recursive-QuickSort( $A, p, q-1$ )
- 4:      $p = q+1$
- 5: **end while**

### 9.7.a Argue that the given version works

This will work due to the while loop. This will work due to the while loop going to the right and the recursive call going to the left.

### 9.7.b Describe how the stack amount could be $n$

This will happend just like the worst case of quick sort where the largest element is always found as the largest element.

### 9.7.c How could the stack call be less

This could be done by like other quick sort optimizations where instead of going with the left most in partitioning it should take some and find the middle and use or just a random element.

## 10 Week

**10.1** In the following formula, what is the best sequence such its as close to  $w$  when  $w = 7$

$$\sum_{i=1}^{m-1} (y_{i+1} - y_i - W)^2$$

$$(10, 15, 20) = (15 - 10 - 7)^2 + (20 - 15 - 7)^2 = -2^2 + (-2)^2 = 8$$

**10.2** Which of these are not a possible search sequence for 363 in a binary tree of 1 to 1000

**10.2.a** 2, 252, 401, 398, 330, 344, 397, 363

This is a valid search

**10.2.b** 924, 220, 911, 244, 898, 258, 362, 363

This is a valid search

**10.2.c** 925, 202, 911, 240, 912, 245, 363

This is not a valid path due to 912 being under the smaller branch of 911

**10.3** Write code to find the predecessor / ordered node before

predecessor(x)

```
1: while MIN(x.p) == x do
2:   x = x.p
3: end while
4: return MIN(x.p)
```

**10.4** Draw a red black tree insert of 36

As seen on the figure, first it is inserted.

Then uncle is red so parent, uncle and granparent change color

The uncle is black and in form of triangle, the parent 30 is rotated in left direction.

The uncle is black and in form of line, so parent and grandparent change

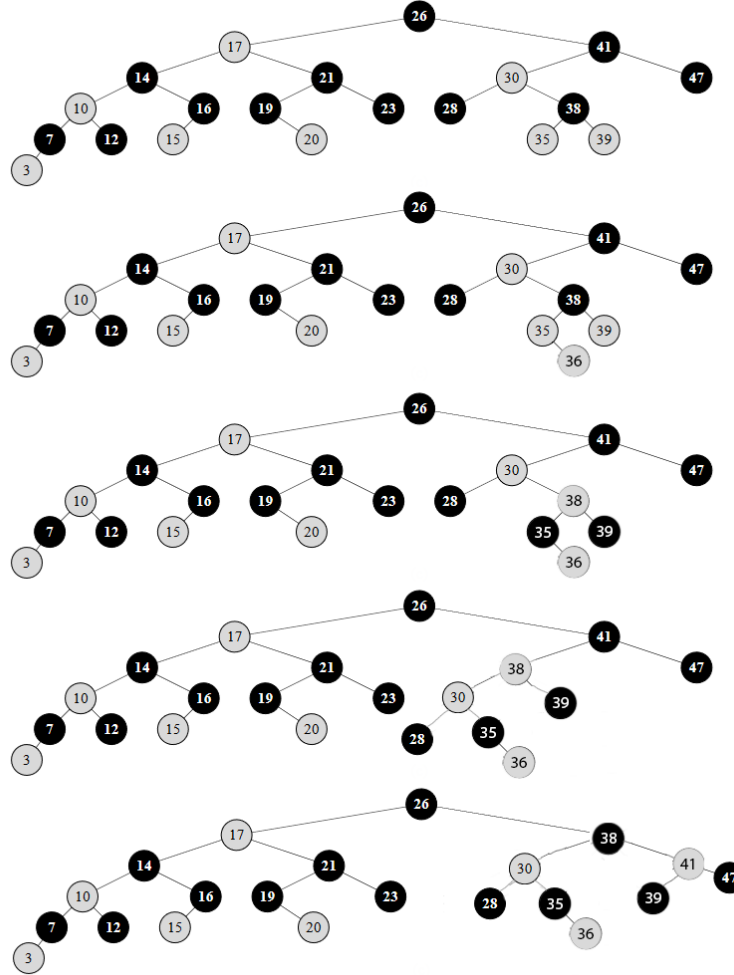


Figure 6: Insertion of element 36 in red-black tree

color and right rotation on grandparent.

### 10.5 What is the worst run time of an unbalanced tree, for a sorted list

In the unbalanced tree the insertion will take  $n$  times by making a tree of an ordered list.

The worst case will be the ordered list, where the first element is the smallest and then in an ascending order.

resulting in making a list. This making of the tree will here take  $\frac{n(n+1)}{2}$ .

Then the walk will then take  $n$  time, making the total run time  $O(n^2 + n)$

### 10.6 What is the worst run time of a balanced red-black tree, for a sorted list

Creating the tree will take  $O(n \log n)$  times, due to the height never getting over  $\log n$ .

There when doing the walk it takes in total  $O(n \log n + n)$

### 10.7 Argue that sorting $n$ elements with binary tree will take $\Omega(n \log n)$

A insertion will take  $\log n$  time.

Therefore doing that  $n$  time will be  $n \log n$ .

The walk will take  $n$  but that still make the run time  $\Omega(n \log n)$

### 10.8 What is the difference between binary search tree and min-heap

The main difference is, that in a binary search tree take for instance the root, every element to the right will always be larger than the root.

Where as the min-heap is only relative to the parent which side the child is one.

### 10.9 Describe a range search for the binary tree, with the run time $\Theta(m + \log n)$

This is pretty simple. First a search is done for the first key, then a walk is done from there until the end range key is found.

## 11 Week

### 11.1 Insert 18 and 26 into the given hashtable with linear opening

0	1	2	3	4	5	6	7	8	9	10
67	20	17		33		16	2			15



$$h(x) = (7x + 4) \bmod 11$$

$$h(18) = 130 \bmod 11 = 9 \bmod 11$$

$$h(26) = (186 \bmod 11 = 10 \bmod 11$$

But since 10 is already in use the next linear free index is 3

0	1	2	3	4	5	6	7	8	9	10
67	20	17	26	33		16	2		18	15

**11.2 Insert 5,28,19,15,20,33,12,17,10 into a hash table with 9 slots and  $h(x) = x \bmod 9$ , as a chain**

0	1	2	3	4	5	6	7	8
	10,19,28	20	12		5	15,33		17

**11.3 Perform hashing function on 10,22,31,4,15 with linear,quadratic, and double hashing, on mod 11 table**

Linear hash										
0	1	2	3	4	5	6	7	8	9	10
22				4	15				31	10

Quadratic (c=2) hash										
0	1	2	3	4	5	6	7	8	9	10
22				4	15				31	10

Double hash										
0	1	2	3	4	5	6	7	8	9	10
22				4				15	31	10

## 12 Week

### 12.1 In a tree which stores the number of children, how to find the $i$ successor to a node?

This would just require to find the index of the node with  $OS - Rank$  and then subtract  $i$  and perform a  $OS - Select$  to find the successor.

### 12.2 Find the number of occurrences of $i < j$ and $A[i] > A[j]$ in a given array in $O(n \log n)$

This can be done using an order statistic tree.

The number of inversion for an element must be the elements current index - the correct index.

The correct index can be found in  $O(\log n)$  time using order statistic tree and this is done for each element so  $n$  times.

Therefore to find the sum of all inversion occurrences it will take  $O(n \log n)$

### 12.3 For the following factorial code which invariants are true

Factorial( $n$ )

```
1:  $i = n$ 
2:  $r = 1$ 
3: while  $i > 1$  do
4:    $r = r * i$ 
5:    $i --$ 
6: end while
7: return  $r$ 
```

- $i \leq 1$  - true
- $r = i!$  - not true
- $r! \cdot i! = n!$  - not true
- $r = n!/i!$  - true
- $r = n!$  - not true

This can all be confirmed by the example  $n = 5, r = 20, i = 3$  which is a given state in the algorithm.

## 12.4 Solve the recursion using the master theorem

**12.4.a**  $T(n) = 4 \cdot T(n/3) + n$

It is seen that  $f(n) = O(n^{\log_3(4)})$  so the run time is  $T(n) = \Omega(n^{\log_3(4)})$

**12.4.b**  $T(n) = T(n/2) + n^2$

$f(n) = \Omega(n^{\log_2(1)+\epsilon})$  where  $0 < \epsilon < 1$

run time:  $T(n) = \Theta(f(n)) = \Theta(n^2)$

**12.4.c**  $T(n) = 16 \cdot T(n/2) + n^4 + n^2$

$f(n) = \Theta(n^{\log_2(16)}) = \Theta(n^4)$

run time:  $T(n) = \Theta(n^{\log_2(16)} \cdot \log n) = \Theta(n^4 \log n)$

## 13 Week

### 13.1 Solve the recursion using the master theorem

**13.1.a**  $T(n) = 2 \cdot T(n/4) + 1$

$f(n) = \Omega(n^{\log_4(2)-\epsilon})$  where  $0 < \epsilon < 1$

$f(n) = \Omega(n^{0.5}) = \omega(\sqrt{n})$

Therefore  $T(n) = \Theta(\sqrt{n})$

**13.1.b**  $T(n) = 2T(n-1) + n$

This can not be done with the master theorem.

It can be seen in the tree the layers will be:

$n$

$2 \cdot (n-1)$

$2^2 \cdot (n-2)$

$2^i \cdot (n-i)$

$2^n \cdot (n-n)$

Therefore the tree have a height of  $2^n$  and each will have a total run time of  $O(n)$  therefore the run time will be  $O(2^n \cdot n)$

### 13.2 Rethink insertion sort as a recursive algorithm and find run time

Insertion sort recursively will first sort from  $1..n-1$  and then insert  $A[n]$ .

Therefore it will be  $T(n) = (n-1) + n$  due to the insertion taking  $n$  time

and only 1 child being made.

The tree layers will therefore be:

$n$

$n - 1$

$n - i$

$n - n$

Therefore the run time of each layer being  $O(n)$  and the height is  $n$  so the total run time is  $O(n^2)$

### 13.3 Use strassen's algorithm on the following two matrices

$$\begin{bmatrix} 1 & 3 \\ 7 & 5 \end{bmatrix} \begin{bmatrix} 6 & 8 \\ 4 & 2 \end{bmatrix}$$

$$p1 = 1(8 - 2) = 6$$

$$p2 = (1 + 3)2 = 8$$

$$p3 = (7 + 5)6 = 72$$

$$p4 = 5(4 - 6) = -10$$

$$p5 = (1 + 5)(6 + 2) = 48$$

$$p6 = (3 - 5)(4 + 2) = -12$$

$$p7 = (1 - 7)(6 + 8) = -84$$

$$\begin{bmatrix} 48 - 10 - 8 - 12 & 6 + 8 \\ 72 - 10 & 6 + 48 - 72 + 84 \end{bmatrix} = \begin{bmatrix} 18 & 14 \\ 62 & 66 \end{bmatrix}$$