
SKILL 4

Amazon S3 – Create a Bucket, Upload Files and Enable Versioning

Aim: To create an Amazon S3 bucket, upload a file, and verify object versioning using the AWS Management Console.


Step 1: Open Amazon S3

Open Amazon S3 from the AWS Management Console and choose Create bucket. A bucket is a container used to store files and folders.

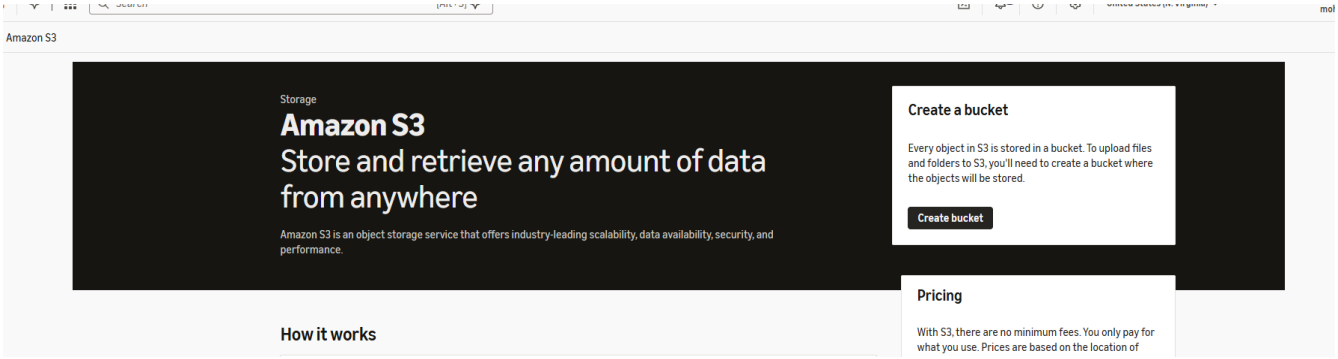

Step 2: Configure the bucket

Choose General purpose and select the AWS Region. Enter a unique bucket name. Keep the recommended ACLs-disabled and Block Public Access settings.

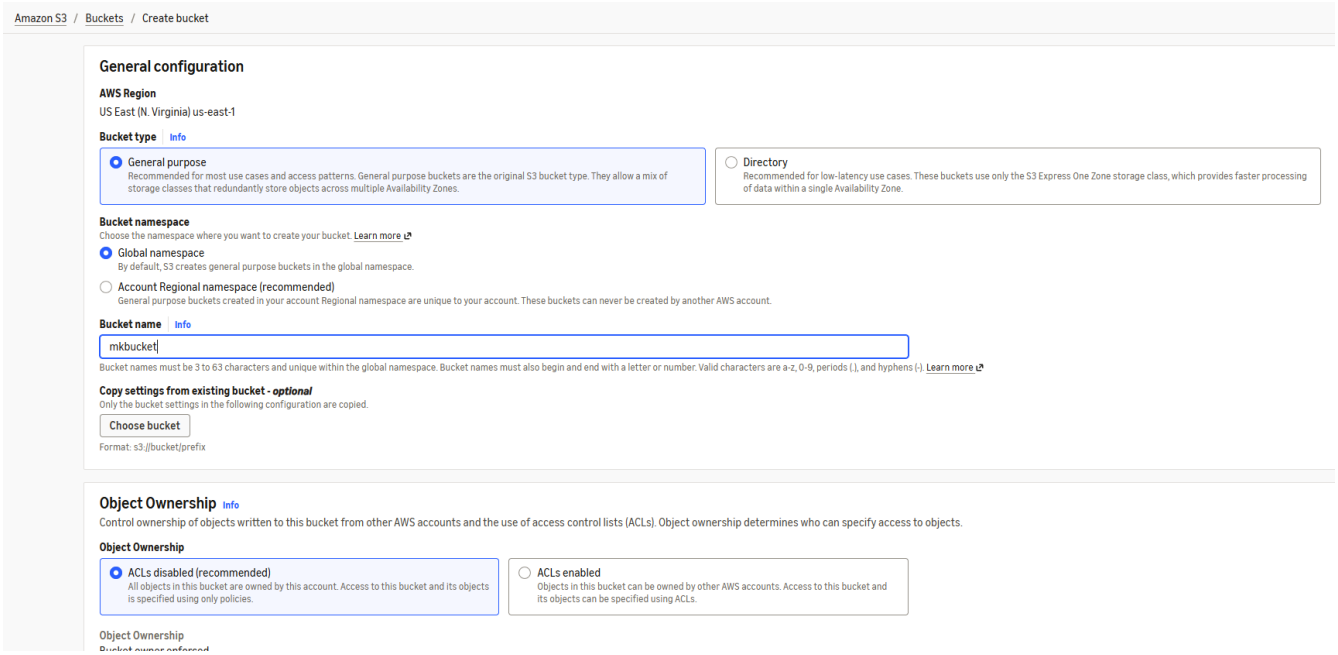

Step 3: Set bucket options

Review the bucket settings. Enable bucket versioning to retain multiple versions of an object. Tags and encryption settings can also be configured.

S3 will ignore all ACLs that grant public access to buckets and objects.

Block public access to buckets and objects granted through *new* public bucket or access point policies
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

Block public and cross-account access to buckets and objects through *any* public bucket or access point policies
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more

Bucket Versioning

- ○ Disable
- ◉ Enable

Tags - *optional*

You can use bucket tags to analyze, manage and specify permissions for a bucket. Learn more

ⓘ You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. To ensure a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. Learn more

No tags associated with this bucket.

Add new tag

You can add up to 50 tags.


Default encryption Info

Server-side encryption is automatically applied to new objects stored in this bucket.

© 2026, Amazon Web Services, Inc. or its affiliates.


Step 4: Create the bucket

Submit the configuration. The success message confirms that the bucket was created. Open the bucket to view its Objects page.

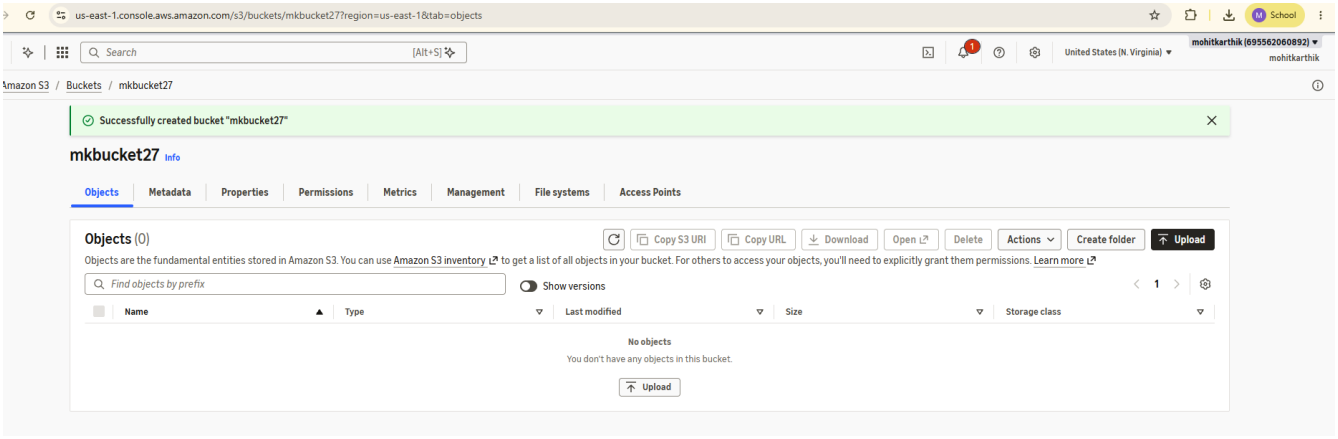

Step 5: Select a file to upload

Choose Upload inside the bucket and add the required file. Check that the file appears in the upload list and that the destination is correct.

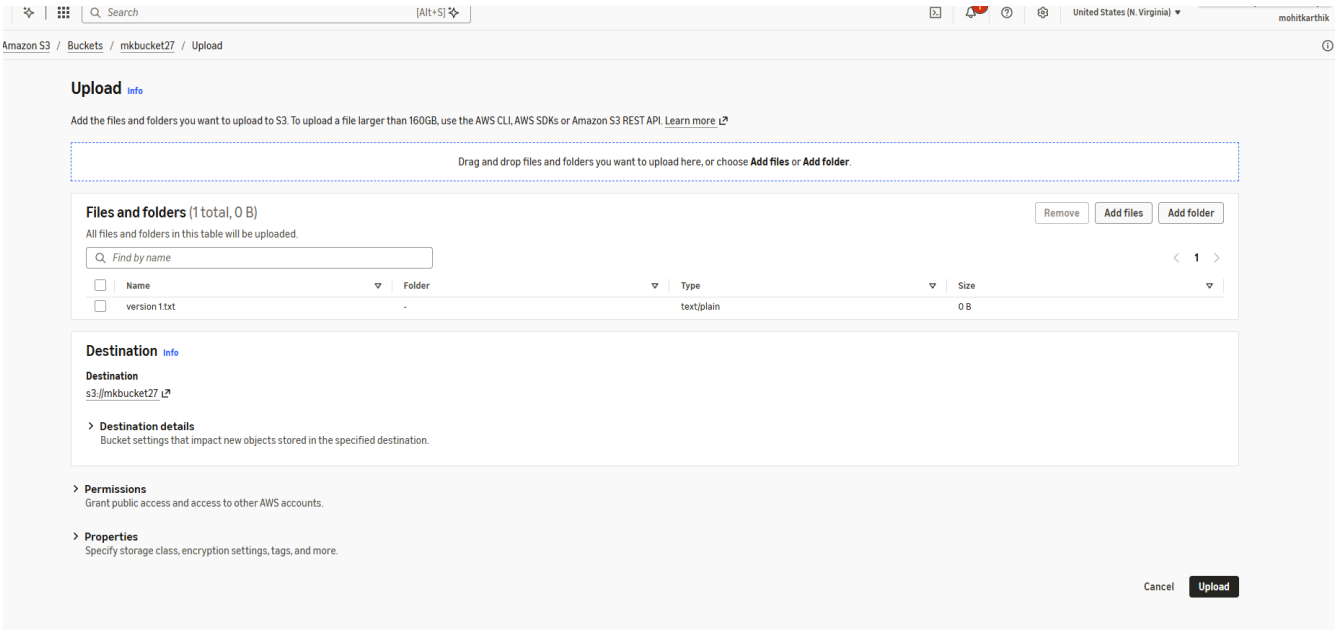

Step 6: Complete the upload

Click Upload to transfer the file. The upload status page displays whether the operation succeeded or failed.

zon S3

Upload succeeded
For more information, see the **Files and folders** table.

Upload: status

Close

After you navigate away from this page, the following information is no longer available.

Summary

Destination	Succeeded	Failed
s3://mkbucket27	1 file, 0 B (0%)	0 files, 0 B (0%)

Files and folders | Configuration

Files and folders (1 total, 0 B)


Find by name

1

Name	Folder	Type	Size	Status	Error
version 1.txt	-	text/plain	0 B	Succeeded	-


Step 7: Upload an updated file

The same file is uploaded again with updated content. Since versioning is enabled, Amazon S3 can retain this as another version.

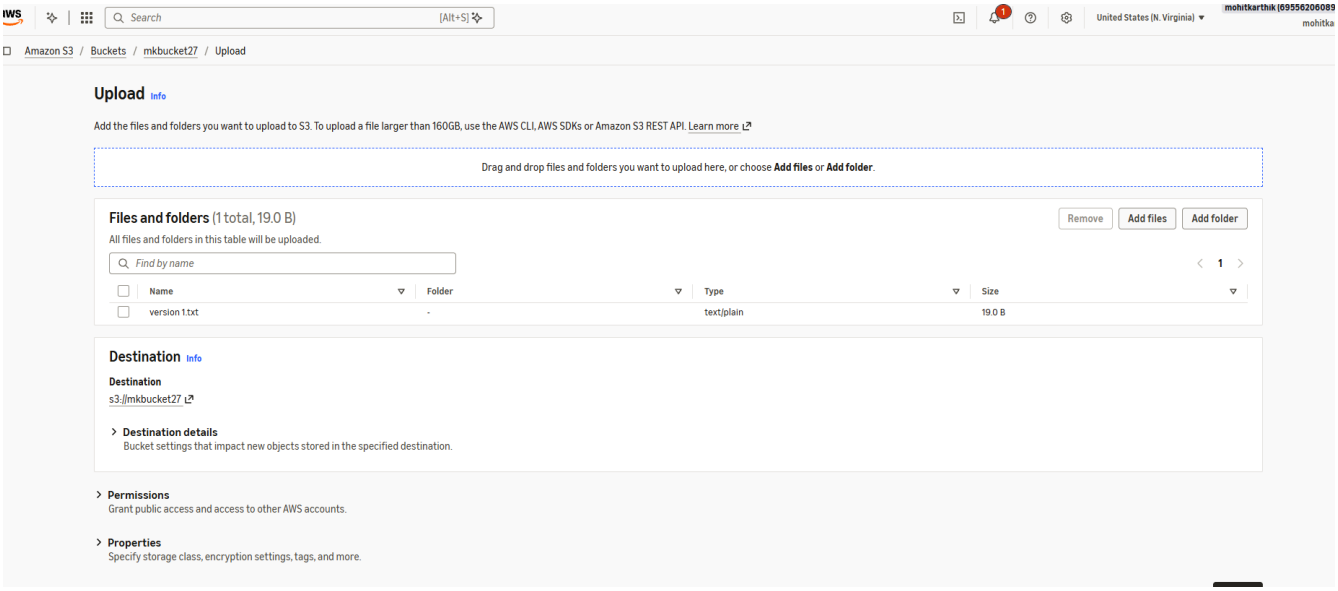

Step 8: Verify object versions

Return to the Objects tab and enable Show versions. Separate version IDs confirm that Amazon S3 has retained multiple versions of the file.

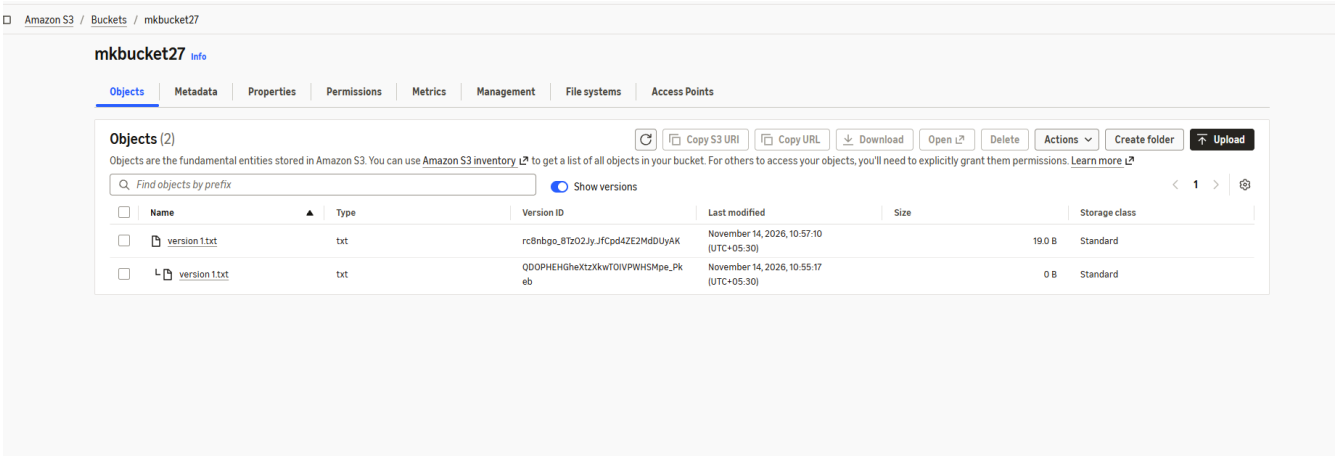

Result: The S3 bucket was created successfully, files were uploaded, and multiple versions of the file were displayed with Show versions enabled.