


SQL Project On Pizza Sales Analysis



*Conducted a detailed analysis
of pizza sales data using SQL
queries to address various
business questions related to
pizza sales*

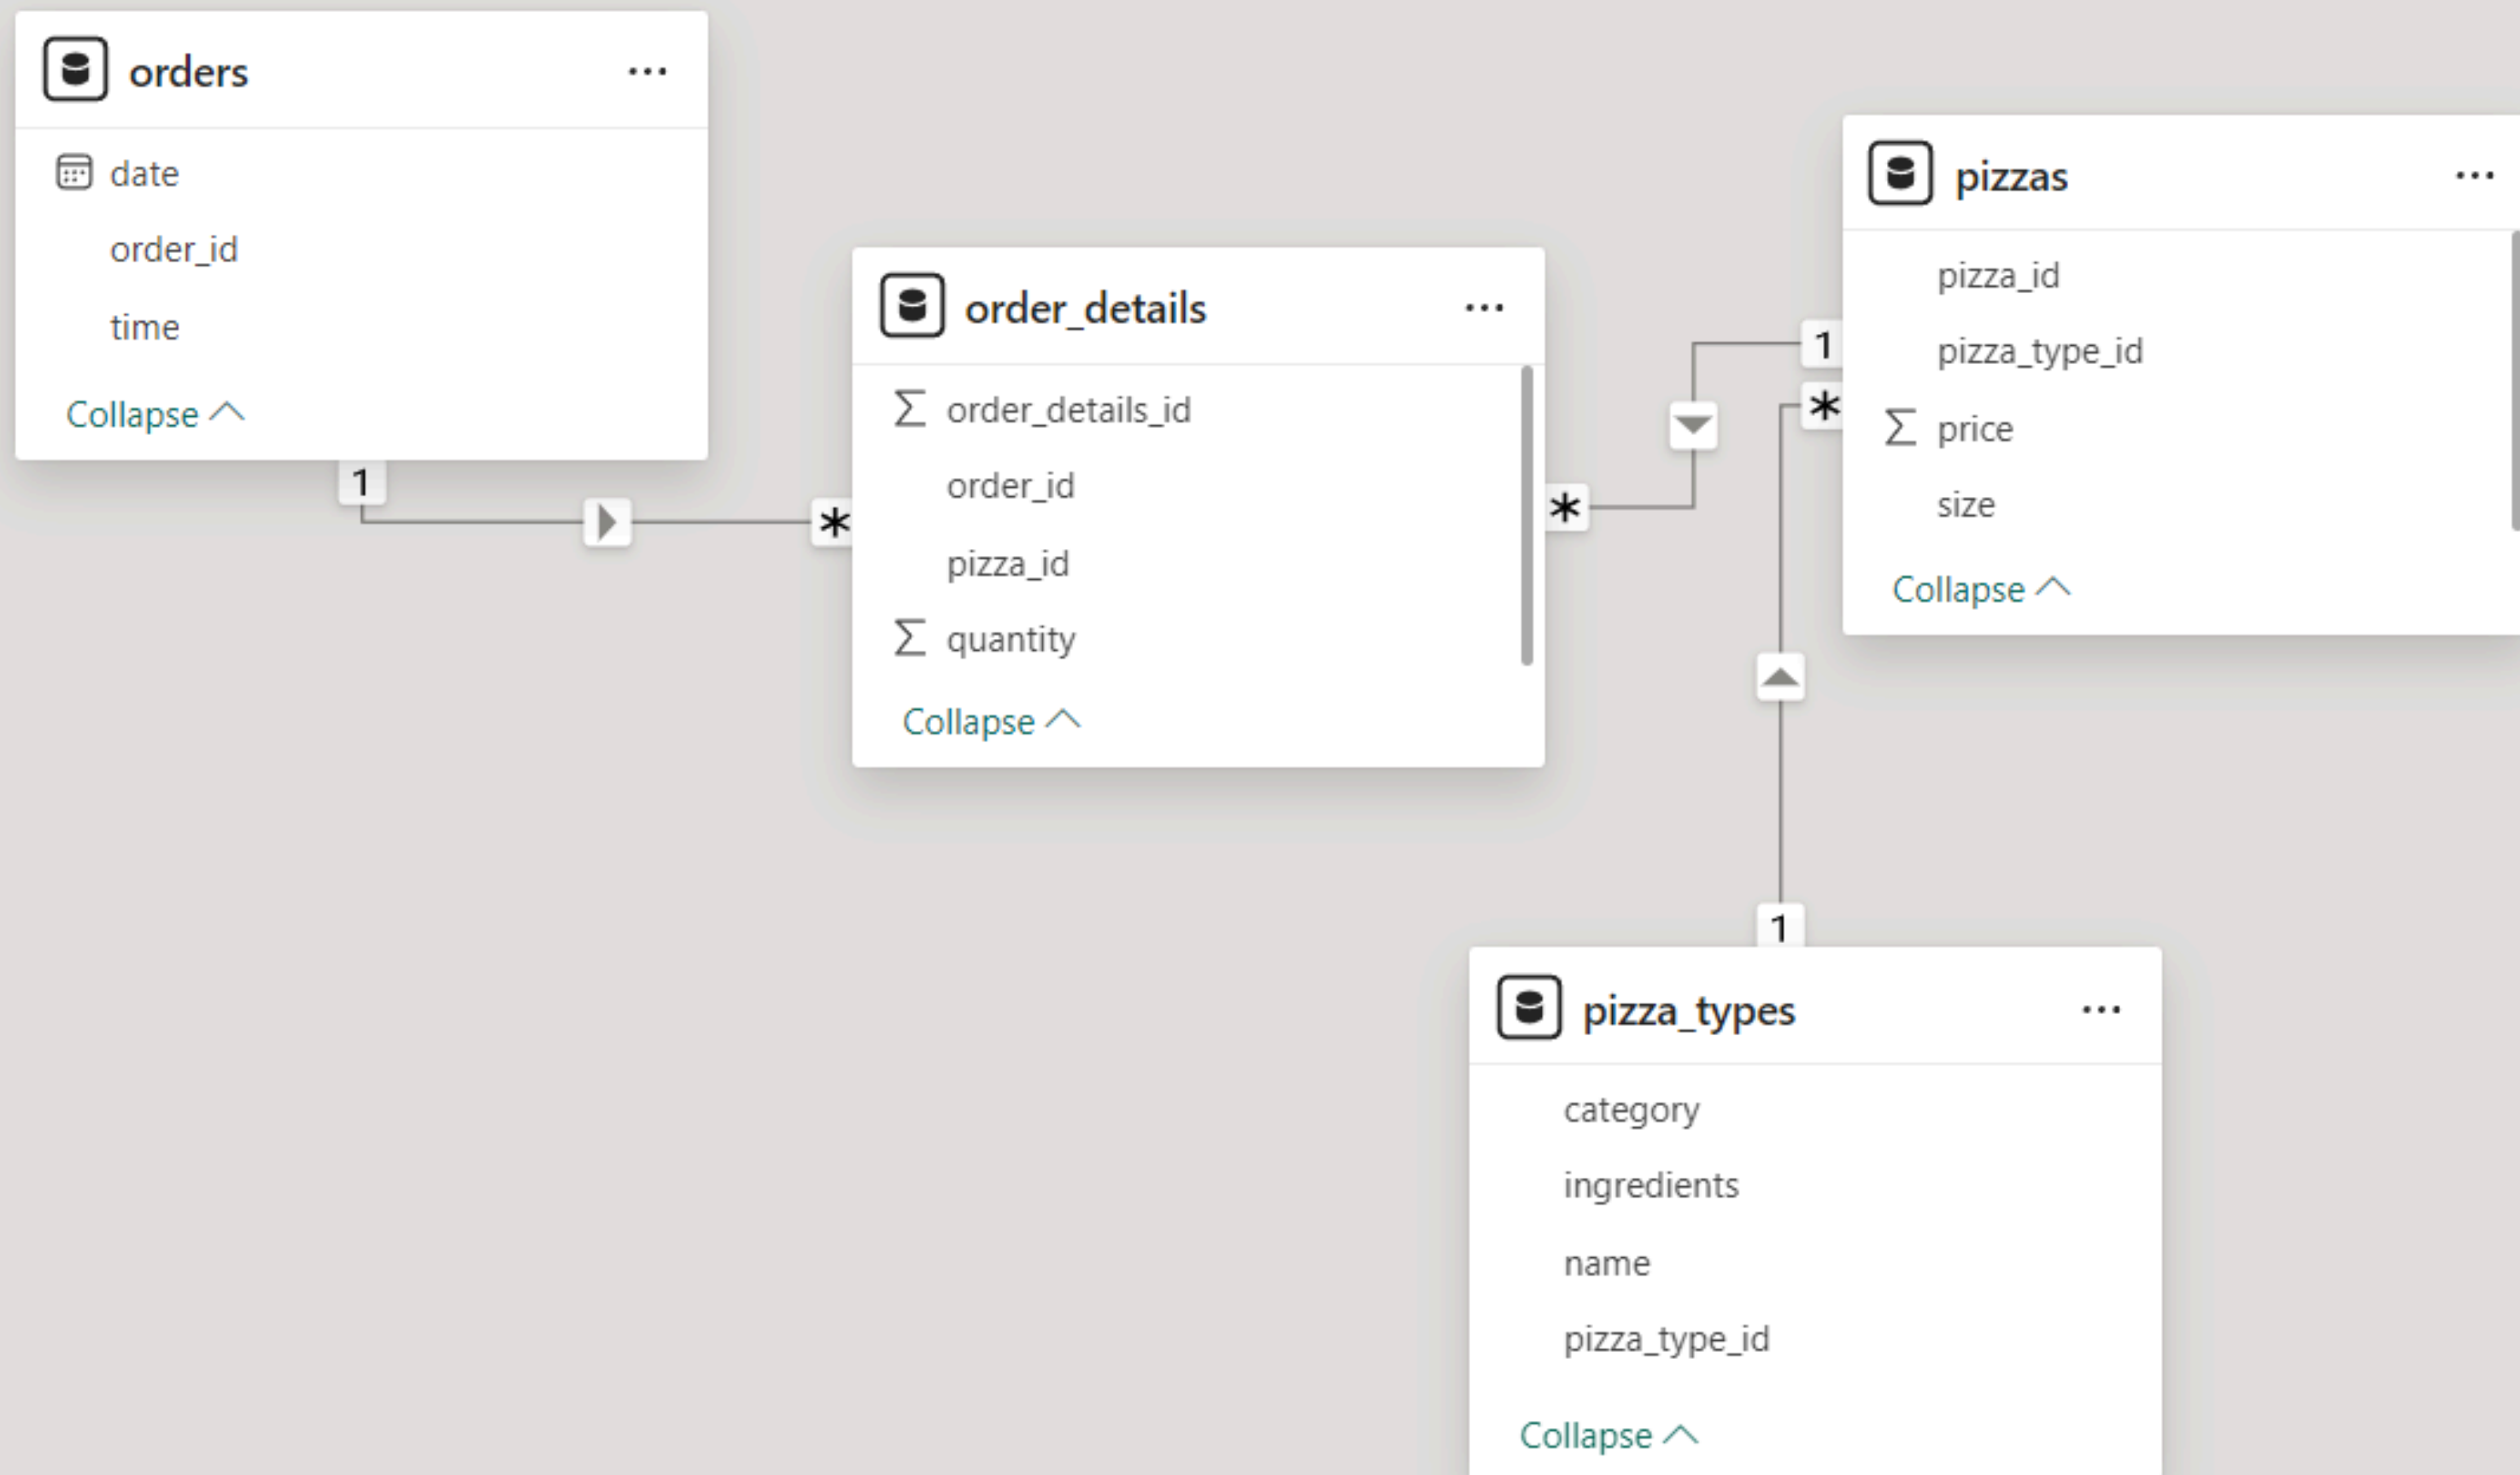

Calculate the total revenue generated from pizza sales

```
SELECT
    ROUND(SUM(order_details.quantity * pizzas.price),
          2) AS total_revenue
FROM
    order_details
    JOIN
    pizzas ON pizzas.pizza_id = order_details.pizza_id;
```

	total_revenue
▶	817860.05

Identify the highest-priced pizza

```
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
    JOIN
        pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

	name	price
▶	The Greek Pizza	35.95

Identify the most common pizza size ordered.

```
SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    pizzas
    JOIN
        order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC
LIMIT 1;
```

	size	order_count
▶	L	18526

List the top 5 most ordered pizza types along with their quantities

```
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
        pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
        order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

	name	quantity
►	The Classic Deluxe Pizza	2453
	The Barbecue Chicken Pizza	2432
	The Hawaiian Pizza	2422
	The Pepperoni Pizza	2418
	The Thai Chicken Pizza	2371

Join the necessary tables to find the total quantity of each pizza category ordered

```
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```

	category	quantity
►	Classic	14888
	Supreme	11987
	Veggie	11649
	Chicken	11050

Find the category-wise distribution of pizzas

```
SELECT
    category, COUNT(name)
FROM
    pizza_types
GROUP BY category
```

	category	count(name)
▶	Chicken	6
	Classic	8
	Supreme	9
	Veggie	9

Group the orders by date and calculate the average number of pizzas ordered per day

```
SELECT
    ROUND(AVG(quantity), 0) AS avg_pizza_ordered_per_day
FROM
    (SELECT
        orders.order_date, SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```

	avg_pizza_ordered_per_day
▶	138

Determine the top 3 most ordered pizza types based on revenue

```
SELECT
    pizza_types.name,
    SUM(order_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
    JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

	name	revenue
►	The Thai Chicken Pizza	43434.25
	The Barbecue Chicken Pizza	42768
	The California Chicken Pizza	41409.5

Calculate the percentage contribution of each pizza type to total revenue

```
SELECT
    pizza_types.category,
    ROUND((SUM(order_details.quantity * pizzas.price) / (SELECT
        ROUND(SUM(order_details.quantity * pizzas.price),
            2) AS total_revenue
    FROM
        order_details
        JOIN
        pizzas ON pizzas.pizza_id = order_details.pizza_id)) * 100,
    2) AS revenue
FROM
    pizza_types
    JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```

	category	revenue
►	Classic	26.91
	Supreme	25.46
	Chicken	23.96
	Veggie	23.68

Analyze the cumulative revenue generated over time

```
select order_date,  
sum(revenue) over(order by order_date) as cum_revenue  
from  
(select orders.order_date,  
sum(order_details.quantity * pizzas.price) as revenue  
from order_details join pizzas  
on order_details.pizza_id = pizzas.pizza_id  
join orders  
on orders.order_id = order_details.order_id  
group by orders.order_date) as sales ;
```

	order_date	cum_revenue
▶	2015-01-01	2713.8500000000004
	2015-01-02	5445.75
	2015-01-03	8108.15
	2015-01-04	9863.6
	2015-01-05	11929.55
	2015-01-06	14358.5
	2015-01-07	16560.7
	2015-01-08	19399.05
	2015-01-09	21526.4
	2015-01-10	23990.350000000002
	2015-01-11	25862.65
	2015-01-12	27781.7
	2015-01-13	29831.300000000003
	2015-01-14	32358.700000000004
	2015-01-15	34343.50000000001
	2015-01-16	36937.65000000001
	2015-01-17	39001.75000000001
	2015-01-18	40978.600000000006
	2015-01-19	43365.75000000001
	2015-01-20	45763.65000000001
	2015-01-21	47804.20000000001
	2015-01-22	50300.90000000001