AIM:

To program using class, object, package, overloaded methods, command line arguments.

Package Diagram:

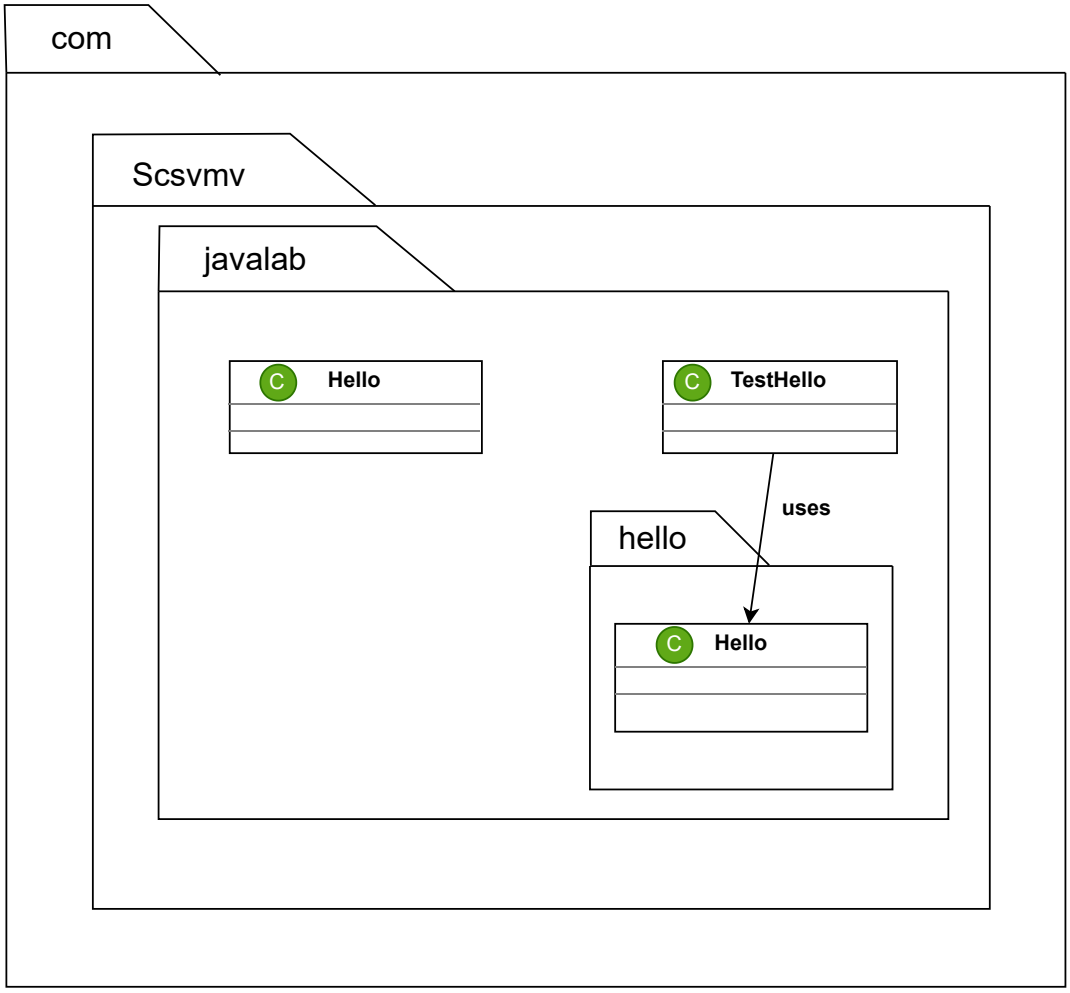

Class Diagrams:

com.scsvmv.javalab.hello.Hello

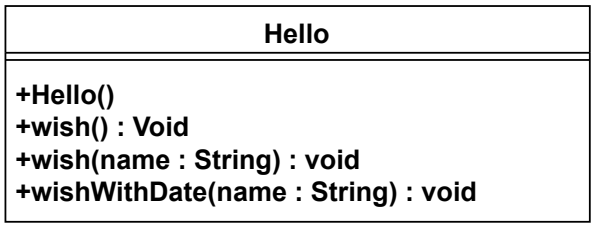

com.scsvmv.javalab.Hello



com.scsvmv.javalab.TestHello

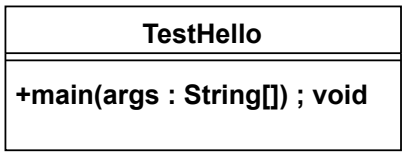

Program 1:

TestHello.java:

```
package com.scsvmv.javalab;

import com.scsvmv.javalab.hello.Hello;

public class TestHello {
public static void main(String[] args) {

Hello simpleHello = new Hello();
simpleHello.wish();

com.scsvmv.javalab.hello.Hello h =
new com.scsvmv.javalab.hello.Hello();

if (args.length > 0){
h.wish(args[0]);
h.wishWithDate(args[0]);
}
 else {
System.out.println("Usage:");
System.out.println("java
com.scsvmv.javalab.TestHello ");
System.out.println("Example:");
System.out.println("java
com.scsvmv.javalab.TestHello Student");
}
}
}
```

Hello.java: *(com.scsvmv.javalab)*

```
package com.scsvmv.javalab;

public class Hello
 {
public void wish()
 {
System.out.println("Hello World");
}
}
```

Hello.java: *(com.scsvmv.javalab.hello)*

```
package com.scsvmv.javalab.hello;
import java.util.Date;

public class Hello {

public Hello() {
}

public void wish() {
System.out.println("Hello World");
}

public void wish(String name) {
System.out.println("Hello " + name);
}

public void wishWithDate(String name) {
Date today = new Date();
System.out.println("Hello " + name + " |
Date: " + today);
}
}
```

Output:

Sample Output (with argument):

Hello World
Hello Seetharaman
Hello Seetharaman | Date: Thu Feb 05 10:30:15 IST 2026

Sample Output (without argument)

Hello World
Usage:
java com.scsvmv.javalab.TestHello
Example:
java com.scsvmv.javalab.TestHello Seetharaman

Result: