

How to solve Access to XMLHttpRequest has been blocked by CORS policy?

Asked 5 years, 10 months ago Modified 5 years, 10 months ago Viewed 7k times



2



[This question is original in Spanish](#), I used Google Translate for post the same question here, I really so sorry if the syntax isn't the best, I did my better work to translate the fully question here. **THANKS!**

Good morning everyone

I have a Rest API in C #, and I have several GET and POST methods in that API, I tried all the methods using Postman and they worked perfectly, they all give me the answers I expect, the problem arises when I'm trying to consume them from my Front, I tried using Axios and Ajax and everyone throws the following exception:

- Axios

```
Access to XMLHttpRequest at 'http://192.168.253.3:8017/api/usuario/' from origin 'http://localhost:8080' has been blocked by CORS policy: Response to preflight request doesn't pass access control check: It does not have HTTP ok status.
POST http://192.168.253.3:8017/api/usuario/ net::ERR_FAILED
```

- jQuery Ajax:

```
Access to XMLHttpRequest at 'https://localhost:44377/api/usuario/verificador/' from origin 'https://localhost:8080' has been blocked by CORS policy: Response to preflight request doesn't pass access control check: It does not have 'Access-Control-Allow-Origin' header in the response.
POST https://localhost:44377/api/usuario/verificador/ net::ERR_FAILED
```

I managed to get this error more accurate haha:

```
Access to XMLHttpRequest at 'https://localhost:44377/api/usuario/' from origin 'http://localhost:8080' has been blocked by CORS policy: Response to preflight request doesn't pass access control check: The value of the 'Access-Control-Allow-Origin' header in the response must not be the wildcard '*' when the request's credentials mode is 'include'. The credentials mode of requests initiated by the XMLHttpRequest is controlled by the withCredentials attribute.
```

I thought it could be first because the API was in https and my front in http, so I placed both in https and both in http and this did not solve it.

The way I am consuming it is as follows:

- Axios:

```
let url = this.apiSeguridad + "usuario/";
let data = {
  Nit_ID: this.userInfo.nit_ID.ID,
  UserName: this.userInfo.userName.ID,
  Password: btoa(this.password),
  Public_IP: this.publicIP,
  Private_IP: this.localIP
};
console.log(url, data);
let resultApi = await axios.post(url, data);
```

I also tried using the following code:

```
let url = this.apiSeguridad + "usuario/";
let config = {
  headers: {
    "Content-Type": "application/json",
    "cache-control": "no-cache"
  }
};
let data = JSON.stringify({
  Nit_ID: this.userInfo.nit_ID.ID,
  UserName: this.userInfo.userName.ID,
  Password: btoa(this.password),
  Public_IP: this.publicIP,
  Private_IP: this.localIP
});
console.log(url, data);
let resultApi = await axios.post(url, data, config);
```

And it didn't work out.

In Ajax I tried in similar ways but it was more to validate if the request was valid but throws the same error, I am interested in making it work in axios.

GET requests work perfectly, I only get the error in POST requests.

The configuration I have of the API on the web.config is this:

```
<httpProtocol>
  <customHeaders>
    <add name="Access-Control-Allow-Origin" value="*" />
    <add name="Access-Control-Allow-Headers" value="Origin, X-Requested-With, Content-Type, Accept" />
    <add name="Access-Control-Allow-Methods" value="POST,GET,PUT,DELETE" />
  </customHeaders>
</httpProtocol>
</system.webServer>
```

And the POST method that I want to consume is like this:

```
// POST api/usuario/
/// <summary>
/// Función post para la validación de datos del usuario
/// </summary>
/// <param name="data"></param>
/// <returns></returns>
// POST api/usuario
[AllowAnonymous]
Referencias
public IHttpActionResult Post([FromBody]InfoEntryValidateUsuarioClass data)
{
  try
  {
    if (data != null)
    {
      if (!string.IsNullOrEmpty(data.Nit_ID) && !string.IsNullOrEmpty(data.UserName) && !string.IsNullOrEmpty(data.Password))
      {

```

Well, now, where I think the problem may be is that I am using `JWT` in my API and added this line of code in the `WebApiConfig.cs` :

```
public static class WebApiConfig
{
    1 referencia
    public static void Register(HttpConfiguration config)
    {
        // Configuración y servicios de API web

        // Rutas de API web
        config.MapHttpAttributeRoutes();

        //Validación de headers
        config.MessageHandlers.Add(new TokenValidationHandler());


        config.Routes.MapHttpRoute(
            name: "DefaultApi",
            routeTemplate: "api/{controller}/{id}",
            defaults: new { id = RouteParameter.Optional }
        );
    }
}
```

That I am supposed to validate the header for all requests to methods in which I have the attribute [Authorize]

To implement the JWT I used [this website](#), that's where I took and added that line of code.

I would like your help to be able to solve it, I don't know if it's API configuration or how I consume the API from axios or what.

The application from postman works correctly and answers me as I would like, here is an example:

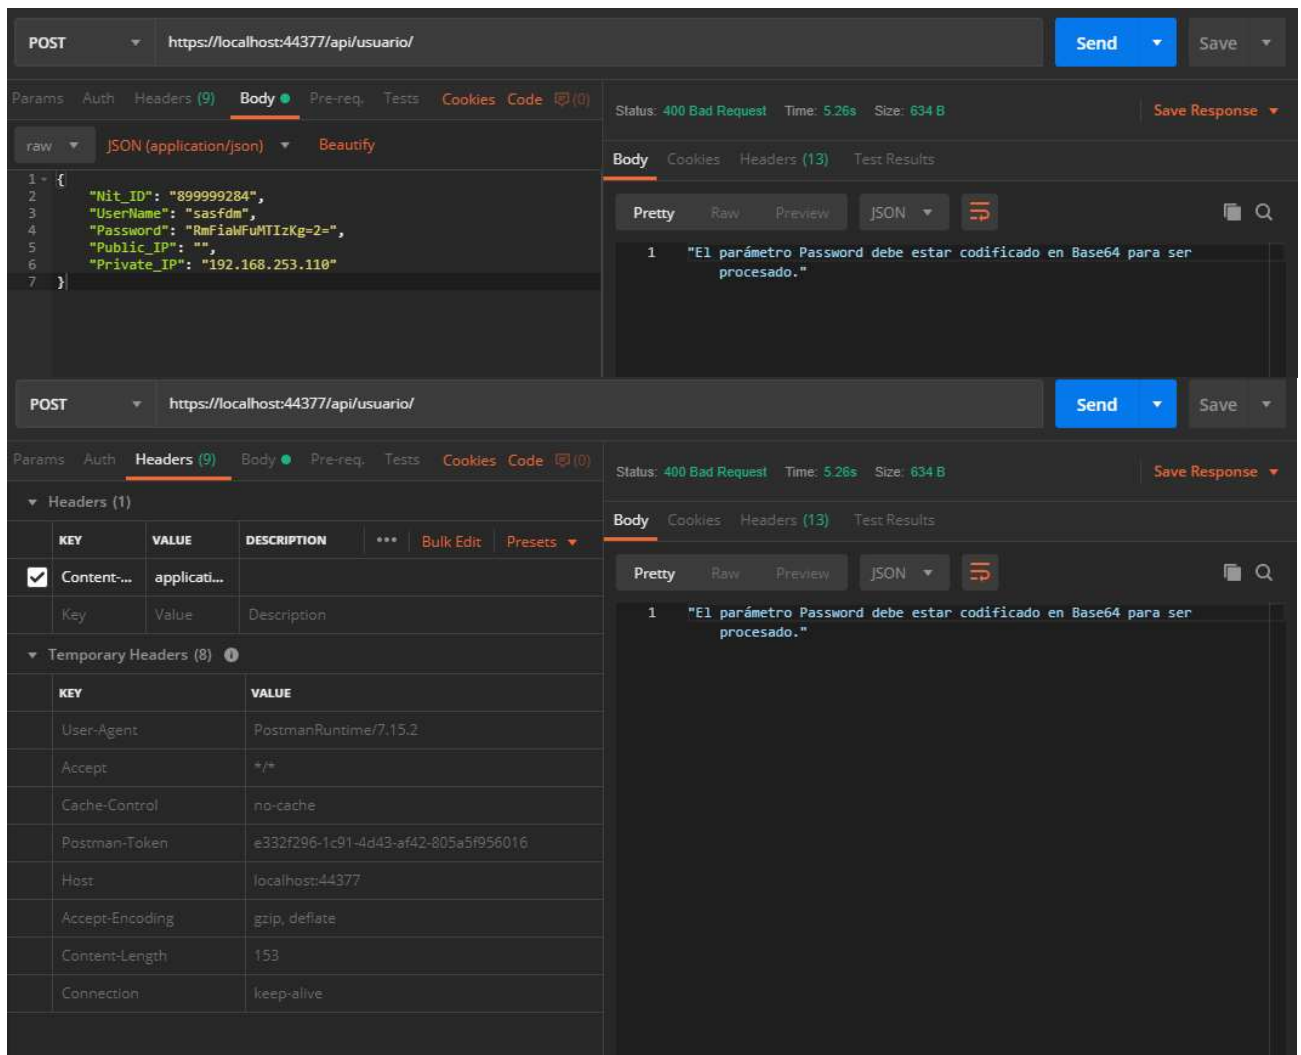

The image displays two screenshots of the Postman application interface, showing a failed POST request to `https://localhost:44377/api/usuario/`.

Top Screenshot (Request Body):

- Method:** POST
- URL:** `https://localhost:44377/api/usuario/`
- Status:** 400 Bad Request
- Time:** 5.26s
- Size:** 634 B
- Body (JSON):**

```
{  "Nit_ID": "899999284",  "UserName": "sasfdm",  "Password": "RmFiaWfuMTIzKg=2=",  "Public_IP": "",  "Private_IP": "192.168.253.110"}
```
- Response Body:** 1 "El parámetro Password debe estar codificado en Base64 para ser procesado."

Bottom Screenshot (Request Headers):

- Method:** POST
- URL:** `https://localhost:44377/api/usuario/`
- Status:** 400 Bad Request
- Time:** 5.26s
- Size:** 634 B
- Headers (9):**

KEY	VALUE	DESCRIPTION
Content-Type	application/json	
Key	Value	Description
- Temporary Headers (8):**

KEY	VALUE
User-Agent	PostmanRuntime/7.15.2
Accept	*/*
Cache-Control	no-cache
Postman-Token	e332f296-1c91-4d43-af42-805a5f956016
Host	localhost:44377
Accept-Encoding	gzip, deflate
Content-Length	153
Connection	keep-alive
- Response Body:** 1 "El parámetro Password debe estar codificado en Base64 para ser procesado."

I do not add anything else to that request.

Thanks to Miguel Zarate's request (In the original Spanish post) to use Fiddler4 to verify the requests, this is what the tool shows me:

• From Postman:

The screenshot shows a Postman interface with a POST request to `/api/usuario/` using HTTP/1.1. The request headers are visible, including `Cache-Control: no-cache`, `Accept: */*`, `Accept-Encoding: gzip, deflate`, `User-Agent: PostmanRuntime/7.15.2`, `Content-Length: 153`, `Content-Type: application/json`, and a `Postman-Token`. The response is a 400 Bad Request. The response headers include `Cache-Control: no-cache`, `Date: Wed, 07 Aug 2019 14:20:37 GMT`, `Expires: -1`, `Pragma: no-cache`, `Content-Length: 76`, `Content-Type: application/json; charset=utf-8`, `Server: Microsoft-IIS/10.0`, `X-AspNet-Version: 4.0.30319`, `X-Powered-By: ASP.NET`, `X-SourceFiles: =?UTF-8?Q?pcvk\VSU0IPTkFNSUVOVE9R0LUSFVCXFNBUI9BUEIfU0VHVJJREFEXEFwaUxvZ2luXGFwaVx1c3VhcmVXA==?=`, `Access-Control-Allow-Headers: Origin, X-Requested-With, Content-Type, Accept`, `Access-Control-Allow-Methods: POST, GET, PUT, DELETE`, `Access-Control-Allow-Origin: *`, and `Connection: close`.

• From the Front:

The screenshot shows a Postman interface with an OPTIONS request to `/api/usuario/` using HTTP/1.1. The request headers include `Accept-Encoding: gzip, deflate, br`, `Accept-Language: es-419,es;q=0.9`, `User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/76.0.3809.87 Safari/537.36`, `Access-Control-Request-Headers: cache-control,content-type`, `Access-Control-Request-Method: POST`, and `Referer: http://localhost:8080/`. The response is a 405 Method Not Allowed. The response headers include `Cache-Control: no-cache`, `Date: Wed, 07 Aug 2019 14:26:45 GMT`, `Expires: -1`, `Pragma: no-cache`, `Content-Length: 72`, `Content-Type: application/json; charset=utf-8`, `Server: Microsoft-IIS/10.0`, `X-AspNet-Version: 4.0.30319`, `X-Powered-By: ASP.NET`, `X-SourceFiles: =?UTF-8?Q?pcvk\VSU0IPTkFNSUVOVE9R0LUSFVCXFNBUI9BUEIfU0VHVJJREFEXEFwaUxvZ2luXGFwaVx1c3VhcmVXA==?=`, `Access-Control-Allow-Headers: Origin, X-Requested-With, Content-Type, Accept`, `Access-Control-Allow-Methods: POST, GET, PUT, DELETE`, `Access-Control-Allow-Origin: *`, and `Allow: POST`.

This seems to be the most obvious difference between the results:

- Postman:

The screenshot shows a Postman interface with a POST request to `https://localhost:44377/api/usuario/`. The request headers include `Content-Type: application/json`, `User-Agent: PostmanRuntime/7.15.2`, `Accept: */*`, `Cache-Control: no-cache`, `Postman-Token: 6545fe0a-00da-4bae-82b4-941f441d2902`, `Host: localhost:44377`, `Accept-Encoding: gzip, deflate`, `Content-Length: 153`, and `Connection: close`. The request body is a JSON object: `{ "Nit_ID": "899999284", "UserName": "sasfdm", "Password": "RmFiaWFuMTIzKg=2=", "Public_IP": "", "Private_IP": "192.168.253.110" }`. The response is an HTTP 400 Bad Request with headers: `Cache-Control: no-cache`, `Pragma: no-cache`, `Content-Type: application/json; charset=utf-8`, `Expires: -1`, `Server: Microsoft-IIS/10.0`, `X-AspNet-Version: 4.0.30319`, `X-SourceFiles: =?UTF-8?B?QzpcvkvSU01PTkFN5U0VE9FR0lUSFVCXFNBu19BUe1fU0VHVjJREFEXEFwaUxvZ2luXGFwaVx1c3Vhcm1vXA==?=`, `X-Powered-By: ASP.NET`, `Access-Control-Allow-Origin: *`, `Access-Control-Allow-Headers: Origin, X-Requested-With, Content-Type, Accept`, `Access-Control-Allow-Methods: POST,GET,PUT,DELETE`, `Date: Wed, 07 Aug 2019 14:20:37 GMT`, and `Connection: close`. The response body is: `"El parámetro Password debe estar codificado en Base64 para ser procesado."`

- Front:

The screenshot shows a Front interface with an OPTIONS request to `https://localhost:44377/api/usuario/`. The request headers include `Host: localhost:44377`, `Connection: keep-alive`, `Access-Control-Request-Method: POST`, `Access-Control-Request-Headers: cache-control,content-type`, `Origin: http://localhost:8080`, `Sec-Fetch-Site: same-site`, `Referer: http://localhost:8080/`, `User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/76.0.3809.87 Safari/537.36`, `Accept-Encoding: gzip, deflate, br`, and `Accept-Language: es-419,es;q=0.9`. The response is an HTTP 405 Method Not Allowed with headers: `Cache-Control: no-cache`, `Pragma: no-cache`, `Allow: POST`, `Content-Type: application/json; charset=utf-8`, `Expires: -1`, `Server: Microsoft-IIS/10.0`, `X-AspNet-Version: 4.0.30319`, `X-SourceFiles: =?UTF-8?B?QzpcvkvSU01PTkFN5U0VE9FR0lUSFVCXFNBu19BUe1fU0VHVjJREFEXEFwaUxvZ2luXGFwaVx1c3Vhcm1vXA==?=`, `X-Powered-By: ASP.NET`, `Access-Control-Allow-Origin: *`, `Access-Control-Allow-Headers: Origin, X-Requested-With, Content-Type, Accept`, `Access-Control-Allow-Methods: POST,GET,PUT,DELETE`, `Date: Wed, 07 Aug 2019 14:26:45 GMT`, and `Content-Length: 72`. The response body is: `{"Message": "El recurso solicitado no admite el método http 'OPTIONS'."}`

The funny thing is that when I delete from the web.config the header `<add name =" Access-Control-Allow-Origin "value =" * "/>` the Postman continues to make the request without

problems, but from my Front I do not I can make no GET request until I place it again, but the failure continues with the POST requests.

CURL from Google Chrome console:

- CMD:

```
curl "https://localhost:44377/api/usuario/" -H "Accept: application/json, text/plain, */*" -H "cache-control: no-cache" -H "DNT: 1" -H "Referer: http://localhost:8080/" -H "User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/76.0.3809.87 Safari/537.36" -H "Sec-Fetch-Mode: cors" -H "Content-Type: application/json" --data-binary "{^\"Nit_ID\": \"899999284\", \"UserName\": \"sasfdm\", \"Password\": \"\"}" --compressed
```

- Bash:

```
curl 'https://localhost:44377/api/usuario/' -H 'Accept: application/json, text/plain, */*' -H 'cache-control: no-cache' -H 'DNT: 1' -H 'Referer: http://localhost:8080/' -H 'User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/76.0.3809.87 Safari/537.36' -H 'Sec-Fetch-Mode: cors' -H 'Content-Type: application/json' --data-binary '{\"Nit_ID\":\"899999284\", \"UserName\":\"sasfdm\", \"Password\":\"NDU0NjU0NjU0\", \"Public_IP\":\"18\"}' --compressed
```

- CMD: All:

```
curl "https://localhost:44377/api/usuario/1032494911" -H "Accept: application/json, text/plain, */*" -H "Referer: http://localhost:8080/" -H "DNT: 1" -H "User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/76.0.3809.87 Safari/537.36" -H "Sec-Fetch-Mode: cors" --compressed &
curl "https://localhost:44377/api/usuario/tipodocumento/899999284/1032494911" -H "Accept: application/json, text/plain, */*" -H "Referer: http://localhost:8080/" -H "DNT: 1" -H "User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/76.0.3809.87 Safari/537.36" -H "Sec-Fetch-Mode: cors" --compressed &
curl "https://localhost:44377/api/usuario/" -H "Accept: application/json, text/plain, */*" -H "cache-control: no-cache" -H "DNT: 1" -H "Referer: http://localhost:8080/" -H "User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/76.0.3809.87 Safari/537.36" -H "Sec-Fetch-Mode: cors" -H "Content-Type: application/json" --data-binary "{^\"Nit_ID\": \"899999284\", \"UserName\": \"sasfdm\", \"Password\": \"\"}" --compressed
```

- Bash All:

```


curl 'https://localhost:44377/api/usuario/1032494911' -H 'Accept:
application/json, text/plain, */*' -H 'Referer: http://localhost:8080/' -H 'DNT:
1' -H 'User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36
(KHTML, like Gecko) Chrome/76.0.3809.87 Safari/537.36' -H 'Sec-Fetch-Mode: cors'
--compressed ;
curl 'https://localhost:44377/api/usuario/tipodocumento/899999284/1032494911' -H
'Accept: application/json, text/plain, */*' -H 'Referer: http://localhost:8080/'
-H 'DNT: 1' -H 'User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64)
AppleWebKit/537.36 (KHTML, like Gecko) Chrome/76.0.3809.87 Safari/537.36' -H
'Sec-Fetch-Mode: cors' --compressed ;
curl 'https://localhost:44377/api/usuario/' -H 'Accept: application/json,
text/plain, */*' -H 'cache-control: no-cache' -H 'DNT: 1' -H 'Referer:
http://localhost:8080/' -H 'User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64)
AppleWebKit/537.36 (KHTML, like Gecko) Chrome/76.0.3809.87 Safari/537.36' -H
'Sec-Fetch-Mode: cors' -H 'Content-Type: application/json' --data-binary
'{"Nit_ID":"899999284","UserName":"sasfdm","Password":"MTIzNDU2Nzg5","Public_IP":"18
--compressed

```

The error lies in how to correctly send the DATA to the POST method, since if a POST method is created that does not allow data there is no problem, what it consumes without problems, when it receives parameters it does not, then **how do I send those correctly? data with Axios?**

When I don't put parameters in the API like `[FromBody] InfoEntryValidateUsuarioClass data` the command `let resultApi = await axios.post (url);` works.

If I add the `[FromBody] InfoEntryValidateUsuarioClass data` as a parameter in the API and send the data using `JSON.stringify ({...})` I receive null in the data sent, but if I do not use it, it appears again the error Access to XMLHttpRequest at 'https: // localhost: 44377 / api / user /' from origin 'http: // localhost: 8080' has been blocked by CORS policy .

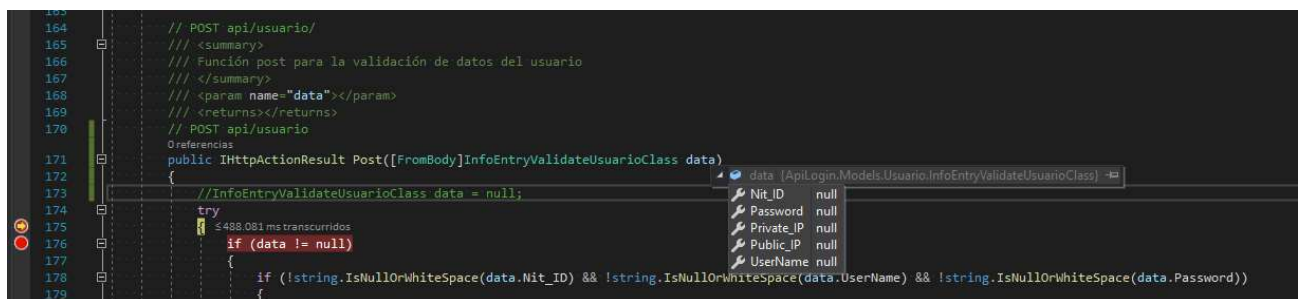

The error is in how to send that data that the API is waiting for, the class I refer to is this:


```
public class InfoEntryValidateUsuarioClass
{
    5referencias
    public string Nit_ID { get; set; }
    10referencias
    public string UserName { get; set; }
    9referencias
    public string Password { get; set; }
    1referencia
    public string Public_IP { get; set; }
    0referencias
    public string Private_IP { get; set; }
}
```

```
public class InfoEntryValidateUsuarioClass
{
    public string Nit_ID { get; set; }
    public string UserName { get; set; }
    public string Password { get; set; }
    public string Public_IP { get; set; }
    public string Private_IP { get; set; }
}
```

And I am sending the data like this:

```
let data = JSON.stringify({
    Nit_ID: this.userInfo.nit_ID.ID,
    UserName: this.userInfo.userName.ID,
    Password: btoa(this.password),
    Public_IP: this.publicIP,
    Private_IP: this.localIP
});
```

c# ajax asp.net-web-api jwt axios

Share Edit Follow

edited Aug 10, 2019 at 3:12



ekad

14.6k

26

46

49

asked Aug 7, 2019 at 14:57



Fabian Montoya

487

1

5

22

You have to compare the first request of the working code with the non working code. And then check the status of the response to see if you are getting 200 OK. I think your code is working. You are getting a response. The response is GZIP so make sure in your code you unzip the data before using. I suspect the working code it automatically gets unzipped. In c# you must add code to unzip. It also looks like the code that fails is setting the language. Some webpages will not support more than one language. – [jdweng](#) Aug 7, 2019 at 15:11

When you say "you must add code to unzip" what code I must add? – [Fabian Montoya](#) Aug 7, 2019 at 15:15

See following : [learn.microsoft.com/en-us/dotnet/api/...](https://learn.microsoft.com/en-us/dotnet/api/) – [jdweng](#) Aug 7, 2019 at 15:16

The error isn't from CORS, I do other Post method without params and it works, the problem is how I send the params data from the API – [Fabian Montoya](#) Aug 7, 2019 at 15:34

Make the Request Headers look exactly like the working. Check to see if the response is giving 200 OK. If you are getting 200 OK then you are getting a good response and the issue is with your code that is doing the processing of the response. – [jdweng](#) Aug 7, 2019 at 15:42

1 Answer

Sorted by: Highest score (default)



After verifying several things, and with the help of many people in the chat that opened, we found that the solution is in a web.config and CORS configuration directly in the API.

0



The following are added to the web.config:



```
<system.webServer>
  <handlers>
    <remove name="ExtensionlessUrlHandler-Integrated-4.0" />
    <remove name="OPTIONSVerbHandler" />
    <remove name="TRACEVerbHandler" />
    <add name="ExtensionlessUrlHandler-Integrated-4.0" path="*.*" verb="*"
type="System.Web.Handlers.TransferRequestHandler"
preCondition="integratedMode,runtimeVersionv4.0" />
  </handlers>
  <httpProtocol>
    <customHeaders>
      <add name="Access-Control-Allow-Headers" value="Origin, X-Requested-
With, Content-Type, Accept, Authorization" />
      <add name="Access-Control-Allow-Methods"
value="POST,GET,OPTIONS,PUT,DELETE" />
    </customHeaders>
  </httpProtocol>
</system.webServer>
```

And in the WebApiConfig.cs file the package was added

```
using System.Web.Http.Cors;
```

To add the safety of CORS, what was placed there was:

```
public static class WebApiConfig
{
    public static void Register(HttpConfiguration config)
    {
        // Configuración y servicios de API web

        //Configuración para verificar la seguridad del CORS
        var corsAttr = new EnableCorsAttribute("*", "*", "*");
        config.EnableCors(corsAttr);

        // Rutas de API web
        config.MapHttpAttributeRoutes();
    }
}
```

```

        config.Routes.MapHttpRoute(
            name: "DefaultApi",
            routeTemplate: "api/{controller}/{id}",
            defaults: new { id = RouteParameter.Optional }
        );
    }
}

```

And the whole issue of applications with Axios, both GET and POST, has already worked.

When I just needed to send data in the POST I did it as follows:

```

let data = {
    Nit_ID: this.userInfo.nit_ID.ID,
    UserName: this.userInfo.userName.ID,
    Password: btoa(this.password),
    Public_IP: this.publicIP,
    Private_IP: this.localIP
};
//Verificamos los datos del usuario
let resultApi = await axios.post(
    "https://localhost:44377/api/usuario",
    data
);
let result = resultApi.data;

```

To send data in the header with axes, I did it as follows:

```

let data = {
    Nit_ID: this.userInfo.nit_ID.ID,
    UserName: this.userInfo.userName.ID,
    Code: this.verificationCode
};
console.log(localStorage.getItem("DoubleFactorToken"));
let headers = {
    Authorization: localStorage.getItem("DoubleFactorToken")
};
let resultApi = await axios.post(
    "https://localhost:44377/api/usuario/verifydoublefactorcode",
    data,
    { headers: headers }
);

console.log(resultApi.data);

```

Thank you very much to all who took their time to collaborate.

Share Edit Follow

edited Aug 9, 2019 at 13:53

answered Aug 8, 2019 at 17:07



Fabian Montoya

487 1 5 22

Start asking to get answers

Find the answer to your question by asking.

[Ask question](#)

Explore related questions

[c#](#) [ajax](#) [asp.net-web-api](#) [jwt](#) [axios](#)

See similar questions with these tags.