



1. Create a simple web page displaying "Hello, World!" using JavaScript.

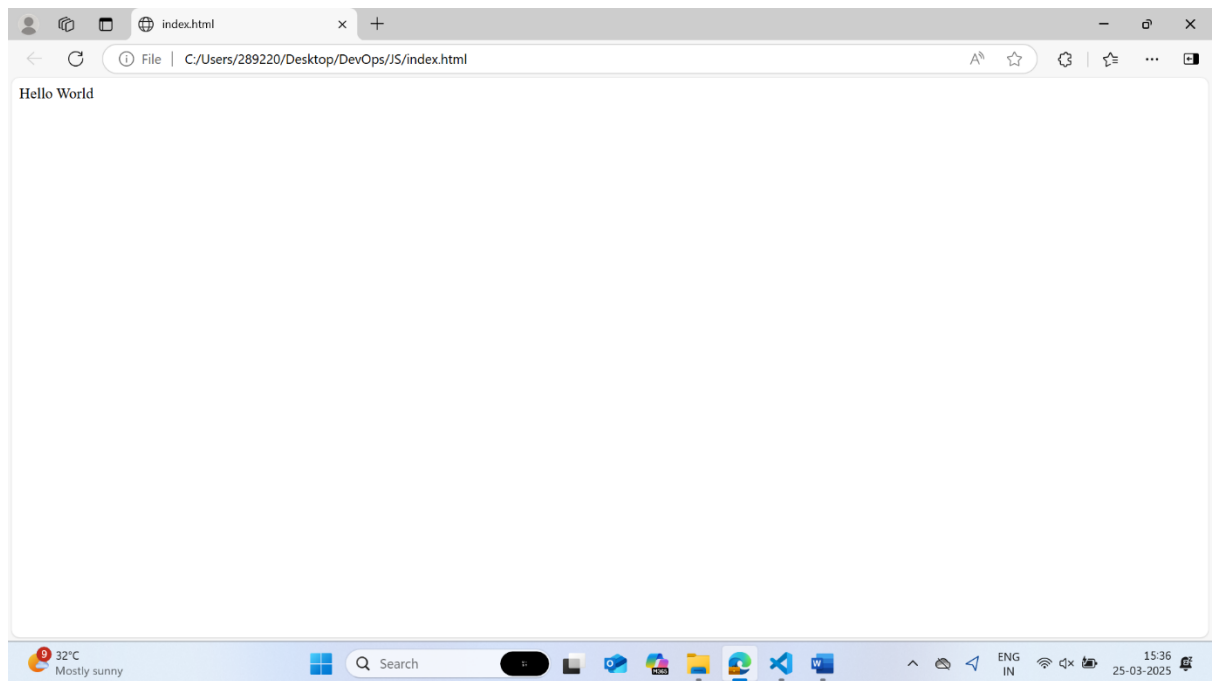

2. Write a function to sum two numbers.

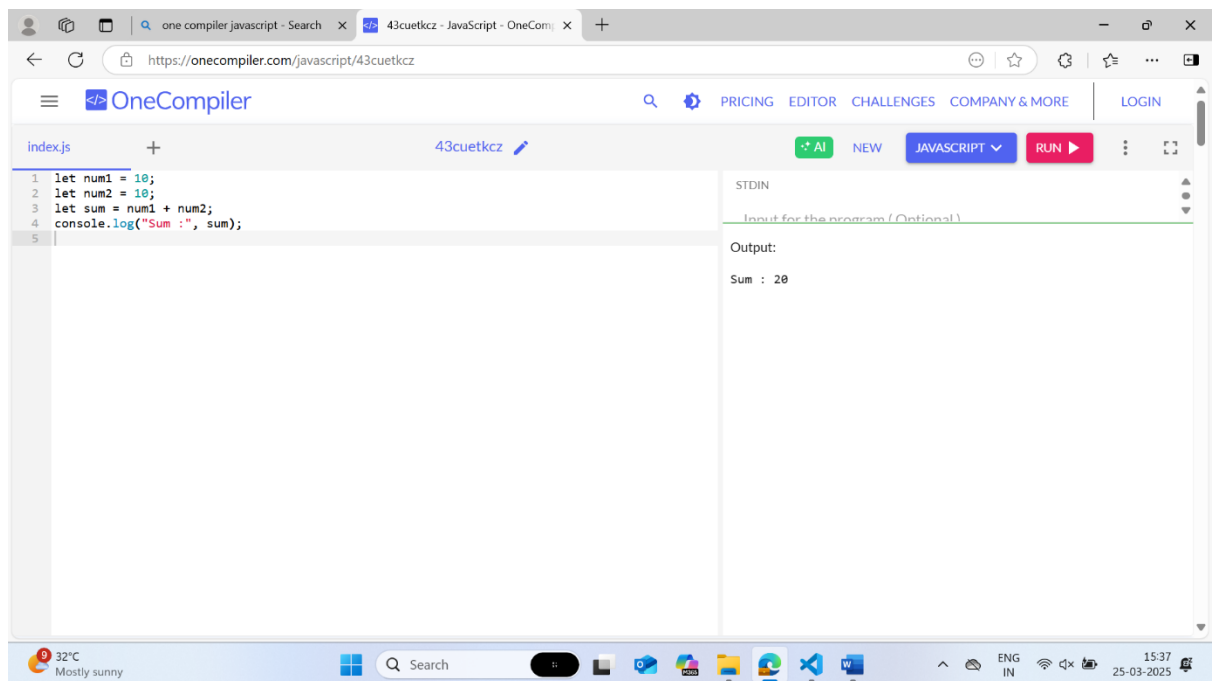

The screenshot shows the OneCompiler website interface. The code editor on the left contains the following JavaScript code:

```
1 function additionFunction(a, b) {  
2   return a + b;  
3 }  
4  
5 let num1 = 5;  
6 let num2 = 10;  
7 let sum = additionFunction(num1, num2);  
8 console.log("Sum of given numbers is :", sum);  
9
```

The right panel shows the output of the program:

```
STDIN  
Input for the program (Optional)  
Output:  
Sum of given numbers is : 15
```

The browser's taskbar at the bottom shows the date as 25-03-2025 and the time as 15:38.

3. Convert a regular function to an arrow function.

The screenshot shows the OneCompiler website interface with the code updated to use an arrow function. The code editor on the left contains the following JavaScript code:

```
1 let addition = (a, b) => a + b;  
2  
3 let num1 = 25;  
4 let num2 = 25;  
5 let sum = addition(num1, num2);  
6 console.log("Sum of given numbers is :", sum);  
7
```

The right panel shows the output of the program:

```
STDIN  
Input for the program (Optional)  
Output:  
Sum of given numbers is : 50
```

The browser's taskbar at the bottom shows the date as 25-03-2025 and the time as 15:38.

one compiler javascript - Search x 43cuetkcz - JavaScript - OneCom x +

https://onecompiler.com/javascript/43cuetkcz

OneCompiler

index.js + 43cuetkcz

1 const add = (a, b) => a + b;
2 console.log(add(5, 3));
3
4

STDIN

Input for the program (Optional)

Output:

8

32°C Mostly sunny Search 15:38 25-03-2025

one compiler javascript - Search x 43cuetkcz - JavaScript - OneCom x +

https://onecompiler.com/javascript/43cuetkcz

OneCompiler

index.js + 43cuetkcz

1 const gfg = () => {
2 console.log("Hi from GeekforGeeks!");
3 }
4 gfg();
5

STDIN

Input for the program (Optional)

Output:

Hi from GeekforGeeks!

32°C Mostly sunny Search 15:39 25-03-2025

one compiler javascript - Search x 43cuetkcz - JavaScript - OneCom x +

https://onecompiler.com/javascript/43cuetkcz

OneCompiler

index.js + 43cuetkcz AI NEW JAVASCRIPT RUN

```
1 const square = x => x*x;
2 console.log(square(4));
3
```

STDIN

Input for the program (Optional)

Output:

16

32°C Mostly sunny

Search

one compiler javascript - Search x 43cuetkcz - JavaScript - OneCom x +

https://onecompiler.com/javascript/43cuetkcz

OneCompiler

index.js + 43cuetkcz AI NEW JAVASCRIPT RUN

```
1 const gfg = ( x, y, z ) => {
2   console.log( x + y + z )
3 }
4 gfg( 10, 20, 30 );
5
```

STDIN

Input for the program (Optional)

Output:

60

32°C Mostly sunny

Search

ENG IN 15:39 25-03-2025

one compiler javascript - Search x 43cuetkcz - JavaScript - OneCom x +

https://onecompiler.com/javascript/43cuetkcz

OneCompiler

index.js + 43cuetkcz

```
1 const gfg = ( x, y, z = 30 ) => {
2   console.log( x + " " + y + " " + z );
3 }
4 gfg( 10, 20 );
5
```

STDIN

Input for the program (Optional)

Output:

10 20 30

32°C Mostly sunny Search 15:39 25-03-2025

one compiler javascript - Search x 43cuetkcz - JavaScript - OneCom x +

https://onecompiler.com/javascript/43cuetkcz

OneCompiler

index.js + 43cuetkcz

```
1 const makePerson = (firstName, lastName) =>
2   ({first: firstName, last: lastName});
3 console.log(makePerson("Pankaj", "Bind"));
4
```


STDIN

Input for the program (Optional)


Output:


{ first: 'Pankaj', last: 'Bind' }

32°C Mostly sunny Search 15:39 25-03-2025

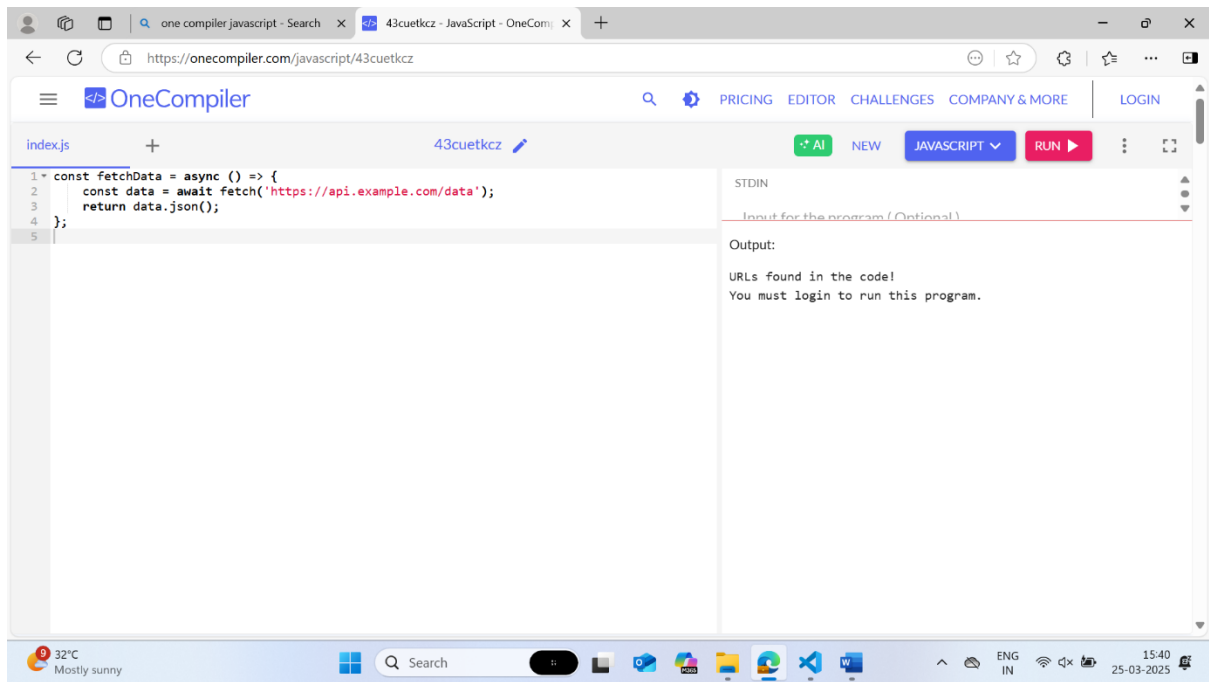


4. Create a counter function using closures

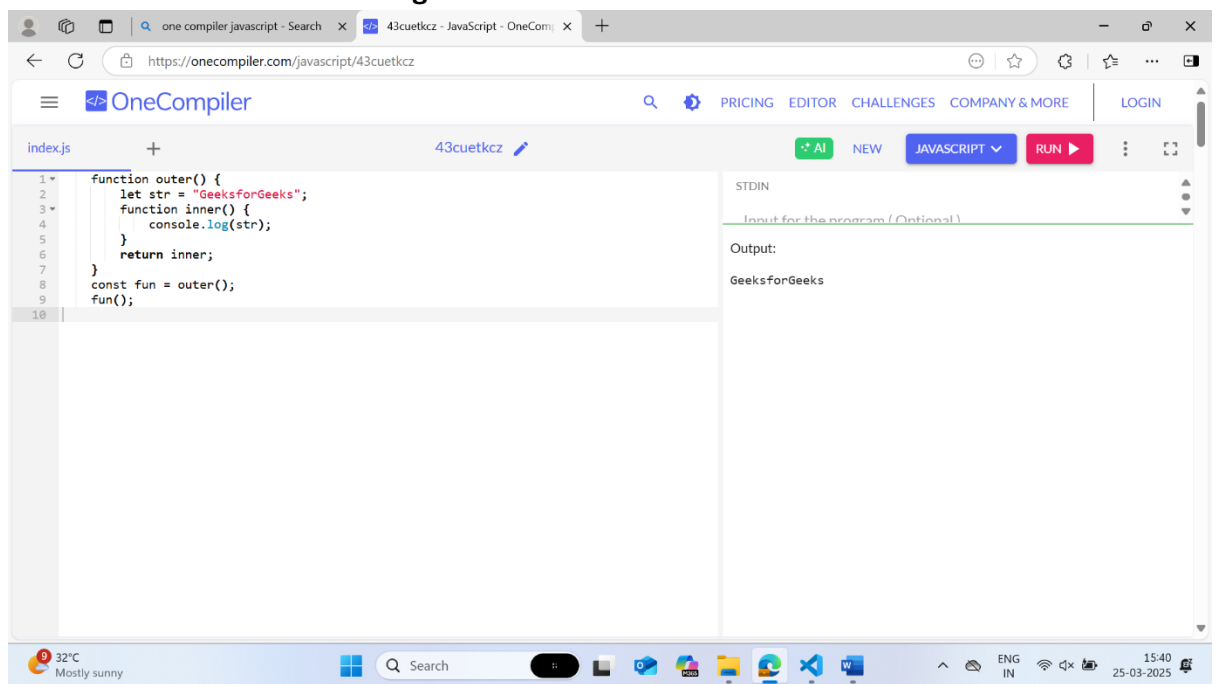

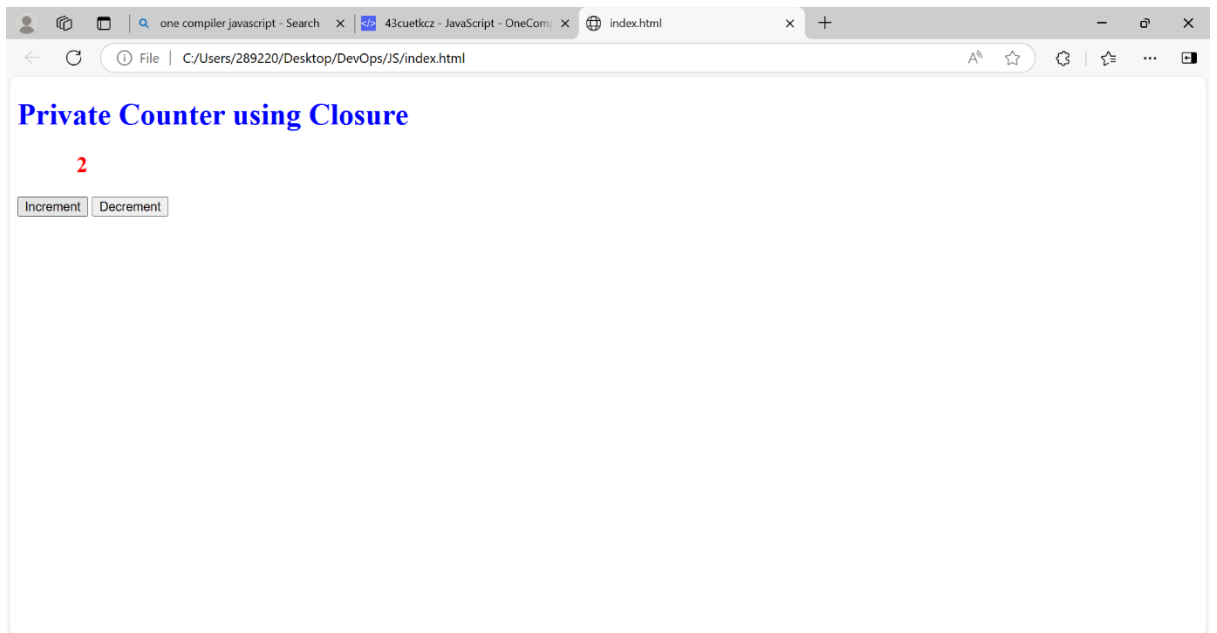


6.

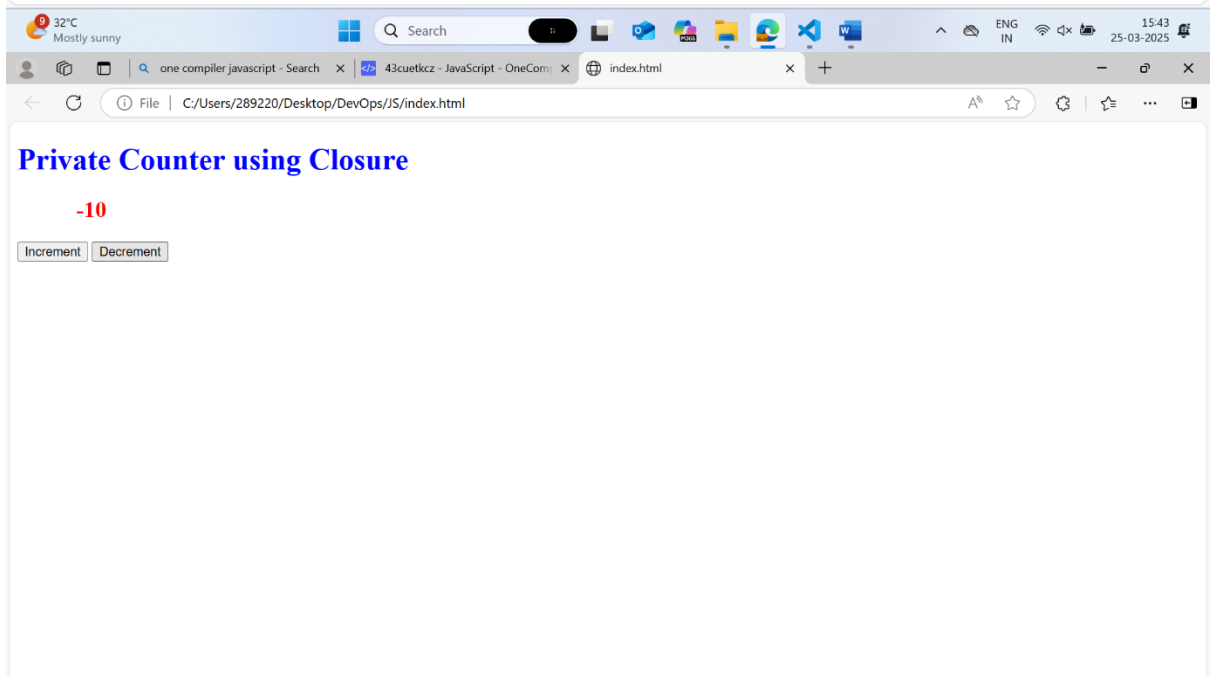


7.



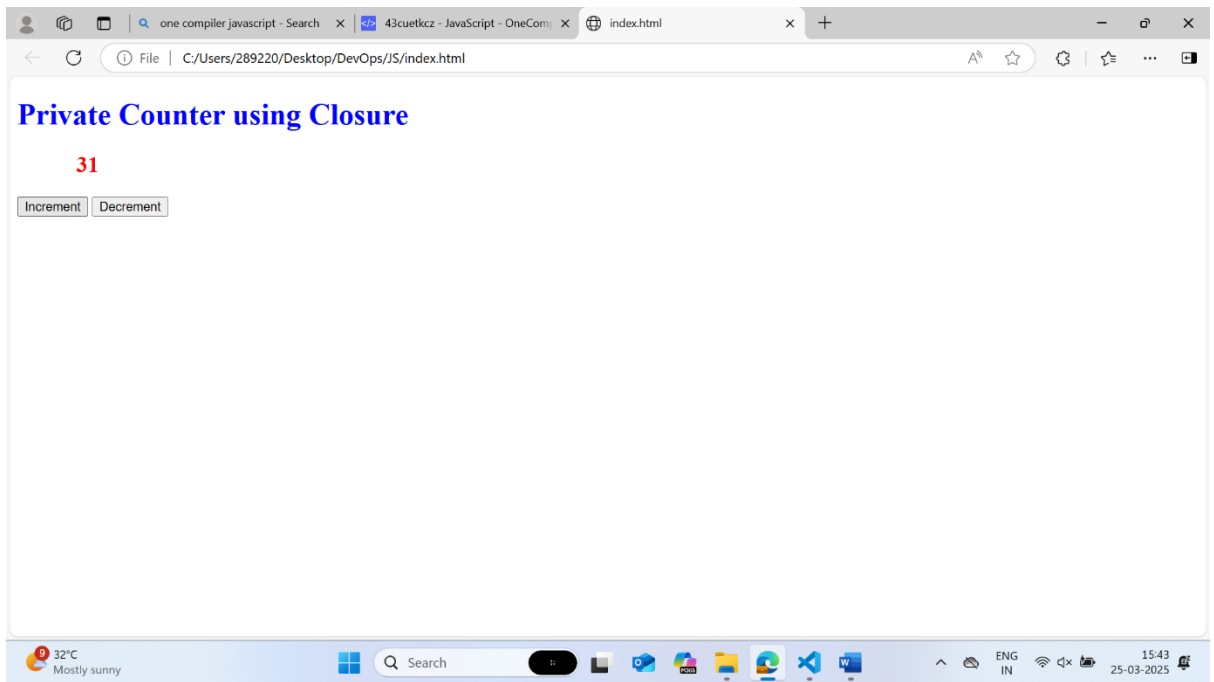

8.

5. Define an object representing a car with properties and a method.

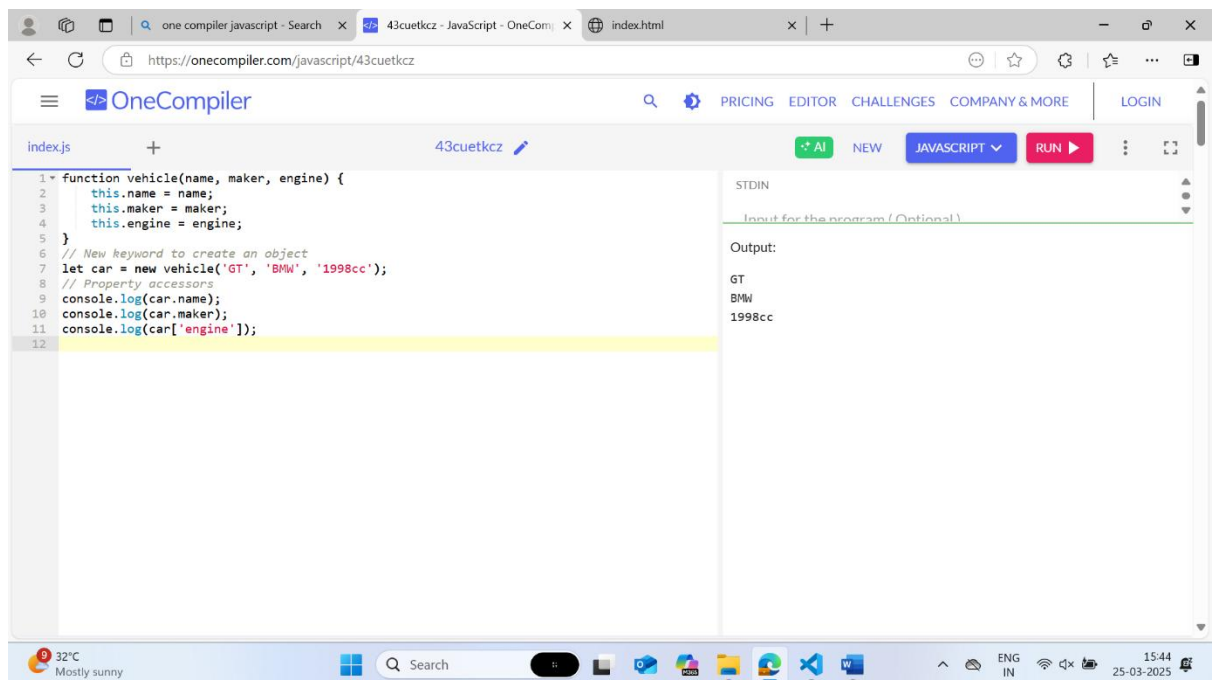

one compiler javascript - Search x 43cuetkcz - JavaScript - OneComi x index.html

https://onecompiler.com/javascript/43cuetkcz

OneCompiler

index.js + 43cuetkcz

1 let car = {
2 name: 'GT',
3 maker: 'BMW',
4 engine: '1998cc'
5 };
6 // Property accessor
7 console.log(car.name); //dot notation
8 console.log(car['maker']); //bracket notation
9

STDIN

Input for the program (Optional)

Output:

GT
BMW

32°C Mostly sunny Search 15:44 25-03-2025

one compiler javascript - Search x 43cuetkcz - JavaScript - OneComi x index.html

https://onecompiler.com/javascript/43cuetkcz

OneCompiler

index.js + 43cuetkcz

1 let car = {
2 name: 'GT',
3 maker: 'BMW',
4 engine: '1998cc'
5 };
6 // Adding property to the object
7 car.brakesType = 'All Disc';
8 console.log(car);
9

STDIN

Input for the program (Optional)

Output:

{ name: 'GT', maker: 'BMW', engine: '1998cc', brakesType: 'All D

32°C Mostly sunny Search 15:44 25-03-2025

one compiler javascript - Search x 43cuetkcz - JavaScript - OneCom x index.html

https://onecompiler.com/javascript/43cuetkcz

OneCompiler

index.js + 43cuetkcz

AI NEW JAVASCRIPT RUN

```
1 let car = {
2   name : 'GT',
3   maker : 'BMW',
4   engine : '1998cc',
5   start : function(){
6     console.log('Starting the engine...');
7   }
8 };
9 car.start();
10 // Adding method stop() Later to the object
11 car.stop = function() {
12   console.log('Applying Brake...');
13 }
14 car.stop();
15
```

STDIN

Input for the program (Optional)

Output:

Starting the engine...
Applying Brake...

32°C Mostly sunny Search 15:45 25-03-2025

one compiler javascript - Search x 43cuetkcz - JavaScript - OneCom x index.html

https://onecompiler.com/javascript/43cuetkcz

OneCompiler

index.js + 43cuetkcz

AI NEW JAVASCRIPT RUN

```
1 const coder = {
2   isStudying : false,
3   printIntroduction : function(){
4     console.log('My name is ${this.name}. Am I studying?: ${this.isStudying}');
5   }
6 };
7 const me = Object.create(coder);
8 me.name = 'Mukul';
9 me.isStudying = true;
10 me.printIntroduction();
11
```

STDIN

Input for the program (Optional)

Output:

My name is Mukul. Am I studying?: true

32°C Mostly sunny Search 15:45 25-03-2025

one compiler javascript - Search43cuetkcz - JavaScript - OneComindex.html

https://onecompiler.com/javascript/43cuetkcz

OneCompilerPRICINGEDITORCHALLENGESCOMPANY & MORELOGIN

indexjs+43cuetkczAI NEW JAVASCRIPT RUN

```
1 // Using es6 classes
2 class Vehicle {
3   constructor(name, maker, engine) {
4     this.name = name;
5     this.maker = maker;
6     this.engine = engine;
7   }
8 }
9
10 let car1 = new Vehicle('GT', 'BMW', '1998cc');
11
12 console.log(car1.name); //GT
13
```

STDIN
Input for the program (Optional)
Output:
GT

32°C
Mostly sunny

Search

ENG
IN

15:45
25-03-2025