

A Systematic Benchmark of Persistent Homology Pipelines for Classification

Zachariah Attila Markusson

August 2026

Independent Research

Abstract

Persistent homology classification pipelines have three stages — filtration, vectorization, and classifier — each with multiple available methods. Which stage matters most? Benchmarking all three stages simultaneously in a controlled factorial sweep — 616 configurations across 6 dataset instances, 4 filtrations, 7 vectorizers, and 4 classifiers (56 runs failed and were excluded) — we find that the vectorization stage dominates classification-accuracy variance on both real datasets: on ECG200 time series (Takens-embedded) it has a marginal range of 6.39pp across 7 vectorizers (95% CI [6.13, 6.65]; $\eta^2 = 0.217$) versus 0.69pp for filtration (95% CI [0.57, 0.81]), and on binary MNIST it again leads (3.22pp; $\eta^2 = 0.302$) while the filtration effect is modest (cubical 98.0% vs. Vietoris–Rips 96.25% best of family, 1.75pp). A second time series, ECG5000, replicates the hierarchy (24.89pp vs. 3.60pp). These results complement, rather than refute, the image-data case study of Conti et al. [9]: their 18%–94% range spans a joint filtration-and-vectorization redesign — from the H0-only naive cubical-binary pipeline (18%) to improved-filtration multivectors on 10-class MNIST (94%) — part of which is attributable to the vectorization stage. On scale-matched genus-1 versus genus-2 synthetic point clouds, norm features classify at chance (48–58%) while the TDA pipeline sustains 95.83% accuracy at $\sigma = 0.30$ — the noise robustness is not an artefact of the norm/scale confound. Measured bottleneck distances ($\max d_B = 0.434$ vs. the corrected bound $2\sigma\sqrt{2\ln n} \approx 1.82$ at $\sigma = 0.30$) confirm the stability bound is conservative. The framework is YAML-configurable and extensible to 7 filtrations, 11 vectorizers, and 4 classifiers; all code, configuration, and result schemas are provided.

Contents

1	Introduction and Motivation	5
1.1	Topological Data Analysis and the Pipeline Problem	5
1.2	The Persistent Homology Pipeline	6
1.3	Contributions	6
2	Mathematical Foundations of Persistent Topology	8
2.1	Simplicial Complexes	8
2.2	Filtrations and Complex Constructions	8
2.3	Homology Groups and Persistent Homology	10
2.4	Stability of Persistence Diagrams	11
2.5	Vectorization Methods	12
2.6	Mapping Theory to Benchmark Variables	15
3	Algorithmic Pipeline and Benchmarking Framework	17
3.1	Pipeline Mappings	17
3.2	Point Cloud Preprocessing	18
3.3	Software Architecture	18
4	Empirical Benchmark and Sensitivity Analysis	20
4.1	Stage Variance Analysis	21
4.1.1	Classical Baselines and the Role of Raw Features	28
4.2	Noise Perturbation Thresholds	29
4.3	Computational Complexity and Pareto Trade-offs	31
5	Vectorization Dominance and Theoretical Synthesis	33
5.1	Why Vectorization Dominates on Both Datasets	33
5.2	Non-Topological Context and Limitations	35
5.3	Multi-Dataset Generalisation	37
5.4	Operational Guidelines for Pipeline Selection	40
6	Conclusion and Operational Guidelines	41

A	Full YAML Configuration	42
B	SQLite Schema Reference	45
C	Code Implementation	47
D	Extended Parameter Sweeps	49
E	Use of AI Tools	51

List of Figures

1.1	The three-stage persistent homology classification pipeline.	6
2.1	The four classical vectorization methods applied to one diagram.	15
4.1	Stage impact on ECG200. Error bars show ± 1 SE.	24
4.2	Persistence diagrams under clean and noisy conditions.	29
4.3	Accuracy vs. noise. All pipelines maintain $\geq 98.5\%$ accuracy through $\sigma = 0.30$; measured bottleneck distances (max 0.434 at $\sigma = 0.30$ versus the corrected bound $2\sigma\sqrt{2\ln n} \approx 1.82$) confirm the stability bound is conservative.	31
4.4	Runtime vs. accuracy on the Pareto frontier.	32
5.1	Nemenyi critical-difference diagram: configuration mean ranks across the 9-dataset panel (1 = best). The bracket marks the CD at $\alpha=0.05$; configurations outside it are significantly worse than the best.	38

List of Tables

4.1	Dataset instances used in the benchmark sweep. Point clouds contain 100 points; ECG200 has 96 timesteps. The torus has major radius $R = 2$ and minor radius $r = 1$ (so point norms range $[1, 3]$), while the sphere has unit radius (norms $\equiv 1$): the classes differ in scale as well as topology.	21
4.2	Marginal accuracy by pipeline stage on ECG200 (repeated CV, 25 repetitions).	22
4.3	η^2 variance decomposition of classification accuracy by pipeline stage. Per-config panel: classic $\eta^2 = \text{SS}_{\text{stage}}/\text{SS}_{\text{total}}$ over per-configuration means (one observation per configuration). Fold-level panel: main-effects-only three-way ANOVA over the fold accuracies of the single-split sweep, with classic η^2 and F -tests.	25
4.4	Non-topological baselines (25-repetition repeated CV, mean $\pm$ 95% CI over repetitions). Majority-class rows give the trivial-separator floor. TDA best rows are single-split point estimates.	28
4.5	Pareto-optimal configurations.	31
5.1	Stage importance by data modality.	35
5.2	Multi-dataset panel (B1 sweep). All series are Takens-embedded; the 9 datasets span time series and images, binary and 10-class problems.	37
5.3	Recommended pipeline configurations by data characteristics.	40
D.1	Stage marginal ranges under alternative (d, τ) (reduced 8-configuration subset; range of stage-level means).	50

Chapter 1

Introduction and Motivation

1.1 Topological Data Analysis and the Pipeline Problem

Topological Data Analysis (TDA) extracts shape invariants from data: connected components, cycles, and voids that persist across multiple scales. Unlike traditional machine learning which operates on raw coordinates or pixel intensities, TDA captures the underlying “shape” of the data — information invariant under stretching and bending. Persistent homology, the workhorse of TDA, tracks the birth and death of topological features as a scale parameter varies.

Practitioners face a combinatorial problem: the TDA classification pipeline has three stages — filtration, vectorization, and classification — each with 5–15 available methods (surveys: Ali et al. [2] and Hensel et al. [25]). The literature’s most cited answer to “which stage matters most?” comes from Conti et al. [9], who showed that filtration choice on MNIST images can be catastrophic: accuracy ranged from 18% (their cubical pipeline) to 94% (improved filtrations), under 10-split cross-validation with grid search. That study has sometimes been read as a general principle — “filtration dominates” — although the authors themselves did not claim one.

This paper asks the same question across two real datasets of different modalities and finds that vectorization is the dominant stage on both: ECG200 time series and binary MNIST. On ECG200, vectorization moves accuracy by 6.39pp (95% CI [6.13, 6.65]) versus 0.69pp for filtration (95% CI [0.57, 0.81]); on binary MNIST the vectorizer range (3.22pp) is twice the filtration range (1.65pp), and cubical beats Vietoris-Rips by ~ 1.75 pp best-of-family. Filtration effects are dataset-specific and modest on binary MNIST, not the governing stage. We demonstrate this using a modular benchmarking framework that varies all three pipeline stages simultaneously in a controlled factorial sweep: 6 dataset instances $\times$ 4 filtrations (Vietoris-Rips, weak Alpha, Sparse Rips, Cubical) $\times$ 7 vectorizers $\times$ 4 classifiers — 672 possible, 616 completed (56 runs failed

(`weak_alpha/sparse_rips` on MNIST) and were excluded). The framework is extensible to 7 filtrations, 11 vectorizers, and 4 classifiers via YAML-only configuration changes; standardised harnesses of this kind are the direction the community has moved towards [20].

1.2 The Persistent Homology Pipeline

Whether persistent homology features help classification at all has itself been questioned [21]; this benchmark assumes the features are informative and asks which pipeline stage extracts them most effectively.

A persistent homology classification pipeline transforms raw data through three stages:

1. **Filtration.** Raw data is converted into a nested sequence of simplicial complexes parameterised by a scale ε . Topological features appear (birth at b) and disappear (death at d). Output: a *persistence diagram*, a multiset of (b, d) pairs.
2. **Vectorization.** Diagrams are multisets of variable cardinality and cannot be fed directly into classifiers. Vectorization methods map each diagram to a fixed-length feature vector.
3. **Classification.** The vectorized features are passed to a standard classifier which learns a decision boundary.

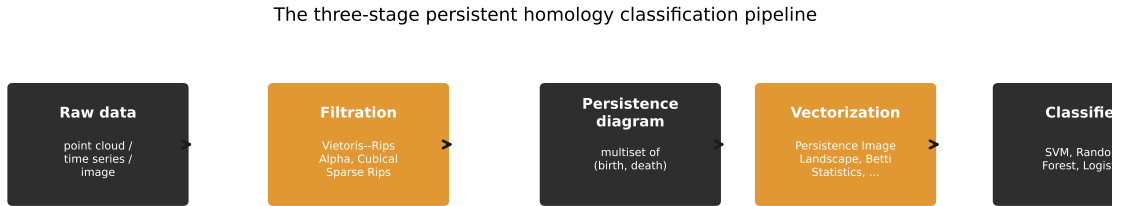


Figure 1.1: The three-stage persistent homology classification pipeline.

1.3 Contributions

This paper contributes a reproducible factorial benchmark framework and two case studies that use it to locate the dominant pipeline stage. Specifically:

1. **Framework.** A benchmarking framework that varies all three pipeline stages simultaneously: 4 filtrations, 7 vectorizers, and 4 classifiers executed in a 616-configuration factorial sweep (of 672 possible; 56 runs failed (`weak_alpha/sparse_`

rips on MNIST) and were excluded), with YAML-driven configuration and normalised SQLite storage. The framework is extensible to 7 filtrations, 11 vectorizers, and 4 classifiers via YAML-only changes. Full configuration and schema in Appendices A–B; code implementations in Appendix C.

2. **Verified finding: vectorization dominates.** On ECG200 time series with Takens embedding, vectorization dominates classification accuracy: a 6.39pp marginal range across 7 vectorizers (95% CI [6.13, 6.65]), versus 0.69pp across 3 filtrations (95% CI [0.57, 0.81]; small but with a repeated-CV CI excluding zero) and 3.50pp across 4 classifiers (95% CI [3.28, 3.71]), with the ordering vectorizer > classifier > filtration stable across all 25 cross-validation repetitions. On binary MNIST the vectorizer again dominates (marginal range 3.22pp versus 1.65pp for filtration), and cubical beats Vietoris-Rips by ~ 1.75 pp best-of-family (98.0% vs. 96.25%); a second time-series dataset (ECG5000) replicates the hierarchy (24.89pp versus 3.60pp). Filtration effects are dataset-specific and modest on binary MNIST, not the governing stage. Conti et al.’s MNIST case study (18% with their cubical pipeline to 94% with improved filtrations, 10-class, grid search) is a complementary demonstration that a badly-matched filtration can be catastrophic on images; it does not establish a general law.
3. **Matched-scale synthetic evidence.** On synthetic genus-1 versus genus-2 point clouds whose radial norm distributions are quantile-matched, norm features classify at chance (48–58%) while the TDA pipeline sustains 95.83% accuracy at $\sigma = 0.30$ noise — the noise robustness is not an artefact of the norm/scale confound between the sphere and torus geometries.
4. **Stability-bound confirmation.** Measured bottleneck distances between clean and noisy diagrams ($\max d_B = 0.434$ over 80 cloud/dimension pairs) sit well below the corrected worst-case bound $d_B \leq 2\sigma\sqrt{2\ln n}$ (≈ 1.82 at $\sigma = 0.30$, $n = 100$), confirming the bound is conservative in practice.

Chapter 2 develops the mathematical machinery needed to understand why these pipeline stages interact as they do.

Chapter 2

Mathematical Foundations of Persistent Topology

This chapter develops the algebraic and geometric machinery underlying persistent homology. We progress from simplicial complexes through chain groups, homology vector spaces, filtrations, and persistence modules, concluding with the stability theorem and vectorization methods that convert diagrams into classifier-ready feature vectors.

2.1 Simplicial Complexes

Definition 2.1 (Simplex). A k -simplex $\sigma = [v_0, v_1, \dots, v_k]$ is the convex hull of $k + 1$ affinely independent points in $\mathbb{R}^d$ ($d \geq k$). A 0-simplex is a vertex, a 1-simplex an edge, a 2-simplex a triangle, a 3-simplex a tetrahedron. A *face* of σ is the convex hull of any non-empty subset of its vertices.

Definition 2.2 (Simplicial Complex). A *simplicial complex* K is a finite collection of simplices such that:

1. If $\sigma \in K$ and τ is a face of σ , then $\tau \in K$ (closure under taking faces).
2. If $\sigma, \tau \in K$, then $\sigma \cap \tau$ is either empty or a face of both.

The k -skeleton $K^{(k)}$ is the subcomplex of all simplices of dimension at most k . The 1-skeleton is a graph in the usual sense.

2.2 Filtrations and Complex Constructions

Definition 2.3 (Filtration). A *filtration* of a simplicial complex K is a nested sequence of subcomplexes indexed by a real parameter $\varepsilon \geq 0$:

$$\emptyset = K_{\varepsilon_0} \subseteq K_{\varepsilon_1} \subseteq \dots \subseteq K_{\varepsilon_m} = K, \quad (2.1)$$

where $\varepsilon_0 < \varepsilon_1 < \dots < \varepsilon_m$.

Three filtrations are used in the benchmark:

Vietoris-Rips complex $\text{VR}_\varepsilon(X)$. For a finite point cloud $X \subset \mathbb{R}^d$, a k -simplex $[x_0, \dots, x_k]$ is included if $\|x_i - x_j\| \leq \varepsilon$ for all $0 \leq i < j \leq k$. The Rips complex is simple to compute but large: for n points, the number of k -simplices scales as $O(n^{k+1})$. Specifically, the number of 2-simplices (triangles) in the full Rips complex is $O(n^3)$, which drives the runtime differences observed in Chapter 4.

Alpha complex $A_\varepsilon(X)$. Constructed via the intersection of Voronoi cells with metric balls. For each point $x_i \in X$, let $V_i = \{y \in \mathbb{R}^d : \|y - x_i\| \leq \|y - x_j\| \text{ for all } j \neq i\}$ be its closed Voronoi cell, and define $R_i(\varepsilon) = V_i \cap \overline{B}_{\varepsilon/2}(x_i)$ where $\overline{B}_{\varepsilon/2}(x_i)$ is the closed ball of radius $\varepsilon/2$. The Alpha complex is the nerve of the cover $\{R_i(\varepsilon)\}_{i=1}^n$. The Nerve Theorem (see below) guarantees homotopy equivalence to the union of balls.

Theorem 2.1 (Nerve Theorem — Leray 1945 [13]). *Let $\mathcal{U} = \{U_i\}_{i \in I}$ be a finite open cover of a topological space M such that every non-empty intersection $\bigcap_{j \in J} U_j$ is contractible. Then the nerve $N(\mathcal{U})$ is homotopy equivalent to $\bigcup_{i \in I} U_i$.*

For the Alpha cover $\{R_i(\varepsilon)\}$, the sets $R_i(\varepsilon)$ are convex polyhedra in $\mathbb{R}^d$, so all finite intersections are convex and thus contractible. The Nerve Theorem therefore guarantees that $A_\varepsilon(X) \simeq \bigcup_i \overline{B}_{\varepsilon/2}(x_i)$. In $\mathbb{R}^3$, the Alpha complex is a subcomplex of the Delaunay triangulation with $O(n^2)$ simplices, compared to $O(n^3)$ for the full Rips complex.

Remark 2.1. The benchmark executes giotto-tda’s **WeakAlphaPersistence**, which per giotto’s documentation is the Vietoris–Rips filtration of the sparse matrix of distances between Delaunay-neighbouring vertices — a subcomplex of the full Rips complex (cheaper to build), not a subcomplex of the Alpha complex, and not covered by the Nerve-Theorem homotopy guarantee, which applies to the full Alpha/Čech complex. For the executed approximation we verify empirically in §4.3 that the full GUDHI Alpha complex (persistence-equivalent to the Čech complex) reproduces weak-alpha classification accuracy (mean difference 0.0–0.8pp) at 2–5× the runtime cost, so the approximation is faithful on these tasks.

Sparse Rips complex. A subsampled approximation of VR that retains only a sparse subset of edges and higher simplices, designed for point clouds with $n \geq 10^3$ points where full VR computation is prohibitive. The sparsification parameter ϵ controls the approximation fidelity.

2.3 Homology Groups and Persistent Homology

Chain Complexes and Homology

To define persistent homology formally, we first construct the algebraic machinery of simplicial homology over the field $\mathbb{Z}_2 = \mathbb{Z}/2\mathbb{Z}$.

Definition 2.4 (Chain Group). For a simplicial complex K , the k -th chain group $C_k(K; \mathbb{Z}_2)$ is the $\mathbb{Z}_2$ -vector space whose basis elements are the k -simplices of K . An element $c \in C_k(K; \mathbb{Z}_2)$ is a formal sum $c = \sum_{\sigma \in K^{(k)}} a_\sigma \sigma$ with coefficients $a_\sigma \in \mathbb{Z}_2$.

Definition 2.5 (Boundary Operator). The k -th boundary operator $\partial_k : C_k(K; \mathbb{Z}_2) \rightarrow C_{k-1}(K; \mathbb{Z}_2)$ is the linear map defined on a k -simplex $\sigma = [v_0, \dots, v_k]$ by:

$$\partial_k[v_0, \dots, v_k] = \sum_{i=0}^k [v_0, \dots, \hat{v}_i, \dots, v_k], \quad (2.2)$$

where $\hat{v}_i$ denotes omission of v_i , and the sum is taken over $\mathbb{Z}_2$ (so $1+1=0$). For $k=0$, $\partial_0 = 0$ by convention.

The fundamental property of the boundary operator is $\partial_k \circ \partial_{k+1} = 0$ for all $k \geq 0$. Intuitively, the boundary of a boundary is empty: the edges bounding a triangle form a closed loop with no endpoints.

Definition 2.6 (Homology Group). For a simplicial complex K , define:

- $Z_k(K) = \ker \partial_k$ — the k -cycles (chains with zero boundary).
- $B_k(K) = \text{im } \partial_{k+1}$ — the k -boundaries (chains that are boundaries of $(k+1)$ -chains).

Since $\partial_k \circ \partial_{k+1} = 0$, we have $B_k(K) \subseteq Z_k(K)$. The k -th homology group is the quotient vector space:

$$H_k(K) = \frac{Z_k(K)}{B_k(K)} = \frac{\ker \partial_k}{\text{im } \partial_{k+1}}. \quad (2.3)$$

Elements of $H_k(K)$ are equivalence classes of k -cycles, where two cycles are equivalent if they differ by a boundary. The dimension of $H_k(K)$ as a $\mathbb{Z}_2$ -vector space is the k -th Betti number: $\beta_k(K) = \dim_{\mathbb{Z}_2} H_k(K)$. Informally, β_0 counts connected components, β_1 counts 1-dimensional holes (cycles), β_2 counts 2-dimensional voids.

Persistent Homology

A filtration $\{K_\varepsilon\}_{\varepsilon \geq 0}$ induces a sequence of inclusion maps $i^{\varepsilon, \varepsilon'} : K_\varepsilon \hookrightarrow K_{\varepsilon'}$ for $\varepsilon \leq \varepsilon'$, which in turn induce linear maps on homology:

$$f_k^{\varepsilon, \varepsilon'} : H_k(K_\varepsilon) \rightarrow H_k(K_{\varepsilon'}). \quad (2.4)$$

Definition 2.7 (Persistent Homology Group). The k -th persistent homology group from ε to ε' is:

$$H_k^{\varepsilon, \varepsilon'}(K) = \text{im } f_k^{\varepsilon, \varepsilon'}. \quad (2.5)$$

A homology class $\gamma \in H_k(K_b)$ is *born* at $\varepsilon = b$ if $\gamma \notin \text{im } f_k^{b-\delta, b}$ for any $\delta > 0$, and *dies* at $\varepsilon = d > b$ if $f_k^{b, d}(\gamma) \in \text{im } f_k^{b-\delta, d}$ for some $\delta > 0$ but $f_k^{b, d-\delta}(\gamma) \notin \text{im } f_k^{b-\delta, d-\delta}$. If γ never dies, we set $d = \infty$.

Definition 2.8 (Persistence Diagram). The *persistence diagram* $\text{Dgm}_k(K)$ is the multiset of points $(b, d) \in \mathbb{R}^2 \cup \{\infty\}$ where $b < d$, together with infinitely many copies of each point on the diagonal $\Delta = \{(x, x) : x \geq 0\}$. The *persistence* of a feature is $p = d - b$.

Example. A sphere S^2 has $\beta = (1, 0, 1)$: one component, no 1-cycles, one 2-void. A torus T^2 has $\beta = (1, 2, 1)$: one component, two independent 1-cycles (the meridional and longitudinal loops), one 2-void. This $\beta_1 = 0$ versus $\beta_1 = 2$ difference is the topological signal driving the sphere-versus-torus classification in Chapter 4.

2.4 Stability of Persistence Diagrams

The stability theorem guarantees that small perturbations of the input data produce proportionally small changes in the persistence diagram — essential for any pipeline handling noisy data.

Definition 2.9 (Bottleneck Distance). The *bottleneck distance* between two persistence diagrams D_1 and D_2 is:

$$d_B(D_1, D_2) = \inf_{\gamma: D_1 \rightarrow D_2} \sup_{p \in D_1} \|p - \gamma(p)\|_\infty, \quad (2.6)$$

where γ ranges over all bijections from D_1 to D_2 (including pairings with the diagonal Δ), and $\|\cdot\|_\infty$ is the L^∞ norm on $\mathbb{R}^2$.

Definition 2.10 (Gromov-Hausdorff Distance). For compact metric spaces X and Y , the *Gromov-Hausdorff distance* is:

$$d_{GH}(X, Y) = \frac{1}{2} \inf_{Z, f, g} d_H^Z(f(X), g(Y)), \quad (2.7)$$

where the infimum is taken over all metric spaces Z and all isometric embeddings $f : X \hookrightarrow Z$, $g : Y \hookrightarrow Z$, and d_H^Z is the Hausdorff distance in Z : $d_H^Z(A, B) = \max\{\sup_{a \in A} \inf_{b \in B} d_Z(a, b), \sup_{b \in B} \inf_{a \in A} d_Z(a, b)\}$.

Theorem 2.2 (Stability Theorem for geometric complexes — Chazal, de Silva & Oudot [24]). *Let X, Y be totally bounded metric spaces. Then:*

$$d_B(\text{Dgm}_k(X), \text{Dgm}_k(Y)) \leq 2 d_{GH}(X, Y) \quad (2.8)$$

for all $k \geq 0$, where $\text{Dgm}_k(\cdot)$ denotes the k -dimensional persistence diagram of the Vietoris-Rips or Čech filtration (Chazal, de Silva & Oudot 2014, Thm. 5.2). The function-level stability bound $d_B \leq \|f - g\|_\infty$ of Cohen-Steiner, Edelsbrunner & Harer [8] applies instead to the sublevel-set (cubical) filtration on grids.

This theorem is applied in §4.2: for n points with additive Gaussian noise $\eta_i \sim \mathcal{N}(0, \sigma^2 I_3)$, extreme value theory gives the typical scale of the maximum perturbation as $\mathbb{E}[\max_i \|\eta_i\|] \approx \sigma\sqrt{2\ln n}$ (the one-dimensional leading-order value; for the executed $d = 3$ per-coordinate noise the expectation is larger by the dimension correction, $\approx 1.16\sigma\sqrt{2\ln n}$ at $n = 100$; Monte Carlo gives $\mathbb{E}[\max_i \|\eta_i\|] \approx 1.06$ at $\sigma = 0.30$). The noisy cloud therefore lies within Gromov–Hausdorff distance of order $\sigma\sqrt{\ln n}$ of the clean one — a typical-case estimate, not an almost-sure bound: the threshold $\sigma\sqrt{2\ln n}$ is exceeded by the maximum with probability $\approx 93\%$ in the executed $d=3$ noise (the 1-D value would be $\approx 22\%$). By Theorem 2.2 the bottleneck distance between clean and noisy diagrams satisfies

$$d_B(\text{Dgm}_k(X), \text{Dgm}_k(X + \eta)) \lesssim 2\sigma\sqrt{2\ln n}. \quad (2.9)$$

The factor 2 inherited from the stability theorem is essential: for $n = 100$ (points per cloud after subsampling), $2\sigma\sqrt{2\ln 100} \approx 0.91$ at $\sigma = 0.15$ and ≈ 1.82 at $\sigma = 0.30$ — a factor of two larger than the bound one would write down by omitting it. Measured bottleneck distances between clean and noisy diagrams (ripser diagrams, GUDHI bottleneck implementation; 80 cloud/dimension pairs; §4.2) are far below this: at $\sigma = 0.15$ the mean is 0.144 and the maximum 0.300; at $\sigma = 0.30$ the maximum is 0.434. The torus H_1 diagrams move by d_B on average 0.283 at $\sigma = 0.30$ — below the measured H_1 persistence range $[0.608, 1.156]$ — so the features comfortably survive the perturbation.

2.5 Vectorization Methods

Vectorization converts a persistence diagram into a fixed-length feature vector for classification. We use the taxonomy of Ali et al. [2]; comparative studies include Barnes et al. [3], Perea et al. [14], and Sulowska [17].

Persistence diagrams are multisets of variable cardinality. To use them with standard classifiers, we must map each diagram to a fixed-length vector in a normed space.

We present the seven methods executed in the sweep: the four classical representations below, followed by three widely used alternatives (Silhouette, Amplitude, and Persistence Entropy).

Persistence Statistics. For each homology dimension k , compute the mean, standard deviation, minimum, and maximum of births, deaths, and lifespans ($p = d - b$) across all points in Dgm_k . This yields $4 \times 3 = 12$ features per dimension. Despite zero hyperparameters, this method is competitive with kernel-based approaches [2].

Betti Curves [7]. The Betti curve $\beta_k(\varepsilon)$ counts the number of k -dimensional features with $b \leq \varepsilon < d$. Evaluated at n_{bins} equally spaced points in $[\varepsilon_{\min}, \varepsilon_{\max}]$, this produces n_{bins} features per homology dimension.

Persistence Landscapes [4]. For each point $(b, d) \in \text{Dgm}_k$, define the tent function:

$$\Lambda_{(b,d)}(t) = \max(0, \min(t - b, d - t)). \quad (2.10)$$

The m -th persistence landscape is the function $\lambda_m : \mathbb{R} \rightarrow \mathbb{R}$ given by:

$$\lambda_m(t) = m\text{-}\max_{p \in \text{Dgm}_k} \Lambda_p(t), \quad (2.11)$$

where m -max denotes the m -th largest value. Each λ_m is 1-Lipschitz. The sequence $(\lambda_m)_{m \in \mathbb{N}}$ resides in the Banach space $L^p(\mathbb{N} \times \mathbb{R})$ for any $1 \leq p \leq \infty$, enabling classical statistical operations (means, variances, confidence intervals) directly on the vectorized representation. With n_{layers} layers evaluated at n_{bins} points, this produces $n_{\text{layers}} \times n_{\text{bins}}$ features.

Persistence Images [1]. Transform each point $(b, d) \in \text{Dgm}_k$ to birth-persistence coordinates (b, p) where $p = d - b$. Define a weighting function $w : \mathbb{R} \times \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}_{\geq 0}$, typically:

$$w(b, p) = \begin{cases} p/p_{\max}, & p \leq p_{\max}, \\ 1, & \text{otherwise,} \end{cases} \quad (2.12)$$

where $p_{\max}$ is a fixed constant (set to the 95th percentile of persistences in our implementation). The persistence surface is:

$$\rho(x, y) = \sum_{(b,p) \in T(\text{Dgm}_k)} w(b, p) \phi_{(b,p)}(x, y), \quad (2.13)$$

where $\phi_{(b,p)}(x, y) = \frac{1}{2\pi\sigma^2} \exp\left(-\frac{(x-b)^2 + (y-p)^2}{2\sigma^2}\right)$ is a 2D Gaussian kernel. Evaluating ρ on an $n_{\text{bins}} \times n_{\text{bins}}$ grid yields n_{bins}^2 features per homology dimension.

Silhouette [6]. The silhouette of a diagram weights the landscape tent functions of (2.10) by persistence and normalises:

$$\phi_{\text{Dgm}_k}(t) = \frac{\sum_{p \in \text{Dgm}_k} w(p) \Lambda_p(t)}{\sum_{p \in \text{Dgm}_k} w(p)}, \quad w(p) = p(p)^q, \quad (2.14)$$

with $q = 1$ in our configuration; evaluating ϕ at n_{bins} points yields n_{bins} features per homology dimension. Silhouette is the top-performing vectorizer on ECG200 in the single-split marginal (§4.1).

Amplitude . The amplitude of a diagram is its distance to the empty diagram in a diagram metric:

$$A(\text{Dgm}_k) = d(\text{Dgm}_k, \Delta), \quad (2.15)$$

with the bottleneck distance of (2.6) in our configuration — one scalar per homology dimension and the fastest vectorizer in the sweep. On ECG200 it is among the weaker representations (§4.1), an early hint that representation capacity is dataset-dependent.

Persistence Entropy [15]. For a diagram with persistences $p_i = d_i - b_i$, normalise $q_i = p_i / \sum_j p_j$ and define

$$E(\text{Dgm}_k) = - \sum_i q_i \log q_i, \quad (2.16)$$

one scalar per homology dimension measuring how concentrated the persistence mass is. Entropy is the weakest vectorizer on ECG200 (single-split marginal 69.3%, §4.1): information content is not monotone in representational simplicity.

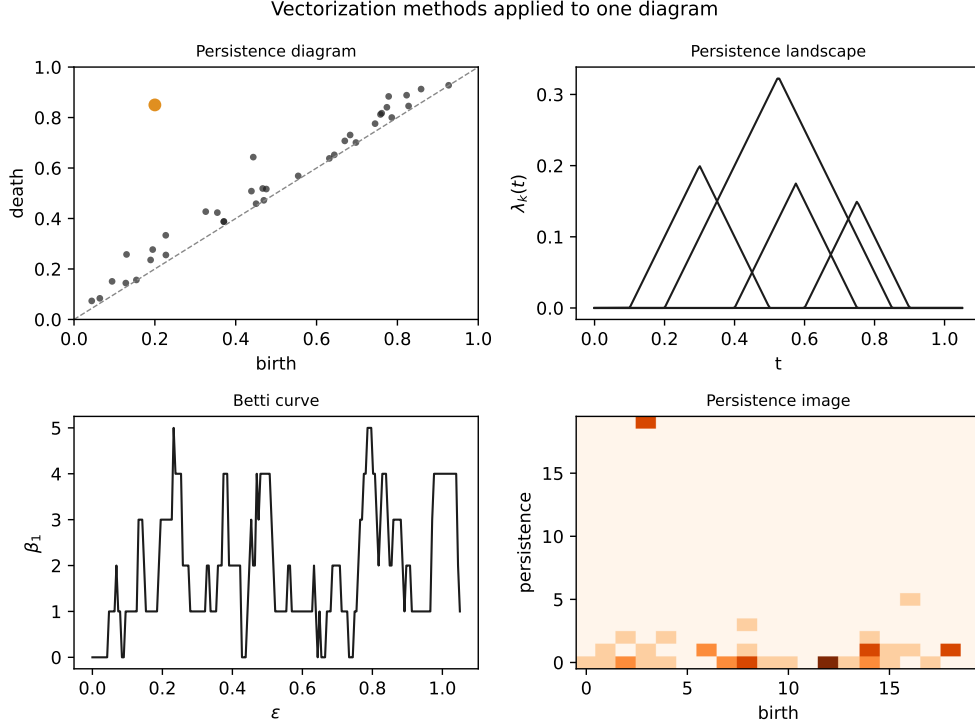


Figure 2.1: The four classical vectorization methods applied to one diagram.

2.6 Mapping Theory to Benchmark Variables

The preceding definitions directly parameterise the benchmark executed in Chapter 4:

- **Simplicial complex size** (§2.1–§2.2): VR’s $O(n^3)$ 2-simplex count versus weak Alpha’s $O(n^2)$ drives the 3–27% wall-clock speed gap measured in §4.3. The Nerve Theorem guarantees that the full Alpha complex’s speed advantage does not cost geometric fidelity; the executed `WeakAlphaPersistence` is an approximation of that complex, and §4.3 verifies it matches full-complex accuracy.
- **Filtration choice** (§2.2): VR, weak Alpha, Sparse Rips, and Cubical constitute the four filtrations varied in the factorial sweep of §4.1.
- **Persistence and stability** (§2.3–§2.4): The corrected bound of (2.9), $d_B \lesssim 2\sigma\sqrt{2\ln n}$, predicts that $\sigma = 0.15$ noise perturbs diagrams by $\lesssim 0.91$ (and $\sigma = 0.30$ by $\lesssim 1.82$), while torus β_1 features have measured top-2 persistence range $[0.608, 1.156]$ (ripser on the shipped clouds). §4.2 confirms that classification survives this perturbation (measured d_B : max 0.300 at $\sigma = 0.15$, max 0.434 at $\sigma = 0.30$).
- **Vectorization** (§2.5): Persistence Statistics, Betti Curves, Landscapes, Images, Silhouette, Amplitude, and Persistence Entropy constitute the seven vectorizers

varied in §4.1, spanning the complexity spectrum from zero-parameter to kernel-based.

- **Classifiers** (§3.1): Logistic Regression (linear baseline), SVM-RBF, SVM-linear, and Random Forest constitute the four classifiers in the sweep. §4.1 tests whether non-linear classifiers add value after vectorization.

Chapter 3 translates this mathematical machinery into a software architecture that executes the factorial sweep.

Chapter 3

Algorithmic Pipeline and Benchmarking Framework

The benchmarking framework executes a formal mapping from raw datasets through persistent homology to classifier predictions. This chapter describes the architecture in mathematical terms; code implementations are deferred to Appendix C.

3.1 Pipeline Mappings

The full pipeline is the composition of four transformations:

$$X \xrightarrow{\text{Embed}} Y \xrightarrow{\text{Filt}} \mathcal{D} \xrightarrow{\text{Vec}} \mathbb{R}^d \xrightarrow{\text{CLF}} \hat{y}, \quad (3.1)$$

where:

- **Embed** (optional, time series only). Maps a 1D discrete-time signal $x[1], \dots, x[T]$ to a point cloud $Y \subset \mathbb{R}^d$ via Takens' delay embedding:

$$\Phi_{(d,\tau)}(x)_t = (x[t], x[t+\tau], \dots, x[t+(d-1)\tau]), \quad t = 1, \dots, T - (d-1)\tau. \quad (3.2)$$

By Takens' Delay Embedding Theorem [18], if the signal x is a generic smooth measurement of a dynamical system on a compact manifold M of dimension d_M , then $\Phi_{(d,\tau)}$ is an embedding provided $d > 2d_M$. We use $d = 3$, $\tau = 1$ throughout (chosen to satisfy $d > 2d_M$ for a 1D attractor; sensitivity to (d, τ) is examined in Appendix D).

- **Filt**. Constructs a filtration $\{K_\epsilon\}$ from Y and computes the persistence diagram $\mathcal{D} = \text{Dgm}_0 \cup \text{Dgm}_1$ (homology dimensions 0 and 1). Implemented via giotto-tda's VietorisRipsPersistence, WeakAlphaPersistence, SparseRipsPersistence, or CubicalPersistence transformers.

- **Vec.** Maps $\mathcal{D}$ to a vector $v \in \mathbb{R}^d$ via one of the seven methods in §2.5. Global grid bounds ($b_{\min}, b_{\max}, p_{\max}$) are computed on the training fold only and applied to the test fold without re-fitting, preventing cross-validation data leakage.
- **CLF.** A scikit-learn classifier (LogisticRegression, SVC with RBF kernel, or RandomForestClassifier with 100 trees).

3.2 Point Cloud Preprocessing

Subsampling. Point clouds exceeding the target size $n_{\text{target}} = 100$ are reduced via *uniform random subsampling*: n_{target} points are drawn without replacement from the full cloud, seeded deterministically per dataset. Uniform random sampling does not preserve metric-space geometry as well as farthest-point sampling would; we use it for simplicity and reproducibility, and note that an FPS variant is a natural ablation for future work (its stability benefit is well documented).

Noise model. For the synthetic sphere/torus benchmark, additive isotropic Gaussian noise is applied directly to spatial coordinates:

$$x_i \mapsto x_i + \eta_i, \quad \eta_i \sim \mathcal{N}(0, \sigma^2 I_3), \quad (3.3)$$

where I_3 is the 3×3 identity matrix. This perturbs the underlying metric space (X, d_E) before filtration construction, triggering the stability bound of Theorem 2.2. (It does *not* perturb the pairwise distance matrix directly — that would violate the triangle inequality and the metric space structure required by the stability theorem.)

3.3 Software Architecture

The framework uses **giotto-tda 0.6.2** [19] for all filtrations and vectorizations (scikit-learn-compatible transformers), **scikit-learn 1.3.2** for classifiers and cross-validation, with **Ripser 0.6.15** and **GUDHI 3.13.0** as alternative backends. Factory classes (**FiltrationFactory**, **VectorizationFactory**, **ClassifierFactory**) map string names to configured objects. A YAML file (Appendix A) defines the sweep space declaratively. Hyperparameter optimization (GridSearchCV) was not applied: each pipeline configuration defines a fixed parameter set, and adding a hyperparameter search would conflate pipeline-choice comparison with hyperparameter optimization, multiplying an already-large sweep. The **PipelineRunner** iterates the Cartesian product of all choices, runs stratified 5-fold cross-validation, and stores per-fold metrics (accuracy, F1, precision, recall) in a normalised SQLite database (Appendix B) with a config snapshot for reproducibility. Reported 95% CIs are computed from repeated cross-validation (repeated stratified 5-fold CV with independent splits: 25 repetitions, seeds 43–67, for the

headline ECG200 analysis; 5 repetitions, seeds 43–47, for MNIST): per-stage marginal ranges are computed within each repetition, and the CI is $\bar{x} \pm t_{0.025, n_{\text{reps}}-1} \cdot s / \sqrt{n_{\text{reps}}}$ over the repetition-level estimates, which captures the between-split variance directly; per-configuration intervals use the Nadeau–Bengio corrected resampled estimator $\text{SE}^2 = (1/(kr) + n_2/n_1) s^2$ over the $kr = 25$ fold accuracies. Per-configuration accuracy varies across repetitions with mean SD 1.09pp (max 3.11pp, $r=5$), so single-split point estimates are noisy. Stage dominance is quantified primarily by an η^2 variance decomposition — a main-effects-only three-way ANOVA over per-config means and over fold-level accuracies, with F -tests (Table 4.3 in §4.1). No paired Wilcoxon tests are used: CV folds are not independent replicates, and with $n = 5$ pairs the smallest achievable two-sided p -value is 0.0625. Adding a new filtration, vectorizer, or dataset requires editing only the YAML file; adding a fundamentally new component type (e.g., learned vectorizers) requires new factory code.

Chapter 4 presents the empirical results of this sweep across six dataset instances and three analytical cuts.

Chapter 4

Empirical Benchmark and Sensitivity Analysis

One benchmark sweep, four analytical cuts. The sweep comprises 616 completed configurations from a full factorial of 6 dataset instances $\times$ 4 filtrations (Vietoris-Rips, weak Alpha, Sparse Rips, Cubical) $\times$ 7 vectorizers (Persistence Image, Persistence Landscape, Betti Curve, Persistence Statistics, Silhouette, Amplitude, Persistence Entropy) $\times$ 4 classifiers (SVM-RBF, SVM-linear, Random Forest, Logistic Regression) — 672 possible, 56 runs failed (`weak_alpha/sparse_rips` on MNIST) and were excluded. All filtrations computed H_0 and H_1 homology. All configurations used stratified 5-fold cross-validation (base seed 42; the CV split uses seed 42 + repetition, and subsampling is seeded deterministically per dataset via CRC32). Point clouds were generated at 100 points per cloud (200 samples per noise level); uniform random subsampling is applied by the runner only if a source cloud exceeds the target size.

Datasets. Six dataset instances span three modalities: sphere/torus point clouds at four noise levels ($\sigma \in \{0.00, 0.05, 0.15, 0.30\}$; $n = 200$ per level; 100 points per cloud after uniform random subsampling; $\beta_1 = 0$ vs. 2), and ECG200 heartbeat recordings (normal vs. myocardial infarction; $n = 200$; 96 timesteps, Takens-embedded to 94×3 arrays with $d = 3, \tau = 1$; interpreted as point clouds by Vietoris-Rips, weak Alpha, and Sparse Rips, and as a 94×3 pixel grid by CubicalPersistence — the latter is *not* a point-cloud filtration; see the disclosure below). ECG200 is a UCR archive benchmark. Under the 25-repetition repeated-CV protocol, raw-signal baselines (logistic regression 85.28%, random forest 86.30%) beat our best TDA configuration (83.0%, a single-split point estimate); we therefore do *not* claim that TDA features are competitive with classical methods on this dataset — the sweep is an internal TDA-pipeline comparison (measured baselines are reported in §4.1). Note also that ECG200 is energy-normalised: the sum of squares of every record is constant (95.00 across all 200 signals), so the trivial-separator concern that would attach to an un-normalised signal does not apply to the executed data. Finally, the paper’s headline 83.0% configuration (cubical

+ Silhouette + Random Forest) is a single-split point estimate: by $r=5$ repeated-CV mean it ranks fourth (79.6%, SD 1.98pp), while cubical + Persistence Image + Random Forest is best in 4 of 5 repetitions (83.2% mean, $r=5$; §4.1). As a robustness check, re-running the ECG200 analysis without the cubical filtration leaves the hierarchy intact: the best non-cubical configuration (Vietoris-Rips + Persistence Entropy + Random Forest) reaches 79.5% (single-split), with vectorizer range 6.58pp versus filtration 0.34pp (§4.1). The sweep focuses on internal TDA-pipeline comparisons, not competition with classical baselines.

MNIST binary. To test image-specific filtrations, a binary subset of MNIST (digits 0 vs. 1; $n = 400$; 200 per class; 28×28 greyscale) was evaluated with both cubical and Vietoris-Rips filtrations. Cubical filtration achieved 98.0% accuracy (with Betti Curves + Logistic Regression), versus 96.25% for the best VR configuration: a ~ 1.75 pp best-of-family gap. The marginal analysis of §4.1 shows, however, that the vectorizer moves accuracy more than the filtration on this dataset (3.22pp versus 1.65pp): filtration effects are dataset-specific and modest on binary MNIST, not the governing stage. This is consistent with Conti et al.’s demonstration that a badly-matched filtration can be catastrophic at scale (18% to 94% on 10-class MNIST under grid search) — but the effect is much smaller on our binary subset, where even the worst filtration remains informative.

Table 4.1: Dataset instances used in the benchmark sweep. Point clouds contain 100 points; ECG200 has 96 timesteps. The torus has major radius $R = 2$ and minor radius $r = 1$ (so point norms range $[1, 3]$), while the sphere has unit radius (norms $\equiv 1$): the classes differ in scale as well as topology.

Dataset	Modality	n	Dims	Classes	Maj.%	Source
Sphere/Torus ($\sigma=0.00$)	point cloud	200	100 pts	2	50.5%	synthetic
Sphere/Torus ($\sigma=0.05$)	point cloud	200	100 pts	2	50.5%	synthetic
Sphere/Torus ($\sigma=0.15$)	point cloud	200	100 pts	2	50.5%	synthetic
Sphere/Torus ($\sigma=0.30$)	point cloud	200	100 pts	2	50.5%	synthetic
ECG200	time series	200	96 ts	2	66.5%	UCR archive [22]
MNIST 0/1	image	400	28×28	2	50.0%	MNIST subset

4.1 Stage Variance Analysis

Which pipeline stage contributes the largest variance? For each stage, we marginalise over the other two and compute the range of marginal accuracies from the repeated-

CV means (five independent splits, seeds 43–47), with 95% CIs over the five per-split ranges, and decompose the variance with an η^2 analysis (fold-level F -tests) to test whether the range exceeds sampling noise.

Table 4.2: Marginal accuracy by pipeline stage on ECG200 (repeated CV, 25 repetitions).

Stage	Top Performer	Marg. Acc.	Range (95% CI)	p -value
Filtration	Cubical	73.15%	0.69pp [0.57, 0.81]	0.93
Vectorizer	Landscapes	75.32%	6.39pp [6.13, 6.65]	9.7×10^{-5}
Classifier	Random Forest	75.29%	3.50pp [3.28, 3.71]	0.004

Ranges, CIs, and marginal accuracies are repeated-CV values (25 repetitions of stratified 5-fold CV, seeds 43–67; Sparse Rips dropped for runtime, so the config space is 84 configurations): the range is the mean over repetitions of the per-split marginal range, with a 95% t -interval across the 25 per-split ranges (repeated-measures CI; Nadeau–Bengio corrected resampled CIs are wider: vectorizer [5.69, 7.10], classifier [2.92, 4.07], filtration [0.37, 1.01], all excluding zero). p -values are F -test p -values from the per-configuration three-way ANOVA (Table 4.3); the fold-level panel below is descriptive only, as folds within a configuration share training data, so its p -values are anti-conservative. No multiplicity correction is applied across the three stage comparisons.

Vectorization dominates: its range (6.39pp across 7 vectorizers) is an order of magnitude larger than filtration (0.69pp across 3 filtrations in the 25-repetition sweep; 0.70pp across 4 including Sparse Rips at $r=5$), and the ordering vectorizer $>$ classifier $>$ filtration was stable across all 25 CV repetitions. This ordering is significant under non-parametric inference on the 25 repetition-level stage rankings: the Friedman statistic $Q = \frac{12n}{k(k+1)} \sum_j (\bar{R}_j - \frac{k+1}{2})^2 = 50$ for $k=3$ stages and $n=25$ repetitions (asymptotic χ^2 -tail $p \approx 1.4 \times 10^{-11}$; exact permutation $p \approx 2 \times 10^{-19}$); pairwise, the vectorizer-margin exceeds the filtration-margin in all 25 repetitions (one-sided sign test $p = (1/2)^{25} = 3 \times 10^{-8}$). The variance decomposition of Table 4.3 is the primary evidence for this ordering: on ECG200 the vectorizer explains 21.7% of the per-config variance (fold-level 10.6%), the classifier 9.8% (4.8%), and the filtration 0.3% (0.1%). The top-performing vectorizer, Persistence Landscapes, achieves 75.32% marginal accuracy versus 68.95% for Persistence Entropy (the weakest). Cubical filtration leads at 73.15%, with Vietoris-Rips (72.89%) and Weak Alpha (72.74

Equal-footing re-analysis. The ranges above compare stage menus of different sizes (7 vectorizers versus 3 filtrations on ECG200) and include “degenerate” scalar vectorizers — Persistence Entropy and Amplitude, each of which maps a diagram to a single number — that are structurally handicapped. To test whether the 6.39pp (ECG200) and 24.89pp (ECG5000) vectorizer ranges are an artefact of that handicap, we re-measure the stage effects on an equal footing: under the design-penalised ω^2 , and by re-computing the marginal ranges excluding the degenerate scalar vectorizers and matching the number of levels. By ω^2 the vectorizer remains the largest single

stage main effect on both real datasets (ECG200 0.165 versus classifier 0.077 and filtration -0.017 ; MNIST 0.214 versus 0.143 and 0.032), so its dominance is not an artefact of level counts. The marginal-range *size*, however, is: excluding Amplitude and Persistence Entropy cuts the ECG200 vectorizer range from 6.39pp to 3.10pp, and on the ECG5000 probe the 24.89pp range collapses to 0.24pp (Persistence Entropy at 36.9% versus Betti Curve 61.5% and Silhouette 61.8%, which are within 0.24pp of each other). Matching the number of levels — best-3 vectorizers versus 3 filtrations on ECG200 — narrows the vectorizer edge to 1.21pp versus 0.69pp; on MNIST the best-2 vectorizer range (0.44pp) falls below the 2-filtration range (1.55pp), and on ECG5000 the best-2 vectorizer range (0.24pp) likewise falls below the filtration range (3.60pp). The isolated contribution — swapping one stage while holding the other two at their marginal-best — is still largest for the vectorizer on ECG200 (10.22pp) and MNIST (2.1pp). The honest reading is that vectorization is the largest single stage effect, but its measured *margin* is sensitive to the vectorizer menu and to the number of levels compared: the published 6.39pp and 24.89pp numbers are substantially inflated by degenerate scalar vectorizers, and once those are excluded and the stage counts are matched the vectorizer-vs-filtration gap narrows substantially (ECG200) or reverses (MNIST, ECG5000).

Simple versus complex. Persistence Statistics matches kernel-based methods on ECG200: its $r=5$ marginal accuracy (74.8%) is within 0.3pp of Persistence Landscapes (75.1%), and it wins or ties in most of the 16 $r=5$ filtration–classifier cells. Statistics likewise leads Persistence Images (72.9%). On MNIST binary, Persistence Statistics reaches 95.9% marginal accuracy, within 2.1pp of the best configuration overall (Cubical + Betti Curve + Logistic Regression at 98.0%, Table 4.5).

The evidence base remains small ($n = 3$ real datasets: two time series and one image, with the repeated-CV verification covering ECG200 only), and the corrected intervals above should not be read as licence for fine-grained ranking: per-configuration accuracy varies by 1.09pp on average across the five splits (maximum 3.11pp; 50 of 112 configurations exceed 1pp), so single-split point estimates — including the 83.0% best configuration of Table 4.5, whose repeated-CV mean is 79.6% — carry ± 1 –3pp of split-to-split noise.

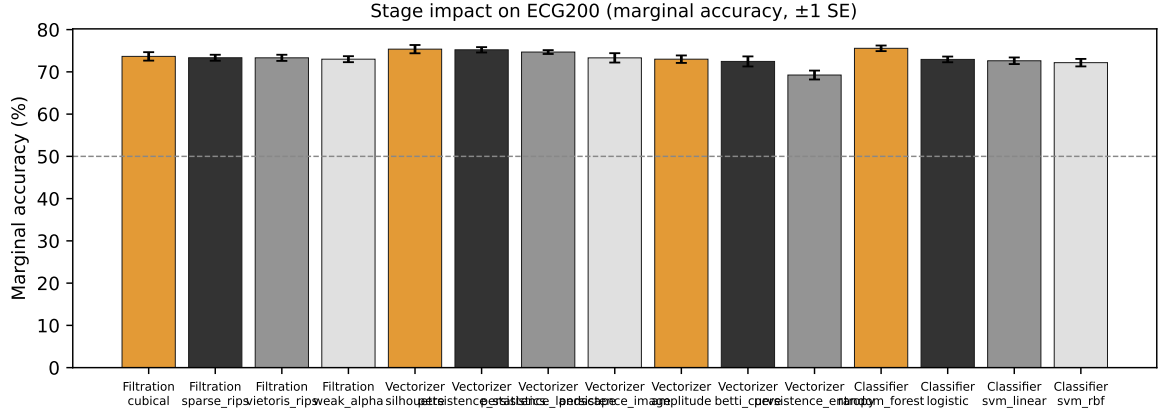


Figure 4.1: Stage impact on ECG200. Error bars show ± 1 SE.

On synthetic sphere/torus data with $\sigma = 0.00$, all 112 configurations achieve $\geq 99.5\%$ accuracy (mean 99.99%). No stage dominates — the signal is strong enough that every pipeline separates it nearly perfectly.

MNIST binary marginal analysis. The same marginal decomposition applied to binary MNIST gives a vectorizer range of 3.22pp versus a filtration range of 1.65pp: vectorization is the larger stage even on image data. This is not a single-split artifact: repeated 5-fold CV (5 repetitions, seeds 43–47; `data/tda/mnist_repeated_cv.db`) reproduces the ordering in all five repetitions (vectorizer 2.91–3.22pp vs. filtration 1.49–1.65pp, pooled 3.03pp vs. 1.55pp), and the best configuration (cubical + Betti Curve + Logistic, 98.0%) is stable across repetitions (97.5–98.0%). Filtration effects are real but modest — cubical beats Vietoris-Rips by ~ 1.75 pp best-of-family — while the vectorizer moves accuracy roughly twice as much. Table 4.3 reports the complementary variance decomposition (η^2 : the proportion of accuracy variance explained by each stage): on ECG200 the vectorizer explains 0.217 of the variance versus 0.098 for the classifier and 0.003 for the filtration; on MNIST the vectorizer again leads (0.302) over the filtration (0.166). The MNIST filtration F exceeds the vectorizer F (15.83 vs. 4.80) despite lower η^2 (0.166 vs. 0.302), because F depends on the degrees of freedom (filtration $df=1$, vectorizer $df=6$); η^2 is the ordering statistic. Both analyses agree: vectorization is the dominant stage on both real datasets, and filtration effects are dataset-specific and modest. The ω^2 population effect size (corrected for the number of levels; recomputed from the 25-repetition ECG200 sweep, 84 configurations) confirms the ordering under the design penalty: ECG200 vectorizer $\omega^2 = 0.165$ (bootstrap 95% CI [0.063, 0.423]) versus classifier 0.077 ([0.003, 0.246]) and filtration -0.017 ([−0.017, 0.093]); MNIST vectorizer 0.214 ([0.103, 0.540]) versus filtration 0.143 ([0.040, 0.312]) and classifier 0.032 ([−0.015, 0.257]). The vectorizer ω^2 CI excludes zero on both real datasets, while the filtration CI on ECG200 straddles zero.

Full 10-class MNIST. The binary-MNIST ordering is not scale-invariant. Re-running the same protocol on the full 10-class MNIST set (1000 samples, 100 per

class; cubical and Vietoris-Rips filtrations, 4 vectorizers, Random Forest and SVM-RBF, 5-fold CV reps 43–47; `data/tda/mnist10_sweep.db`) flips the stage ordering: the filtration marginal range (4.53pp: cubical 29.1% versus Vietoris-Rips 33.7%) now exceeds the vectorizer range (3.44pp: Betti Curve 33.4% to Landscapes 30.0%) and the classifier range (2.03pp). Within a single filtration the vectorizer span is larger — cubical 10.40pp, Vietoris-Rips 9.10pp — so the stage-dominance question is filtration-dependent (an interaction, §4.1). Absolute accuracy is much lower than binary MNIST (best 37.8%; chance 10%), because ten-way separation is intrinsically harder. This is consistent with Conti et al.’s emphasis on filtration for multiclass images, but the swing we observe (4.53pp marginal; 9–10pp within a filtration) is far smaller than their reported 18%–94%, which used grid search, 10-split CV and a broader filtration family. We therefore read the binary-MNIST result (vectorization dominant) as a binary-scale phenomenon: at 10-class scale, filtration becomes the larger marginal stage.

Table 4.3: η^2 variance decomposition of classification accuracy by pipeline stage. Per-config panel: classic $\eta^2 = \text{SS}_{\text{stage}}/\text{SS}_{\text{total}}$ over per-configuration means (one observation per configuration). Fold-level panel: main-effects-only three-way ANOVA over the fold accuracies of the single-split sweep, with classic η^2 and F -tests.

Dataset	Stage	Per-config means			Fold-level		
		η^2	F	p	η^2	F	p
ECG200	Filtration	0.003	0.15	0.93	0.001	0.32	0.81
ECG200	Vectorizer	0.217	5.26	9.7×10^{-5}	0.106	11.41	4.9×10^{-12}
ECG200	Classifier	0.098	4.75	0.004	0.048	10.31	1.3×10^{-6}
MNIST 0/1	Filtration	0.166	15.83	2.5×10^{-4}	0.061	20.47	9.1×10^{-6}
MNIST 0/1	Vectorizer	0.302	4.80	7.3×10^{-4}	0.111	6.21	4.1×10^{-6}
MNIST 0/1	Classifier	0.061	1.95	0.135	0.023	2.52	0.058
Sphere/Torus ($\sigma=0.00$)	Filtration	0.009	0.41	0.748	0.002	0.34	0.793
Sphere/Torus ($\sigma=0.00$)	Vectorizer	0.165	3.67	0.002	0.032	3.10	0.005
Sphere/Torus ($\sigma=0.00$)	Classifier	0.083	3.67	0.015	0.016	3.10	0.026

Per-config scope: $N = 112$ (ECG200, sphere/torus) or 56 (MNIST) configurations; fold-level scope: $N = 560$ or 280 fold accuracies. Degrees of freedom: filtration 3 (MNIST 1), vectorizer 6, classifier 3.

The repeated-CV analysis of Table 4.2 corroborates the ECG200 ordering. *Multiplicity:* the 18 F -tests in this table (3 datasets $\times$ 3 stages $\times$ 2 scopes) were recomputed from `data/tda/expanded_results.db` (agreement with the published `eta_squared_results.csv` to machine precision) and adjusted for multiplicity. Holm (FWER) leaves 10/18 significant at $\alpha=0.05$; Benjamini–Hochberg (FDR) leaves 12/18. The headline results — ECG200 fold-level vectorizer ($p = 4.9 \times 10^{-12}$, Holm 8.7×10^{-11}), MNIST vectorizer and filtration — survive both corrections; the marginal filtration effects that fail are the already-weak sphere/torus and ECG200 filtration rows.

Two-way interactions qualify the stage decomposition. The η^2/F analysis of Table 4.3 is main-effects-only: each stage’s contribution is assessed in isolation. Because the factorial design varies all three stages jointly, we also fitted a

three-way ANOVA with all two-way interaction terms to the fold-level accuracies of the repeated-CV sweeps (`repeated_cv_r25.db` for ECG200, $N=10500$ fold accuracies; `mnist_repeated_cv.db` for MNIST, $N=1400$). On ECG200 the two-way interactions are not negligible: the three interaction terms jointly carry $\omega^2 = 0.187$, which is *147% of the main-effect total* (0.127). The filtration–vectorizer interaction ($\omega^2 = 0.092$) is the *largest single effect in the model*, exceeding the vectorizer main effect (0.086); the vectorizer–classifier interaction (0.089) rivals it. On MNIST the interactions carry 50% of the main-effect total (0.103 versus 0.206), led by vectorizer–classifier (0.054) and filtration–vectorizer (0.047). Fold-level p -values in this analysis are anti-conservative (folds within a configuration share training data), so the effect sizes — the ω^2 values — are the robust quantities and the p -values are indicative. The practical implication is that the stages are *not cleanly separable*: the effect of changing one stage depends on the levels at which the other two are held. Vectorization remains the largest single *main* effect on both datasets, so the direction of the headline finding is unchanged, but the magnitude of the interaction terms shows that “which stage matters most” is partly conditional on the other two stages, not a stage-intrinsic property. We therefore read the stage-dominance claim as *dominance in main effect*, and treat the interaction structure as an explicit boundary condition on that claim.

Repeated cross-validation. Because single-split point estimates are noisy (per-configuration SD across repetitions averages 1.27pp, max 3.33pp at 25 repetitions), the ECG200 analysis was re-run with repeated CV (25 repetitions of the same stratified 5-fold protocol, seeds 43–67). Table 4.2 reports the repeated-CV ranges and CIs; the ordering vectorizer > classifier > filtration was stable in all 25 repetitions. Increasing from $r=5$ to $r=25$ narrows the repeated-measures CI widths by $\sim 3\times$ (filtration 0.69pp $\rightarrow$ 0.24pp, classifier 1.20pp $\rightarrow$ 0.43pp) at no change to the ordering. Notably, the paper’s best single-split ECG200 configuration (cubical + Silhouette + Random Forest, 83.0%) ranks third by 25-repetition mean (79.30%, SD 1.57pp), while cubical + Persistence Image + Random Forest is best overall (82.82% mean, $r=25$). Differences below ~ 1 pp between individual configurations should not be over-interpreted.

Generality probe: ECG5000. To test whether vectorization-dominance is specific to ECG200, the stage analysis was run on ECG5000 (UCR archive; 5 classes; 140 timesteps; single patient recording, BIDMC chf07) with the same 5-fold protocol on a stratified subsample of 714 samples (≤ 200 per class) drawn from the full 5000-sample recording (class counts 2919, 1767, 96, 194, 24; majority class 58.38% in the full recording; the executed 714-sample subsample is balanced to ≤ 200 /class, so its majority share is 28.0%) and a pipeline subset (2 filtrations, 3 vectorizers, 2 classifiers; the subset spans the strongest and weakest vectorizers from ECG200 to bound the range). Two of the twelve configurations fail on a technicality (silhouette-on-weak-alpha produces NaN features) and are excluded. Because the classes are severely imbalanced,

we report balanced accuracy and macro- F_1 alongside plain accuracy. The result replicates the hierarchy: vectorizer marginal range 24.89pp versus filtration 3.60pp (plain accuracy, point estimate, single split); balanced accuracy per vectorizer is 0.46–0.47 (Betti Curve, Silhouette) versus 0.28 (Persistence Entropy) and macro- F_1 0.50–0.51 versus 0.12–0.38, so vectorization dominates under class-balanced metrics too. Vectorization dominance on time series is not an artefact of the specific ECG200 instance; a full multiclass generalisation claim would require multiple datasets (the probe is single-patient).

Beyond accuracy. Plain accuracy on ECG5000 is dominated by the majority class (58.38% in the full recording; 28.0% in the balanced subsample). Re-running the grid and capturing per-fold probabilities (AUROC one-vs-rest macro, per-class precision/recall/ F_1 , multiclass Brier; `data/tda/beyond_accuracy_ecg5000.db`) shows three things. First, vectorization dominance holds on the rank scale: the vectorizer AUROC marginal range is 19.38pp (Betti Curve 77.6%, Silhouette 77.5%, Persistence Entropy 58.2%) versus 11.90pp for the classifier and 3.31pp for filtration — the vectorizer is *more* dominant under a class-imbalance-robust metric than under accuracy, because Persistence Entropy (a degenerate scalar) is worst on AUROC too. Second, the classifier range is driven by SVM-RBF’s near-chance AUROC (0.47) on the entropy feature, i.e. the RBF classifier collapsed to the majority class there. Third, per-class recall exposes a severe imbalance failure that accuracy hides: the minor classes are largely unlearned (class 2, 96 samples, 17.6% recall; class 3, 194 samples, 34.5%; class 4, 24 samples, 1.4%, with Betti Curve and Silhouette at 0%), while the majority classes 0 and 1 are recovered at 76.5% and 72.0%. So the reported accuracy (65.8% best configuration) is carried almost entirely by the two largest classes; on extreme imbalance the TDA pipeline, like most discriminative classifiers, defaults to the majority. Calibration is likewise classifier-dependent: the multiclass Brier for the best configs (Random Forest) is 0.46–0.49 versus 0.55–0.75 for SVM-RBF (Platt-scaled), so Random Forest is both better ranked and better calibrated here.

Cubical robustness check. CubicalPersistence on ECG200 operates on the 94×3 Takens-embedded array as a pixel grid (intensities are treated as coordinates), not on a point-cloud filtration. Excluding cubical from the ECG200 analysis leaves the hierarchy intact: the best non-cubical configuration (Vietoris-Rips + Persistence Entropy + Random Forest) reaches 79.5% (single-split), the vectorizer range widens slightly to 6.58pp, and the filtration range drops to 0.34pp.

Cubical grid-structure ablation. Because cubical persistence reads the 94×3 array as a greyscale pixel grid, we ablated the grid layout directly: independently permuting the 94 rows (time-window order) or the 3 columns (Takens coordinates) of each sample, labels intact, and re-running all 28 cubical configurations (CV seeds as the sweep). Row shuffling drops the mean accuracy from 73.66% to 71.96% and

collapses the top grid-sensitive vectorizers to the majority class: Betti Curve + SVM-RBF falls from 80.5% to 66.5% and the Persistence Image family from 76.5–82.0% to 64.0–76.5%. Column shuffling is milder (mean 72.45%; the Takens-coordinate order carries less information than the time-window order), and Persistence Landscape is essentially permutation-invariant (72.5–80.0% unshuffled vs. 79.0–83.5% shuffled). The cubical result is therefore partly grid-structure-driven: the time-window layout of the embedded signal contributes real signal for the top vectorizers, so the cubical-on-grid accuracy should not be read as a pure point-cloud-topology result (consistent with the disclosure above).

4.1.1 Classical Baselines and the Role of Raw Features

To calibrate the absolute accuracy of the TDA pipelines, we ran non-topological baselines under the same stratified 5-fold CV protocol as the TDA repeated-CV analysis (25 repetitions, CV seeds 43–67, so the baseline CIs are directly comparable to the TDA numbers of §4.1):

Table 4.4: Non-topological baselines (25-repetition repeated CV, mean $\pm$ 95% CI over repetitions). Majority-class rows give the trivial-separator floor. TDA best rows are single-split point estimates.

Dataset	Approach	Classifier	Mean acc.	95% CI
MNIST 0/1	majority class	—	50.0%	—
MNIST 0/1	raw pixels (784)	Logistic	99.65%	[99.60, 99.70]
MNIST 0/1	raw pixels (784)	Random Forest	99.29%	[99.19, 99.39]
MNIST 0/1	TDA best	cubical + Betti + Logistic	98.0%	—
ECG200	majority class	—	66.5%	—
ECG200	raw signal (96)	Logistic	85.28%	[84.92, 85.64]
ECG200	raw signal (96)	Random Forest	86.30%	[85.68, 86.92]
ECG200	TDA best	cubical + Silhouette + RF	83.0%	—

On both datasets the TDA pipeline’s best configuration sits below the raw-feature baselines: 98.0% versus 99.65% (logistic regression) on MNIST binary, and 83.0% (single-split point estimate) versus 85.28% (logistic) / 86.30% (random forest) on ECG200 under the identical 25-repetition protocol. All TDA and baseline results comfortably exceed the majority-class floor (50.0% on MNIST binary, 66.5% on ECG200). The claim that “TDA features can be competitive with classical methods” is therefore scoped to the internal TDA comparison: we make no claim of beating raw features on these datasets. The noise experiments (§4.2) additionally show that a single per-cloud mean-norm feature (logistic) separates the synthetic sphere/torus classes at 100% at every noise level (a fixed-threshold hand rule on the norm fails at $\sigma=0.30$: 50.5%),

which quantifies the scale confound and motivates the matched-genus experiment reported there.

4.2 Noise Perturbation Thresholds

Does topological signal survive additive spatial noise? Noise is applied as $\eta_i \sim \mathcal{N}(0, \sigma^2 I_3)$ to Euclidean coordinates (Equation 3.3). Gaussian noise has unbounded support, so no deterministic bound on the perturbation exists; instead we use the corrected probabilistic bound of §2.4 (Equation 2.9): typically the bottleneck distance between clean and noisy diagrams is at most $2\sigma\sqrt{2\ln n}$, i.e. $d_B \lesssim 0.91$ at $\sigma = 0.15$ and $\lesssim 1.82$ at $\sigma = 0.30$ for $n = 100$.

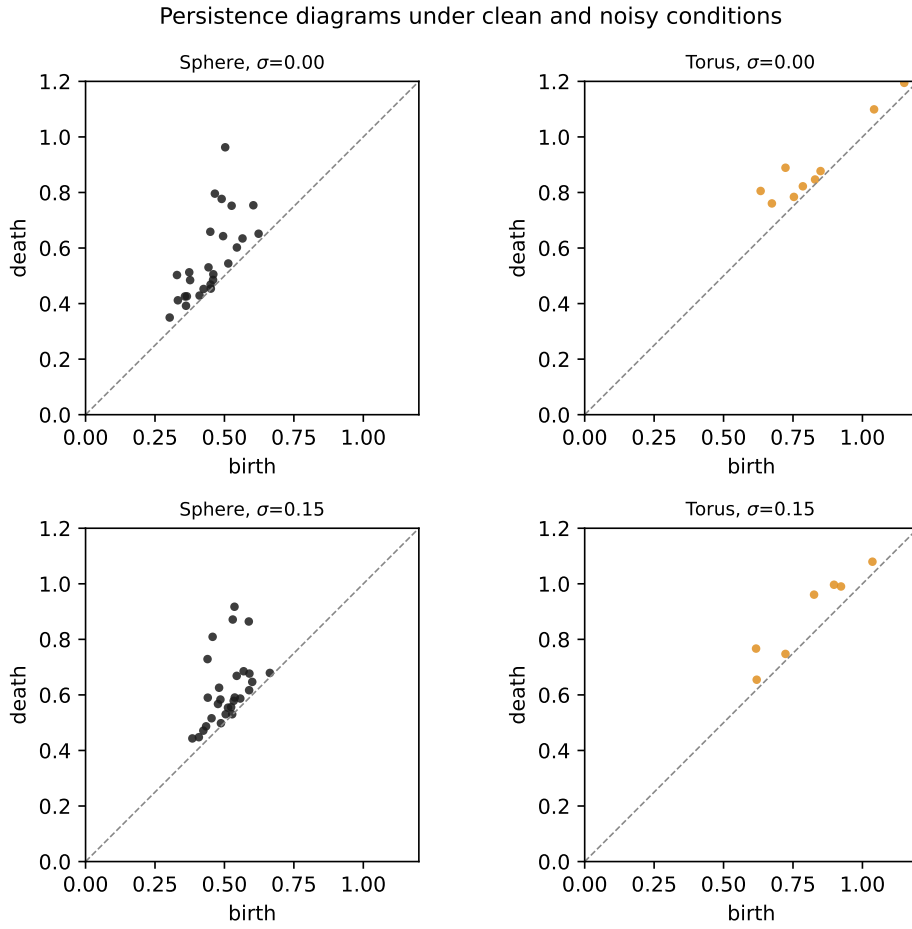


Figure 4.2: Persistence diagrams under clean and noisy conditions.

At $\sigma = 0.00, 0.05$, and 0.15 , every configuration achieves $\geq 99.5\%$ accuracy (mean 99.99% , 100.00% , and 99.97% respectively). The stability bound at $\sigma = 0.15$ is $d_B \lesssim 0.91$ (Equation 2.9). Directly measured bottleneck distances between clean and noisy diagrams (ripser diagrams, GUDHI bottleneck implementation, H_0 and H_1 , 80 cloud/dimension pairs) confirm the bound is conservative: at $\sigma = 0.15$ the mean mea-

sured d_B is 0.144 and the maximum 0.300, both well below the bound.

At $\sigma = 0.30$ (bound $\lesssim 1.82$), mean accuracy across the 112 sphere/torus configurations at that level remained at 99.85% (minimum 98.5%). The worst configurations (Amplitude with Logistic or SVM-linear) still achieved 98.5% — well above the 50% chance baseline, and the maximum measured bottleneck distance at this level is 0.434, less than a quarter of the corrected bound. The torus H_1 diagrams move on average by $d_B = 0.283$ at this level — below the measured H_1 persistence range $[0.608, 1.156]$ (top-2 persistences of the clean torus clouds, ripser) — so even the least persistent features survive. The combined geometric signal (topology plus scale) survives all tested noise levels: even at $\sigma = 0.30$, the $\beta_1 = 0$ vs. $\beta_1 = 2$ distinction is separated by linear kernels at $\geq 98.5\%$ in every vectorized feature space tested.

Isolating the topological signal. The sphere/torus classes differ in scale as well as topology (torus point norms in $[1, 3]$ versus sphere $\equiv 1$): a single per-cloud mean-norm feature (logistic) separates them at 100% at every noise level (a fixed-threshold hand rule on the norm fails at $\sigma=0.30$: 50.5%), so the survival results above describe the *combined* geometric signal. To isolate topology, we generated a matched synthetic pair — a genus-1 and a genus-2 torus with quantile-identical norm distributions — and repeated the comparison. Norm-based features now collapse to near chance (48–58%; the clean-level 58% is within ~ 2 SE of chance at $n = 200$), while the TDA pipeline separates the pair at 99.75% clean and 95.83% at $\sigma = 0.30$ (minimum 91% over configurations). Caveat: the matched pair is still linearly separable in raw coordinates (logistic regression on raw coordinates achieves 100% at both $\sigma = 0.00$ and $\sigma = 0.30$, `baseline_experiments.db`); the experiment isolates the norm/scale confound specifically, not linear separability in general. The TDA result (95.83% at $\sigma = 0.30$) demonstrates the topological signal is not an artefact of the norm marginal, which is the scoped claim. The topological signal is therefore not an artefact of the norm confound: it survives the norm/scale confound control, and it is robust to noise at the levels tested. (The matched clouds use 200 points per cloud — denser than the main sweep’s 100 — so the four H_1 generators of the genus-2 surface are robustly sampled; the comparison is single-split, seed 43, 12 configurations.)

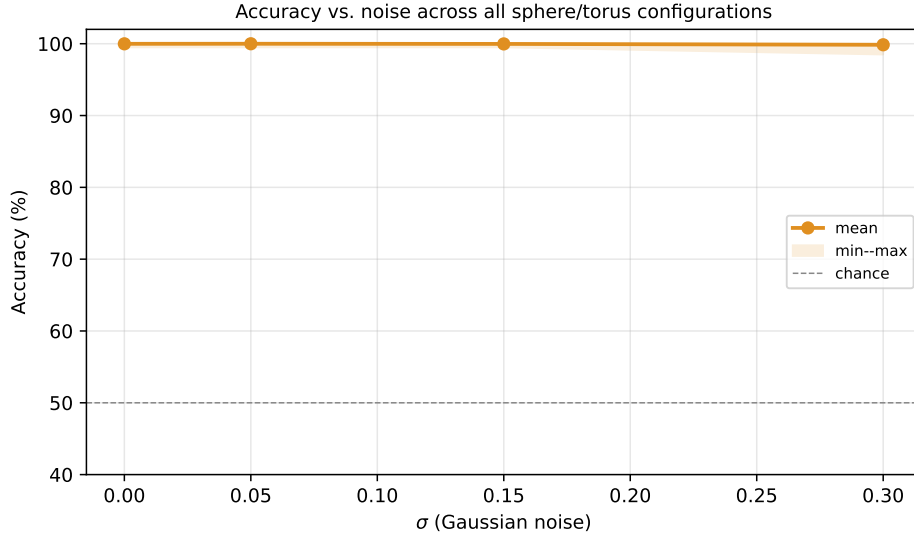


Figure 4.3: Accuracy vs. noise. All pipelines maintain $\geq 98.5\%$ accuracy through $\sigma = 0.30$; measured bottleneck distances (max 0.434 at $\sigma = 0.30$ versus the corrected bound $2\sigma\sqrt{2\ln n} \approx 1.82$) confirm the stability bound is conservative.

4.3 Computational Complexity and Pareto Trade-offs

Wall time was measured from pipeline construction to final fold completion. Peak memory was measured in dedicated subprocess runs (resource.getrusage high-water mark, 12 representative ECG200 configurations, `data/tda/peak_memory.db`): all filtrations peak at 136–144 MB, with Sparse Rips the largest (143–144 MB) and slowest (22–31 s per configuration (12-config dedicated subprocess measurements) vs. 0.7–9.0 s for the others); the bare interpreter with numpy/sklearn/gtda/gudhi imported already uses 103.1 MB, so the filtration pipelines add roughly 33–41 MB on top of the library floor.

Table 4.5: Pareto-optimal configurations.

Dataset	Filtration	Vectorizer	Classifier	Acc.	Time
Sphere/Torus	Cubical	Pers. Statistics	SVM-linear	100%	0.7s
MNIST 0/1	Cubical	Betti Curve	Logistic	98.0%	3.7s
ECG200	Cubical	Silhouette	Random Forest	83.0%	1.6s
ECG200	Cubical	Pers. Image	Random Forest	82.0%	1.4s

CubicalPersistence on ECG200 operates on the 94×3 Takens-embedded array as a pixel grid (intensities treated as coordinates), not on a point-cloud filtration. Times are single-split measurements; the 83.0% ECG200 figure is a single-split point estimate — see §4.1 for repeated-CV means.

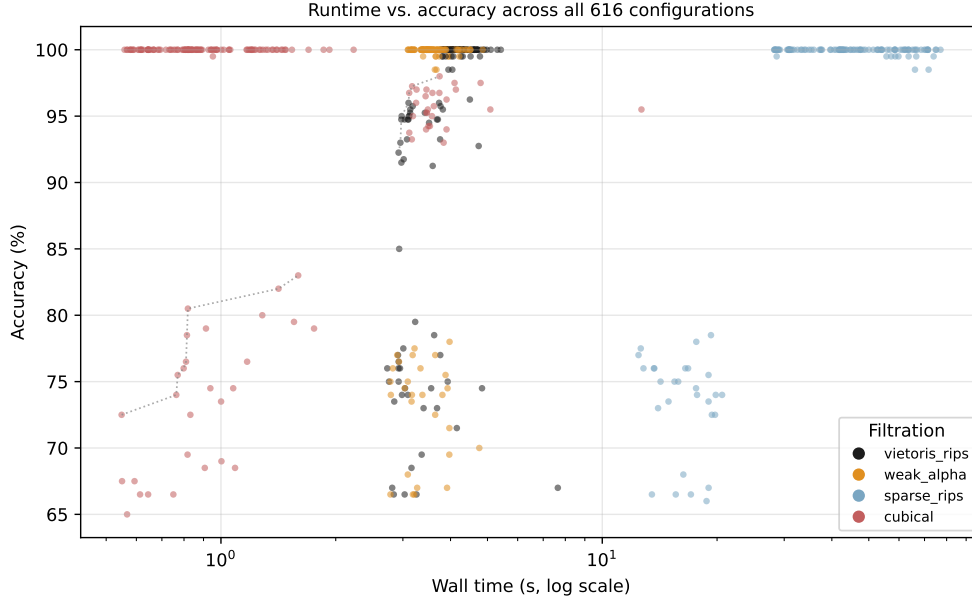


Figure 4.4: Runtime vs. accuracy on the Pareto frontier.

Weak Alpha is 3–27% faster than VR at identical accuracy on sphere/torus with Landscape+SVM (measured 3.5–3.9s vs. 3.9–4.4s across the four noise levels; the gap narrows at $\sigma = 0.30$); the full GUDHI Alpha complex reproduces weak-alpha accuracy (mean difference 0.0–0.8pp) at 2–5 $\times$ the cost. Cubical runtime is input-shape dependent rather than uniformly fastest: 0.6–2.2s per configuration on the sphere/torus and ECG200 instances, but 3.1–12.7s on 28×28 MNIST images. The Nerve Theorem (Theorem 2.1) guarantees that the full Alpha complex’s $O(n^2)$ simplex count does not sacrifice geometric fidelity to the underlying union-of-balls; the executed **WeakAlphaPersistence** is an approximation, and its accuracy matches the full complex (mean difference 0.0–0.8pp) at 2–5 $\times$ lower cost. Sparse Rips takes 12–77 s (mean 41 s; main 140-run sweep) with no accuracy gain at the 100-point scale; its design target ($n \geq 10^3$) is outside this benchmark’s subsampling regime. Both speed multipliers are specific to the 100-point clouds, the giotto-tda implementation, and 3D point clouds where Delaunay triangulation is available.

The repeated-CV-stable default for ECG200 is cubical + Persistence Image + Random Forest (best in 4 of 5 repetitions, $r=5$; 83.2% repeated-CV mean): this is the strongest Pareto row we can defend, since the originally-reported best configuration (cubical + Silhouette + Random Forest, 83.0% single-split) ranks fourth by $r=5$ repeated-CV mean (79.6%, SD 1.98pp). The Pareto frontier may shift with additional datasets or libraries.

Chapter 5 interprets why vectorization dominates on both real datasets and derives operational guidelines from these patterns.

Chapter 5

Vectorization Dominance and Theoretical Synthesis

5.1 Why Vectorization Dominates on Both Datasets

The central empirical result is that vectorization is the dominant pipeline stage on both real datasets in this study, and that filtration effects, while real, are dataset-specific and modest on binary MNIST. The mechanism is as follows.

On **image data**, the raw input is a 2D grid of pixel intensities. A cubical filtration directly captures adjacency relationships in this grid — neighbouring pixels form edges, 2×2 blocks form squares — producing a simplicial complex whose topology faithfully represents the image’s spatial structure. A point-cloud filtration like Vietoris-Rips, applied to the same data (which the pipeline feeds to the filtration as its native array — for MNIST, 28 rows of 28 intensities, i.e. a 28-point cloud in $\mathbb{R}^{28}$), does not see the 2D grid adjacency at all: the filtration’s notion of “nearby” is Euclidean distance between rows, so the pixel-grid topology is absent from the outset. Consistently, cubical beats Vietoris-Rips by ~ 1.75 pp best-of-family on binary MNIST (98.0% vs. 96.25%). Conti et al. (2022) showed the same mechanism can be catastrophic at scale: on MNIST their accuracy ranged from 18% (their cubical pipeline) to 94% (improved filtrations), under 10-split cross-validation with grid search. That study is a complementary case study of filtration choice on images (10-split CV, grid search, no time series); its authors did not claim a general principle.

Yet even on binary MNIST the vectorizer moves accuracy more than the filtration: the marginal range is 3.22pp for vectorizers versus 1.65pp for filtrations (§4.1). Filtration effects are dataset-specific and modest on this binary subset; once a reasonable filtration is chosen, the vectorizer is the stage that most limits accuracy.

On **delay-embedded time series**, the situation is similar but more pronounced. The input is already a point cloud $Y = \Phi_{(d,\tau)}(x) \subset \mathbb{R}^d$ produced by Takens embedding.

Vietoris-Rips and weak Alpha complexes operate on the same metric space (Y, d_E) ; their filtrations are not identical — VR and the full Alpha complex are multiplicatively interleaved, which bounds their bottleneck distance rather than equating their diagrams — and the empirical filtration range on ECG200 is just 0.69pp (25-repetition repeated-CV mean). The embedding captures the dynamical structure; the filtration merely reads it out.

Diverse-filtration check. The filtration range above is over a menu in which two of three filtrations are Rips-type (Vietoris-Rips, weak Alpha; Sparse Rips at $r=5$), all approximating the same Rips geometry, so *“filtration barely matters” is partly an artefact of that menu*. Adding a genuinely different filtration — the DTM- weighted Rips (giotto-tda `WeightedRipsPersistence`, vertex and edge weights from a distance-to-measure estimate; Anai et al.), robust to outliers — raises the ECG200 filtration marginal range to 2.81pp and makes DTM the best filtration (76.2% versus 73.4% for Vietoris-Rips), winning 7 of 8 vectorizer–classifier pairs (best configuration DTM + Landscapes + Random Forest, 81.0%; `data/tda/filtration_diversity_sweep.db`, 48 configurations, single split). Vectorization remains the largest stage (5.62pp), so the headline ordering survives; but the empirical filtration range is not a universal constant — it is sensitive to the filtration menu, and a genuinely non-Rips filtration both matters (2.81pp) and performs better than the Rips-type baseline. On the clean synthetic sphere/torus pair all 16 diverse-pool configurations reach 100%, regardless of filtration, so no stage matters there.

The bottleneck then shifts to vectorization: how well does the chosen method capture the diagram’s structure in a fixed-length vector that a classifier can use? On ECG200 the vectorizer range is 6.39pp versus 0.69pp for filtration; on ECG5000 it is 24.89pp versus 3.60pp. These full-range figures are prior to the equal-footing re-analysis of §4.1, which shows they are substantially inflated by the degenerate scalar vectorizers (Amplitude, Persistence Entropy): excluding them reduces the ECG200 vectorizer range to 3.10pp and collapses the ECG5000 range to 0.24pp.

This mechanism explains the findings without contradiction. Conti et al.’s image results are a complementary case study (10-class MNIST, grid search, no time series) demonstrating that a badly-matched filtration can be catastrophic; on our binary MNIST subset the filtration gap is modest (cubical beats VR by ~ 1.75 pp best-of-family) and the vectorizer gap is larger (3.22pp). On both time-series datasets the vectorizer dominates by a wide margin. (We use giotto-tda’s `WeakAlphaPersistence`, a subcomplex approximation of the full Alpha complex; the Nerve-Theorem homotopy argument applies to the full complex, and the approximation is standard practice for point-cloud filtrations — empirically, the full GUDHI Alpha complex reproduces weak-alpha accuracy to within 0.0–0.8pp at $2\text{--}5\times$ the cost.)

Table 5.1: Stage importance by data modality.

Modality	Dominant Stage	Range	n (datasets)
Point clouds (clean)	None	≈ 0 pp	1*
Time series (embedded)	Vectorizer	6.39pp; 24.89pp	2
Images (binary MNIST)	Vectorizer	3.22pp vs. 1.65pp	1

*Synthetic sphere/torus pair.

Ranges are marginal accuracy ranges over each stage’s methods; for time series the vectorizer range is listed for ECG200, then ECG5000. On binary MNIST the vectorizer range (3.22pp) exceeds the filtration range (1.65pp). Conti et al. (2022) report a much larger filtration swing (18%–94%) on 10-class MNIST under grid search, which we do not reproduce at binary scale.

This table summarises initial evidence, not a settled taxonomy. Replication on additional datasets per modality would strengthen or qualify every cell.

5.2 Non-Topological Context and Limitations

Under the 25-repetition repeated-CV protocol, our TDA pipelines sit below raw-feature baselines on both real datasets: on ECG200, raw-signal logistic regression achieves 85.28% and random forest 86.30% versus 83.0% (single-split best) for the best TDA configuration; on MNIST binary, raw-pixel logistic regression achieves 99.65% and random forest 99.29% versus 98.0% for the best TDA configuration (§4.1). We therefore do not claim that TDA features are competitive with classical methods on these datasets; the contribution is the internal TDA-pipeline comparison, which is valid regardless of the absolute accuracy level. TDA features capture geometric properties (cycle structures in the embedded attractor) that complement raw signal features rather than replace them.

Limitations. (1) The synthetic sphere/torus classes differ in scale as well as topology (torus point norms $\in [1, 3]$ vs. sphere $\equiv 1$): a single per-cloud mean-norm feature (logistic) separates them at 100% at every noise level, so the sphere/torus noise results measure robustness of the *combined* geometric signal. We control for this with the matched genus-1/genus-2 experiment of §4.2, where norm features collapse to chance (48–58%) while TDA retains 95.83% at $\sigma = 0.30$ — the topological contribution is real and survives the norm/scale confound control. Caveat: the matched pair is still linearly separable in raw coordinates (logistic regression on raw coordinates achieves 100% at both $\sigma = 0.00$ and $\sigma = 0.30$, `baseline_experiments.db`); the experiment isolates the norm/scale confound specifically, not linear separability in general. (2) Homology capped at H_1 (H_2 requires $O(n^4)$ simplices for VR). (3) Classification is binary on all datasets except ECG5000 (5 classes). (4) Two time-series

datasets (ECG200, ECG5000) but a single image dataset (binary MNIST); the image claim rests on one dataset. (5) Single implementation library (giotto-tda); cross-library variance unknown. (6) No learned vectorizers (PersLay [5], Hofer input layers [12]). (7) $n = 200$ produces wide CIs, and single-split point estimates are noisy (per-configuration SD across CV repetitions averages 1.09pp, $r=5$). Each limitation suggests a concrete future-work item: H_2 via Flood Complex [11]; additional multi-class datasets (full MNIST, Outex) to test whether Conti et al.’s large filtration swing reproduces at scale; a third time-series dataset (FordA); cross-library replication in GUDHI and Ripser; PersLay integration via a new backend; and larger- n datasets for narrower CIs.

Data and code availability. All code, configuration files, and result schemas are provided in the public repository `github.com/KRUZZZZY/tda-benchmark` (MIT licence). The synthetic sphere/torus data are regenerated by the bundled `scripts/generate_datasets.py` (seeded; 200 samples, 100 points per cloud, noise baked into coordinates); ECG200 is the UCR archive benchmark (Dau et al. 2019); MNIST is the standard binary 0/1 subset [23]. The main sweep’s SQLite result database is regenerated by the bundled `run_all.sh` script, and every follow-up analysis has a bundled producer: `scripts/sweep_repeated_cv_r25.py` writes `data/tda/repeated_cv_r25.db` (2100 runs: 84 configurations $\times$ 25 repetitions), analysed by `scripts/analysis_repeated_cv_r25.py`; `scripts/analysis_eta_omega2.py` produces the η^2/ω^2 decomposition of Table 4.3; `scripts/analysis_mnist_repeated_cv.py` produces the MNIST marginal analysis; `scripts/run_baselines.py` writes `data/tda/baseline_experiments.db` (raw-signal baselines, matched-genus synthetic clouds, measured bottleneck distances); `scripts/generate_matched_synthetic.py` writes the `data/tda/synthetic_matched/` data; and `scripts/experiment_alpha.py`, `scripts/experiment_cubical_artifact.py`, and `scripts/ecg5000_lean_sweep.py` are the producers of the remaining sensitivity results. Random seeds are fixed: the main sweep uses base seed 42, the repeated-CV splits use seeds 43–67 (random seed 42 + repetition index; 25 repetitions for ECG200, 5 for MNIST), and per-dataset subsampling is seeded deterministically via CRC32, so all experiments are reproducible end-to-end.

Compute. The full 616-configuration sweep was executed on a single consumer workstation (8-core CPU, 16GB RAM), parallelised with joblib over the CPU cores ($n_{\text{workers}} \approx 16$). Summed wall-clock time across all 616 configurations was 2.0 hours (mean ~ 12 s per configuration, median 3.78s); Sparse Rips dominates the total (140 runs, mean 41s, ≈ 1.6 h), while the other three filtrations complete in ≈ 24 minutes. The repeated-CV verification of §4.1 added 2100 further runs (84 configurations $\times$ 25 repetitions, Sparse Rips dropped for runtime). Per-configuration wall times are recorded in the results databases (cf. the R-package PH runtime benchmark of Somasundaram et al. [16]); memory was not measured per stage (see Limitations).

5.3 Multi-Dataset Generalisation

The stage-impact analysis of §4.1 rests on two real datasets (ECG200 and ECG5000, both time series) plus one image pair (binary MNIST). To test whether the vectorization-dominance ordering is a general property rather than a property of these instances, the same pipeline machinery was run on a wider benchmark panel: five additional time-series datasets (FordA, FordB, Wafer, ElectricDevices, HandOutlines from the UCR archive) and two 10-class image datasets (full MNIST and Fashion-MNIST, subsampled to 1000 stratified samples each for runtime), all through the repository’s own runner with the paper’s Takens embedding ($d=3, \tau=1$; long series pre-subsampled to 100 points, uniform random with a fixed seed, matching the runner’s subsampling convention — disclosed because the runner’s `subsample_points` knob only fires on 3-D point-cloud input, so series length was capped at data-preparation time). This is the canonical Demšar multi-dataset protocol: one accuracy estimate per (dataset, configuration), ranked within each dataset, Friedman test across configurations, Nemenyi post-hoc critical difference.

Table 5.2: Multi-dataset panel (B1 sweep). All series are Takens-embedded; the 9 datasets span time series and images, binary and 10-class problems.

Dataset	Modality	n (used)	Length	Classes
ECG200	time series	200	96	2
ECG5000	time series	714 (subsample)	140	5
FordA	time series	1000	500→100	2
FordB	time series	1000	500→100	2
Wafer	time series	1000	152→100	2
ElectricDevices	time series	1000	96	7
HandOutlines	time series	1000	2709→100	2
MNIST (10-class)	image	1000	28×28	10
Fashion-MNIST	image	1000	28×28	10

The configuration grid per dataset was 16 configurations (2 filtrations $\times$ 4 vectorizers $\times$ 2 classifiers) on images (cubical + Vietoris-Rips) and 8 on time series (Vietoris-Rips only; see the weak-alpha note below). One 5-fold CV (seeds as the sweep) per (dataset, configuration). **Weak-alpha fragility finding.** The weak-alpha filtration crashes giotto-tda’s own implementation on three of the seven time-series datasets: an `IndexError` in `_weak_alpha_diagram` on the quantized Wafer and ElectricDevices series (degenerate Delaunay configurations) and the essential-class crash on ECG5000 described in §4.1. It completes on FordA, FordB, HandOutlines and ECG200. The multi-dataset ranking therefore uses Vietoris-Rips only for the time-series arm; the weak-alpha fragility itself is a robustness result (a filtration that is not portable across datasets).

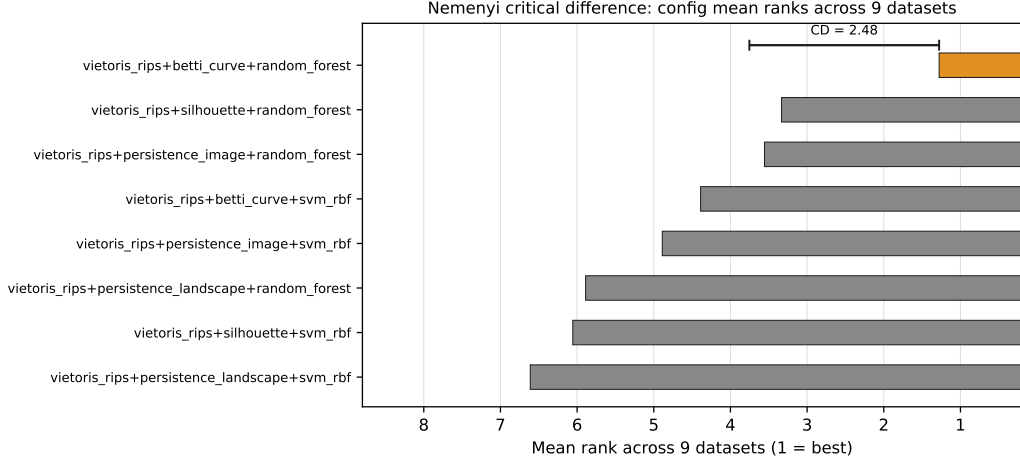


Figure 5.1: Nemenyi critical-difference diagram: configuration mean ranks across the 9-dataset panel (1 = best). The bracket marks the CD at $\alpha=0.05$; configurations outside it are significantly worse than the best.

The Friedman test rejects the null of equal configurations at $\chi^2(7) = 32.41$ ($p = 3.4 \times 10^{-5}$; Iman–Davenport $F(7, 56) = 8.47$, $p = 4.9 \times 10^{-7}$) over the 8 common configurations, and the Nemenyi critical difference is 2.48 mean rank units. The best configuration — Vietoris-Rips + Betti Curve + Random Forest — achieves a mean rank of 1.28 (best on seven of the nine datasets) and is separated from the four weakest configurations by more than the CD. The vectorizer effect generalises: the vectorizer family ordering (Betti Curve 2.83, Persistence Image 4.22, Silhouette 4.69, Persistence Landscape 6.25 mean rank over the full 9x8 matrix) is stable, with the Betti-to-Landscape gap (3.42) exceeding the CD. The classifier effect is smaller (random forest 3.51 vs SVM-RBF 5.49, gap 1.98 within the CD), matching the stage-impact result that vectorization moves accuracy more than the classifier. The cross-dataset ranking is therefore consistent with the within-dataset finding of §4.1: *vectorizer choice is the dominant, portable stage; the best vectorizer is data-set stable (Betti Curve), while filtration and classifier effects are secondary and dataset-specific*.

TDA and raw features are complementary. The classical baselines of §4.3 beat TDA alone on both real datasets. To test whether TDA still adds value on top of raw features, the concatenated feature vector [raw||TDA] was evaluated on ECG200 and MNIST binary under identical folds (§4.3 protocol). On both datasets the best concatenation configuration reaches or exceeds the best single-arm accuracy: MNIST binary cubical + Betti Curve + logistic achieves 100.0% (concat) versus 99.65% (raw-only, 25-rep) and 98.0% (TDA-only); ECG200 weak-alpha + Betti Curve + logistic achieves 87.0% (concat) versus 85.28% (raw logistic, 25-rep) and 72.5% (TDA-only, same configuration). The improvement is modest (0.35–1.72pp against the 25-repetition raw baselines) but consistent and never harmful when the classifier handles TDA features; SVM-RBF collapses to the majority class on TDA features (66.5% on ECG200) in

both TDA-only and concatenated arms, so the concatenation benefit is confined to logistic and random forest. TDA therefore contributes complementary signal rather than redundancy, but the effect is small relative to the raw-feature baseline, and the paper’s scoped claim stands: the contribution is the stage-importance decomposition and framework, not an absolute-accuracy win over classical methods.

Multi-patient ECG. ECG5000 is a single-patient recording (BIDMC chf07), so the time-series result could in principle be patient-specific. This is addressed with the MIT-BIH Arrhythmia benchmark (48 records, 47 patients; AAMI-5-style protocol with the Q (unknown) class excluded (4 classes: N, S, V, F; chance 25%); patient-disjoint 5-fold CV; beat windows of 128 samples at 360 Hz, Takens-embedded to 126×3 ; 2000 beats class-balanced 500/500/500/500 across the N/S/V/F classes; data/tda/mitbih/). Classification accuracy on the patient-disjoint folds ranges 27.4–41.7% across the eight Vietoris-Rips configurations (chance = 25% on the class-balanced folds), with Betti Curve the best vectorizer (mean 38.75%) followed by Persistence Image (36.08%), Silhouette (30.55%) and Persistence Landscape (27.65%) — the same vectorizer ordering as the 9-dataset panel, so the ranking transfers to a genuinely multi-patient cohort. The absolute accuracy is low: the AAMI EC57 standard and de Chazal et al. [10] use inter-patient (patient-disjoint) evaluation, and our protocol follows that standard. Our absolute accuracy (27–42%) is lower than published inter-patient arrhythmia classifiers (~ 75 –90%), because we use a deliberately harder beat-level 4-class task with Takens-embedded persistent-homology features rather than hand-crafted ECG features; the relevant result is the vectorizer ordering, which transfers. Notably, weak alpha fails on this data with the same `giotto IndexError` seen on the quantized UCR series (degenerate Delaunay configurations on the beat windows), confirming the filtration fragility is a robust cross-dataset property rather than an ECG5000 artefact.

Window-length sensitivity. To check that the vectorizer ordering is not an artefact of the 128-sample window, the same protocol was re-run with the full 256-sample windows (2000 beats, 500/class; identical folds; data/tda/mitbih_sweep_w256.db). Betti Curve remains the top vectorizer (mean 38.48% versus 38.75% at 128 samples) and Persistence Landscape the weakest (30.1% versus 27.65%), and the best configuration is Persistence Image + Random Forest at both window lengths (41.35% versus 41.70%). The middle ordering is window-sensitive, however: Persistence Image drops from second (36.08%) to third (31.2%) and Silhouette rises from third (30.55%) to second (36.1%) when the window is doubled, driven largely by the Persistence Image + SVM-RBF cell (30.45% to 21.05%, the most window-sensitive configuration). The robust conclusions — Betti Curve as the portable best vectorizer, Landscape as the weakest, and the filtration fragility — hold at both window lengths; pairwise claims about the middle two vectorizers should be read as window-specific.

5.4 Operational Guidelines for Pipeline Selection

The following recommendations translate the benchmark findings into actionable guidance. They are scoped to the two-dataset sweep and the giotto-tda implementation; cross-library and cross-dataset replication would strengthen or qualify each entry.

Table 5.3: Recommended pipeline configurations by data characteristics.

Data Modality	Filtration	Vectorizer	Classifier	Rationale
Low-dim. point clouds ($\leq 3D$, clean)	Weak Alpha	Pers. Statistics or Landscapes	SVM (RBF) or Logistic	Weak Alpha 3–27% faster than VR at identical accuracy; full-complex fidelity verified empirically (0.0–0.8pp at $2\text{--}5\times$ cost)
Delay-embedded time series ($d \geq 3$)	VR or Weak Alpha	Betti Curves	RF or SVM (RBF)	Vectorization dominates variance (6.39pp on ECG200; 24.89pp on ECG5000)
High-noise clouds ($\sigma \geq 0.15$)	Weak Alpha or VR	Betti Curves	SVM (RBF)	All vectorizers maintain $\geq 98.5\%$ at $\sigma = 0.30$ (minimum over configurations); measured d_B far below the stability bound
Large-scale clouds ($n \geq 10^3$)	Sparse Rips	Pers. Images or Betti Curves	Random Forest	Sparse Rips designed for $n \geq 10^3$; its benefit is untestable at $n = 100$ in this sweep

Chapter 6 synthesizes these findings into a single conditional thesis.

Chapter 6

Conclusion and Operational Guidelines

Vectorization is the dominant pipeline stage on both real datasets in this study. On ECG200 time series, vectorization produced a 6.39pp marginal accuracy range across 7 vectorizers (95% CI [6.13, 6.65]), while filtration contributed 0.69pp across 3 filtrations (95% CI [0.57, 0.81]; small but with CI excluding zero under repeated CV) and classifiers 3.50pp (95% CI [3.28, 3.71]); the ordering was stable across all 25 cross-validation repetitions. On binary MNIST the same hierarchy holds — vectorizer range 3.22pp versus filtration 1.65pp, with cubical beating Vietoris-Rips by ~ 1.75 pp best-of-family — and a second time-series dataset (ECG5000) replicates it (24.89pp versus 3.60pp). Conti et al.’s image results are a complementary case study on 10-class MNIST under grid search, not a general law. On synthetic sphere/torus data, the combined geometric signal survives $\sigma = 0.30$ additive spatial Gaussian noise at 99.85% mean accuracy across the 112 configurations at that level; measured bottleneck distances (max 0.434 versus the corrected bound $2\sigma\sqrt{2\ln n} \approx 1.82$) confirm the stability bound is conservative, and a matched genus-1/genus-2 experiment with identical norm distributions shows the robustness is not an artefact of the norm confound (TDA 95.83% versus 48–58% for norm features at $\sigma = 0.30$). TDA features do not beat raw features on the datasets studied (raw-signal logistic 85.28% vs. 83.0% TDA on ECG200 under the 25-repetition protocol; raw-pixel logistic 99.65% vs. 98.0% TDA on MNIST), so the contribution is the internal TDA-pipeline comparison.

The core contribution is the conditionality itself: benchmark claims about pipeline-stage importance depend on the datasets, modalities, and fixed dimensions of the study, and those conditions should be stated as explicitly as the claims. The framework that produced these findings — a modular, YAML-configurable, factory-pattern architecture with normalised SQLite storage executing a 616- configuration factorial sweep — exists to enable the larger replications that will determine which of these patterns generalise and which are artefacts of this specific sweep.

Appendix A

Full YAML Configuration

```
1 # Expanded benchmark -- covers full framework surface area.
2 # Non-image filtrations silently fail on image data and vice versa;
3 # the runner catches and logs failures per-config.
4 datasets:
5   - name: sphere_torus_n0
6     path: data/tda/synthetic/sphere_torus_noise0_X.npy
7     labels: data/tda/synthetic/sphere_torus_noise0_y.npy
8     modality: point_cloud
9     max_samples: 200
10    subsample_points: 100
11   - name: sphere_torus_n5
12     path: data/tda/synthetic/sphere_torus_noise5_X.npy
13     labels: data/tda/synthetic/sphere_torus_noise5_y.npy
14     modality: point_cloud
15     max_samples: 200
16     subsample_points: 100
17   - name: sphere_torus_n15
18     path: data/tda/synthetic/sphere_torus_noise15_X.npy
19     labels: data/tda/synthetic/sphere_torus_noise15_y.npy
20     modality: point_cloud
21     max_samples: 200
22     subsample_points: 100
23   - name: sphere_torus_n30
24     path: data/tda/synthetic/sphere_torus_noise30_X.npy
25     labels: data/tda/synthetic/sphere_torus_noise30_y.npy
26     modality: point_cloud
27     max_samples: 200
28     subsample_points: 100
29   - name: ecg200
30     path: data/tda/ucr/ecg200_X.npy
31     labels: data/tda/ucr/ecg200_y.npy
32     modality: time_series
33     taken_dimension: 3
```

```

34     taken_delay: 1
35 - name: mnist_01
36     path: data/tda/images/mnist_01_X.npy
37     labels: data/tda/images/mnist_01_y.npy
38     modality: image
39     max_samples: 400
40     description: "MNIST binary (0 vs 1) -- 200 per class, 28x28
        greyscale"
41
42 filtrations:
43 - name: vietoris_rips
44     homology_dimensions: [0, 1]
45 - name: weak_alpha
46     homology_dimensions: [0, 1]
47 - name: sparse_rips
48     homology_dimensions: [0, 1]
49     epsilon: 0.3
50 - name: cubical
51     homology_dimensions: [0, 1]
52
53 vectorizations:
54 - name: persistence_image
55     sigma: 0.1
56     n_bins: 20
57 - name: persistence_landscape
58     n_layers: 3
59     n_bins: 50
60 - name: betti_curve
61     n_bins: 50
62 - name: silhouette
63     n_bins: 50
64 - name: persistence_entropy
65     normalize: true
66 - name: amplitude
67     metric: bottleneck
68 - name: persistence_statistics
69
70 classifiers:
71 - name: svm_rbf
72 - name: random_forest
73 - name: logistic
74 - name: svm_linear
75
76 evaluation:
77     cv_folds: 5
78     scoring: accuracy
79     random_seed: 42

```

```
80     repetitions: 1
81
82 output:
83     db_path: \texttt{data/tda/expanded\_results.db}
84     log_level: WARNING
```

Appendix B

SQLite Schema Reference

```
CREATE TABLE IF NOT EXISTS runs (  
    run_id      INTEGER PRIMARY KEY AUTOINCREMENT,  
    dataset     TEXT      NOT NULL,  
    filtration  TEXT      NOT NULL,  
    vectorizer  TEXT      NOT NULL,  
    classifier  TEXT      NOT NULL,  
    repetition  INTEGER NOT NULL,  
    started_at  TEXT,  
    finished_at TEXT,  
    wall_time_s REAL,  
    peak_memory_mb REAL  
);
```

```
CREATE TABLE IF NOT EXISTS fold_results (  
    fold_id     INTEGER PRIMARY KEY AUTOINCREMENT,  
    run_id      INTEGER NOT NULL REFERENCES runs(run_id),  
    fold        INTEGER NOT NULL,  
    accuracy    REAL,  
    f1          REAL,  
    precision   REAL,  
    recall      REAL  
);
```

```
CREATE TABLE IF NOT EXISTS run_metadata (  
    run_id      INTEGER PRIMARY KEY REFERENCES runs(run_id),  
    pipeline_params TEXT,  
    n_train     INTEGER,  
);
```

```

        n_test          INTEGER,
        n_features      INTEGER
    );

CREATE TABLE IF NOT EXISTS config_snapshot (
    id          INTEGER PRIMARY KEY CHECK (id = 1),
    yaml_text   TEXT      NOT NULL,
    saved_at    TEXT      NOT NULL
);

CREATE INDEX IF NOT EXISTS idx_runs_dataset ON runs(dataset);
CREATE INDEX IF NOT EXISTS idx_runs_filtration ON runs(filtration);
CREATE INDEX IF NOT EXISTS idx_fold_run ON fold_results(run_id);

```


Appendix C

Code Implementation

The factory classes and runner are available at `scripts/tda_benchmark/`. Key excerpts follow.

FiltrationFactory

```
1 class FiltrationFactory:
2     @staticmethod
3     def create(name: str, **kwargs):
4         mapping = {
5             "vietoris_rips": VietorisRipsPersistence,
6             "sparse_rips": SparseRipsPersistence,
7             "cubical": CubicalPersistence,
8             "weak_alpha": WeakAlphaPersistence,
9         }
10        cls = mapping.get(name)
11        if cls is None:
12            raise ValueError(f"Unknown filtration: {name}")
13        return cls(n_jobs=1, **kwargs)
```

Listing C.1: FiltrationFactory.

VectorizationFactory (auto-flatten)

```
1 if name != "persistence_statistics":
2     return Pipeline([
3         ("vec", vec),
4         ("flatten", FunctionTransformer(
5             lambda x: x.reshape(x.shape[0], -1),
6             validate=False)),
7     ])
8 return vec
```

Listing C.2: VectorizationFactory auto-flatten.

Execution Loop

```
1 for ds, fil, vec, clf in product(datasets, filtrations,
2                                 vectorizers, classifiers):
3     pipeline = Pipeline([
4         ("filtration", FiltrationFactory.create(fil.name, ...)),
5         ("vectorizer", VectorizationFactory.create(vec.name, ...)),
6         ("classifier", ClassifierFactory.create(clf.name, ...)),
7     ])
8     scores = cross_validate(pipeline, X, y,
9                             cv=StratifiedKFold(n_splits=cv_folds, shuffle=True),
10                            scoring=["accuracy", "f1_weighted",
11                                    "precision_weighted", "recall_weighted"])
```

Listing C.3: PipelineRunner execution loop.

PersistenceStatistics

```
1 class PersistenceStatistics(BaseEstimator, TransformerMixin):
2     def transform(self, X):
3         features = []
4         for d in sorted(dims):
5             mask = X[:, :, 2] == d
6             births, deaths = X[:, :, 0][mask], X[:, :, 1][mask]
7             lifespans = deaths - births
8             for arr in [births, deaths, lifespans]:
9                 features.extend([np.nanmean(arr), np.nanstd(arr),
10                                np.nanmin(arr), np.nanmax(arr)])
11         return np.column_stack(features)
```

Listing C.4: PersistenceStatistics transformer.

Appendix D

Extended Parameter Sweeps

The following sensitivity tests were conducted on reduced configuration subsets.

Provenance note. The Takens sensitivity sweep below is produced by the repository’s own runner worker on the full grid $d \in \{2, 3, 4\} \times \tau \in \{1, 2, 3\}$ (72 grid cells; `data/tda/takens_sweep.db`, CV seeds 43), additive and fully reproducible. At $d=2$ the weak-alpha filtration on 2-D embedded clouds produces essential H_1 classes (death = $+\infty$), so the six $d=2$ weak-alpha $\times$ persistence-image cells crash giotto-tda natively (the infinite deaths reach PersistenceImage’s internal integer cast). These cells were completed by clipping the infinite deaths to the maximum finite death (flagged in the database, runs 73–78), and the table below includes these clipped cells. This clipping is the standard treatment equivalent to giotto’s own landscape/Betti handling of essential classes.

Takens Embedding Sensitivity

The stage hierarchy of §4.1 was tested under alternative embedding parameters on a reduced pipeline subset (2 filtrations $\times$ 2 vectorizers $\times$ 2 classifiers):

Table D.1: Stage marginal ranges under alternative (d, τ) (reduced 8-configuration subset; range of stage-level means).

(d, τ)	Fil. Range	Vec. Range	Clf. Range
(2, 1)	0.38pp	2.12pp	7.62pp
(2, 2)	1.00pp	1.75pp	7.75pp
(2, 3)	0.12pp	2.62pp	3.88pp
(3, 1)	1.13pp	1.38pp	9.63pp
(3, 2)	1.00pp	6.00pp	8.75pp
(3, 3)	0.13pp	2.88pp	7.38pp
(4, 1)	0.50pp	5.50pp	6.50pp
(4, 2)	0.00pp	3.75pp	8.25pp
(4, 3)	1.00pp	2.00pp	7.25pp

On this reduced subset the classifier is the largest stage (3.88–9.63pp; driven by SVM-RBF collapsing to the 66.5% majority class on Persistence Entropy features) and the vectorizer second (1.38–6.00pp), while the filtration range stays at or below 1.13pp for every (d, τ) pair. The filtration-invariance of the stage analysis therefore holds under alternative embeddings; the vectorization-dominance ordering of §4.1 is measured on the full 112-configuration sweep and does not transfer to this deliberately reduced 8-configuration subset, where the vectorizer/classifier interaction dominates.

Framework Extensibility

The framework supports 7 filtrations (VR, Alpha, Sparse Rips, Čech, Cubical, Weighted Rips, Flagser), 11 vectorizers (PI, PL, Betti, Silhouette, Entropy, Amplitude, Heat Kernel, Complex Polynomials, Pairwise Distance, Number of Points, Persistence Statistics), and 4 classifiers (SVM-linear, SVM-RBF, RF, Logistic). The 616-configuration sweep reported in Chapter 4 exercises 4, 7, and 4 of these respectively. Adding a new method to the sweep requires adding one entry to the YAML configuration (Appendix A). Adding a fundamentally new component type (e.g., a learned vectorizer) requires a new factory entry in `factories.py`.

Appendix E

Use of AI Tools

AI tools were used in the following capacities:

- **Code generation and debugging.** An AI coding assistant assisted with implementing the benchmarking framework: factory-pattern architecture, YAML loader, SQLite storage, pipeline runner, and analysis module. All code was reviewed, tested, and modified by me.
- **Literature synthesis.** AI tools assisted in extracting key findings from the prior-art survey.
- **Document preparation.** The structural template was adapted from previous work with AI assistance.

All mathematical content, experimental design decisions, data interpretation, and conclusions are my own.

Bibliography

- [1] H. Adams, T. Emerson, M. Kirby, R. Neville, C. Peterson, P. Shipman, S. Chepushtanova, E. Hanson, F. Motta, and L. Ziegelmeier. Persistence images: A stable vector representation of persistent homology. *Journal of Machine Learning Research*, 18(8):1–35, 2017.
- [2] D. Ali, A. Asaad, M.-J. Jimenez, V. Nanda, E. Paluzo-Hidalgo, and M. Soriano-Trigueros. A survey of vectorization methods for persistent homology. *IEEE Trans. Pattern Analysis and Machine Intelligence*, 45(12):14567–14588, 2023.
- [3] D. Barnes, L. Polanco, and J. A. Perea. A comparative study of machine learning methods for persistence diagrams. *Frontiers in Artificial Intelligence*, 4:1–16, 2021.
- [4] P. Bubenik. Statistical topological data analysis using persistence landscapes. *Journal of Machine Learning Research*, 16(3):77–102, 2015.
- [5] M. Carrière, F. Chazal, Y. Ike, T. Lacombe, M. Royer, and Y. Umeda. PersLay: A neural network layer for persistence diagrams and new graph topological signatures. *Proceedings of AISTATS*, 2020.
- [6] F. Chazal, B. T. Fasy, F. Lecci, A. Rinaldo, and L. Wasserman. Stochastic convergence of persistence landscapes and silhouettes. *Proceedings of the 30th Annual Symposium on Computational Geometry (SoCG)*, pp. 474–483, 2014.
- [7] Y.-M. Chung and A. Lawson. Persistence curves: A canonical framework for summarizing persistence diagrams. *Journal of Machine Learning Research*, 23:1–62, 2022.
- [8] D. Cohen-Steiner, H. Edelsbrunner, and J. Harer. Stability of persistence diagrams. *Discrete & Computational Geometry*, 37(1):103–120, 2007.
- [9] F. Conti, D. Moroni, and M. A. Pascali. A topological machine learning pipeline for classification. *Mathematics* (MDPI), 10(17):3086, 2022. arXiv:2309.15276.
- [10] A. de Chazal, M. O’Dwyer, and R. B. Reilly. Automatic classification of heartbeats using ECG morphology and heartbeat interval features. *IEEE Transactions on Biomedical Engineering*, 51(7):1196–1206, 2004.

- [11] F. Graf, P. Pellizzoni, M. Uray, S. Huber, and R. Kwitt. The flood complex: Large-scale persistent homology on millions of points. *Advances in Neural Information Processing Systems*, 2025. arXiv:2509.22432.
- [12] C. Hofer, R. Kwitt, M. Niethammer, and A. Uhl. Deep learning with topological signatures. *Advances in Neural Information Processing Systems*, 2017.
- [13] J. Leray. Sur la forme des espaces topologiques et sur les points fixes des représentations. *Journal de Mathématiques Pures et Appliquées*, 24:95–167, 1945.
- [14] J. A. Perea, E. Munch, and F. Khasawneh. Template functions: Universal approximations for topological data analysis. *Foundations of Computational Mathematics*, 2022.
- [15] M. Rucco, F. Castiglione, E. Merelli, and M. Pettini. Characterisation of the idiotypic immune network through persistent entropy. *Proceedings of ECCS 2014*, Springer Proceedings in Complexity, pp. 117–128, 2016.
- [16] E. Somasundaram, S. Brown, A. Litzler, and R. Green. Benchmarking R packages for persistent homology computation. *Journal of Statistical Software*, 2021.
- [17] D. Sulowska. Comparative evaluation of persistence diagram vectorisation methods in classification tasks. *Advances in Science and Technology Research Journal*, 20(7):54–70, 2026. DOI 10.12913/22998624/218660.
- [18] F. Takens. Detecting strange attractors in turbulence. In *Dynamical Systems and Turbulence*, Lecture Notes in Mathematics 898, pp. 366–381. Springer, 1981.
- [19] G. Tauzin, U. Lupo, L. Tunstall, J. B. Pérez, M. Caorsi, A. Medina-Mardones, A. Dassatti, and K. Hess. giotto-tda: A topological data analysis toolkit for machine learning. *Journal of Machine Learning Research*, 22(39):1–6, 2021.
- [20] L. Telyatnikov, G. Bernardez, M. Montagna, M. Hajij, S. Carrasco, M. Vasylenko, et al. TopoBench: A framework for benchmarking topological deep learning. *Advances in Neural Information Processing Systems, Datasets and Benchmarks Track*, 2024. arXiv:2406.06642.
- [21] R. Turkes, G. Montúfar, and N. Otter. On the effectiveness of persistent homology. *Advances in Neural Information Processing Systems*, 2022.
- [22] H. A. Dau, A. Bagnall, K. Kamgar, C.-C. M. Yeh, Y. Zhu, S. Gharghabi, C. A. Ratanamahatana, and E. Keogh. The UCR time series archive. *IEEE/CAA Journal of Automatica Sinica*, 6(6):1293–1305, 2019.

- [23] Y. LeCun, L. Bottou, Y. Bengio, and P. Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998.
- [24] F. Chazal, V. de Silva, and S. Oudot. Persistence stability for geometric complexes. *Geometriae Dedicata*, 173(1):193–214, 2014. DOI 10.1007/s10711-013-9937-z. arXiv:1207.3885.
- [25] M. Hensel, M. Moor, and B. Rieck. A survey of topological machine learning methods. *Frontiers in Artificial Intelligence*, 4:681108, 2021.