


RFQ Bidding System - README

Overview: Real-time bidding system using WebSockets and MySQL.

Tables: users, rfq, bids, auction_config, activity_log

ER Diagram:

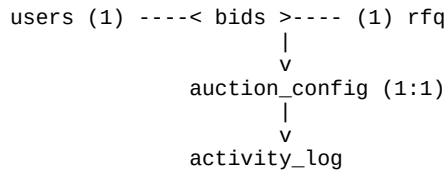

Schema:

Users Table:

```
CREATE TABLE users (
  id INT AUTO_INCREMENT PRIMARY KEY,
  name VARCHAR(100),
  email VARCHAR(100) UNIQUE,
  password VARCHAR(255),
  role ENUM('ADMIN', 'SUPPLIER')
);
```

RFQ Table:

```
CREATE TABLE rfq (
  id INT PRIMARY KEY AUTO_INCREMENT,
  name VARCHAR(255),
  startTime DATETIME,
  closeTime DATETIME,
  currentCloseTime DATETIME,
  forcedCloseTime DATETIME,
  createdBy INT,
  status ENUM('ACTIVE', 'CLOSED', 'FORCE_CLOSED')
);
```

Bids Table:

```
CREATE TABLE bids (
  id INT AUTO_INCREMENT PRIMARY KEY,
  rfqId INT,
  supplierId INT,
  price DECIMAL(10,2),
  FOREIGN KEY (rfqId) REFERENCES rfq(id)
);
```

Auction Config:

```
CREATE TABLE auction_config (
  id INT AUTO_INCREMENT PRIMARY KEY,
  rfqId INT UNIQUE,
  triggerWindow INT,
  extensionDuration INT,
  triggerType ENUM('BID_PLACED', 'ANY_RANK_CHANGE', 'L1_CHANGE')
);
```

Activity Log:

```
CREATE TABLE activity_log (
  id INT AUTO_INCREMENT PRIMARY KEY,
  rfqId INT,
  eventType ENUM('BID_PLACED', 'TIME_EXTENDED', 'AUCTION_CLOSED'),
  details TEXT
);
```