

# Cucumber Report

Feb 7, 2023, 9:14:04 AM

**Start : Feb 07, 8:29:17.118 AM**

**End : Feb 07, 9:13:50.296 AM**

**Duration : 44 m 33.178 s**

Features







PASSED - 1  
FAILED - 5  
SKIPPED - 0


Scenarios

PASSED - 7  
FAILED - 28  
SKIPPED - 0


Steps

PASSED - 139  
FAILED - 28  
SKIPPED - 200

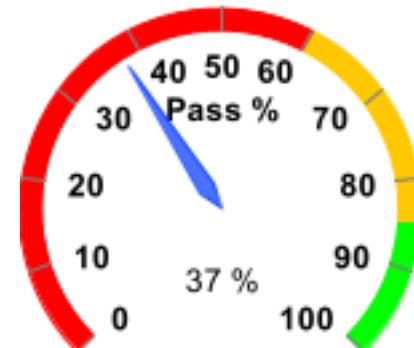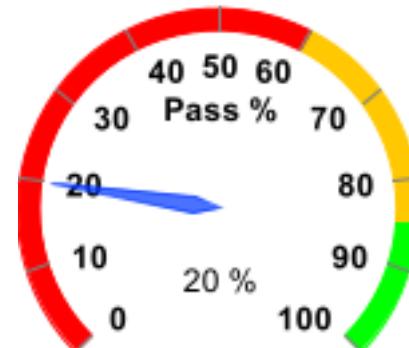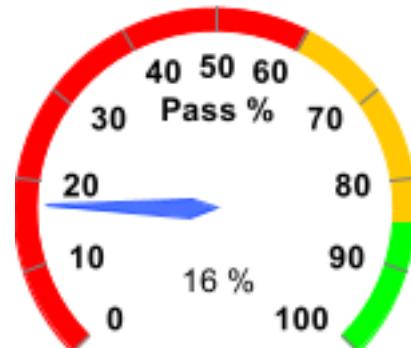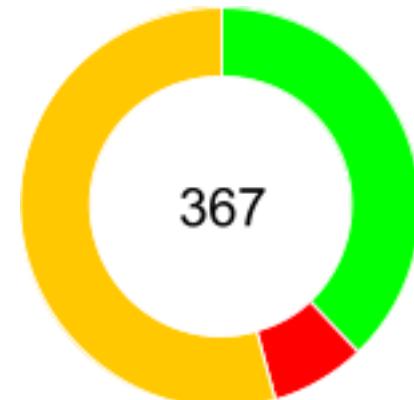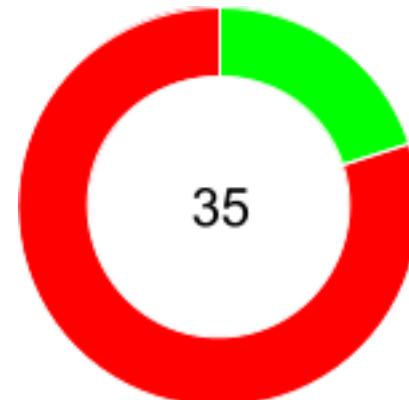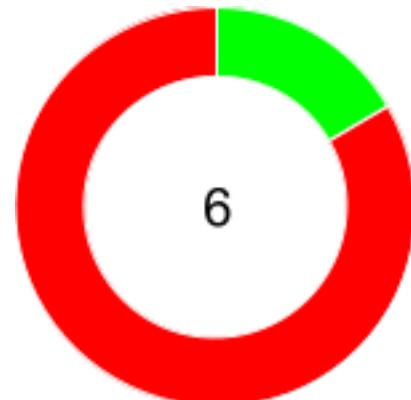


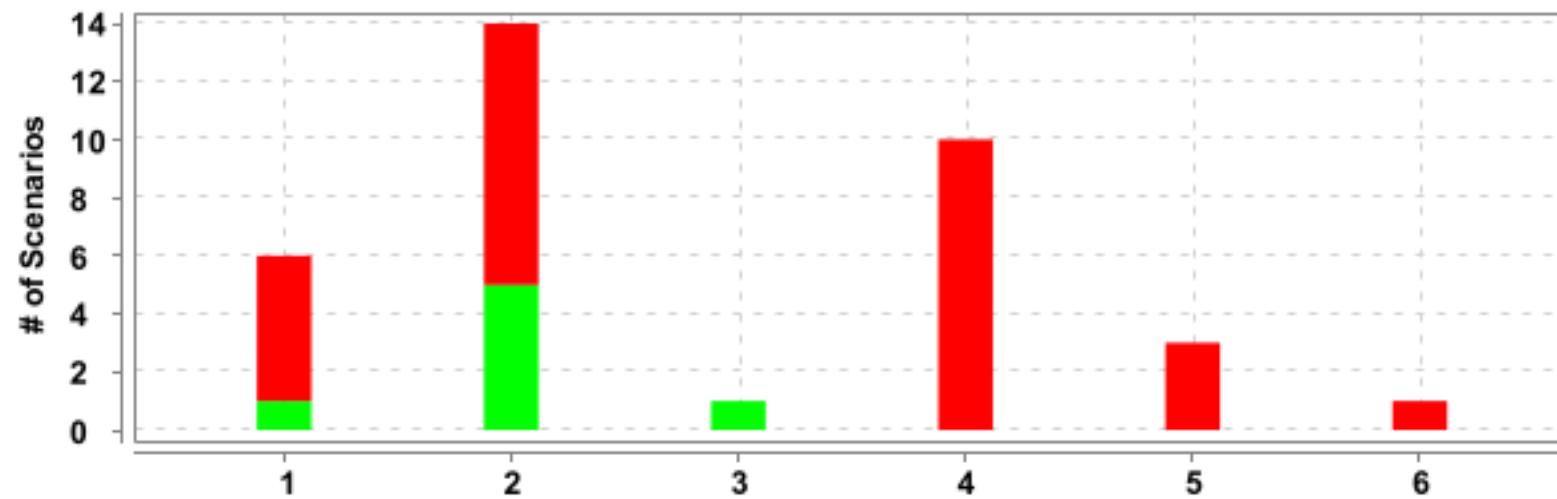


#	<b>Feature Name</b>	<b>T</b>	<b>P</b>	<b>F</b>	<b>S</b>	<b>Duration</b>
1	<u>AR Inquiry</u>	6	1	5	0	7 m 35.530 s
2	<u>All orders</u>	14	5	9	0	36 m 56.877 s
3	<u>All orders1</u>	1	1	0	0	0.000 s
4	<u>Standing Order</u>	10	0	10	0	0.424 s
5	<u>Standing Order1</u>	3	0	3	0	0.085 s
6	<u>Standing order1</u>	1	0	1	0	0.016 s

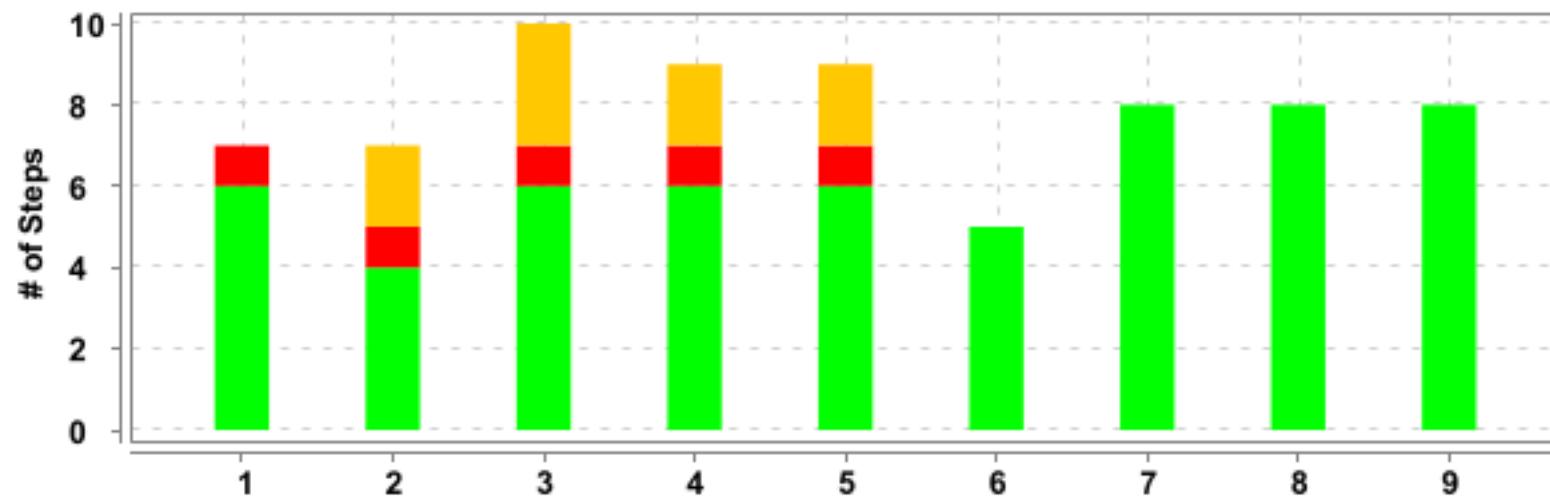


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>AR Inquiry</u>	<u>For searching of Invoice number using Add filter button</u>	7	6	1	0	1 m 48.603 s
2	<u>AR Inquiry</u>	<u>For searching of Invoice number using search bar</u>	7	4	1	2	41.545 s
3	<u>AR Inquiry</u>	<u>To add new payment method</u>	10	6	1	3	41.576 s
4	<u>AR Inquiry</u>	<u>For Posting Invoice</u>	9	6	1	2	41.429 s
5	<u>AR Inquiry</u>	<u>To cancel Posting invoice</u>	9	6	1	2	41.497 s
6	<u>AR Inquiry</u>	<u>Loging out from the application</u>	5	5	0	0	3 m 0.616 s
7	<u>All orders</u>	<u>Test scenario to display all the orders</u>	8	8	0	0	4 m 28.359 s
8	<u>All orders</u>	<u>Test scenario for displaying all order with quotes</u>	8	8	0	0	4 m 2.698 s
9	<u>All orders</u>	<u>For loading order details in All Order</u>	8	8	0	0	4 m 16.134 s

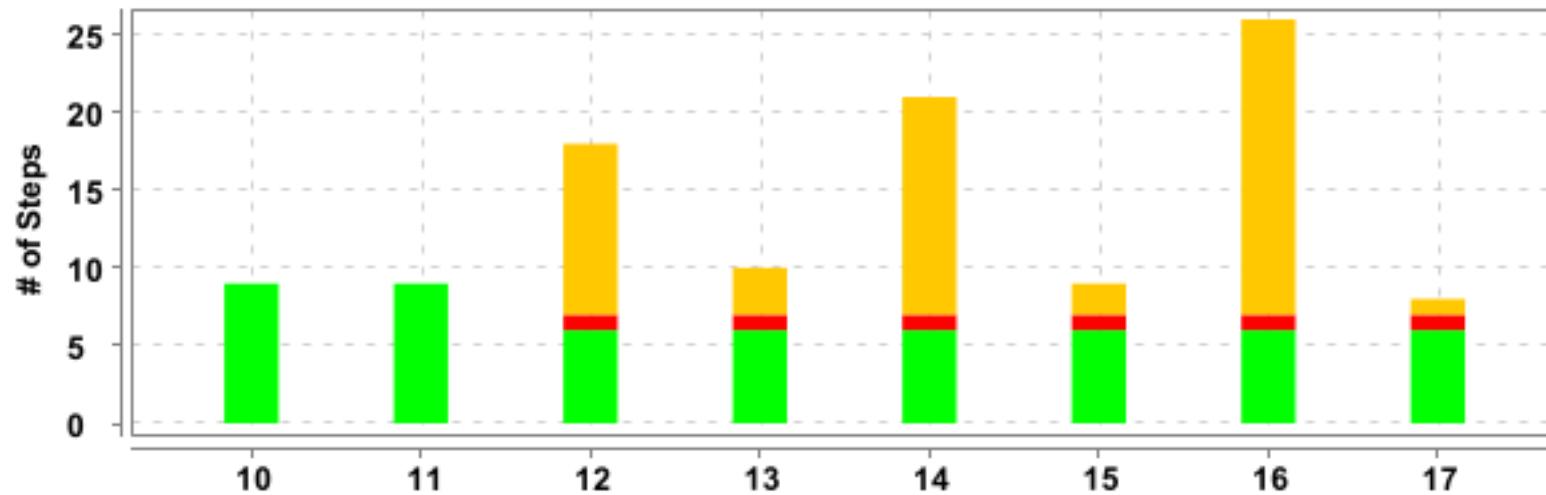


#	Feature Name	Scenario Name	T	P	F	S	Duration
10	<u>All orders</u>	<u>Test scenario for displaying all orders which are submitted using submitted status drop down</u>	9	9	0	0	2 m 45.585 s
11	<u>All orders</u>	<u>Test scenario for displaying all Open order in all orders</u>	9	9	0	0	13 m 5.593 s
12	<u>All orders</u>	<u>Test scenario for creating All Order</u>	18	6	1	11	8 m 9.516 s
13	<u>All orders</u>	<u>Test scenario for displaying only those orders having particular product</u>	10	6	1	3	5.242 s
14	<u>All orders</u>	<u>Test scenario for verifying Comment Icon</u>	21	6	1	14	3.071 s
15	<u>All orders</u>	<u>Test scenario for testing print button functionality</u>	9	6	1	2	0.016 s
16	<u>All orders</u>	<u>Test scenario for editing open order</u>	26	6	1	19	0.037 s
17	<u>All orders</u>	<u>Test scenario for grouping or drag and drop</u>	8	6	1	1	0.006 s

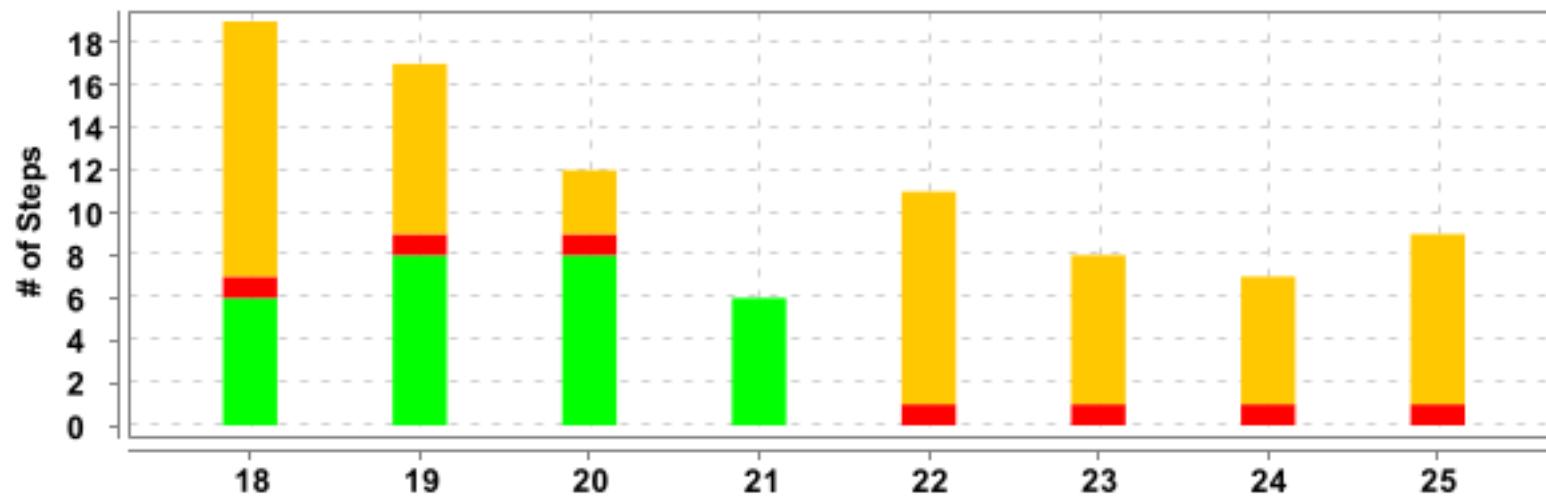



#	Feature Name	Scenario Name	T	P	F	S	Duration
18	<u>All orders</u>	<u>Test scenario for creating Pickup order</u>	19	6	1	12	0.016 s
19	<u>All orders</u>	<u>Test scenario to create copy of Open order/All order</u>	17	8	1	8	0.032 s
20	<u>All orders</u>	<u>Test scenario for navigating from All order to OE</u>	12	8	1	3	0.016 s
21	<u>All orders1</u>	<u>Loging out from the application</u>	6	6	0	0	0.000 s
22	<u>Standing Order</u>	<u>Test scenario for creating standing order, using catalog</u>	11	0	1	10	0.007 s
23	<u>Standing Order</u>	<u>Test scenario for Deleting product from standing order</u>	8	0	1	7	0.000 s
24	<u>Standing Order</u>	<u>Test scenario for skipping specific date in standing order</u>	7	0	1	6	0.000 s
25	<u>Standing Order</u>	<u>Test scenario for verifying skip in SO with skip in OE page</u>	9	0	1	8	0.000 s

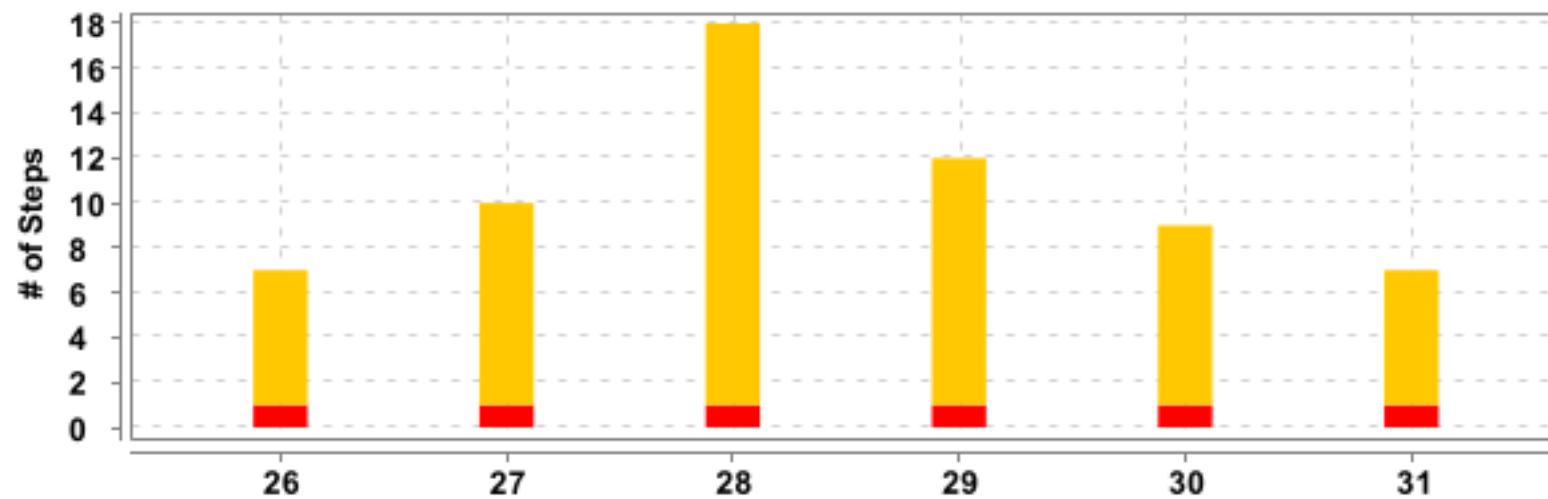


#	Feature Name	Scenario Name	T	P	F	S	Duration
26	<u>Standing Order</u>	<u>Test scenario for remove skipping specific date in standing order</u>	7	0	1	6	0.023 s
27	<u>Standing Order</u>	<u>Test scenario for creating standing order using Quick product entry input box</u>	10	0	1	9	0.003 s
28	<u>Standing Order</u>	<u>Test scenario for creating multiple standing orders</u>	18	0	1	17	0.000 s
29	<u>Standing Order</u>	<u>Test scenario for creating standing order using catalog standing order</u>	12	0	1	11	0.000 s
30	<u>Standing Order</u>	<u>Test scenario for copying Standing order</u>	9	0	1	8	0.015 s
31	<u>Standing Order</u>	<u>Test scenario for deleting all the standing orders which are active and pending</u>	7	0	1	6	0.016 s

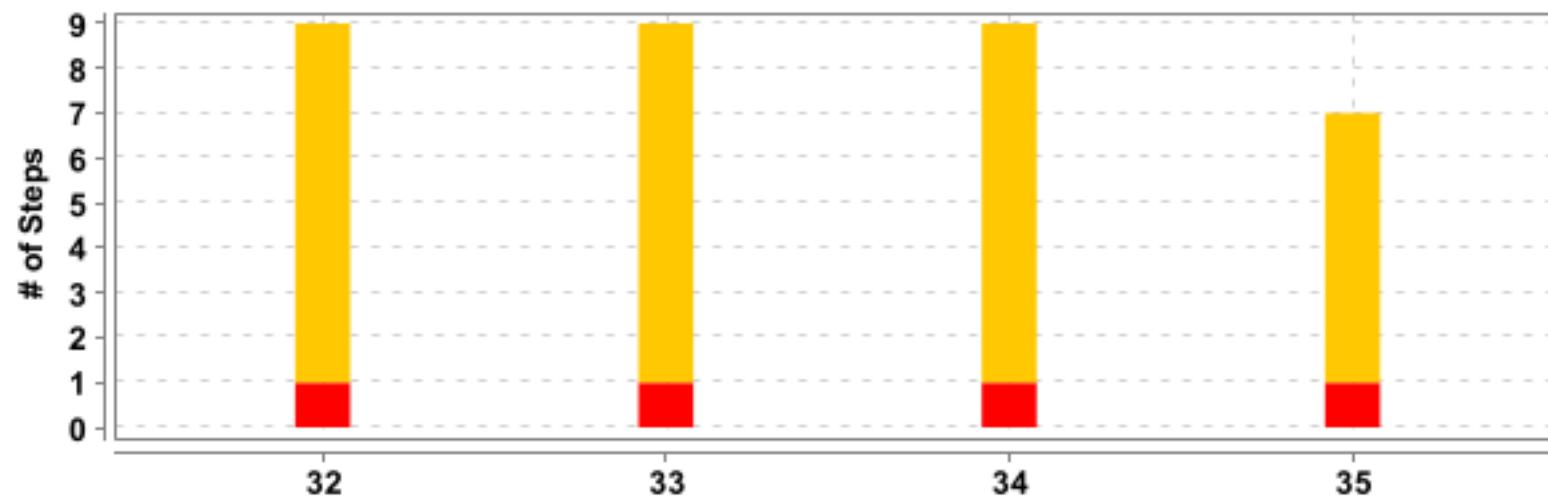


#	<b>Feature Name</b>	<b>Scenario Name</b>	<b>T</b>	<b>P</b>	<b>F</b>	<b>S</b>	<b>Duration</b>
32	<u>Standing Order1</u>	<u>Test scenario for generating Excel sheet for standing order registration</u>	9	0	1	8	0.000 s
33	<u>Standing Order1</u>	<u>Test scenario for generating Excel sheet for standing order registration</u>	9	0	1	8	0.016 s
34	<u>Standing Order1</u>	<u>Test scenario for generating standing order</u>	9	0	1	8	0.000 s
35	<u>Standing order1</u>	<u>Loging out from the application</u>	7	0	1	6	0.016 s

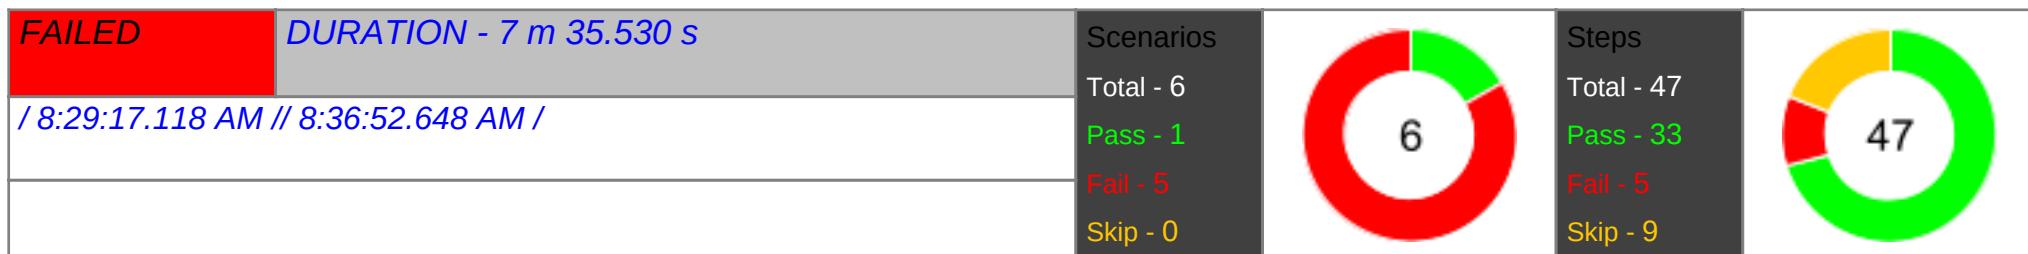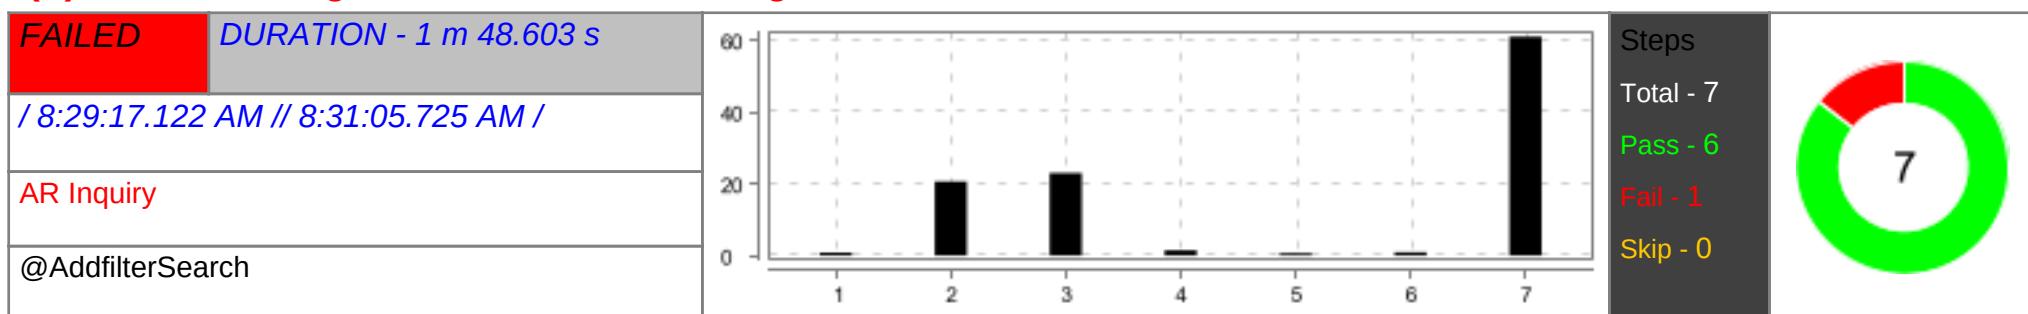**(F)- AR Inquiry****(S)- For searching of Invoice number using Add filter button**

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for AR Inquiry  <b>SIGNIN BUTTON CLICKED</b>	PASSED	0.796 s
2	When User is on Home Page for AR Inquiry	PASSED	20.619 s
3	Then User navigate to Client side for AR Inquiry  <b>NAVIGATED TO AR INQUIRY PAGE</b>	PASSED	22.968 s
4	Given User must be on Client side and select AR Inquiry	PASSED	1.417 s
5	When User navigated to AR Inquiry validate the page	PASSED	0.601 s
6	And User should select Customer Account#	PASSED	0.950 s
7	Then User search for invoice using Add filter button  <b>INVOICE HAS NOT BEEN FOUND</b>  java.lang.AssertionError: expected [true] but found [false] at org.testng.Assert.failAssert.java:99) at org.testng.Assert.failNotEqualsAssert.java:1037) at org.testng.Assert.assertEqualsImplAssert.java:140) at org.testng.Assert.assertEqualsAssert.java:122) at org.testng.Assert.assertEqualsAssert.java:819)	FAILED	1 m 1.033 s
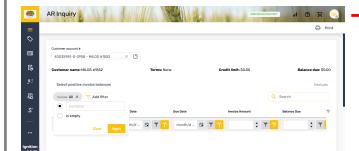
#	Step / Hook Details	Status	Duration
	at org.testng.Assert.assertEquals(Assert.java:829) at pages_DSD_OMS.aRInquiry.ARInquiryPage.SearchInvoice(ARInquiryPage.java:306) at stepDefination_DSD_OMS.ARInquiry.ARInquiryPageStep.userSearchForInvoiceUsingAddFilterButton(ARInquiryPageStep.java:124) at ?.User search for invoice using Add filter button(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/ARInquiryFeature/aRInquiryFeature.feature:14) * Not displayable characters are replaced by '?'		
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario) For searching of Invoice number using Add filter button 	PASSED	0.169 s


### (S)- For searching of Invoice number using search bar

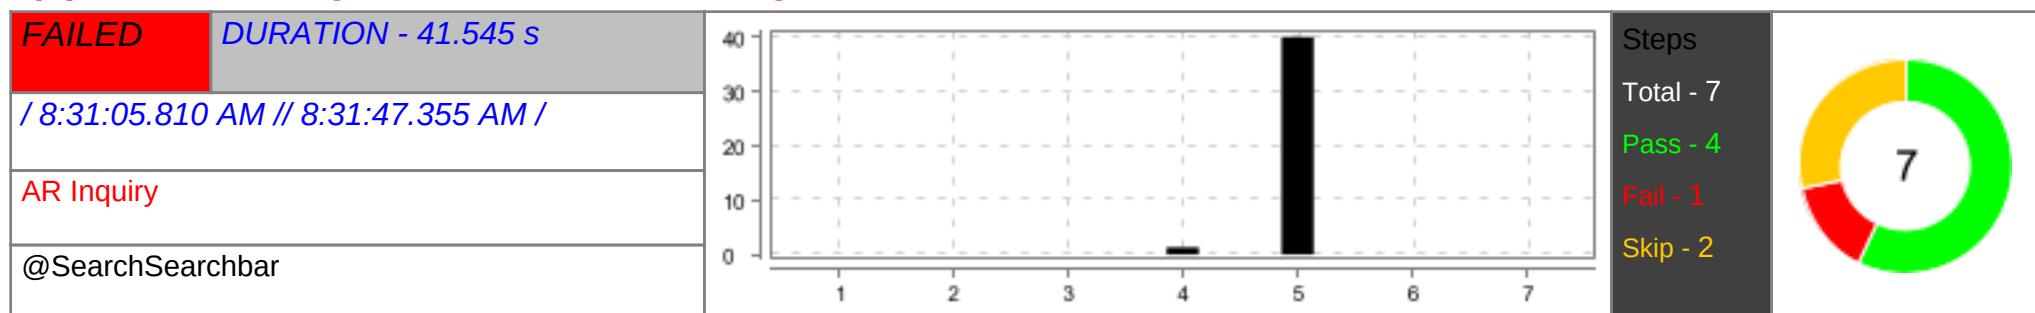

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for AR Inquiry	PASSED	0.000 s
2	When User is on Home Page for AR Inquiry	PASSED	0.000 s
3	Then User navigate to Client side for AR Inquiry	PASSED	0.000 s
4	Given User must be on Client side and select AR Inquiry	PASSED	1.338 s
5	When User navigated to AR Inquiry validate the page  java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebElement.isDisplayed()" because "element" is null at org.openqa.selenium.support.ui.ExpectedConditions.isInvisible(ExpectedConditions.java:1348) at org.openqa.selenium.support.ui.ExpectedConditions.access\$200(ExpectedConditions.java:43) at org.openqa.selenium.support.ui.ExpectedConditions\$46.apply(ExpectedConditions.java:1336) at org.openqa.selenium.support.ui.ExpectedConditions\$46.apply(ExpectedConditions.java:1332) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:249) at helper.HelpersMethod.waitTillLoadingWheelDisappears(HelpersMethod.java:627)	FAILED	40.075 s

#	Step / Hook Details	Status	Duration
	at pages_DSD_OMS.aRInquiry.ARInquiryPage.Validate_ARInquiry(ARInquiryPage.java:147) at stepDefination_DSD_OMS.ARInquiry.ARInquiryPageStep.userNavigatedToARInquiryValidateThePage(ARInquiryPageStep.java:104) at ?.User navigated to AR Inquiry validate the page(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/ARInquiryFeature/aRInquiryFeature.feature:19) * Not displayable characters are replaced by '?'.		
6	And User should select Customer Account#	SKIPPED	0.000 s
7	Then User search for invoice using Search bar	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  For searching of Invoice number using search bar   +	PASSED	0.116 s


### (S)- To add new payment method

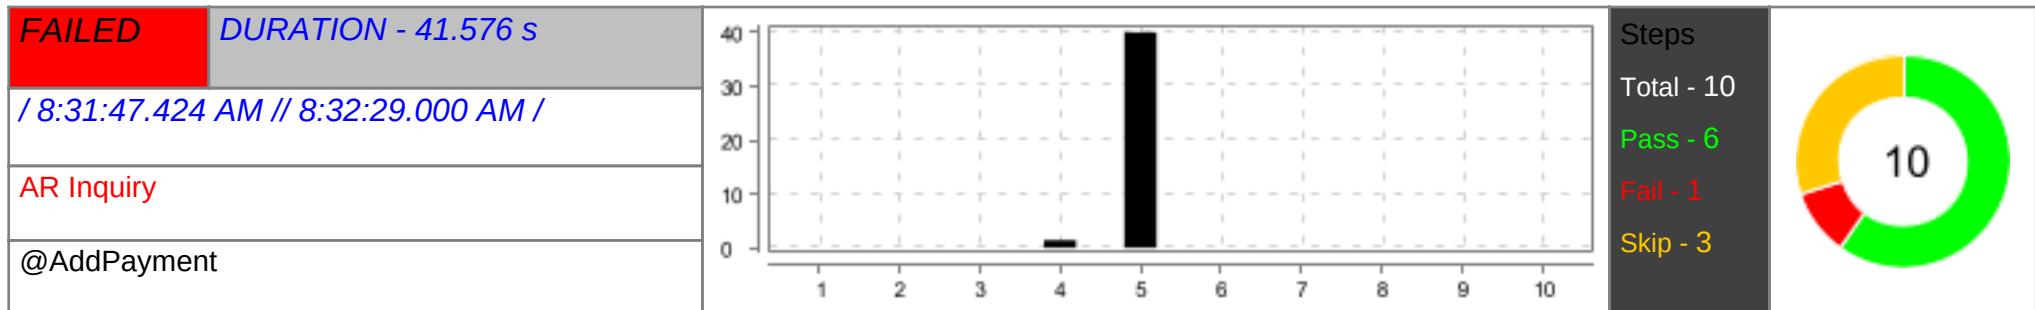


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for AR Inquiry	PASSED	0.000 s
2	When User is on Home Page for AR Inquiry	PASSED	0.000 s
3	Then User navigate to Client side for AR Inquiry	PASSED	0.000 s
4	Given User must be on Client side and select AR Inquiry	PASSED	1.391 s
5	When User navigated to AR Inquiry validate the page	PASSED	40.023 s
6	And User should select Customer Account#	PASSED	0.000 s
7	Then User should select Invoice check box  INVOICE HAS NOT BEEN FOUND  java.lang.AssertionError: expected [true] but found [false] at org.testng.Assert.fail(Assert.java:99)	FAILED	0.000 s


#	Step / Hook Details	Status	Duration
	at org.testng.Assert.failNotEquals(Assert.java:1037) at org.testng.Assert.assertEqualsImpl(Assert.java:140) at org.testng.Assert.assertEquals(Assert.java:122) at org.testng.Assert.assertEquals(Assert.java:819) at org.testng.Assert.assertEquals(Assert.java:829) at pages_DSD_OMS.aRInquiry.ARInquiryPage.Click_CheckBox(ARInquiryPage.java:203) at stepDefination_DSD_OMS.ARInquiry.ARInquiryPageStep.userShouldSelectInvoiceCheckBox(ARInquiryPageStep.java:131) at ?.User should select Invoice check box(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/ARInquiryFeature/aRInquiryFeature.feature:28) * Not displayable characters are replaced by '?'.		
8	And User should click on Post button and navigated to PostPayment page	SKIPPED	0.000 s
9	Then User should click on Add payment button and add details of payment method  Divya   AR   Checking - Personal	SKIPPED	0.000 s
10	Then User should select Add payment method and then user click on Post button	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)	PASSED	0.131 s
	To add new payment method  		

## (S)- For Posting Invoice

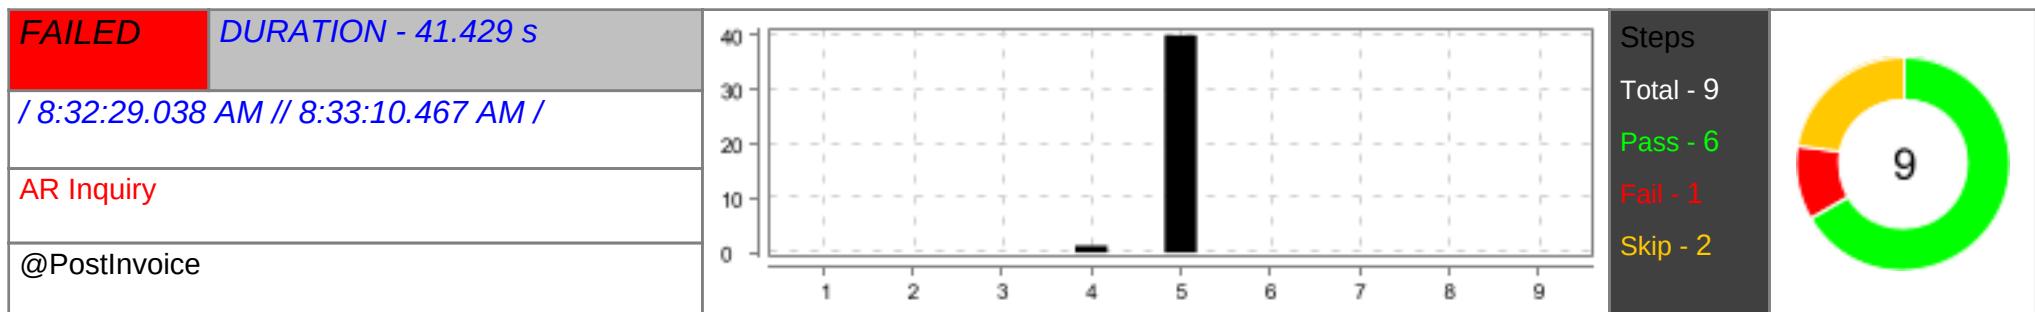


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for AR Inquiry	PASSED	0.000 s
2	When User is on Home Page for AR Inquiry	PASSED	0.000 s
3	Then User navigate to Client side for AR Inquiry	PASSED	0.000 s

#	Step / Hook Details	Status	Duration
4	Given User must be on Client side and select AR Inquiry	PASSED	1.264 s
5	When User navigated to AR Inquiry validate the page	PASSED	40.027 s
6	And User should select Customer Account#	PASSED	0.000 s
7	Then User should select Invoice check box  INVOICE HAS NOT BEEN FOUND  java.lang.AssertionError: expected [true] but found [false] at org.testng.Assert.fail(Assert.java:99) at org.testng.Assert.failNotEquals(Assert.java:1037) at org.testng.Assert.assertEqualsImpl(Assert.java:140) at org.testng.Assert.assertEquals(Assert.java:122) at org.testng.Assert.assertEquals(Assert.java:819) at org.testng.Assert.assertEquals(Assert.java:829) at pages_DSD_OMS.aRInquiry.ARInquiryPage.Click_CheckBox(ARInquiryPage.java:203) at stepDefination_DSD_OMS.ARInquiry.ARInquiryPageStep.userShouldSelectInvoiceCheckBox(ARInquiryPageStep.java:131) at ?.User should select Invoice check box(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/ARInquiryFeature/aRInquiryFeature.feature:39) * Not displayable characters are replaced by '?'.	FAILED	0.000 s
8	And User should click on Post button and navigated to PostPayment page	SKIPPED	0.000 s
9	Then User should select Add payment method and then user click on Post button  AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  For Posting Invoice  	SKIPPED	0.000 s

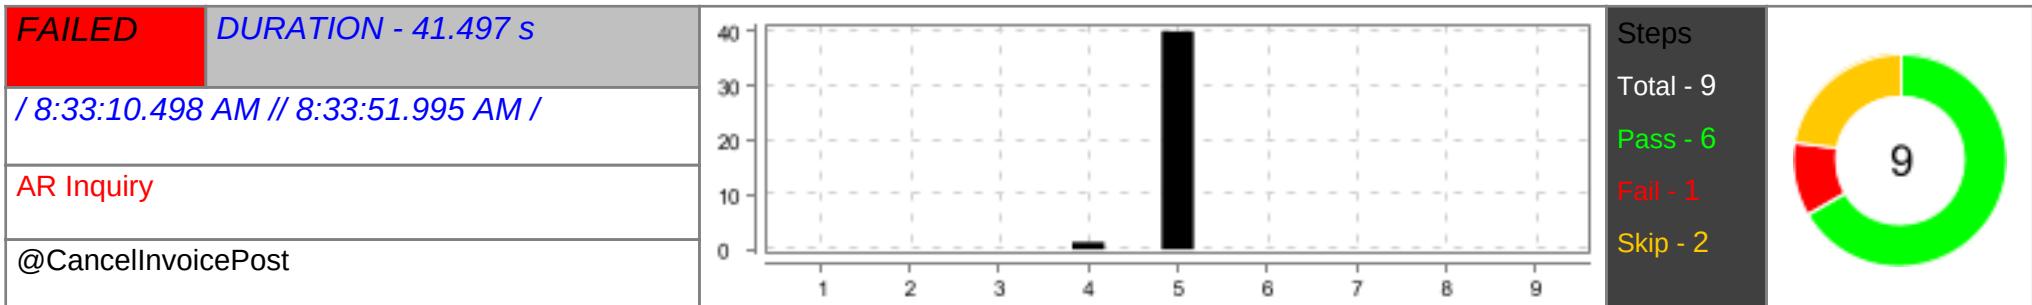**(S)- To cancel Posting invoice**


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for AR Inquiry	PASSED	0.000 s
2	When User is on Home Page for AR Inquiry	PASSED	0.000 s
3	Then User navigate to Client side for AR Inquiry	PASSED	0.000 s
4	Given User must be on Client side and select AR Inquiry	PASSED	1.338 s
5	When User navigated to AR Inquiry validate the page	PASSED	40.011 s
6	And User should select Customer Account#	PASSED	0.000 s
7	Then User should select Invoice check box  INVOICE HAS NOT BEEN FOUND  java.lang.AssertionError: expected [true] but found [false] at org.testng.Assert.fail(Assert.java:99) at org.testng.Assert.failNotEquals(Assert.java:1037) at org.testng.Assert.assertEqualsImpl(Assert.java:140) at org.testng.Assert.assertEquals(Assert.java:122) at org.testng.Assert.assertEquals(Assert.java:819) at org.testng.Assert.assertEquals(Assert.java:829) at pages_DSD_OMS.aRInquiry.ARInquiryPage.Click_CheckBox(ARInquiryPage.java:203) at stepDefination_DSD_OMS.ARInquiry.ARInquiryPageStep.userShouldSelectInvoiceCheckBox(ARInquiryPageStep.java:131) at ?.User should select Invoice check box(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/ARInquiryFeature/aRInquiryFeature.feature:48) * Not displayable characters are replaced by '?'.	FAILED	0.000 s
8	And User should click on Post button and navigated to PostPayment page	SKIPPED	0.000 s
9	Then User should select Add payment method and then user click on Cancel button	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  To cancel Posting invoice  	PASSED	0.132 s

## (S)- Logging out from the application

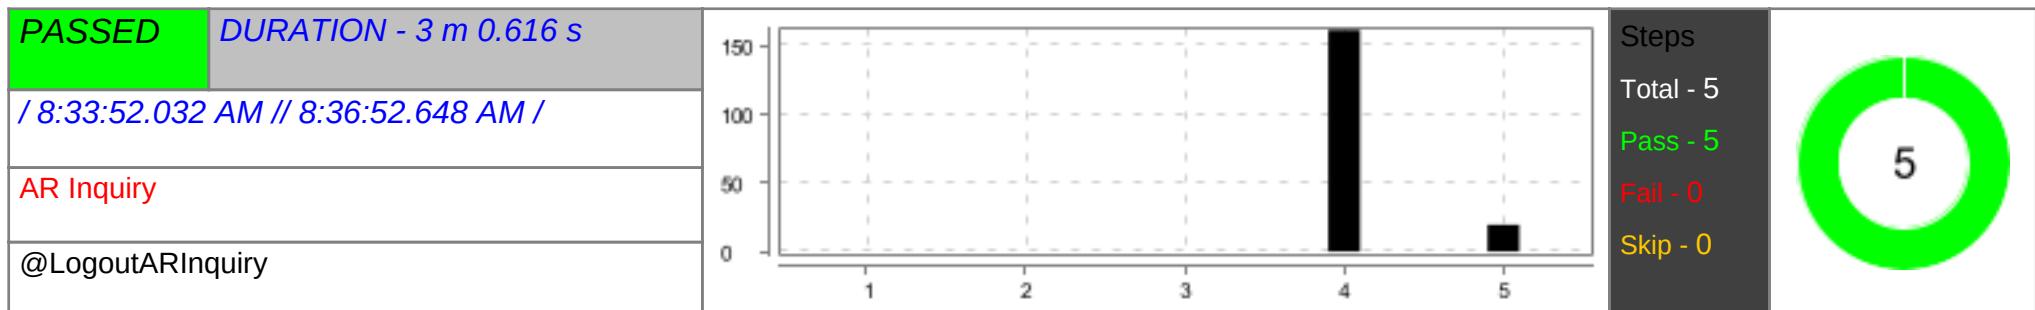


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for AR Inquiry	PASSED	0.000 s
2	When User is on Home Page for AR Inquiry	PASSED	0.000 s
3	Then User navigate to Client side for AR Inquiry	PASSED	0.000 s
4	Then Click on user Icon on Order Entry page	PASSED	2 m 41.213 s
5	And Click on Logout on Order Entry page	PASSED	19.403 s


## (F)- All orders

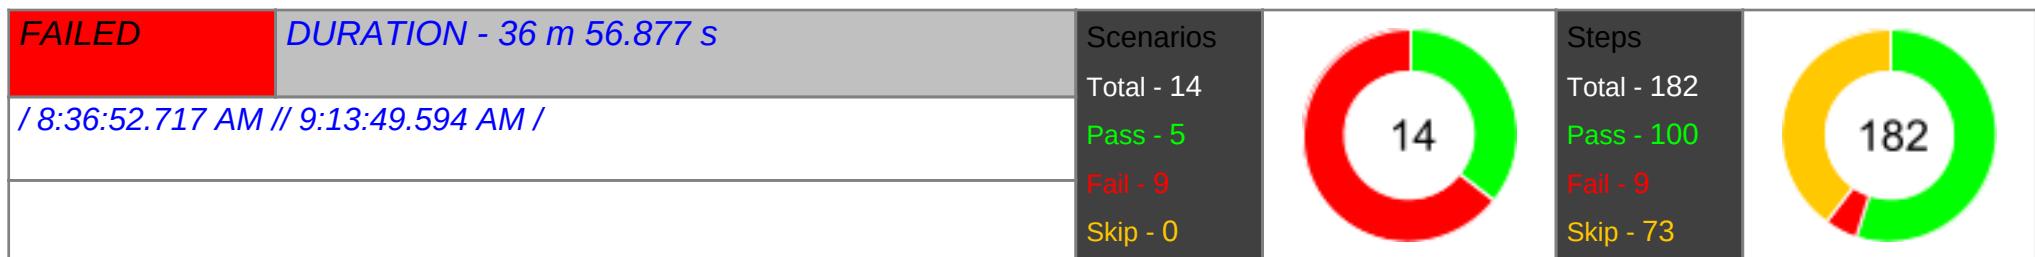


## (S)- Test scenario to display all the orders

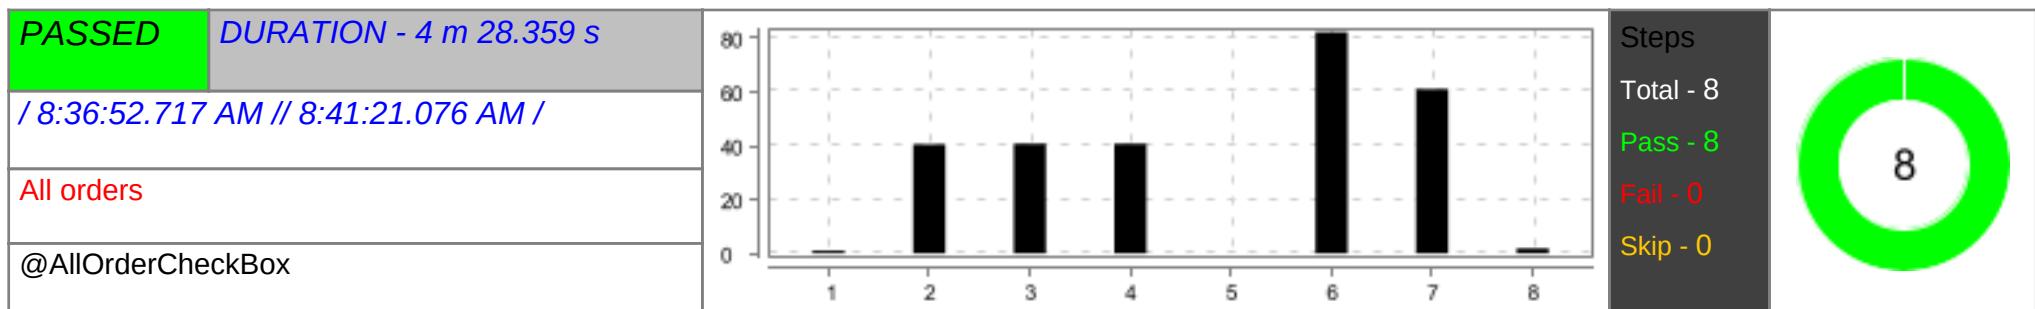


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order  SIGNIN BUTTON CLICKED	PASSED	1.026 s
2	When User is on Home Page for All order	PASSED	40.569 s
3	Then User navigate to Client side for All order	PASSED	40.790 s
4	Then User should select Order Entry tab for All order	PASSED	40.786 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	1 m 22.240 s
7	Then User clicks on Show all orders check box after Clicking All orders tab	PASSED	1 m 1.096 s
8	And User goes through all the order in Open order grid  Order# 3715903 Order# 3715904 Order# 3714866 Order# 3714867 Order# 3714868 Order# 3714869 Order# 3714873 Order# 3715921 Order# 3715922 Order# 3715919 Order# 3715927 Order# 3715920 Order# 3715923 Order# 3715924 Order# 3715925 Order# 3715926 Order# 3715892 Order# 3715902 Order# 3715905 Order# 3715906 Order# 3715907 Order# 3715908 Order# 3715909 Order# 3715910 Order# 3715911	PASSED	1.852 s

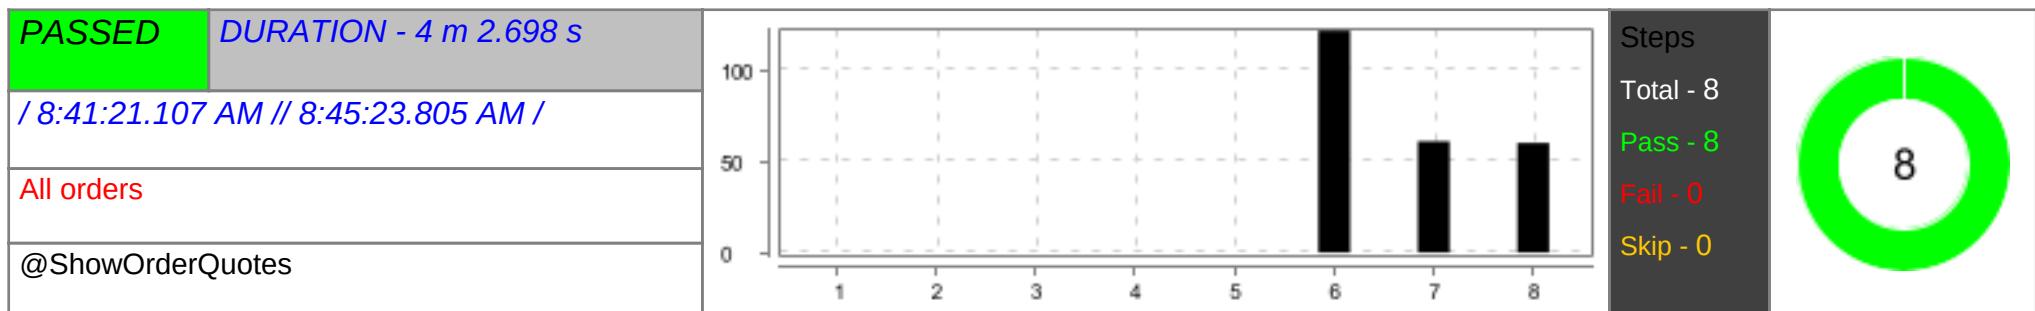**(S)- Test scenario for displaying all order with quotes**

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	2 m 1.576 s
7	Then User clicks on Show all Quotes check box  SHOW ORDER FROM QUOTES CHECK BOX HAS BEEN SELECTED	PASSED	1 m 1.036 s
8	And User goes through all the order in Open order grid  Order# Q000001257 Order# Q000001258 Order# Q000001260 Order# Q000001263 Order# Q000001350 Order# Q000001368 Order# Q000004718	PASSED	1 m 0.070 s

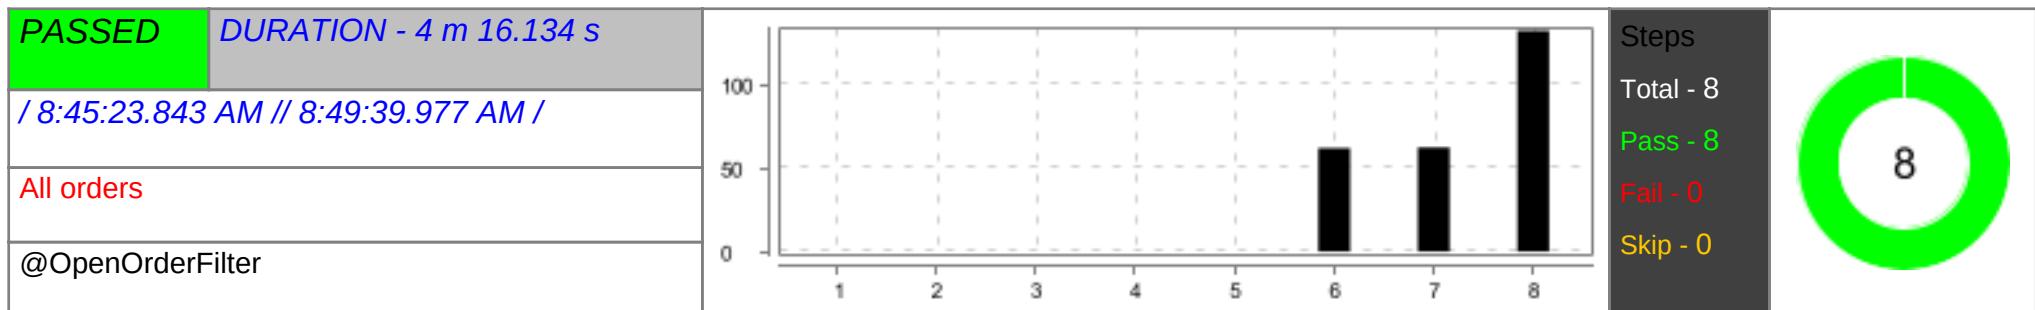
**(S)- For loading order details in All Order**

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	1 m 1.808 s
7	Then User clicks on Show all orders check box after Clicking All orders tab	PASSED	1 m 2.274 s
8	And User Clicks on Add filter button and enter values for search options	PASSED	2 m 12.052 s
	ORDER CREATED IS: 3714866 ORDER HAS BEEN FOUND 3714866		

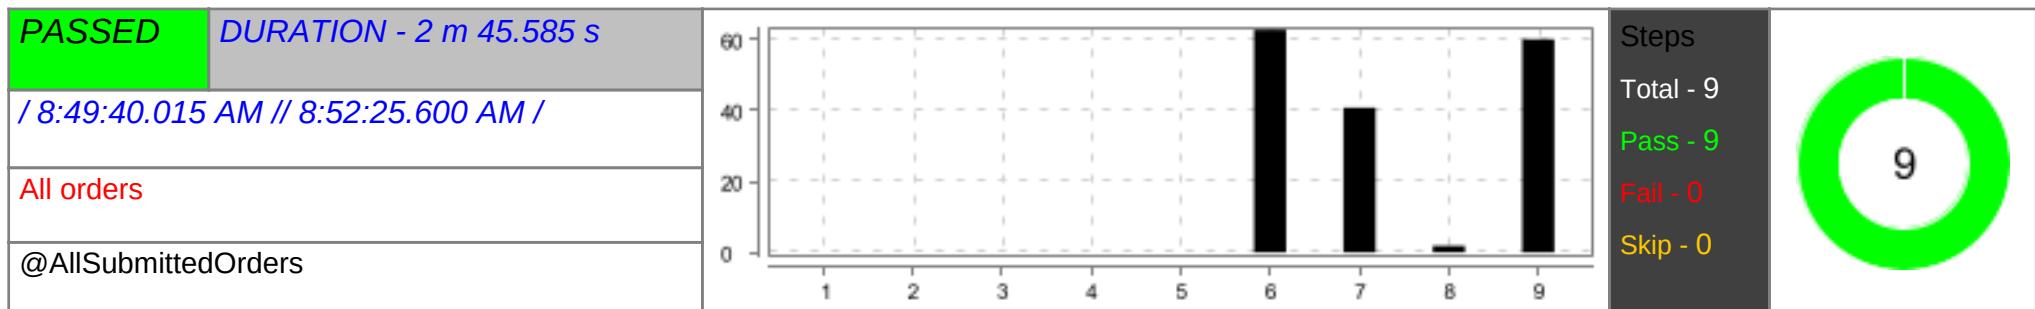
**(S)- Test scenario for displaying all orders which are submitted using submitted status drop down**

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s

#	Step / Hook Details	Status	Duration
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	1 m 2.824 s
7	And User clicks on Submitted status and select Submitted option from drop down	PASSED	40.800 s
8	And User clicks on search button	PASSED	1.823 s
9	And User goes through all the order in Open order grid  Order# 3715903 Order# 3715904 Order# 3714866 Order# 3714867 Order# 3714868 Order# 3714869 Order# 3714873 Order# 3715921 Order# 3715922 Order# 3715919 Order# 3715927 Order# 3715920 Order# 3715923 Order# 3715924 Order# 3715925 Order# 3715926 Order# 3715892 Order# 3715902 Order# 3715905 Order# 3715906 Order# 3715907 Order# 3715908 Order# 3715909 Order# 3715910 Order# 3715911	PASSED	1 m 0.138 s

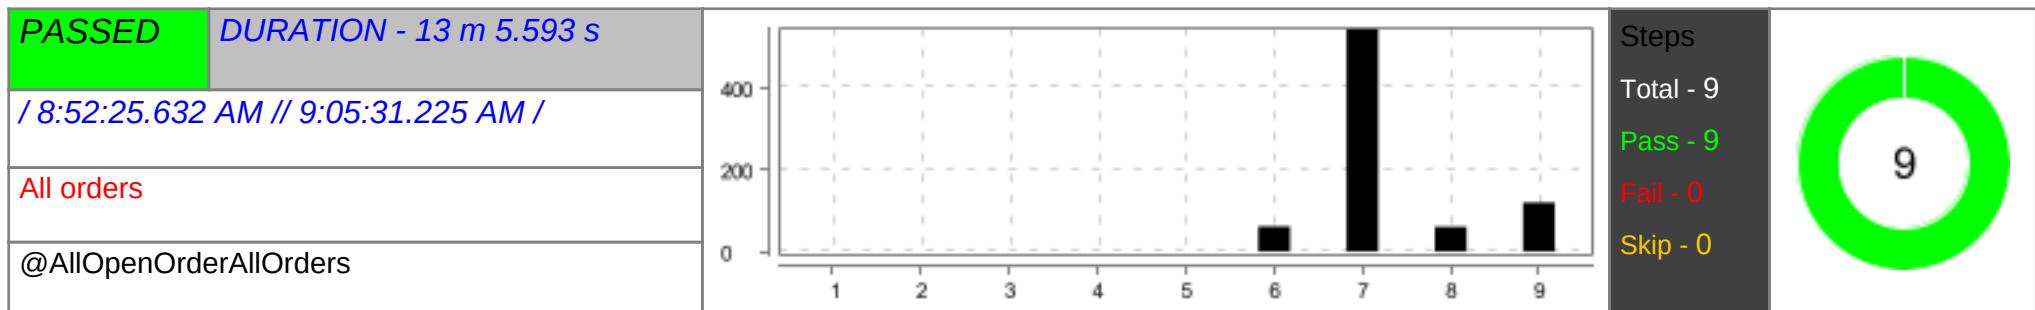**(S)- Test scenario for displaying all Open order in all orders**

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	1 m 1.742 s
7	And User clicks on Order status and select Open order option from drop down	PASSED	9 m 3.533 s
8	And User clicks on search button	PASSED	1 m 0.284 s
9	And User goes through all the order in Open order grid	PASSED	2 m 0.018 s

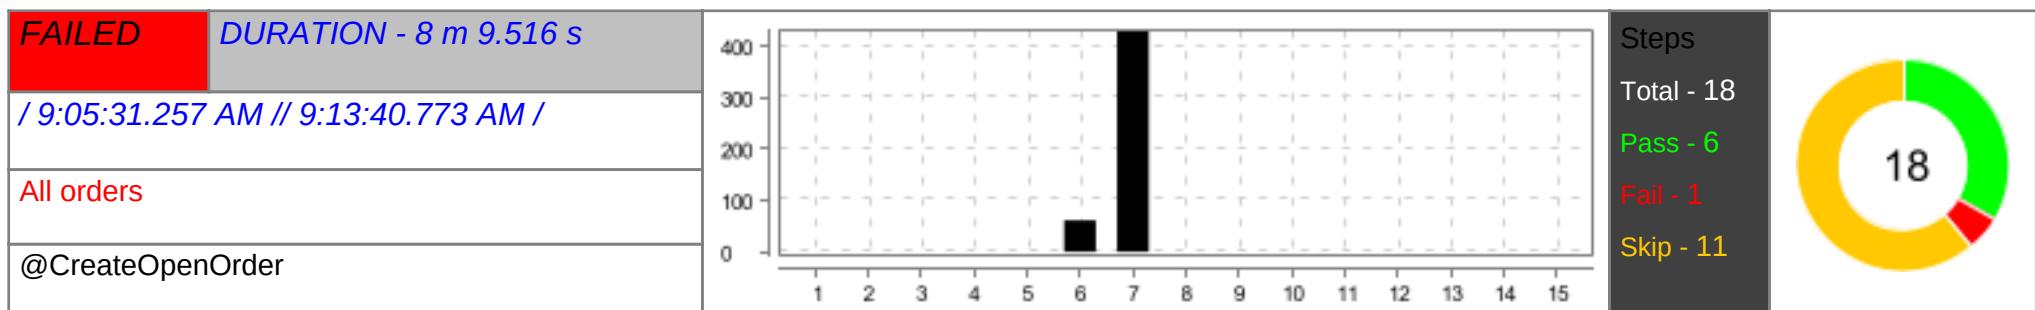
**(S)- Test scenario for creating All Order**

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s


#	Step / Hook Details	Status	Duration
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	1 m 1.445 s
7	<p>Then User clicks on Start order button and selects Add from drop down</p> <pre>org.openqa.selenium.WebDriverException: Failed to convert data to an object Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\Profile..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 *** Element info: {Using=xpath, value=//div[contains(text(),'Customer account index')]/ancestor::div[contains(@class,'k-widget k-window k-dialog')]}</pre> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)      at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:78)      at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)      at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)      at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)      at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)      at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)      at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)      at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)      at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)      at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)      at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323)      at org.openqa.selenium.remote.RemoteWebDriver.findElementByXPath(RemoteWebDriver.java:428)      at org.openqa.selenium.By\$ByXPath.findElement(By.java:353)      at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315)      at org.openqa.selenium.support.ui.ExpectedConditions\$6.apply(ExpectedConditions.java:182)      at org.openqa.selenium.support.ui.ExpectedConditions\$6.apply(ExpectedConditions.java:179)      at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:249)      at helper.HelpersMethod.WaitElementPresent(HelpersMethod.java:148)      at pages_DSD_OMS.allOrder.AllOrderPage.ClickOnStartOrder(AllOrderPage.java:277)      at stepDefinition_DSD_OMS.AllOrdersPage.AllOrdersPageStep.      userClicksOnStartOrderButtonAndSelectsAddFromDropDown(AllOrdersPageStep.java:180)      at ?.User clicks on Start order button and selects Add from drop down(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/AllOrderFeature/allOrderFeature.feature:51)      * Not displayable characters are replaced by '?'.</p>	FAILED	7 m 8.008 s
8	Then User selects customer account# and delivery date from popup	SKIPPED	0.000 s
9	Then User should make selection between Pending order or Start New order	SKIPPED	0.000 s
10	Then User should select Note from popup and select any OG from popup	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
	SampleOG		
11	Then Enter PO# for New order PO123	SKIPPED	0.000 s
12	Then Enter Pro# in Quick Product Entry area	SKIPPED	0.000 s
13	And Check for Case and Unit input box enabled or not based on that enter value 60 20	SKIPPED	0.000 s
14	Then Click on Next button	SKIPPED	0.000 s
15	And Click on Submit Order button and read Order_no created for All order	SKIPPED	0.000 s
16	Then User should be navigated back to All order page	SKIPPED	0.000 s
17	And User clicks on Show all orders check box	SKIPPED	0.000 s
18	And User Clicks on Add filter button and Search for OrderNo	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  org.openqa.selenium.UnhandledAlertException: Dismissed user prompt dialog: Selecting 'Clear Now' will clear all cookies and site data stored by Firefox. This may sign you out of websites and remove offline web content.: Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\scoped_dir3108_11428, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:120) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)	FAILED	0.063 s


## (S)- Test scenario for displaying only those orders having particular product

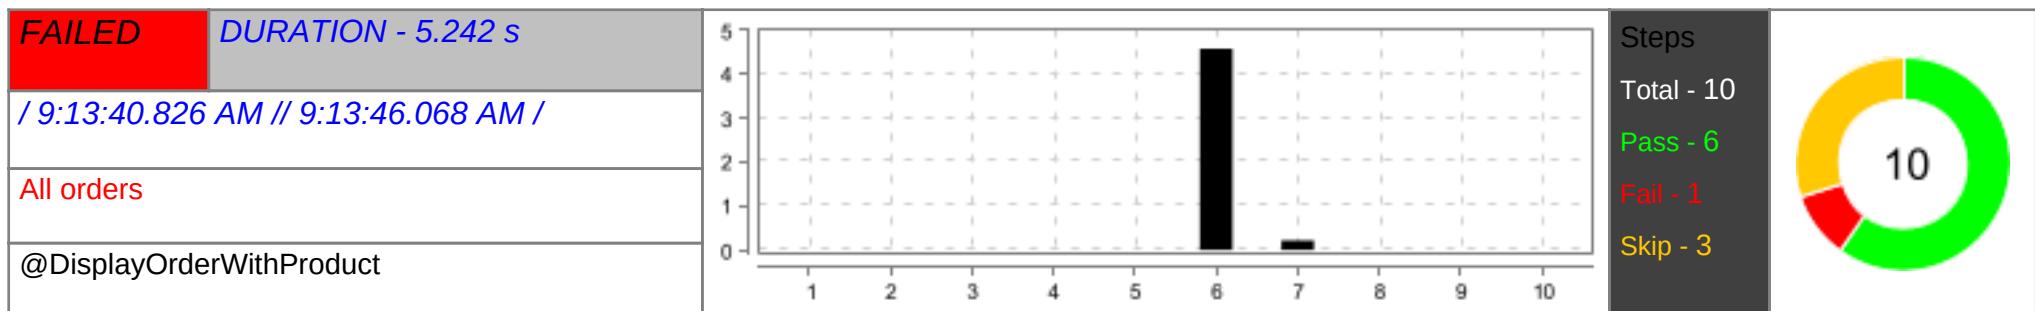

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	4.578 s
7	<p>Then User clicks on Show all orders check box after Clicking All orders tab</p> <pre>org.openqa.selenium.UnhandledAlertException: Dismissed user prompt dialog: Selecting 'Clear Now' will clear all cookies and site data stored by Firefox. This may sign you out of websites and remove offline web content.: Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\Profile..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 *** Element info: {Using=xpath, value=/div[@class='allOrdersCheckbox']}</pre> <p>at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:120)  at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323)  at org.openqa.selenium.remote.RemoteWebDriver.findElementByXPath(RemoteWebDriver.java:428)  at org.openqa.selenium.By\$ByXPath.findElement(By.java:353)  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315)  at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:205)  at org.openqa.selenium.support.ui.ExpectedConditions\$7.apply(ExpectedConditions.java:201)  at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:249)</p>	FAILED	0.216 s

#	Step / Hook Details	Status	Duration
	at pages_DSD_OMS.allOrder.AllOrderPage.ClickShowAllOrderCheckbox(AllOrderPage.java:167) at stepDefination_DSD_OMS.AllOrdersPage.AllOrdersPageStep. userClicksOnShowAllOrdersCheckBoxAfterClickingAllOrdersTab(AllOrdersPageStep.java:260) at ?.User clicks on Show all orders check box after Clicking All orders tab(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/AllOrderFeature/allOrderFeature.feature:71) * Not displayable characters are replaced by '?'.		
8	And User enters product# in input box	SKIPPED	0.000 s
9	And User clicks on search button	SKIPPED	0.000 s
10	And User goes through all the order in Open order grid	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  Test scenario for displaying only those orders having particular product   +	PASSED	0.432 s

### (S)- Test scenario for verifying Comment Icon

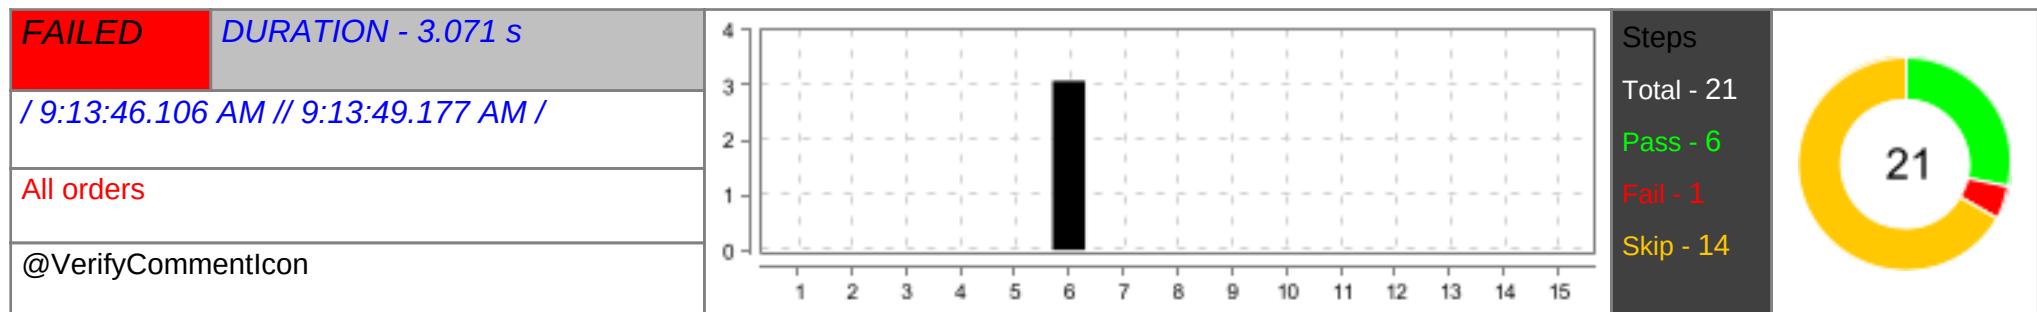


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	3.071 s
7	Then User clicks on Start order button and selects Add from drop down	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59',		

#	Step / Hook Details	Status	Duration
	<p>revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\scoped_dir3108_15088, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:78)  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499)  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)  at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)  at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)  at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)  at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:489)  at helper.HelpersMethod.returnDocumentStatus(HelpersMethod.java:658)  at pages_DSD_OMS.AllOrder.AllOrderPage.ClickOnStartOrder(AllOrderPage.java:231)  at stepDefination_DSD_OMS.AllOrdersPage.AllOrdersPageStep.  userClicksOnStartOrderButtonAndSelectsAddFromDropDown(AllOrdersPageStep.java:180)  at ?.User clicks on Start order button and selects Add from drop down(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/AllOrderFeature/allOrderFeature.feature:81)  * Not displayable characters are replaced by '?'.</p>		
8	Then User selects customer account# and delivery date from popup	SKIPPED	0.000 s
9	Then User should make selection between Pending order or Start New order	SKIPPED	0.000 s
10	Then User should select Note from popup and Order guide from popup	SKIPPED	0.000 s
11	Then Enter PO# for New order  PO123	SKIPPED	0.000 s
12	Then Enter Pro# in Quick Product Entry area	SKIPPED	0.000 s
13	And Check for Case and Unit input box enabled or not based on that enter value  60 80	SKIPPED	0.000 s
14	Then User should click on Comment icon in Order entry card	SKIPPED	0.000 s
15	And User should enter comment in comment popup  Comment for All order	SKIPPED	0.000 s
16	Then Click on Next button	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
17	And Click on Submit Order button and read Order_no created for All order	SKIPPED	0.000 s
18	Then User should be navigated back to All order page	SKIPPED	0.000 s
19	And User clicks on Show all orders check box	SKIPPED	0.000 s
20	And User Clicks on Add filter button and Search for OrderNo	SKIPPED	0.000 s
21	Then USer clicks on Comment icon and comments popup gets displayed	SKIPPED	0.000 s
	AFTER - stepDefinatoin_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2a2ccc82 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:78) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefinatoin_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)		


### (S)- Test scenario for testing print button functionality

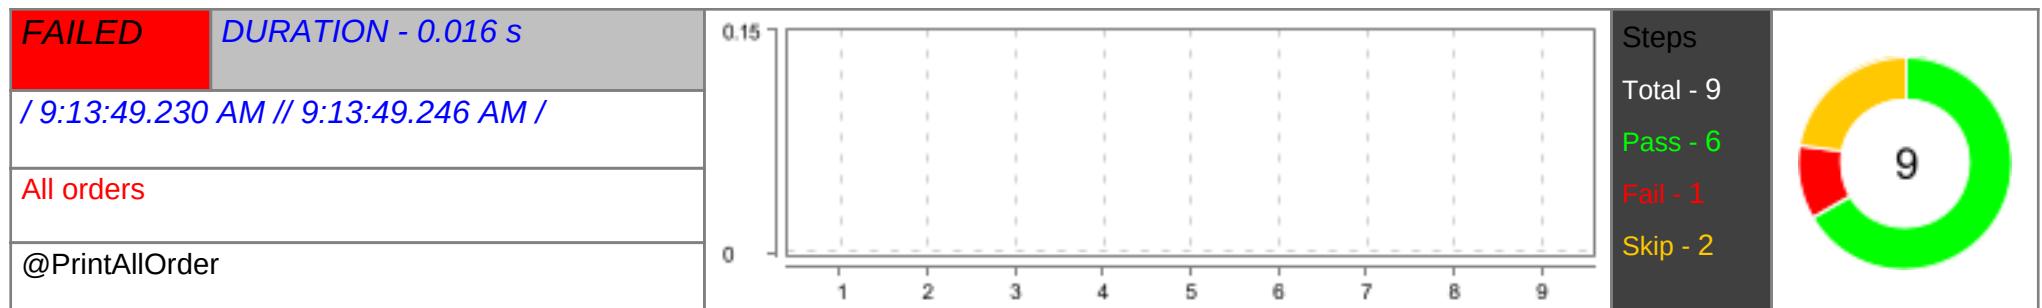

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	0.000 s
7	Then User clicks on Show all orders check box after Clicking All orders tab  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\Profile-102.0.1, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:78) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.AllOrdersPage.AllOrdersPageStep. userClicksOnShowAllOrdersCheckBoxAfterClickingAllOrdersTab(AllOrdersPageStep.java:258) at ?.User clicks on Show all orders check box after Clicking All orders tab(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/AllOrderFeature/allOrderFeature.feature:104) * Not displayable characters are replaced by '?'. 	FAILED	0.000 s
8	And User Clicks on Add filter button and enter values for search options	SKIPPED	0.000 s
9	Then User select the order and click on Print button	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false,	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<pre>moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\scoped_dir3108_11128, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:78)     at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)     at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)     at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609)     at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295)     at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)</pre>		

## (S)- Test scenario for editing open order

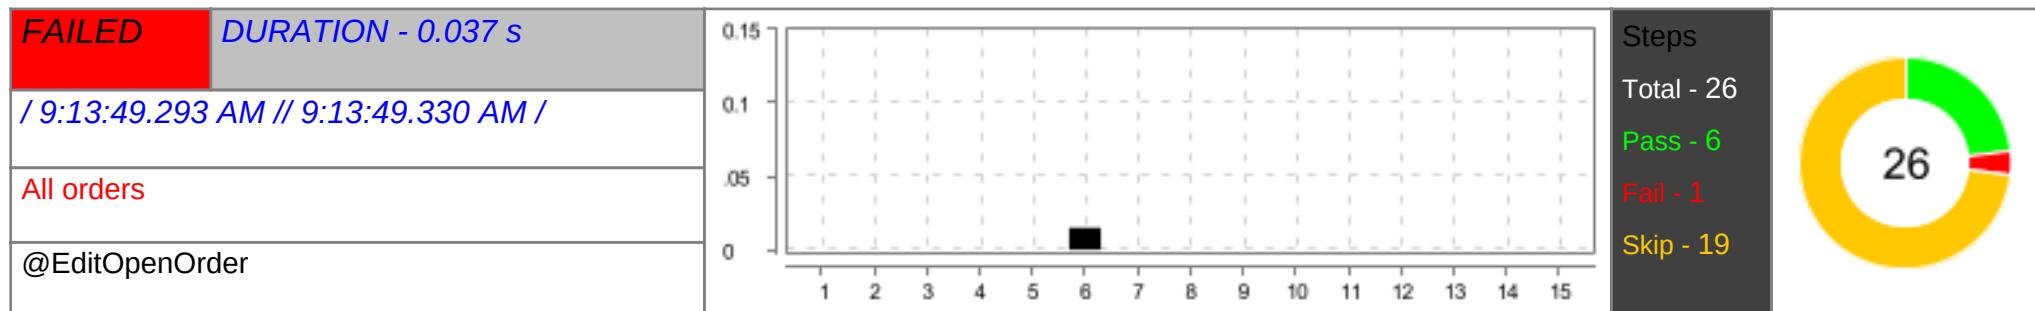


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	0.015 s
7	Then User clicks on Start order button and selects Add from drop down	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\Profile-102.0.1-20220705093820, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:78)     at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)     at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)     at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)     at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:489)     at helper.HelpersMethod.returnDocumentStatus(HelpersMethod.java:658)     at pages_DSD_OMS.allOrder.AllOrderPage.ClickOnStartOrder(AllOrderPage.java:231)     at stepDefination_DSD_OMS.AllOrdersPage.AllOrdersPageStep.userClicksOnStartOrderButtonAndSelectsAddFromDropDown(AllOrdersPageStep.java:180)     at ?.User clicks on Start order button and selects Add from drop down(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/AllOrderFeature/allOrderFeature.feature:112) * Not displayable characters are replaced by '?'.</pre>		
8	Then User selects customer account# and delivery date from popup to edit all order	SKIPPED	0.000 s
9	Then User should make selection between Pending order or Start New order	SKIPPED	0.000 s
10	Then User should select Note from popup and Order guide from popup	SKIPPED	0.000 s
11	Then Enter PO# for New order PO123	SKIPPED	0.000 s
12	Then Enter Pro# in Quick Product Entry area	SKIPPED	0.000 s
13	And Check for Case and Unit input box enabled or not based on that enter value 50 60	SKIPPED	0.000 s
14	Then Click on Next button	SKIPPED	0.000 s
15	And Click on Submit Order button and read Order_no created for All order	SKIPPED	0.000 s
16	Then User should be navigated back to All order page	SKIPPED	0.000 s
17	And User clicks on Show all orders check box	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
18	And User Clicks on Add filter button and Search for OrderNo	SKIPPED	0.000 s
19	Then User Clicks on the order# in All order grid	SKIPPED	0.000 s
20	Then Navigate to Summary order entry page and user clicks on Edit button	SKIPPED	0.000 s
21	And If user navigates to payment and address page click on Back button or else add product# in Quick product entry for editng all order  50 50	SKIPPED	0.000 s
22	Then Click on Next button	SKIPPED	0.000 s
23	And Click on Submit Order button and read Order_no created for All order	SKIPPED	0.000 s
24	Then User should be navigated back to All order page	SKIPPED	0.000 s
25	And User clicks on Show all orders check box	SKIPPED	0.000 s
26	And User Clicks on Add filter button and Search for OrderNo	SKIPPED	0.000 s
	AFTER - stepDefinatoin_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:78) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefinatoin_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)	FAILED	0.000 s


## (S)- Test scenario for grouping or drag and drop

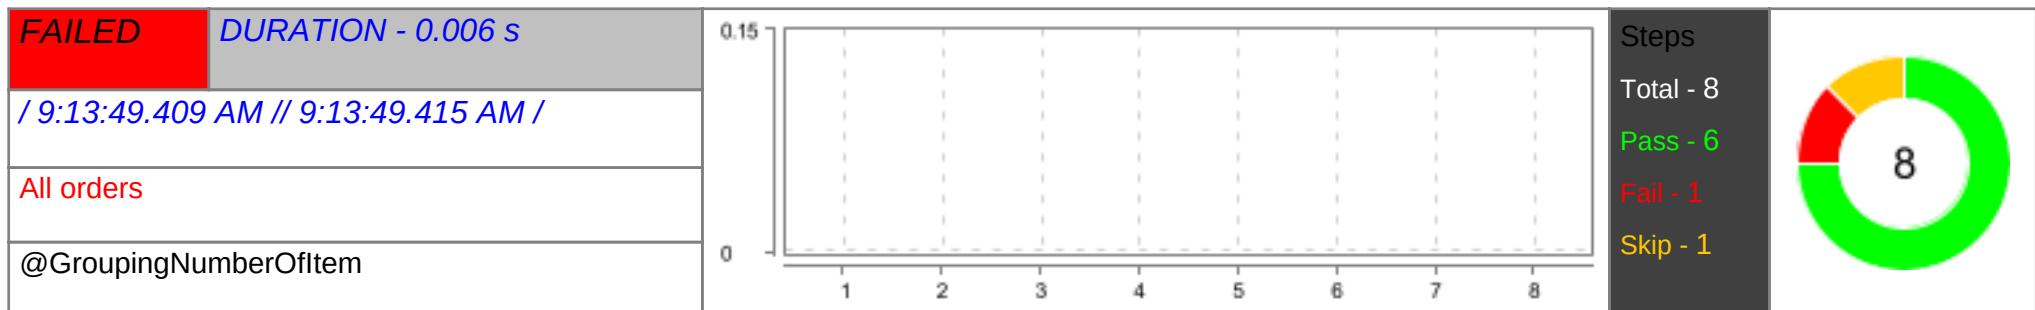

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	0.000 s
7	<p>Then User clicks on Show all orders check box after Clicking All orders tab</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\Profile-1626548888, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2cccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.AllOrdersPage.AllOrdersPageStep.</pre>	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<pre>userClicksOnShowAllOrdersCheckBoxAfterClickingAllOrdersTab(AllOrdersPageStep.java:258)   at ?.User clicks on Show all orders check box after Clicking All orders tab(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/AllOrderFeature/allOrderFeature.feature:140) * Not displayable characters are replaced by '?'.</pre>		
8	And User should drag and drop "Day of week" then verify grouping with number of elements in each group	SKIPPED	0.000 s
	<p>AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82   at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source)   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609)   at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295)   at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)</pre>	FAILED	0.000 s


### (S)- Test scenario for creating Pickup order

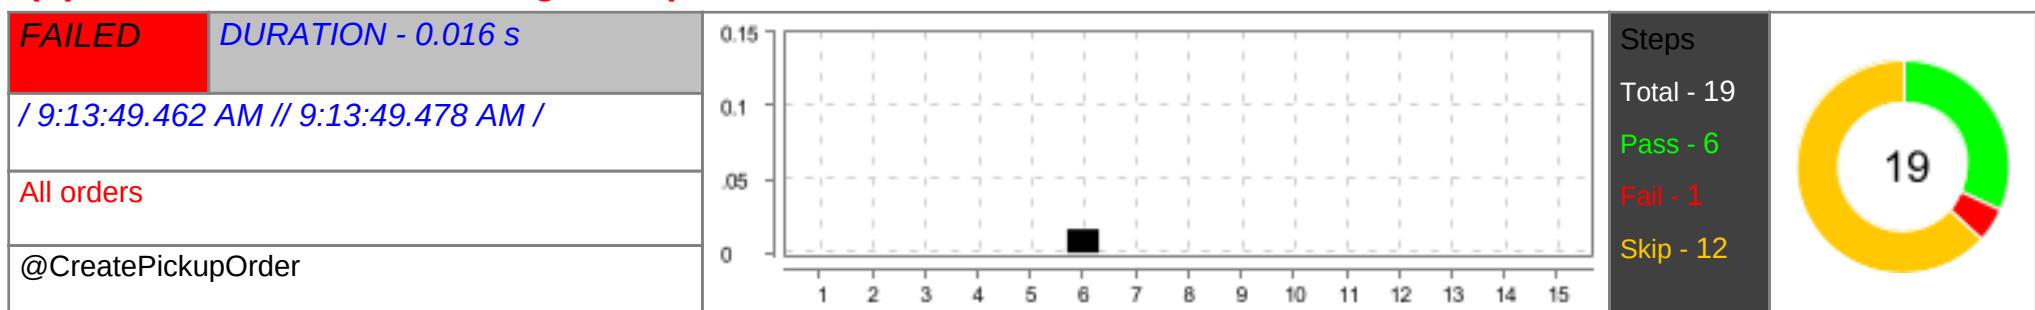

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	0.016 s
7	Then User clicks on Start order button and selects Pick up order from drop down  java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebElement.isDisplayed()" because "ele" is null at helper.HelpersMethod.ScrollElement(HelpersMethod.java:184) at pages_DSD_OMS.allOrder.AllOrderPage.ClickOnStartOrderToSelectPickupOrder(AllOrderPage.java:1155) at stepDefination_DSD_OMS.AllOrdersPage.AllOrdersPageStep. userClicksOnStartOrderButtonAndSelectsPickUpOrderFromDropDown(AllOrdersPageStep.java:440) at ?.User clicks on Start order button and selects Pick up order from drop down(file:///C:/Users/Divya.Ramadas/Downloads/ IgnitionTestAutomation/src/test/resources/features_DSD_OMS/AllOrderFeature/allOrderFeature.feature:150) * Not displayable characters are replaced by '?'.	FAILED	0.000 s
8	Then User selects customer account# and delivery date for pickup order	SKIPPED	0.000 s
9	Then User should make selection between Pending order or Start New order	SKIPPED	0.000 s
10	Then User should select Note from popup and Order guide from popup	SKIPPED	0.000 s
11	And User validates Pickup order check box is selected	SKIPPED	0.000 s
12	Then Enter PO# for New order  PO123	SKIPPED	0.000 s
13	Then Enter Pro# in Quick Product Entry area	SKIPPED	0.000 s
14	And Check for Case and Unit input box enabled or not based on that enter value  60 20	SKIPPED	0.000 s
15	Then Click on Next button	SKIPPED	0.000 s
16	And Click on Submit Order button and read Order_no created for All order	SKIPPED	0.000 s
17	Then User should be navigated back to All order page	SKIPPED	0.000 s
18	And User clicks on Show all orders check box	SKIPPED	0.000 s
19	And User Clicks on Add filter button and Search for OrderNo	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\Profile, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect:	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)		

### (S)- Test scenario to create copy of Open order/All order

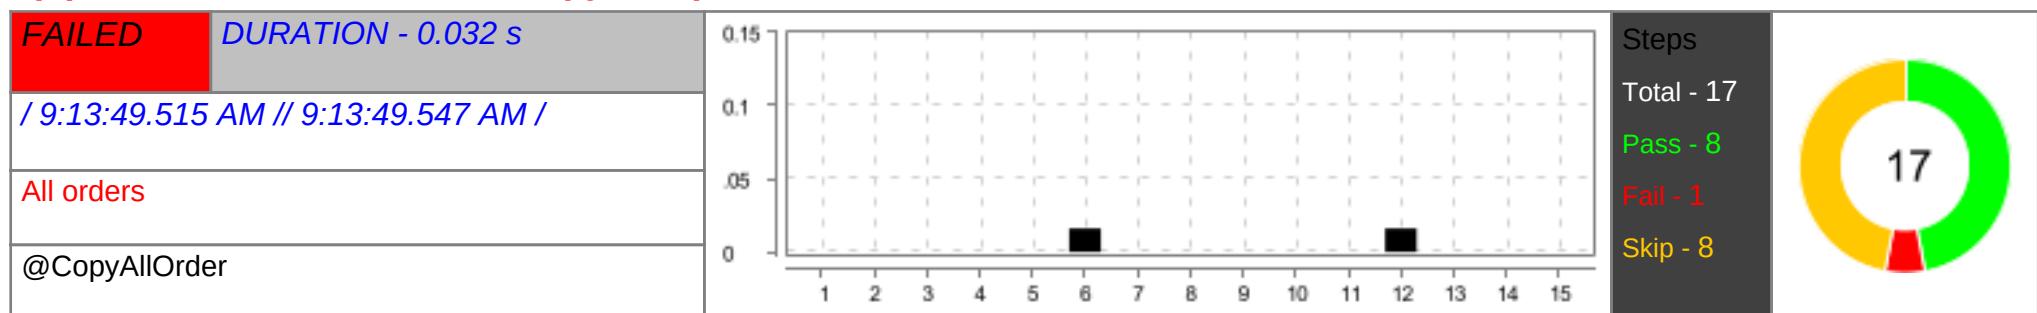


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	0.016 s
7	And User clicks on Order status and select Active order option from drop down	PASSED	0.000 s
8	And User clicks on search button	PASSED	0.000 s
9	And User Clicks on Add filter button and enter values for search options	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59',		

#	Step / Hook Details	Status	Duration
	<p>revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\scoped_dir3208_15212, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 *** Element info: {Using=id, value=Submitted}</p> <p>at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source)</p> <p>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</p> <p>at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)</p> <p>at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)</p> <p>at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.findElementById(RemoteWebDriver.java:372)</p> <p>at org.openqa.selenium.By\$Byld.findElement(By.java:188)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315)</p> <p>at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:69)</p> <p>at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)</p> <p>at jdk.proxy2/jdk.proxy2.\$Proxy30.isDisplayed(Unknown Source)</p> <p>at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:314)</p> <p>at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:43)</p> <p>at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:300)</p> <p>at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:297)</p> <p>at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:249)</p> <p>at pages_DSD_OMS.allOrder.AllOrderPage.SubmittedStatusDropDown(AllOrderPage.java:922)</p> <p>at stepDefination_DSD_OMS.AllOrdersPage.AllOrdersPageStep.</p> <p>userClicksOnAddFilterButtonAndEnterValuesForSearchOptions(AllOrdersPageStep.java:171)</p> <p>at ?.User Clicks on Add filter button and enter values for search options(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/AllOrderFeature/allOrderFeature.feature:172)</p> <p>* Not displayable characters are replaced by '?'.</p>		
10	Then User select the order and click on copy button and select delivery date	SKIPPED	0.000 s
11	Then User should select Note from popup and Order guide from popup	SKIPPED	0.000 s
12	Then Enter PO# for New order PO123	SKIPPED	0.016 s
13	Then Click on Next button	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
14	And Click on Submit Order button and read Order_no created for All order	SKIPPED	0.000 s
15	Then User should be navigated back to All order page	SKIPPED	0.000 s
16	And User clicks on Show all orders check box	SKIPPED	0.000 s
17	And User Clicks on Add filter button and Search for OrderNo	SKIPPED	0.000 s
	<p>AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\Profile-1658888888888888, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)</pre>	FAILED	0.000 s


### (S)- Test scenario for navigating from All order to OE

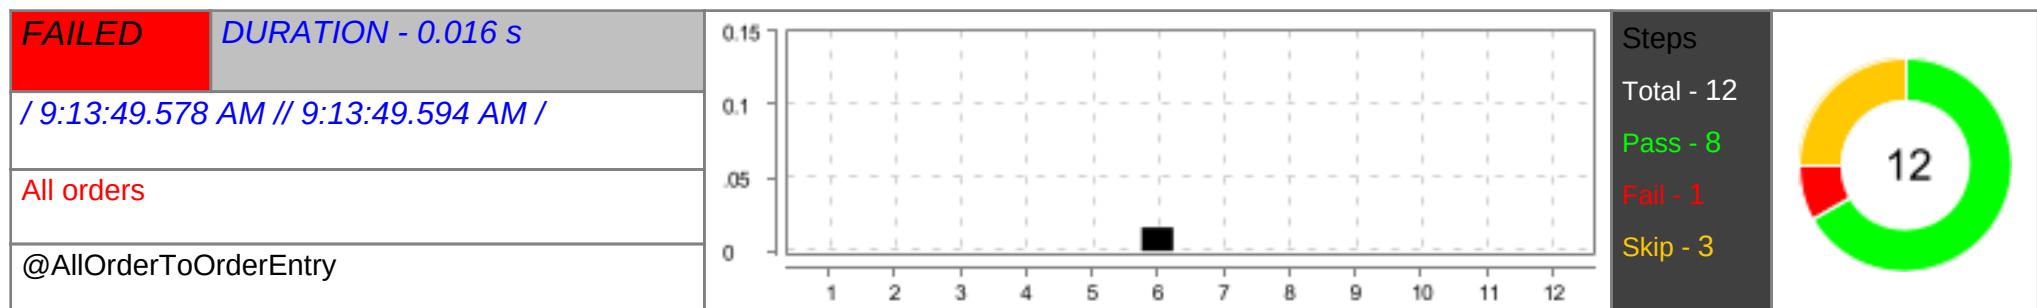


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Given User must be on Order Entry Page to select All Orders	PASSED	0.000 s
6	And User should navigate to All Orders	PASSED	0.016 s
7	And User clicks on Order status and select Active order option from drop down	PASSED	0.000 s
8	And User clicks on search button	PASSED	0.000 s
9	And User Clicks on Add filter button and enter values for search options  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 *** Element info: {Using=id, value=Submitted} at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:323) at org.openqa.selenium.remote.RemoteWebDriver.findElementById(RemoteWebDriver.java:372) at org.openqa.selenium.By\$ById.findElement(By.java:188) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:315) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:69) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy30.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:314) at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:43) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:300) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:297) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:249) at pages_DSD_OMS.allOrder.AllOrderPage.SubmittedStatusDropDown(AllOrderPage.java:922)	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<pre>at stepDefinition_DSD_OMS.AllOrdersPage.AllOrdersPageStep. userClicksOnAddFilterButtonAndEnterValuesForSearchOptions(AllOrdersPageStep.java:171)   at ?.User Clicks on Add filter button and enter values for search options(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/AllOrderFeature/allOrderFeature.feature:189)   * Not displayable characters are replaced by '?'.</pre>		
10	Then User clicks on OrderNo in All Order grid and User should be navigated Ordersummary page	SKIPPED	0.000 s
11	Then User clicks on Back to Order list button and should be navigated to OE page	SKIPPED	0.000 s
12	And User enters orderNo That he has selected from order grid and validates it exists in order also	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)	FAILED	0.000 s
	<pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82   at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source)   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609)   at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295)   at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)</pre>		

## (F)- All orders1

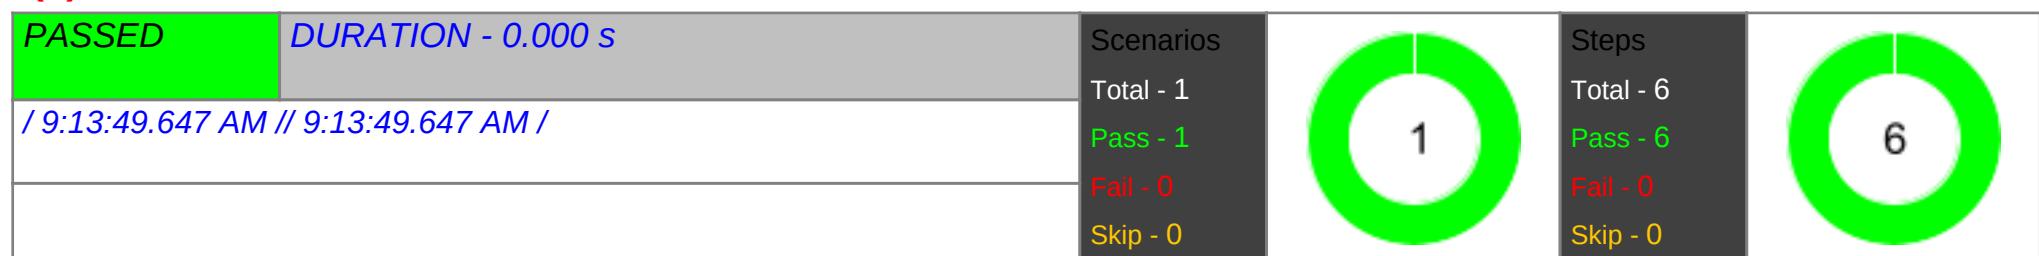


## (S)- Logging out from the application

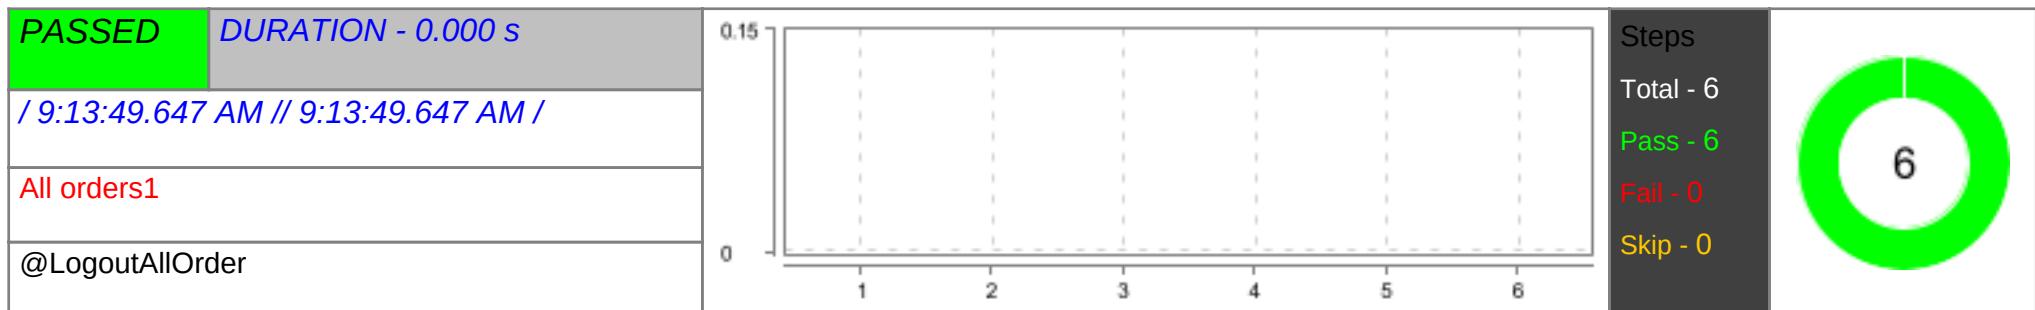


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for All order	PASSED	0.000 s
2	When User is on Home Page for All order	PASSED	0.000 s
3	Then User navigate to Client side for All order	PASSED	0.000 s
4	Then User should select Order Entry tab for All order	PASSED	0.000 s
5	Then Click on user Icon on Order Entry page	PASSED	0.000 s
6	And Click on Logout on Order Entry page	PASSED	0.000 s

## (F)- Standing Order

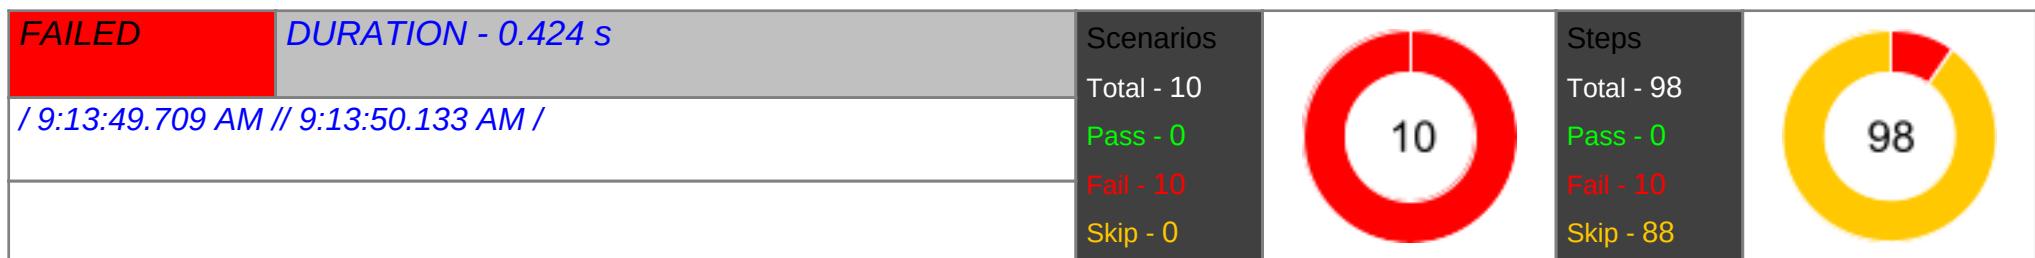


## (S)- Test scenario for creating standing order, using catalog

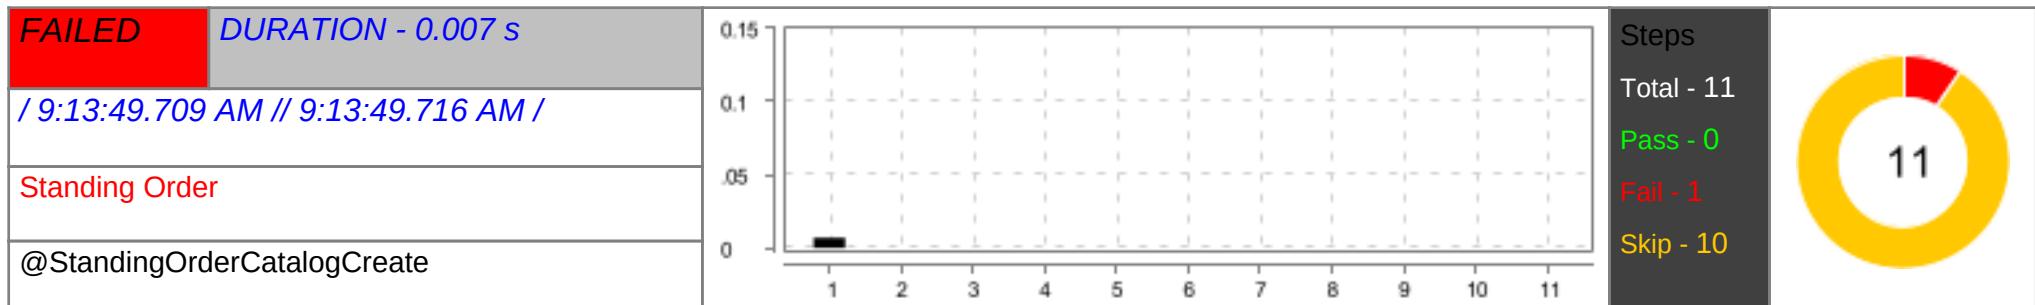

#	Step / Hook Details	Status	Duration																												
1	<p>Given User enters URL and is on login page and entered credentials for SO</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\scoped_dir3108_15212, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66) at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature.feature:5) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.007 s																												
2	When User is on Home Page for SO	SKIPPED	0.000 s																												
3	Then User navigate to Client side for SO	SKIPPED	0.000 s																												
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s																												
5	Then User selects Account# for SO	SKIPPED	0.000 s																												
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s																												
7	And User click on Start standing order button and selects start and end date from popup	SKIPPED	0.000 s																												
8	Then User click on Add Product button in Standing order page and select catalog option	SKIPPED	0.000 s																												
9	And User checks for catalog popup and searches for product in catalog	SKIPPED	0.000 s																												
10	And User enters Qty in standing order product grid based on enabled days for multiple products	SKIPPED	0.000 s																												
	<table border="1"> <tr><td>10</td><td>20</td><td>30</td><td>40</td><td>15</td><td>10</td><td>5</td></tr> <tr><td>2</td><td>4</td><td>6</td><td>8</td><td>10</td><td>12</td><td>14</td></tr> <tr><td>3</td><td>5</td><td>7</td><td>9</td><td>11</td><td>13</td><td>15</td></tr> <tr><td>12</td><td>24</td><td>6</td><td>32</td><td>16</td><td>12</td><td>8</td></tr> </table>	10	20	30	40	15	10	5	2	4	6	8	10	12	14	3	5	7	9	11	13	15	12	24	6	32	16	12	8		
10	20	30	40	15	10	5																									
2	4	6	8	10	12	14																									
3	5	7	9	11	13	15																									
12	24	6	32	16	12	8																									

#	Step / Hook Details	Status	Duration
	24   8   14   22   12   10   8		
11	Then User clicks on Save button and handles popup	SKIPPED	0.000 s
	<p>AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)</pre>	FAILED	0.000 s

### (S)- Test scenario for Deleting product from standing order

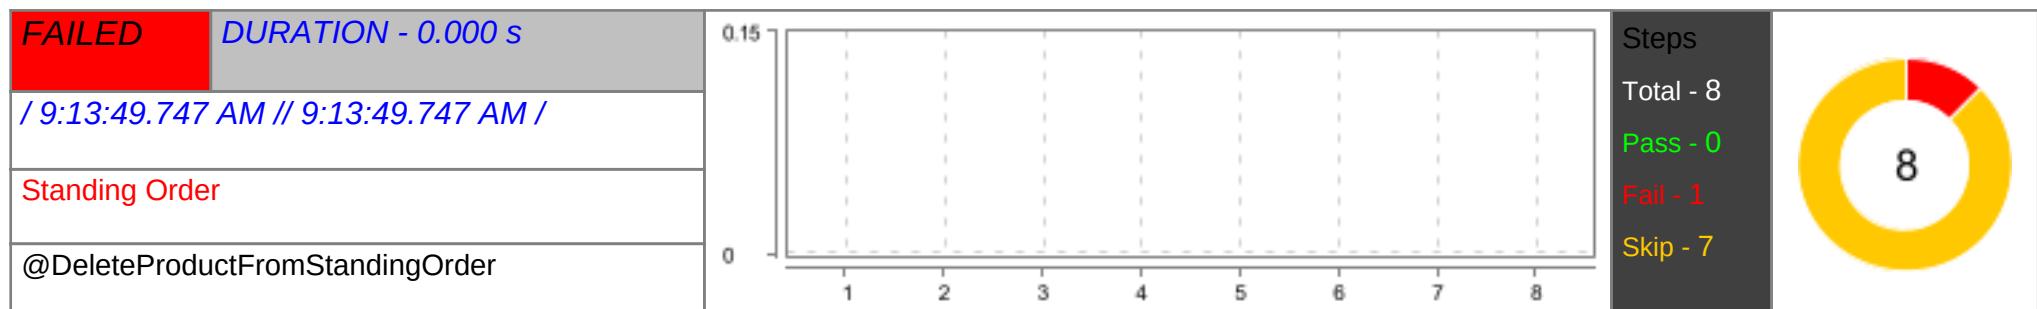


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for SO <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59',</pre>	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<p>revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify}</p> <p>Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82</p> <pre> at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66) at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature.feature:5) * Not displayable characters are replaced by '?'.</pre>		
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s
7	Then read the first product from the product grid and click on check box	SKIPPED	0.000 s
8	And User clicks on Delete Product button and confirms deletion	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} <p>Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82</p>		

#	Step / Hook Details	Status	Duration
	<pre> at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64) </pre>		


### (S)- Test scenario for skipping specific date in standing order

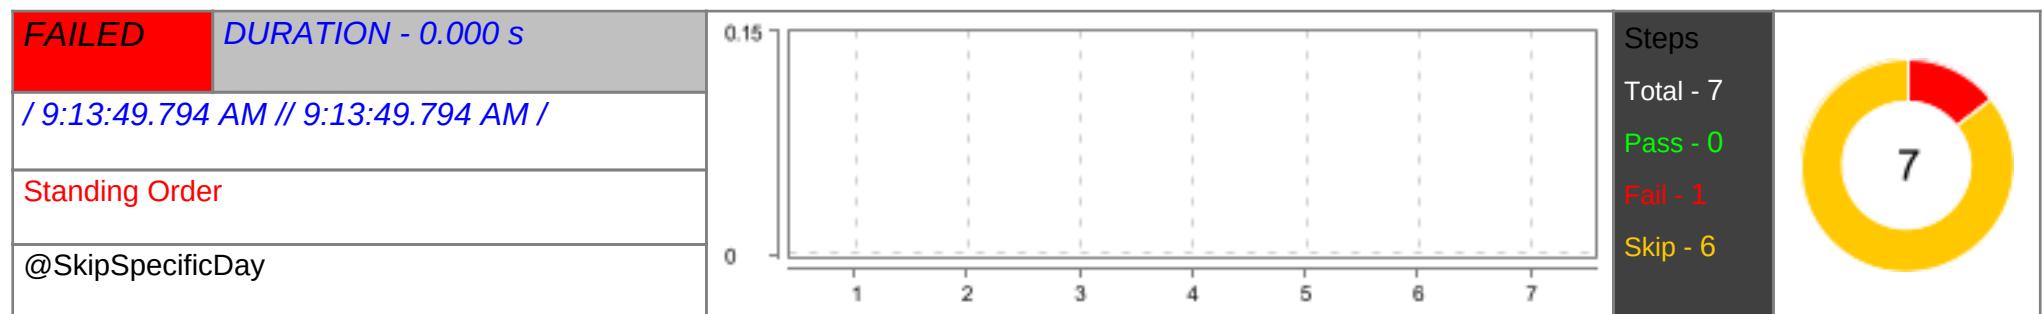

#	Step / Hook Details	Status	Duration
1	<p>Given User enters URL and is on login page and entered credentials for SO</p> <pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya. Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) </pre>	FAILED	0.000 s


#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66)   at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/ IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature.feature:5) * Not displayable characters are replaced by '?'. </pre>		
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s
7	Then Click on Skip specific day and select reason date for skip in skip popup and click on ok	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)	FAILED	0.000 s
	<pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82   at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source)   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609)   at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295)   at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64) </pre>		

## (S)- Test scenario for verifying skip in SO with skip in OE page

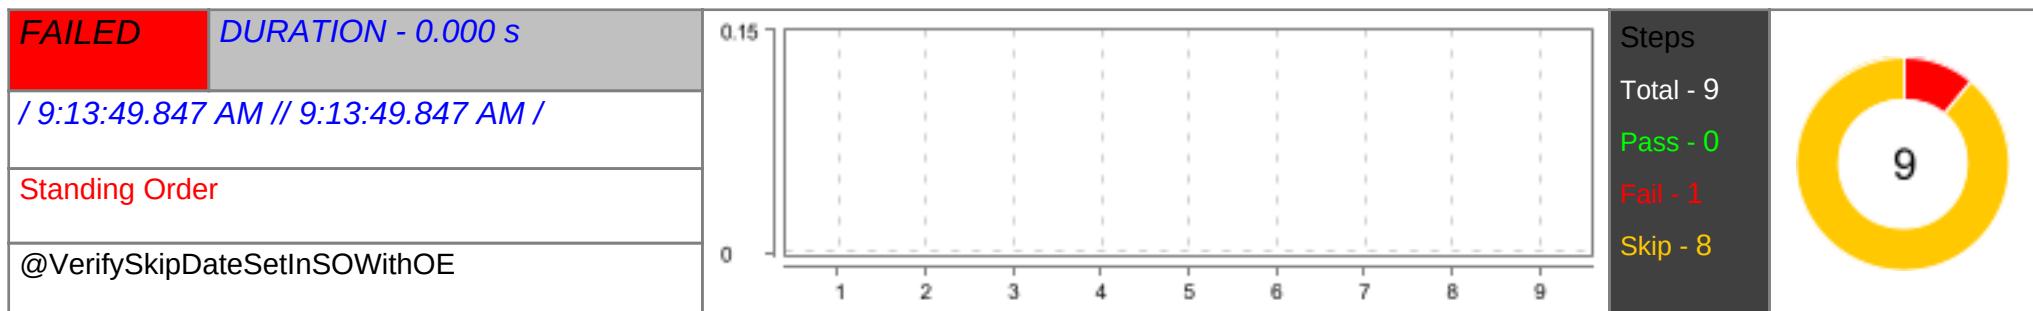

#	Step / Hook Details	Status	Duration
1	<p>Given User enters URL and is on login page and entered credentials for SO</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefinition_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66) at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature.feature:5) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.000 s
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s


#	Step / Hook Details	Status	Duration
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s
7	Then User Click on Skip specific day and read the skip date value and click on Ok	SKIPPED	0.000 s
8	And User should navigate to OE page, User should select the same delivery date from calender	SKIPPED	0.000 s
9	Then User should verify for that date remove skip has been enabled or Skip has been disabled	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)	FAILED	0.000 s

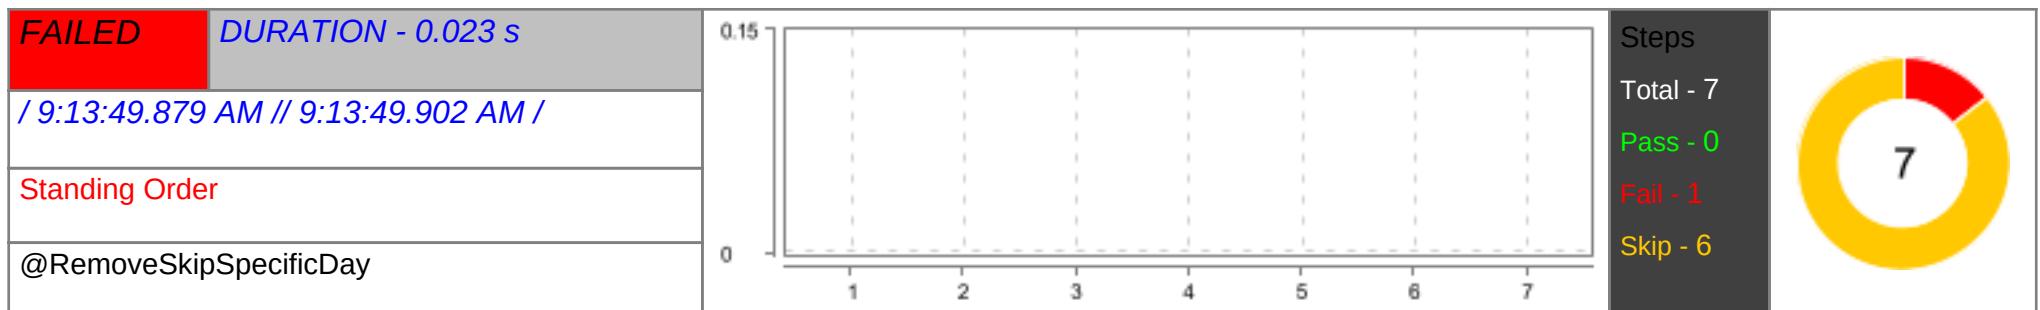**(S)- Test scenario for remove skipping specific date in standing order**

#	Step / Hook Details	Status	Duration
1	<p>Given User enters URL and is on login page and entered credentials for SO</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\scoped_dir3000_1511, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66) at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature.feature:5) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.000 s
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s
7	Then Click on Skip specific day and select first date in the list of skip days in skip popup and click on ok	SKIPPED	0.000 s
	<p>AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\scoped_dir3000_1511, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify}</pre>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre>Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefinition_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)</pre>		

### (S)- Test scenario for creating standing order using Quick product entry input box

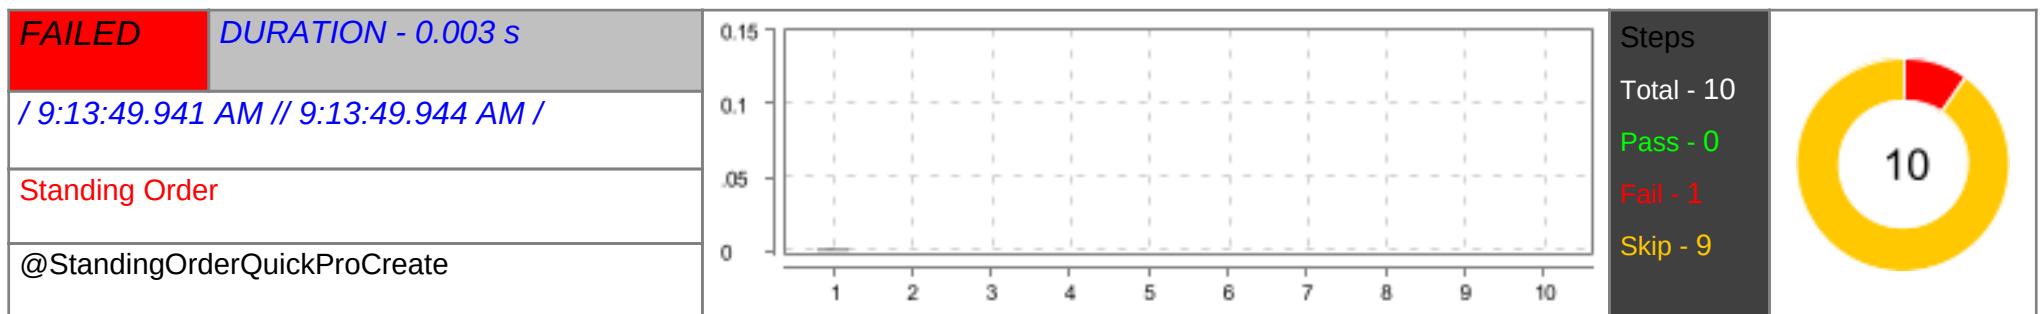


#	Step / Hook Details	Status	Duration
1	<p>Given User enters URL and is on login page and entered credentials for SO</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration							
	<pre> at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66)   at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature.feature:5) * Not displayable characters are replaced by '?'. </pre>									
2	When User is on Home Page for SO	SKIPPED	0.000 s							
3	Then User navigate to Client side for SO	SKIPPED	0.000 s							
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s							
5	Then User selects Account# for SO	SKIPPED	0.000 s							
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s							
7	And User click on Start standing order button and selects Start date 2 and End date 2 day from current date	SKIPPED	0.000 s							
8	Then User enters Product# in Quick product entry inputbox	SKIPPED	0.000 s							
9	And User enters Qty in standing order product grid based on enabled days	SKIPPED	0.000 s							
	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr><td>10</td><td>20</td><td>30</td><td>40</td><td>15</td><td>10</td><td>5</td></tr> </table>	10	20	30	40	15	10	5		
10	20	30	40	15	10	5				
10	Then User clicks on Save button and handles popup	SKIPPED	0.000 s							
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)	FAILED	0.000 s							
	<pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya. Ramadas\AppData\Local\Temp\Profile-102.0.1-20220705093820, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82   at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source)   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499)   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) </pre>									

#	Step / Hook Details	Status	Duration
	<pre>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefinition_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)</pre>		

## (S)- Test scenario for creating multiple standing orders

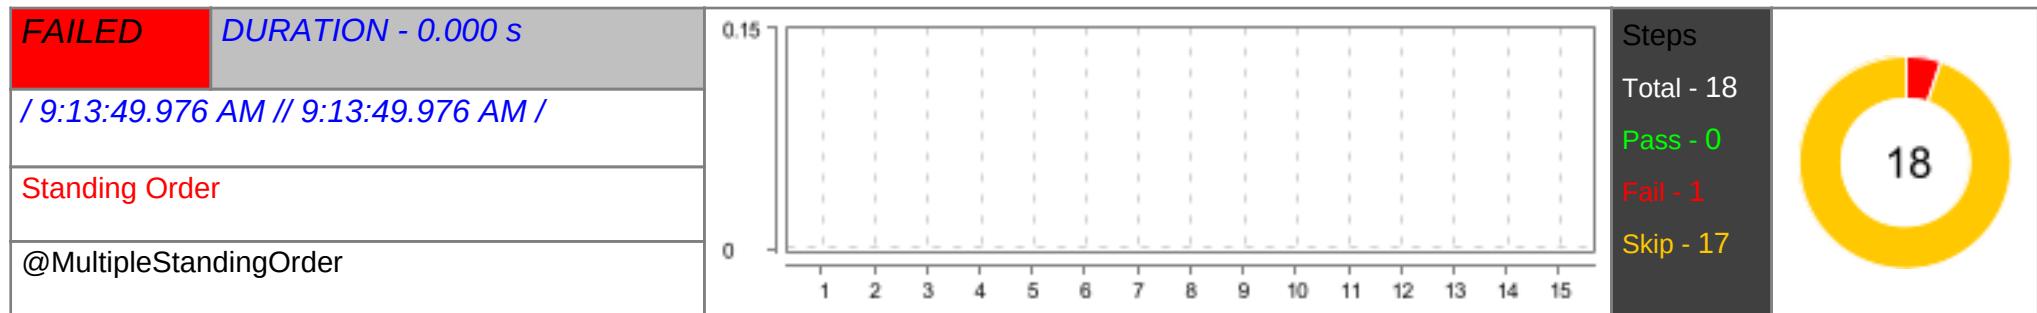


#	Step / Hook Details	Status	Duration
1	<p>Given User enters URL and is on login page and entered credentials for SO</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102)</pre>	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66) at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/ IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature.feature:5) * Not displayable characters are replaced by '?'.  2 When User is on Home Page for SO 3 Then User navigate to Client side for SO 4 Then User should select Order Entry tab for SO 5 Then User selects Account# for SO 6 Given User must be on Order Entry Page to select Standing Order and navigate to standing order 7 And User click on Start standing order button and selects Start date 3 and End date 4 day from current date 8 Then User enters Product# in Quick product entry inputbox 9 And User enters Qty in standing order product grid based on enabled days 10 Then User clicks on Save button and handles popup and continue creation of multiple standing order 11 And User click on Start standing order button and selects Start date 9 and End date 15 day from current date 12 Then User enters Product# in Quick product entry inputbox 13 And User enters Qty in standing order product grid based on enabled days 14 Then User clicks on Save button and handles popup and continue creation of multiple standing order 15 And User click on Start standing order button and selects Start date 4 and End date 8 day from current date 16 Then User enters Product# in Quick product entry inputbox 17 And User enters Qty in standing order product grid based on enabled days 18 Then User clicks on Save button and handles popup	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya. Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)		

### (S)- Test scenario for creating standing order using catalog standing order

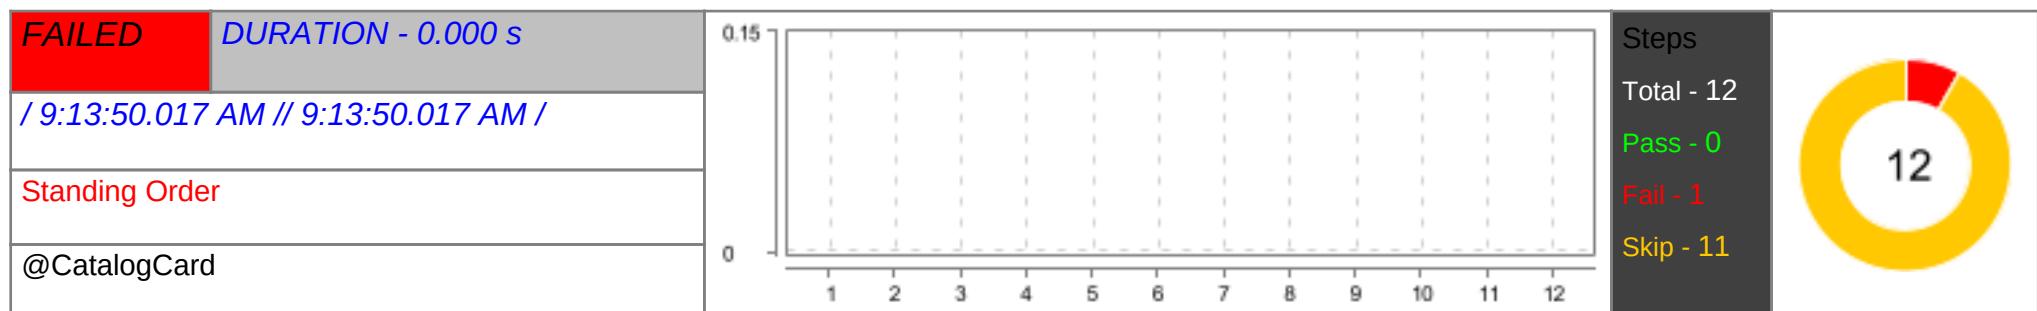


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for SO  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66)     at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature.feature:5) * Not displayable characters are replaced by '?'. </pre>		
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s
7	And User click on Start standing order button and selects Start date 16 and End date 17 day from current date	SKIPPED	0.000 s
8	Then User click on Add Product button in Standing order page and select catalog option	SKIPPED	0.000 s
9	And User should make sure that Catalog popup displayed in card view and select Category values	SKIPPED	0.000 s
10	Then Select products from card view	SKIPPED	0.000 s
11	And User enters Qty in standing order product grid based on enabled days	SKIPPED	0.000 s
	10   20   30   40   15   10   5		
12	Then User clicks on Save button and handles popup	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario) <pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82     at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source)     at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)     at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) </pre>	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	<pre>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefinition_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)</pre>		


## (S)- Test scenario for copying Standing order

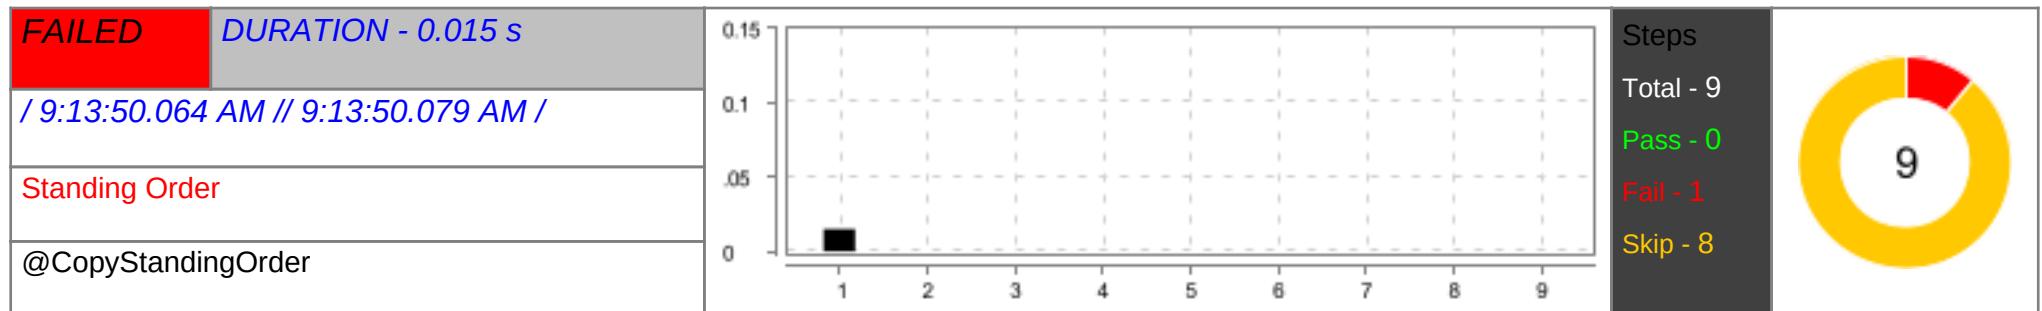

#	Step / Hook Details	Status	Duration
1	<p>Given User enters URL and is on login page and entered credentials for SO</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102)</pre>	FAILED	0.015 s


#	Step / Hook Details	Status	Duration
	at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66) at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/ IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature.feature:5) * Not displayable characters are replaced by '?'. at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)		
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s
7	Then User checks for all the products in Active SO	SKIPPED	0.000 s
8	And User clicks on Copy Standing order button selects start and end date as 18 and 19 day from current date	SKIPPED	0.000 s
9	Then User checks for the products added to copied SO	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)	FAILED	0.000 s

## (S)- Test scenario for deleting all the standing orders which are active and pending

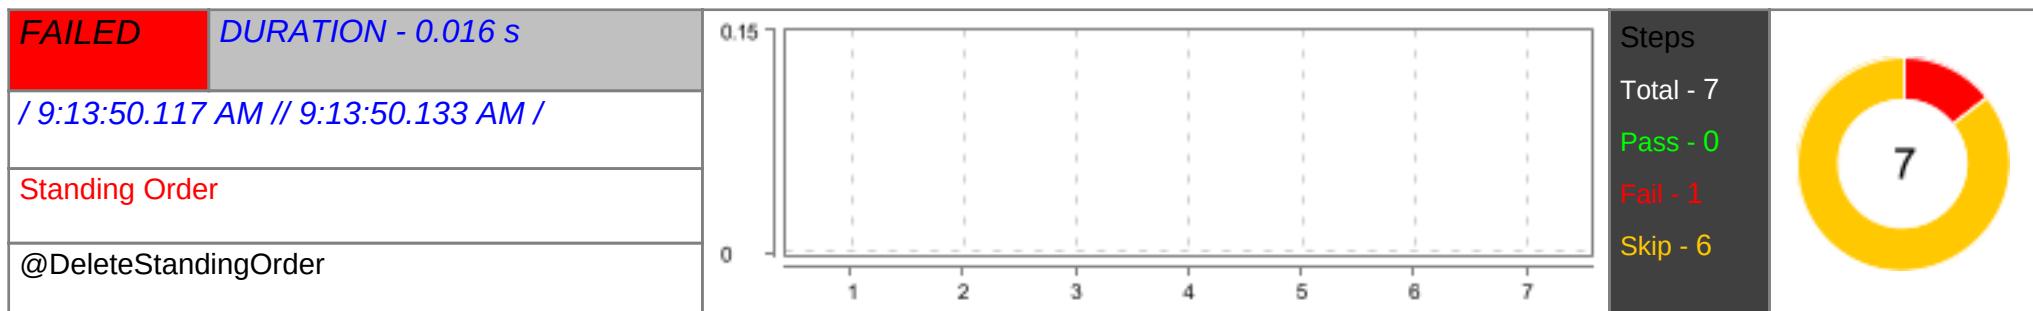


#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for SO  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefinition_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66) at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature.feature:5) * Not displayable characters are replaced by '?'.	FAILED	0.000 s
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s
7	Then User navigates to Standing order card and clicks on Delete button	SKIPPED	0.000 s
	AFTER - stepDefinatoin_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefinatoin_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)	FAILED	0.016 s

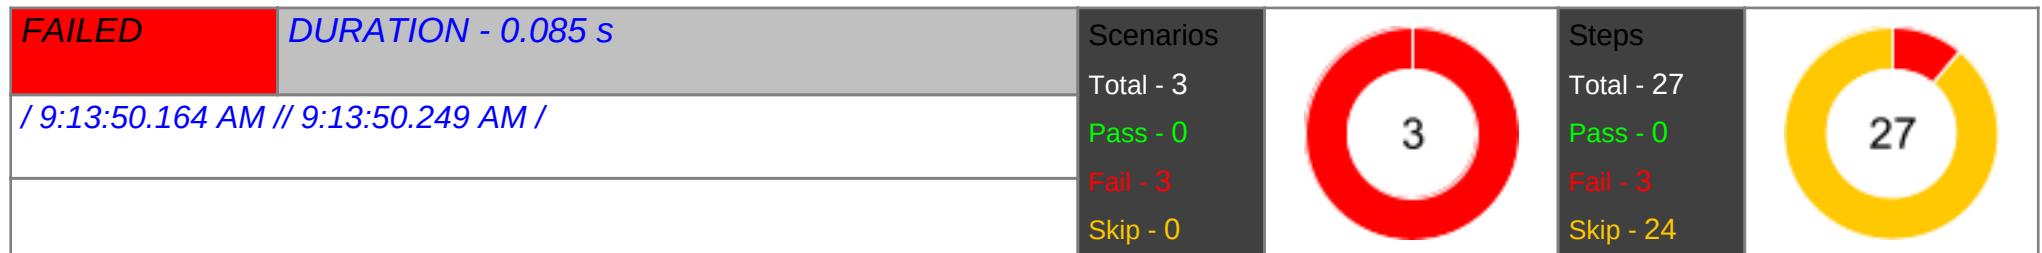
**(F)- Standing Order1**

## (S)- Test scenario for generating Excel sheet for standing order registration

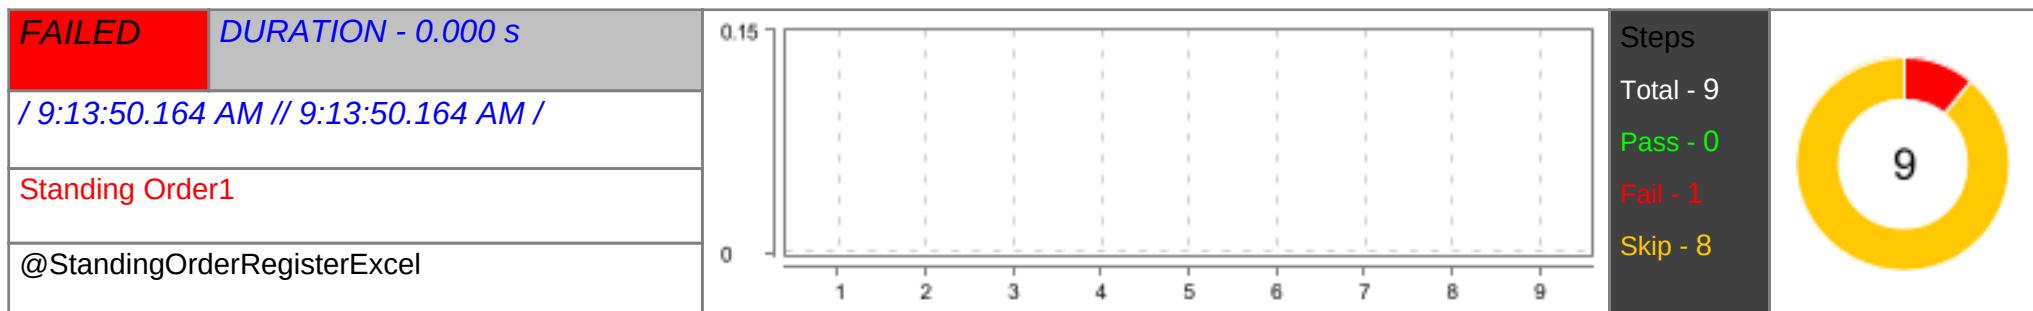

#	Step / Hook Details	Status	Duration
1	Given User enters URL and is on login page and entered credentials for SO  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefinition_DSD_OMS.StandingOrderPage.StandingOrderSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderSteps.java:66) at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature1.feature:5) * Not displayable characters are replaced by '?'.	FAILED	0.000 s
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s


#	Step / Hook Details	Status	Duration
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s
7	And User should click on Standing Order Register button	SKIPPED	0.000 s
8	Then User should search for Customer and Route in Standing order register popup	SKIPPED	0.000 s
9	And User should click on Excel button, should download csv files	SKIPPED	0.000 s
	AFTER - stepDefinatoin_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)  org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefinatoin_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)	FAILED	0.000 s

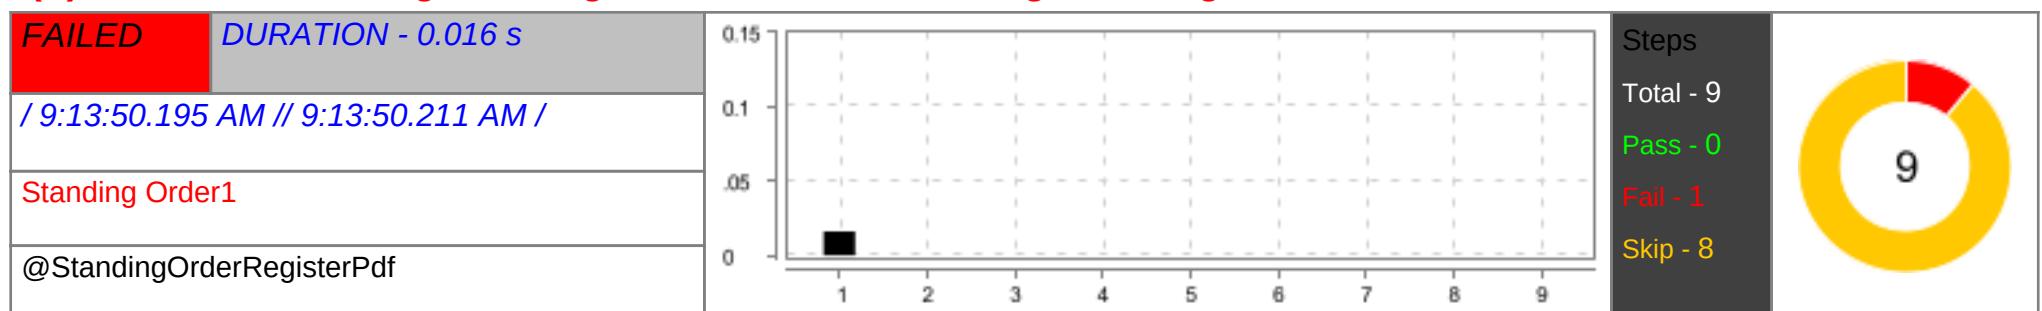**(S)- Test scenario for generating Excel sheet for standing order registration**

#	Step / Hook Details	Status	Duration
1	<p>Given User enters URL and is on login page and entered credentials for SO</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\scoped_dir3208_15212, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66) at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature1.feature:5) * Not displayable characters are replaced by '?'.</pre>	FAILED	0.016 s
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s
7	And User should click on Standing Order Register button	SKIPPED	0.000 s
8	Then User should search for Customer and Route in Standing order register popup	SKIPPED	0.000 s
9	And User should click on PDF button, should Open new browser	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\scoped_dir3208_15212, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify}		

#	Step / Hook Details	Status	Duration
	<pre>Ramadas\AppD..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82     at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source)     at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)     at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)     at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49)     at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158)     at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552)     at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609)     at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295)     at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)</pre>		

### (S)- Test scenario for generating standing order

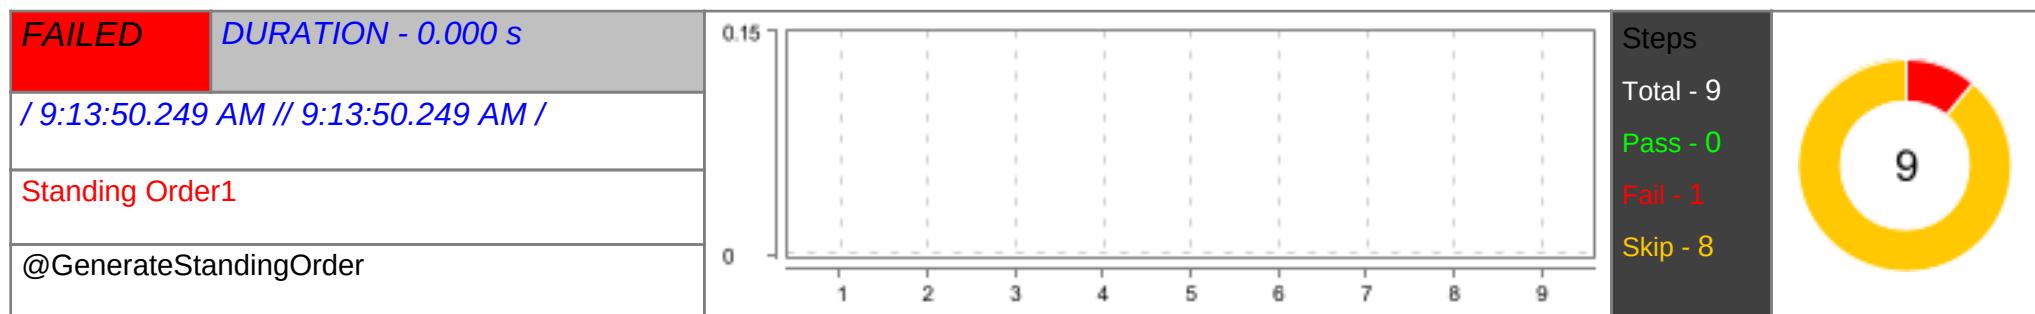


#	Step / Hook Details	Status	Duration
1	<p>Given User enters URL and is on login page and entered credentials for SO</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppD..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82     at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source)</pre>	FAILED	0.000 s


#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66)   at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeature1.feature:5) * Not displayable characters are replaced by '?'. </pre>		
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Given User must be on Order Entry Page to select Standing Order and navigate to standing order	SKIPPED	0.000 s
7	And User should click on Generate Standing order button	SKIPPED	0.000 s
8	Then User should select From and To date in Generate standing order(s) popup, Click on Ok	SKIPPED	0.000 s
9	And User should click on ok, in All task completed popup	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)	FAILED	0.000 s
	<pre> org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82   at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source)   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122)   at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) </pre>		

#	Step / Hook Details	Status	Duration
	<pre>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefinition_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)</pre>		

### (F)- Standing order1

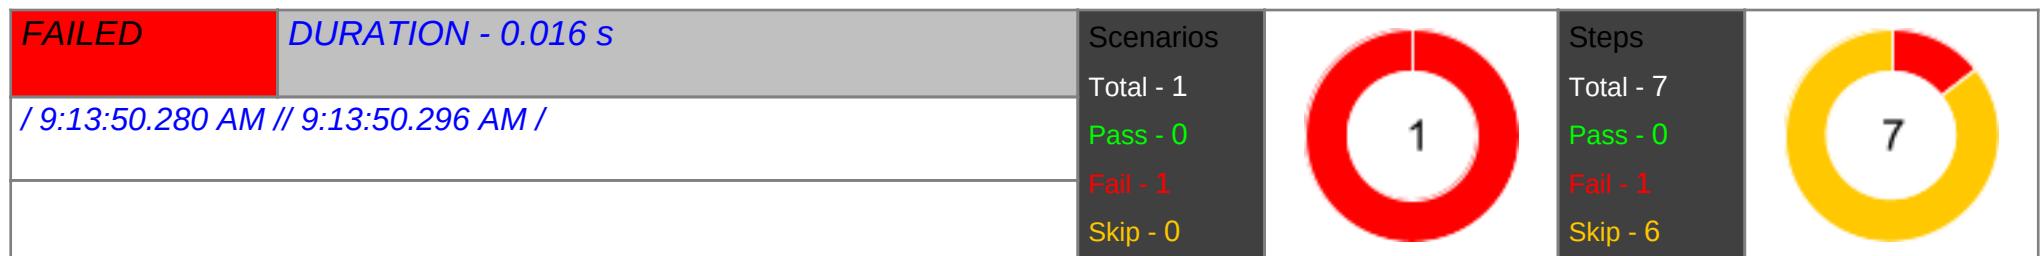

### (S)- Loging out from the application

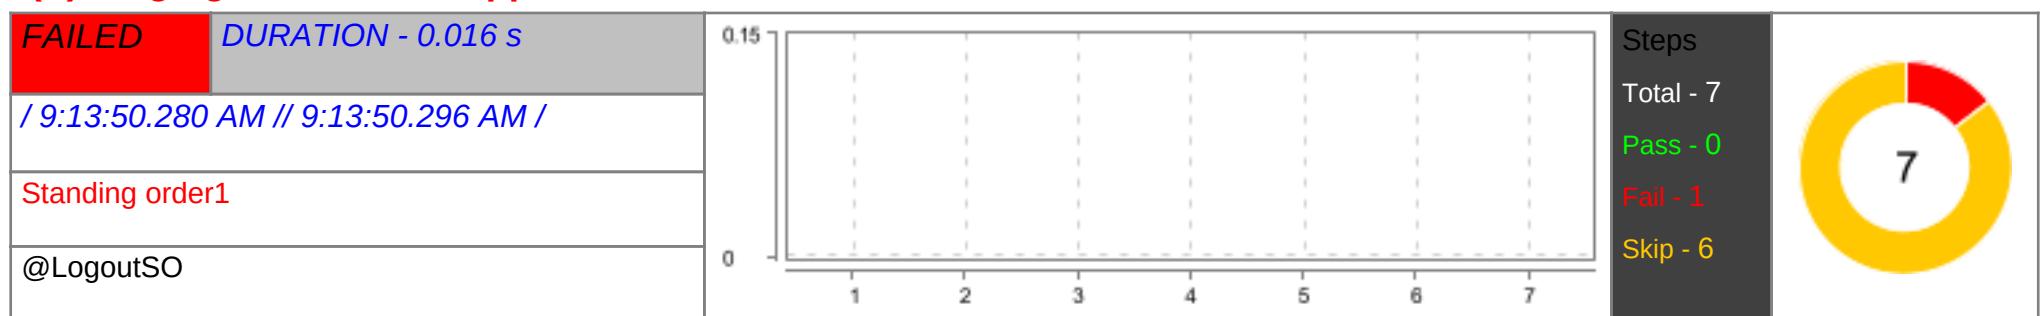

#	Step / Hook Details	Status	Duration
1	<p>Given User enters URL and is on login page and entered credentials for SO</p> <pre>org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData\Local\Temp\Profile-102.0.1-20220705093820, moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractivity: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source)</pre>	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:780) at helper.HelpersMethod.Implicitwait(HelpersMethod.java:102) at stepDefination_DSD_OMS.StandingOrderPage.StandingOrderPageSteps. user_enters_url_and_is_on_login_page_and_entered_credentialsForSO(StandingOrderPageSteps.java:66) at ?.User enters URL and is on login page and entered credentials for SO(file:///C:/Users/Divya.Ramadas/Downloads/ IgnitionTestAutomation/src/test/resources/features_DSD_OMS/StandingOrderFeature/standingOrderFeatureEnd.feature:4) * Not displayable characters are replaced by '?'.		
2	When User is on Home Page for SO	SKIPPED	0.000 s
3	Then User navigate to Client side for SO	SKIPPED	0.000 s
4	Then User should select Order Entry tab for SO	SKIPPED	0.000 s
5	Then User selects Account# for SO	SKIPPED	0.000 s
6	Then Click on user Icon on Order Entry page	SKIPPED	0.000 s
7	And Click on Logout on Order Entry page	SKIPPED	0.000 s
	AFTER - stepDefination_DSD_OMS.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)	FAILED	0.000 s
	org.openqa.selenium.NoSuchSessionException: Tried to run command without establishing a connection Build info: version: '3.141.59', revision: 'e82be7d358', time: '2018-11-14T08:17:03' System info: host: 'AFSIGNITIONQA01', ip: '10.70.41.6', os.name: 'Windows Server 2019', os.arch: 'amd64', os.version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.firefox.FirefoxDriver Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 102.0.1, javascriptEnabled: true, moz:accessibilityChecks: false, moz:buildID: 20220705093820, moz:geckodriverVersion: 0.31.0, moz:headless: false, moz:processID: 8596, moz:profile: C:\Users\Divya.Ramadas\AppData..., moz:shutdownTimeout: 60000, moz:useNonSpecCompliantPointerOrigin: false, moz:webdriverClick: true, moz:windowless: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, platformVersion: 10.0, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify} Session ID: 3ca1eebe-5fd1-49f4-b248-222a2a2ccc82 at jdk.internal.reflect.GeneratedConstructorAccessor57.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:187) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:122) at org.openqa.selenium.remote.http.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:49) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:158) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:83)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:552) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:609) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:295) at stepDefination_DSD_OMS.LoginPageStep.afterScenario1(LoginPageStep.java:64)		

(Step) AFTER - stepDefination\_DSD\_OM  
S.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)

**(S) For searching of Invoice number using Add filter button**

**(F) AR Inquiry**

The screenshot shows the AR Inquiry interface. On the left, there's a vertical toolbar with various icons. In the center, the AR Inquiry page displays customer information: Customer account # 40035981-0-2958 - MILOS #1552, Customer name: MILOS #1552, Terms: None, Credit limit: \$0.00, and Balance due: \$0.00. Below this, a section titled "Select positive invoice balances" contains a "Add filter" button. A tooltip or callout box highlights this button with the text "(S) For searching of Invoice number using Add filter button". At the bottom of the page, there's a table header for "Invoice Date", "Due Date", "Invoice Amount", and "Balance Due", with a "Search" bar to its right.

(Step) AFTER - stepDefination\_DSD\_OM  
S.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)

**(S) For searching of Invoice number using search bar**

**(F) AR Inquiry**

This screenshot is identical to the one above it, showing the AR Inquiry interface. The "Add filter" button is highlighted with a tooltip "(S) For searching of Invoice number using search bar". The rest of the interface, including the customer details, filter section, and table headers, remains the same.

(Step) AFTER - stepDefination\_DSD\_OM  
S.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)

**(S) To add new payment method**

**(F) AR Inquiry**

The screenshot shows the AR Inquiry interface. At the top, there's a header with the title 'AR Inquiry' and a sub-header 'IGNITION QA DSD TEST'. On the left, a vertical toolbar has icons for home, back, forward, search, and other functions. The main area displays customer information: 'Customer account #' (40035981-0-2958 - MILOS #1552), 'Customer name: MILOS #1552', 'Terms: None', 'Credit limit: \$0.00', and 'Balance due: \$0.00'. Below this, a section titled 'Select positive invoice balances' contains an 'Add filter' button and a search bar. A table at the bottom lists columns: 'Invoice' (sorted descending), 'Invoice Date', 'Due Date', 'Invoice Amount', and 'Balance Due'. Each column has a filter icon.

(Step) AFTER - stepDefination\_DSD\_OM  
S.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)

**(S) For Posting Invoice**

**(F) AR Inquiry**

This screenshot is identical to the one above, showing the AR Inquiry interface with the same customer information, search filters, and table at the bottom.

(Step) AFTER - stepDefination\_DSD\_OM  
S.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)

**(S) To cancel Posting invoice**

**(F) AR Inquiry**

AR Inquiry

Customer account # 40035981-0-2958 - MILOS #1552

Customer name: MILOS #1552 Terms: None Credit limit: \$0.00 Balance due: \$0.00


Select positive invoice balances

Add filter

Invoice Date Due Date Invoice Amount Balance Due

Search

Ignition by TELUS

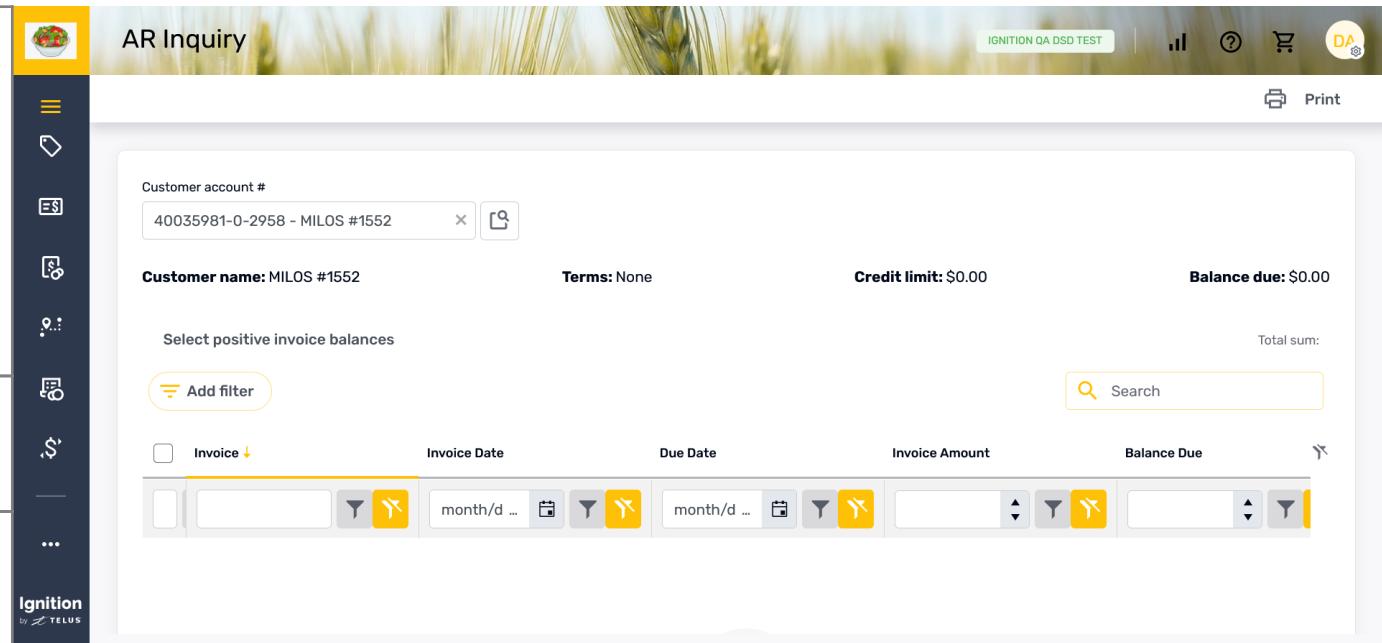

(Step) AFTER - stepDefination\_DSD\_OM  
S.LoginPageStep.afterScenario1(io.cucumber.java.Scenario)

**(S) Test scenario for displaying only those orders having particular product**

**(F) All orders**

Ignition DSD AFS

Login

User name:

Password:

Remember me

Sign in

Forgot password

