

# RDF and RDF Schema

- Basic Concepts of RDF Schema
- Core Classes of RDFs
- Core properties of RDFs

# Basic Concept of RDF

- RDF is a universal language that lets users describe resources in their own vocabularies
- But it does not give any special meaning (**semantics**) to vocabulary such as `subClassOf` or `type`.
- RDFS describes the **vocabulary** of the RDF data model.
- The user can do so in **RDF Schema** using:
  - Classes and Properties
  - Class Hierarchies and Inheritance
  - Property Hierarchies

# RDF Schema (RDFS)


- RDFS describes the **vocabulary** of the RDF data model.
- The equivalent to the database schema.
- **Vocabulary == ontology!**

# Classes and their Instances

- We must distinguish between
  - Sets of individuals sharing properties called **classes**: lecturers, students, courses etc.
    - These are described in **RDFS**
  - Individual **objects** in the domain: Discrete Maths, Abeer Mohamed etc.
    - These are described in **RDF**

# RDF Schema

- Describe **vocabulary** for RDF:
  - Class, subClassOf, type
  - Property, subPropertyOf
  - domain, range
- Vocabulary can be used to define other vocabularies for your application domain

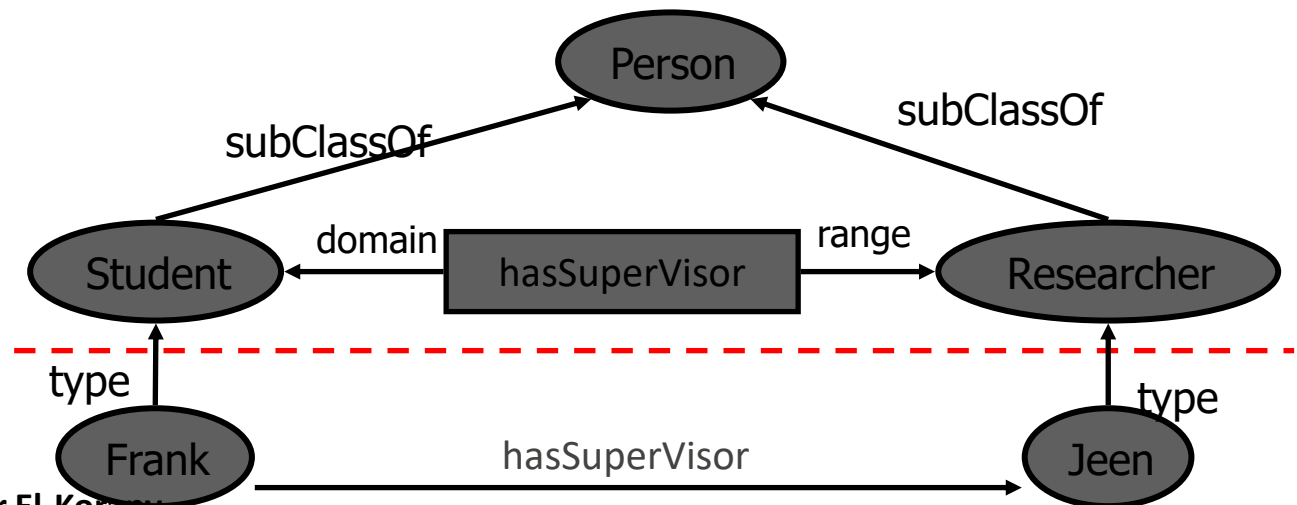

# RDF Schema (RDFS)

- The class and property concepts in RDF are similar to the type systems of object-oriented programming languages such as Java.
- In object-oriented systems a class is usually defined in terms of the properties its instances may have.
- In the RDF vocabulary properties are defined in terms of the classes of resource to which they apply.
- This is the role of the **domain** and **range** mechanisms.
- For example, we could define the **eg:Author-by** property to have a domain of **eg:Article** and a range of **eg:Person**.

# RDF Schema

- **RDF Schema**
  - provides the framework to define application-specific classes and properties.
  - allows resource to be defined as instances of classes
  - provides facility to define the ***subclass*** relationship of classes and properties.
- **RDF** describes resources with subject, predicate and object (class, property and value)

# RDF Schema (language for simple ontologies)

RDF schema is a semantic extension of RDF used for simple ontologies' design. The RDF schema language is used for declaring basic class and types when describing the terms used in RDF and are used to determine characteristics of other resources, such as the domains and ranges of properties.

- **rdfs:Resource**
- **rdfs:Class**
- **rdfs:domain**
- **rdfs:range**
- **rdfs:subClassOf**
- **rdfs:subPropertyOf**
- ...

The namespace is identified by:  
<http://www.w3.org/2000/01/rdf-schema#>

RDF Schema provides a data-modelling vocabulary for RDF data.

<http://www.w3.org/TR/rdf-schema/>

The RDF Schema class and property system is similar to the type systems of object-oriented programming languages such as Java. RDF Schema differs from many such systems in that instead of defining a class in terms of the properties its instances may have, RDF Schema describes properties in terms of the classes of resource to which they apply.



# Core Classes of RDFs


- Used to start from an ontology design.
- **rdfs:Resource**, the class of all resources.
- **rdfs:Class**, the class of all classes.
- **rdfs:Literal**, the class of all literals (strings).
- **rdf:Property**, the class of all properties.
- **rdf:Statement**, the class of all reified statements.

# Core Properties

- **rdf:type**, which relates a resource to its class
  - The resource is declared to be an instance of that class
- **rdfs:subClassOf**, which relates a class to one of its superclasses
  - All instances of a class are instances of its superclass
- **rdfs:subPropertyOf**, relates a property to one of its superproperties

# Core Properties (2)

- **rdfs:domain**, which specifies the domain of a property P
  - The class of those resources that may appear as subjects in a triple with predicate P
  - If the domain is not specified, then any resource can be the subject
- **rdfs:range**, which specifies the range of a property P
  - The class of those resources that may appear as values in a triple with predicate P

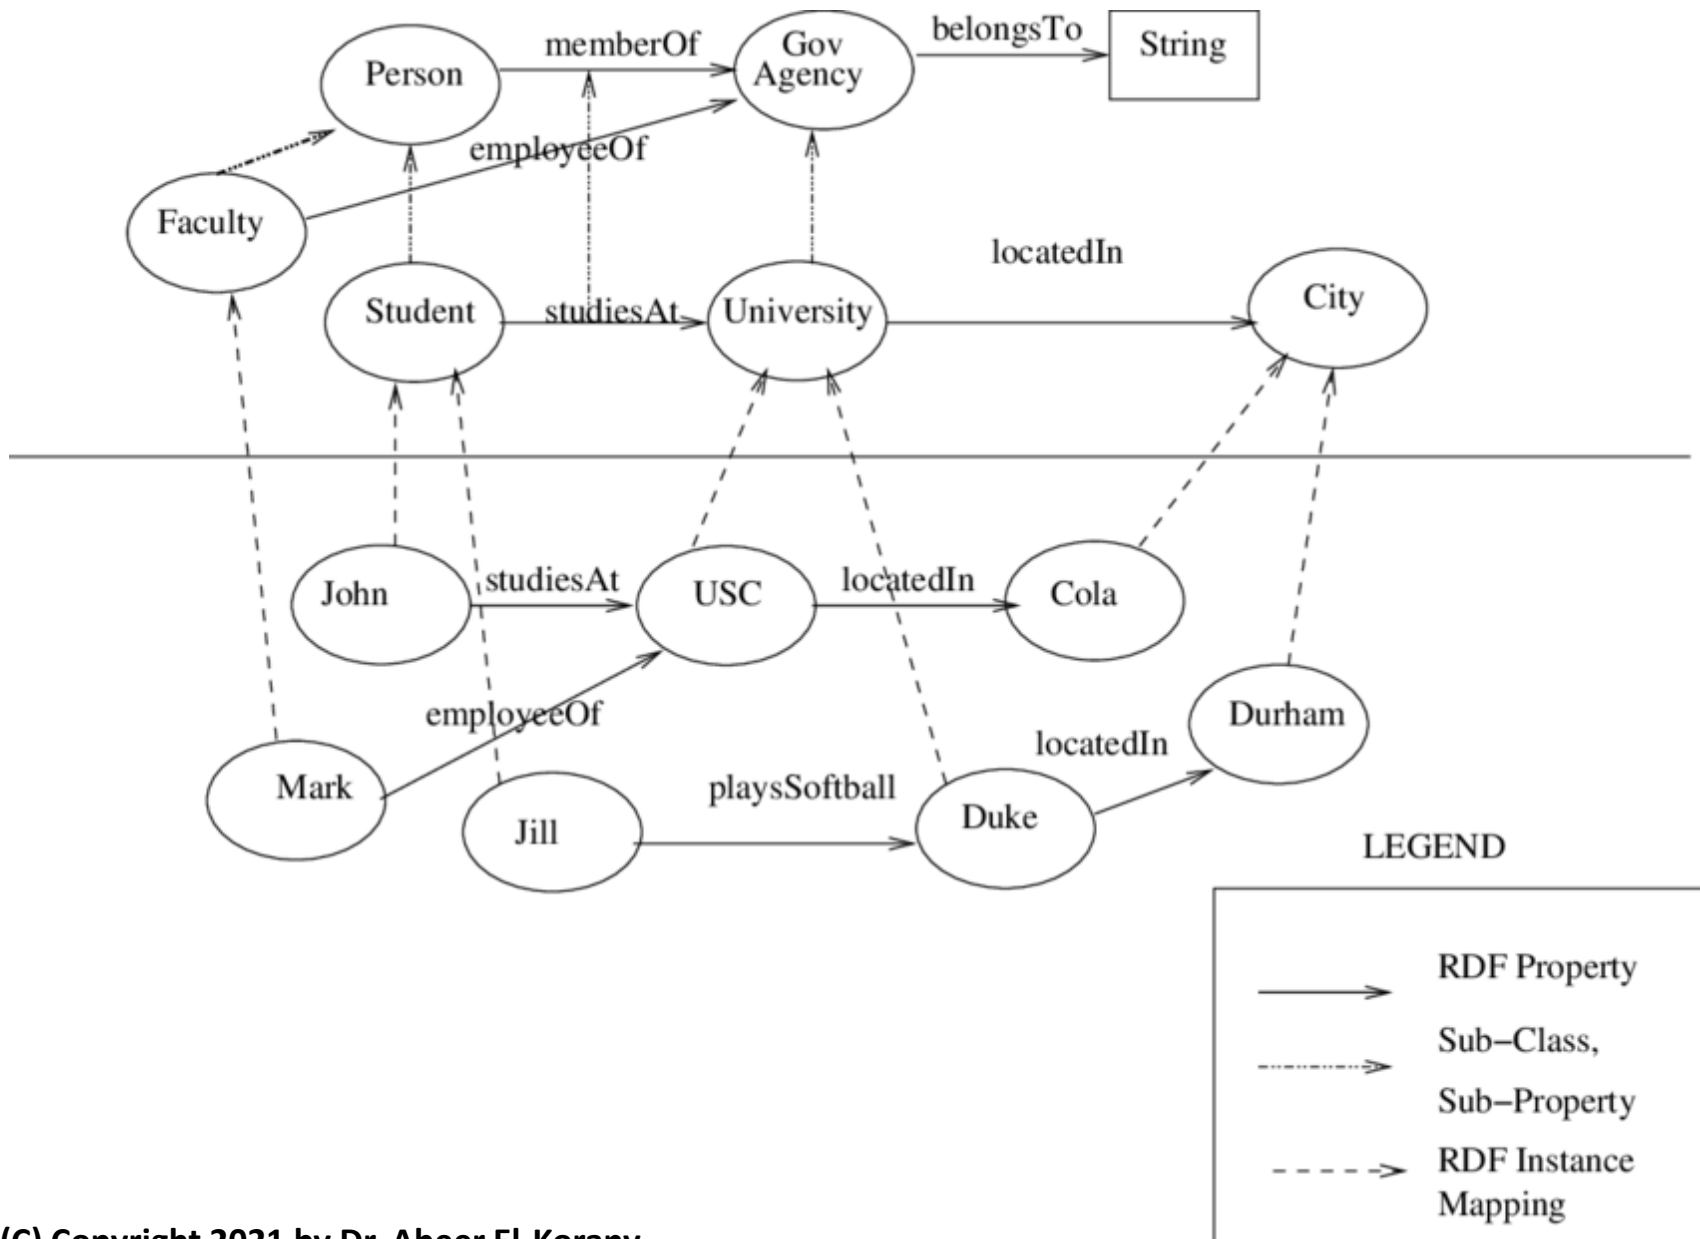

# RDFS example

That's the only we know  
from the RDF statement:

```
...  
:Mary    :hasHusband  
:John .  
...
```


**RDFS**

:Mary  
:hasHusband  
:John

**RDF**


# RDFS example

Now the question is, can we tell more about RDF statement components (subject, predicate, object) with the RDFS ?

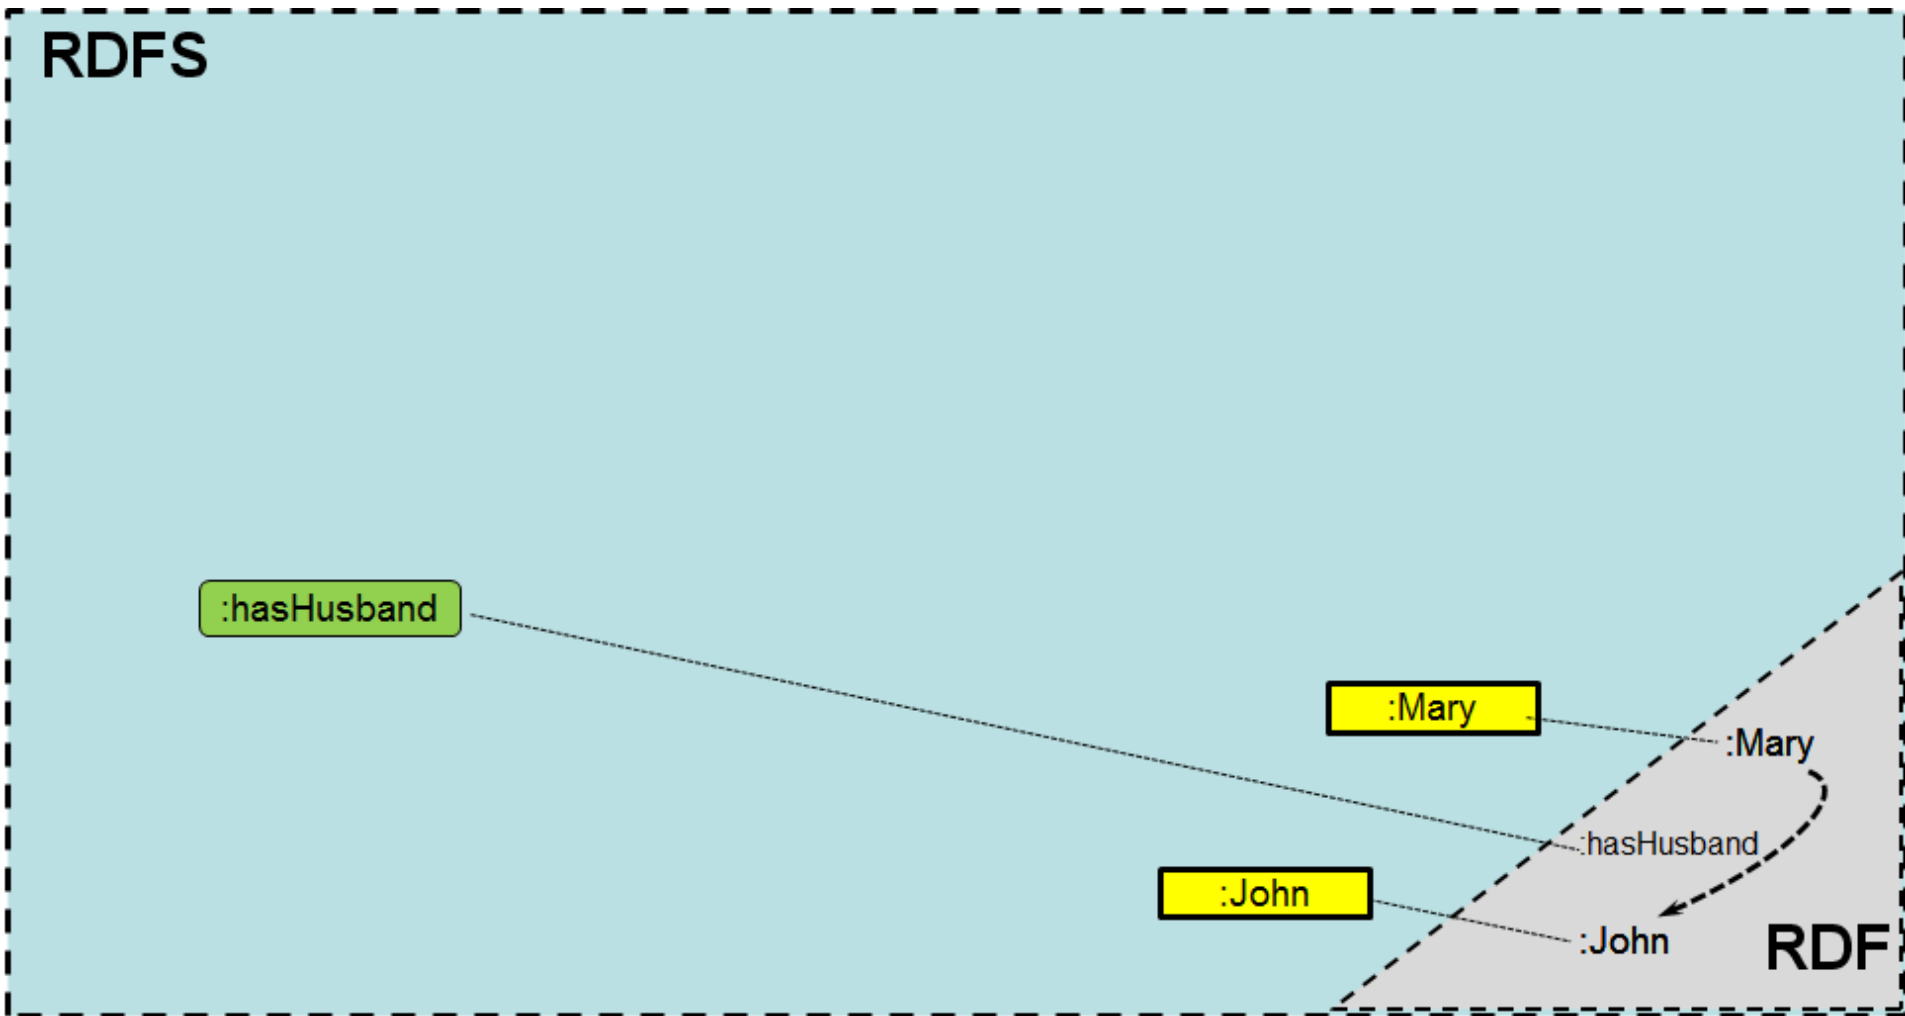


# RDFS example

First, we say explicitly that :Mary is a :Woman and :Woman is a Class

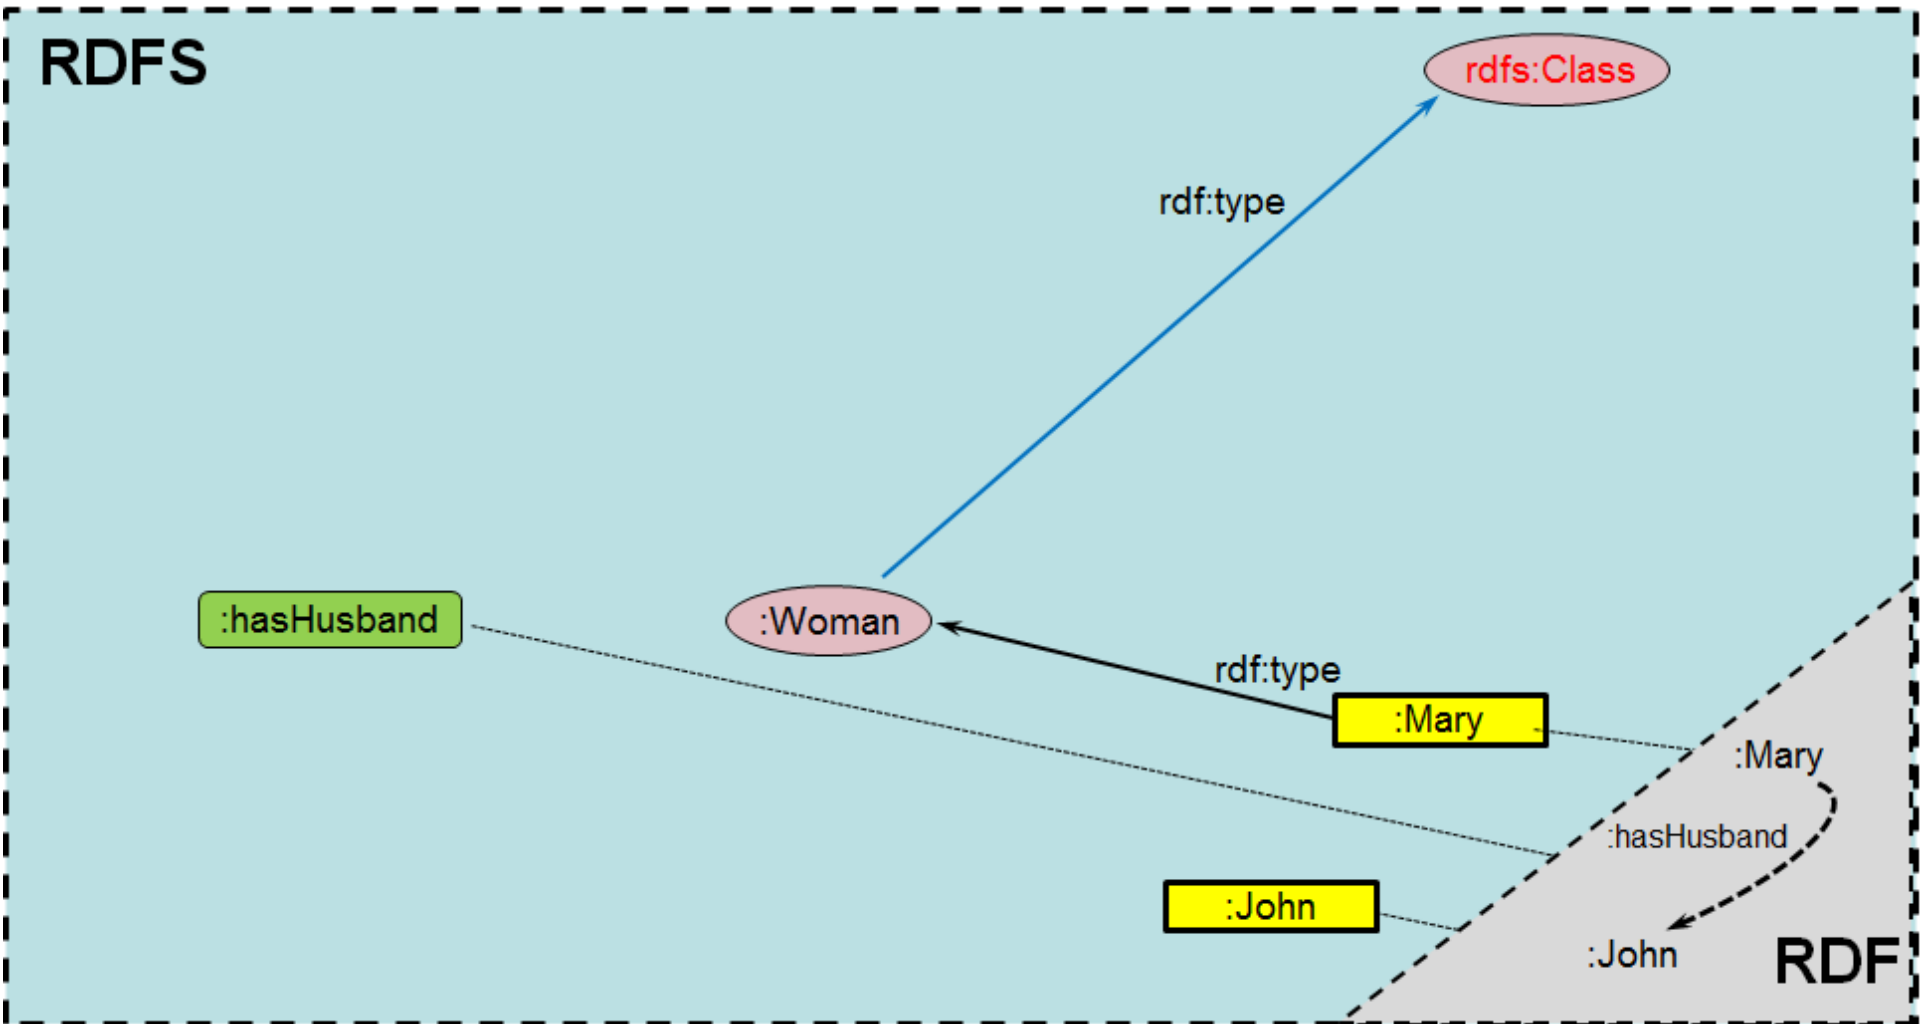

# RDFS example


Then we say explicitly that :John is a :Man and :Man is a rdfs:Class

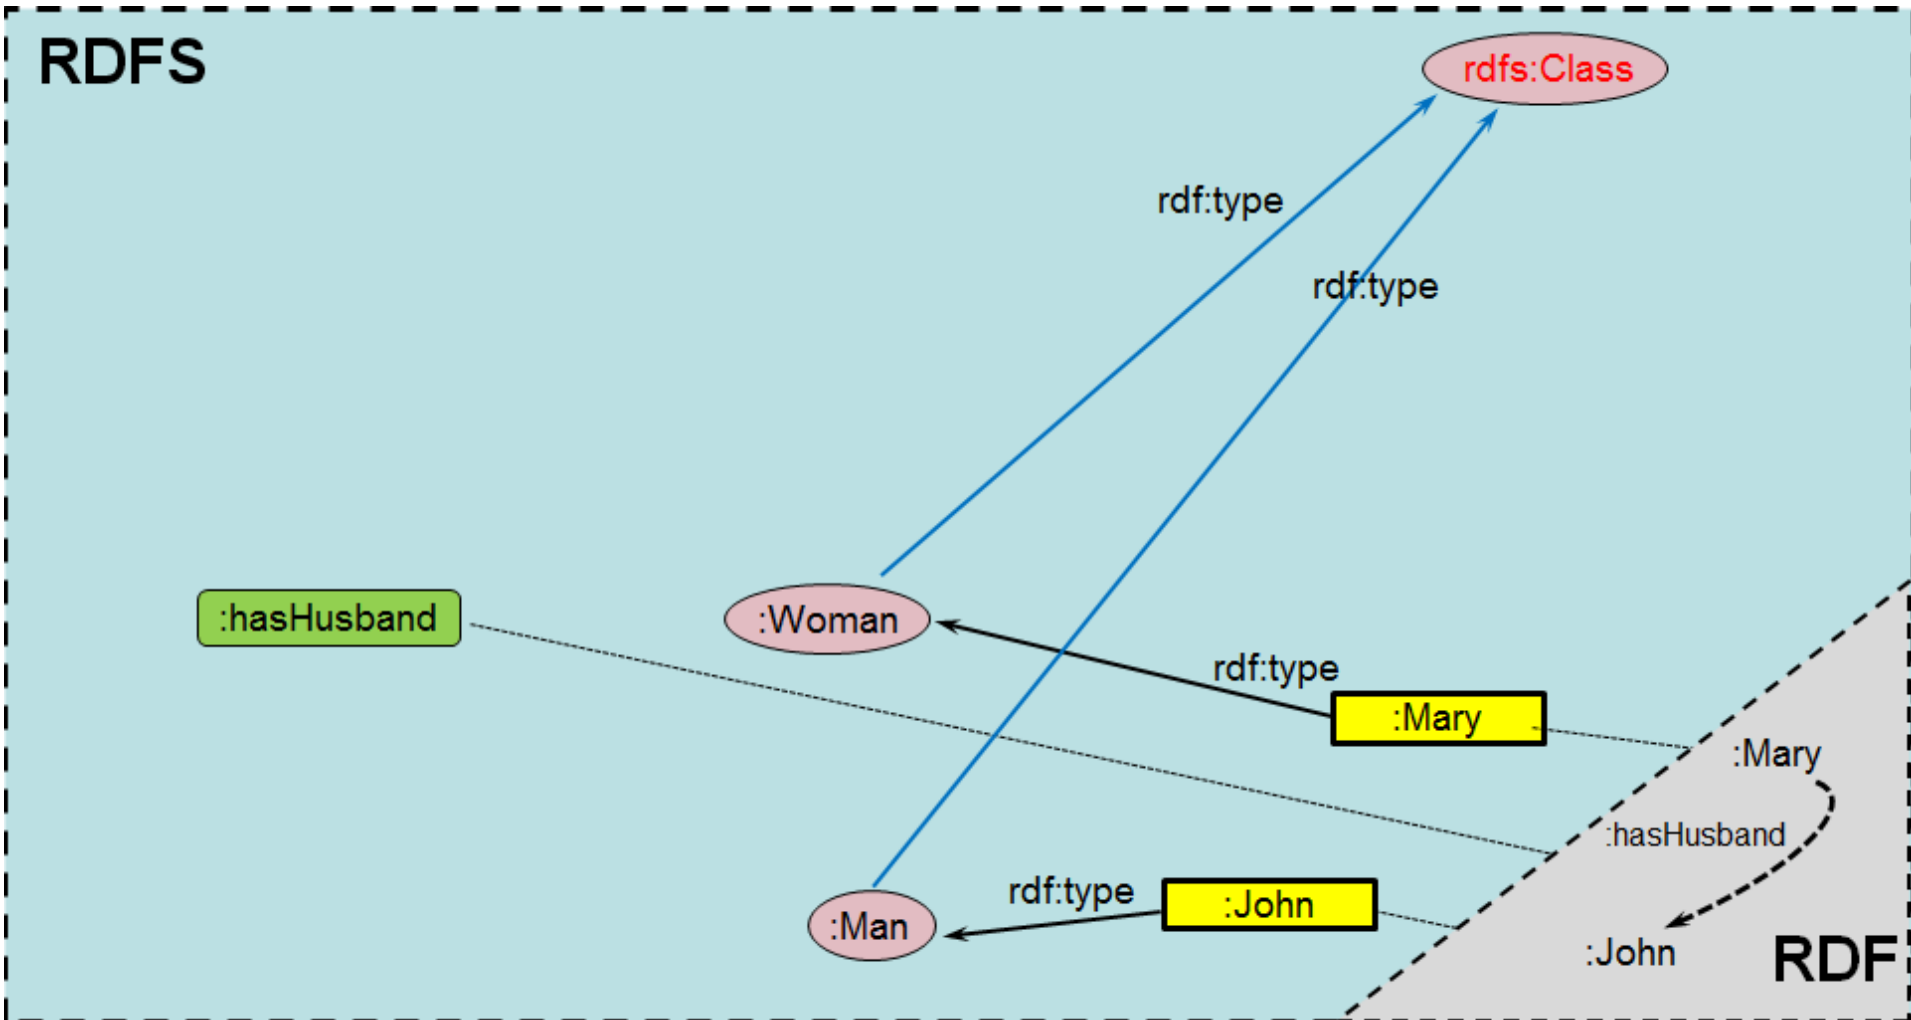




# RDFS example

After that, we say explicitly that `:hasHusband` is a `rdf:property`

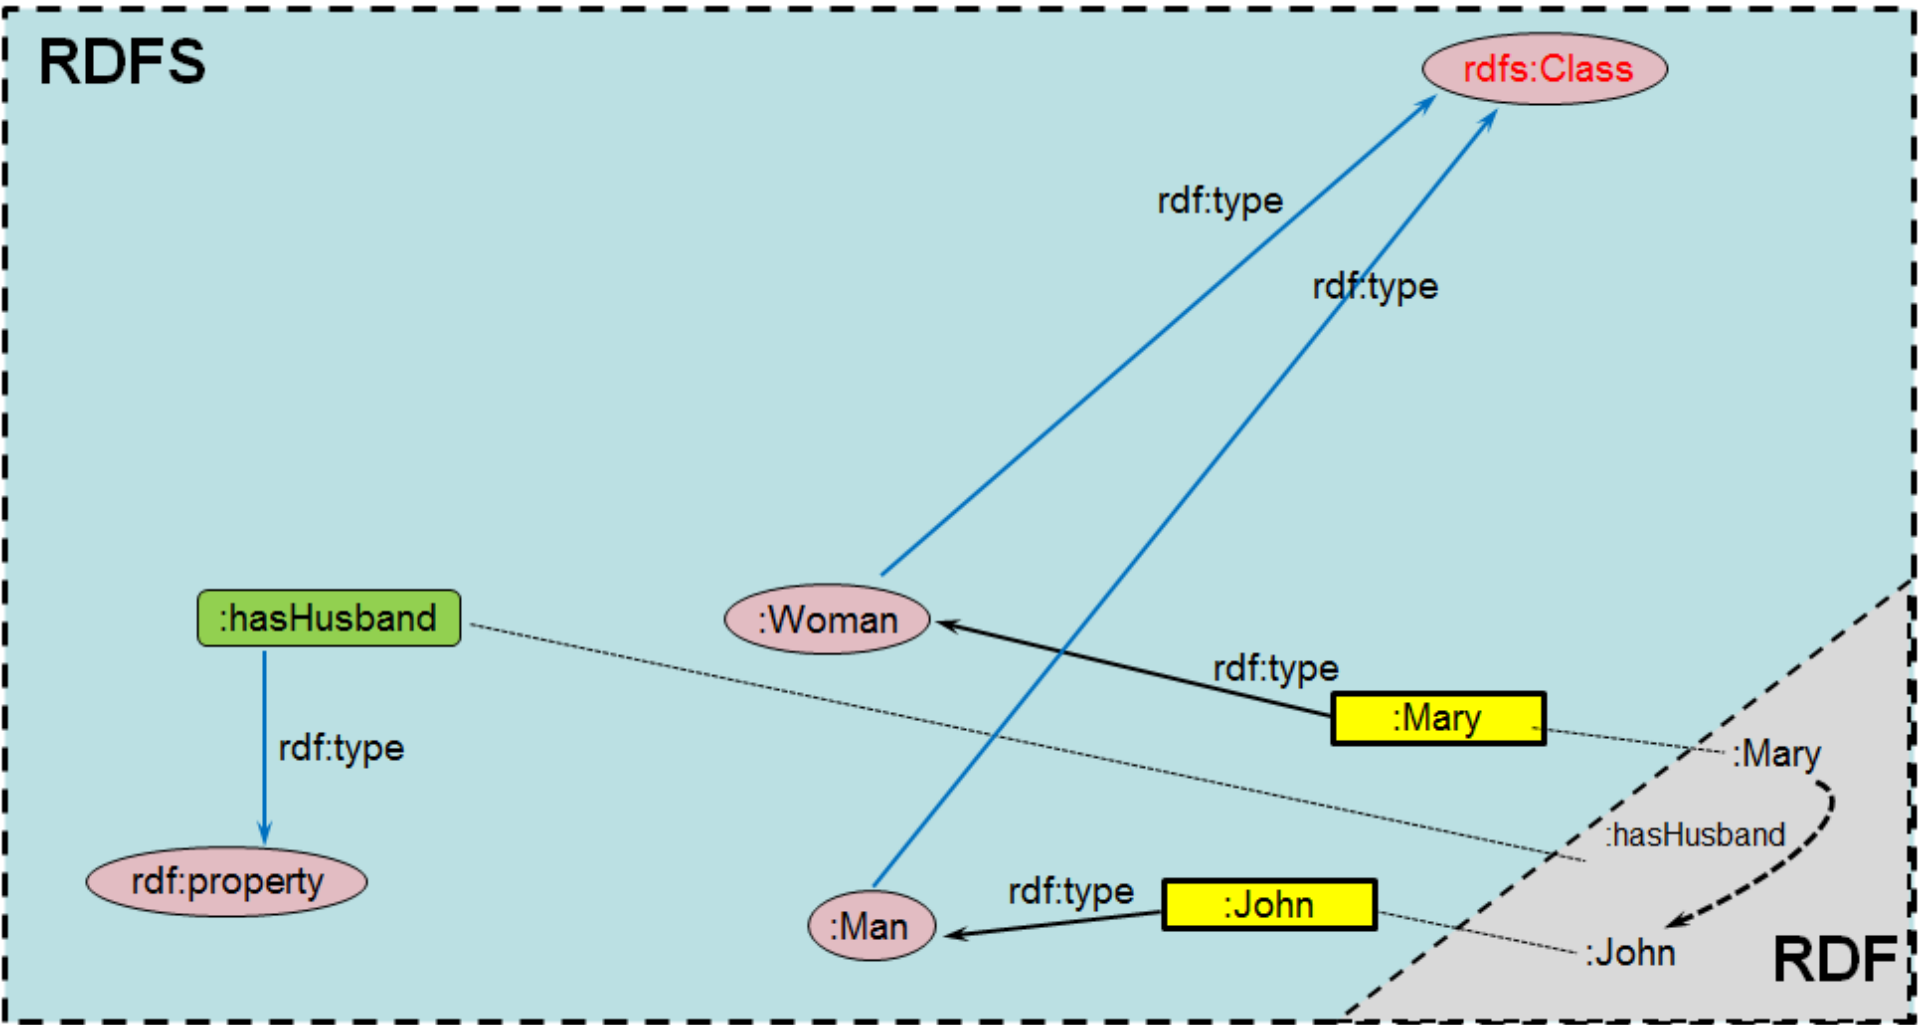

# RDFS example


Then we say that class `:Woman` is the domain for the `:hasHusband` property

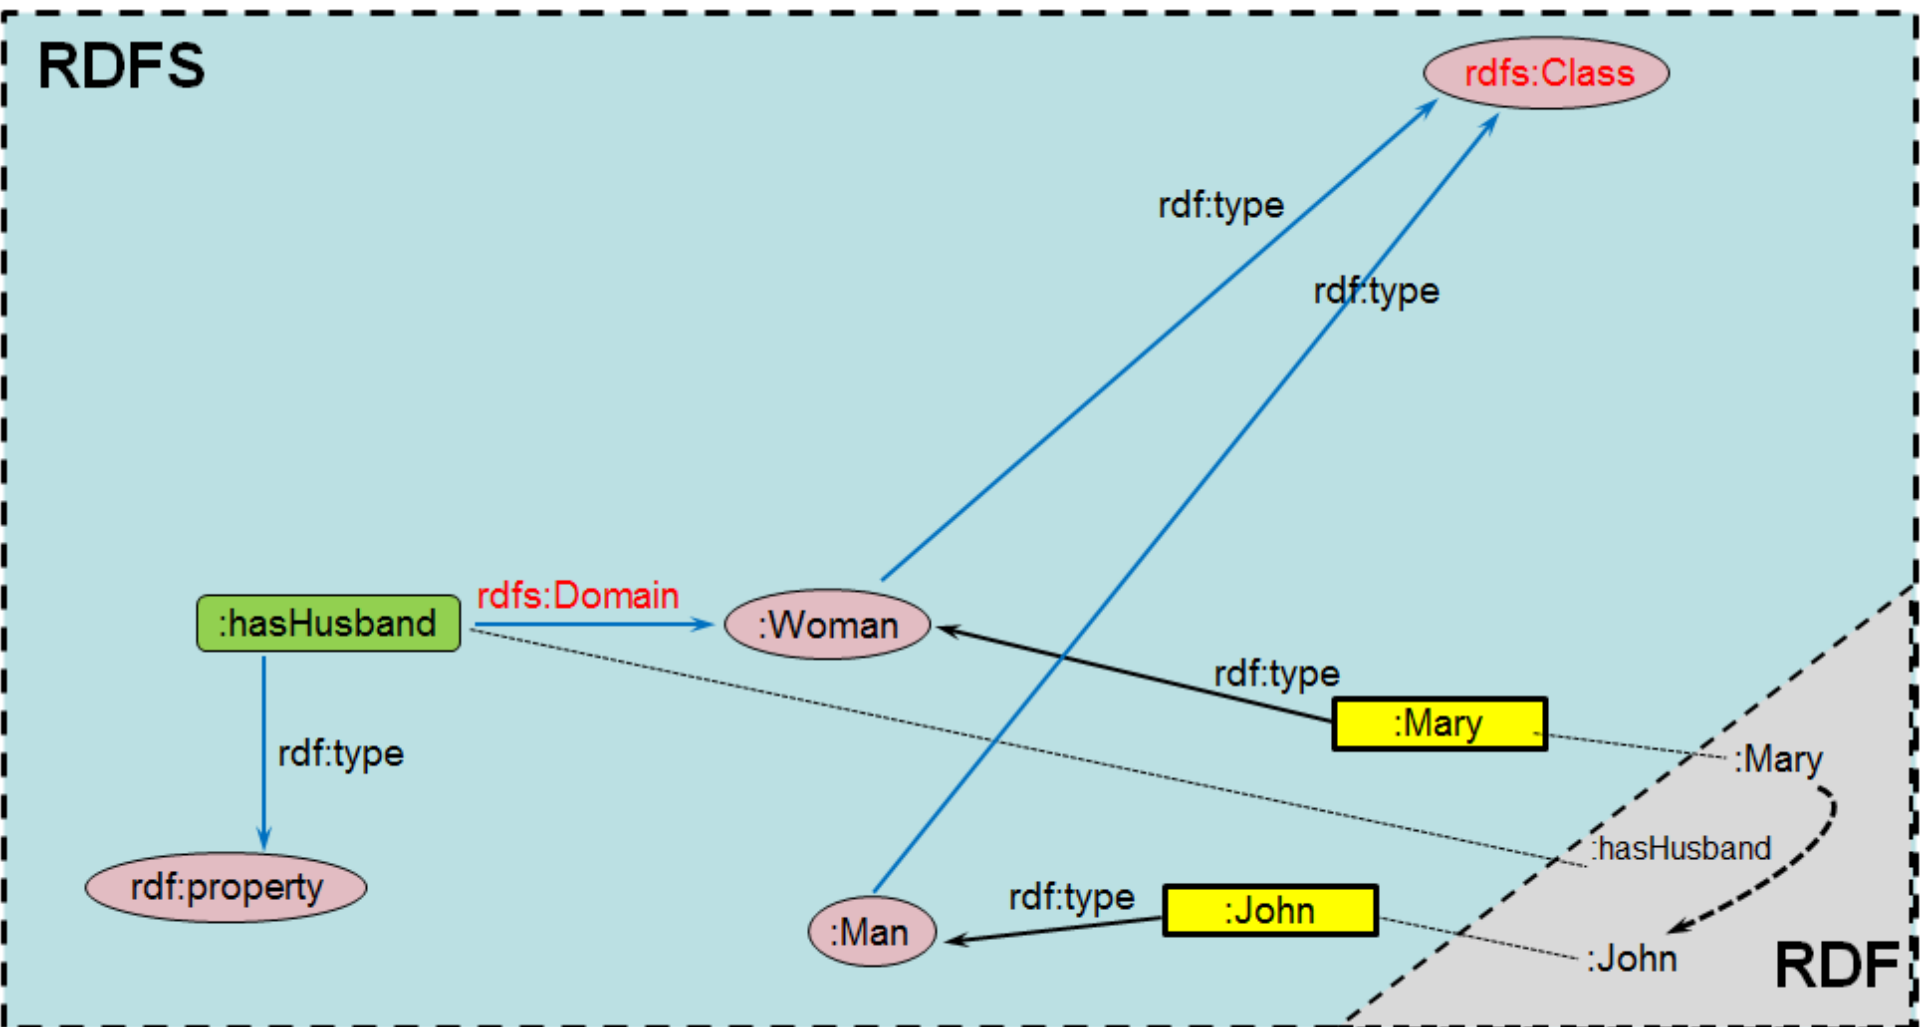

# RDFS example

Then we say that class :Man is the range for the:hasHusband property


## RDFS

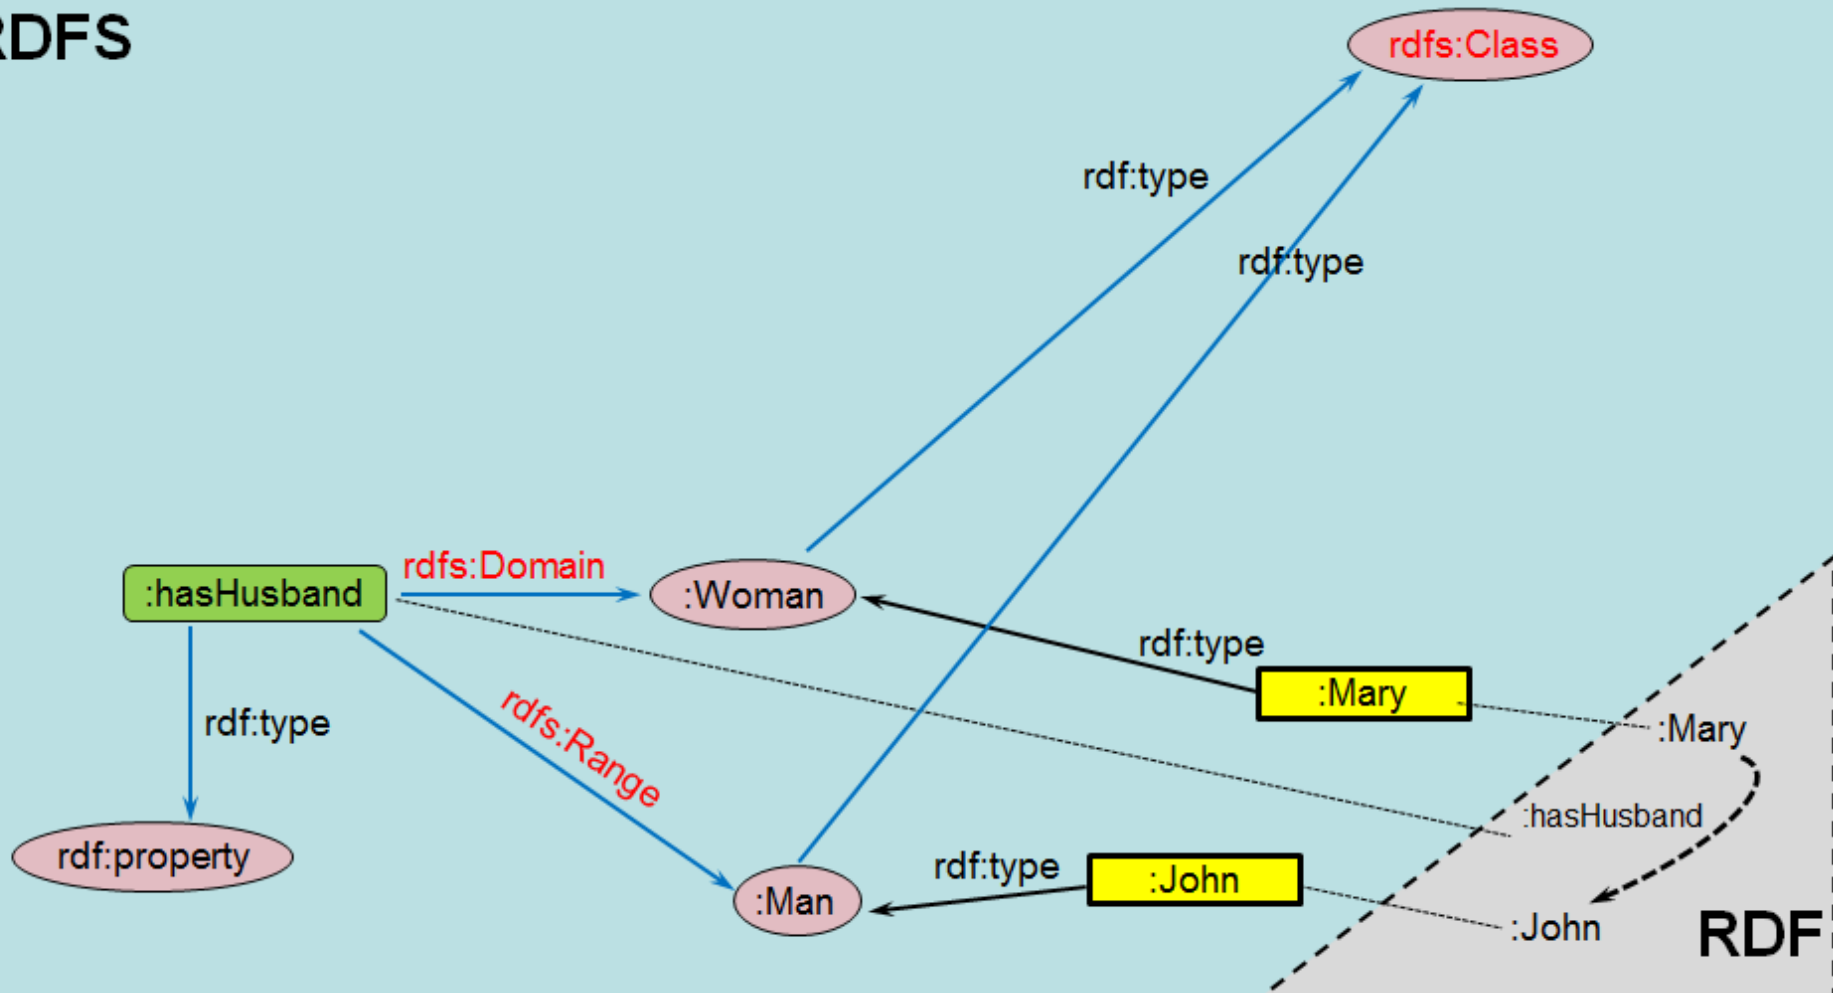

# RDFS example

We can also add that both classes :Woman and :Man are subclasses of the class :Person


## RDFS

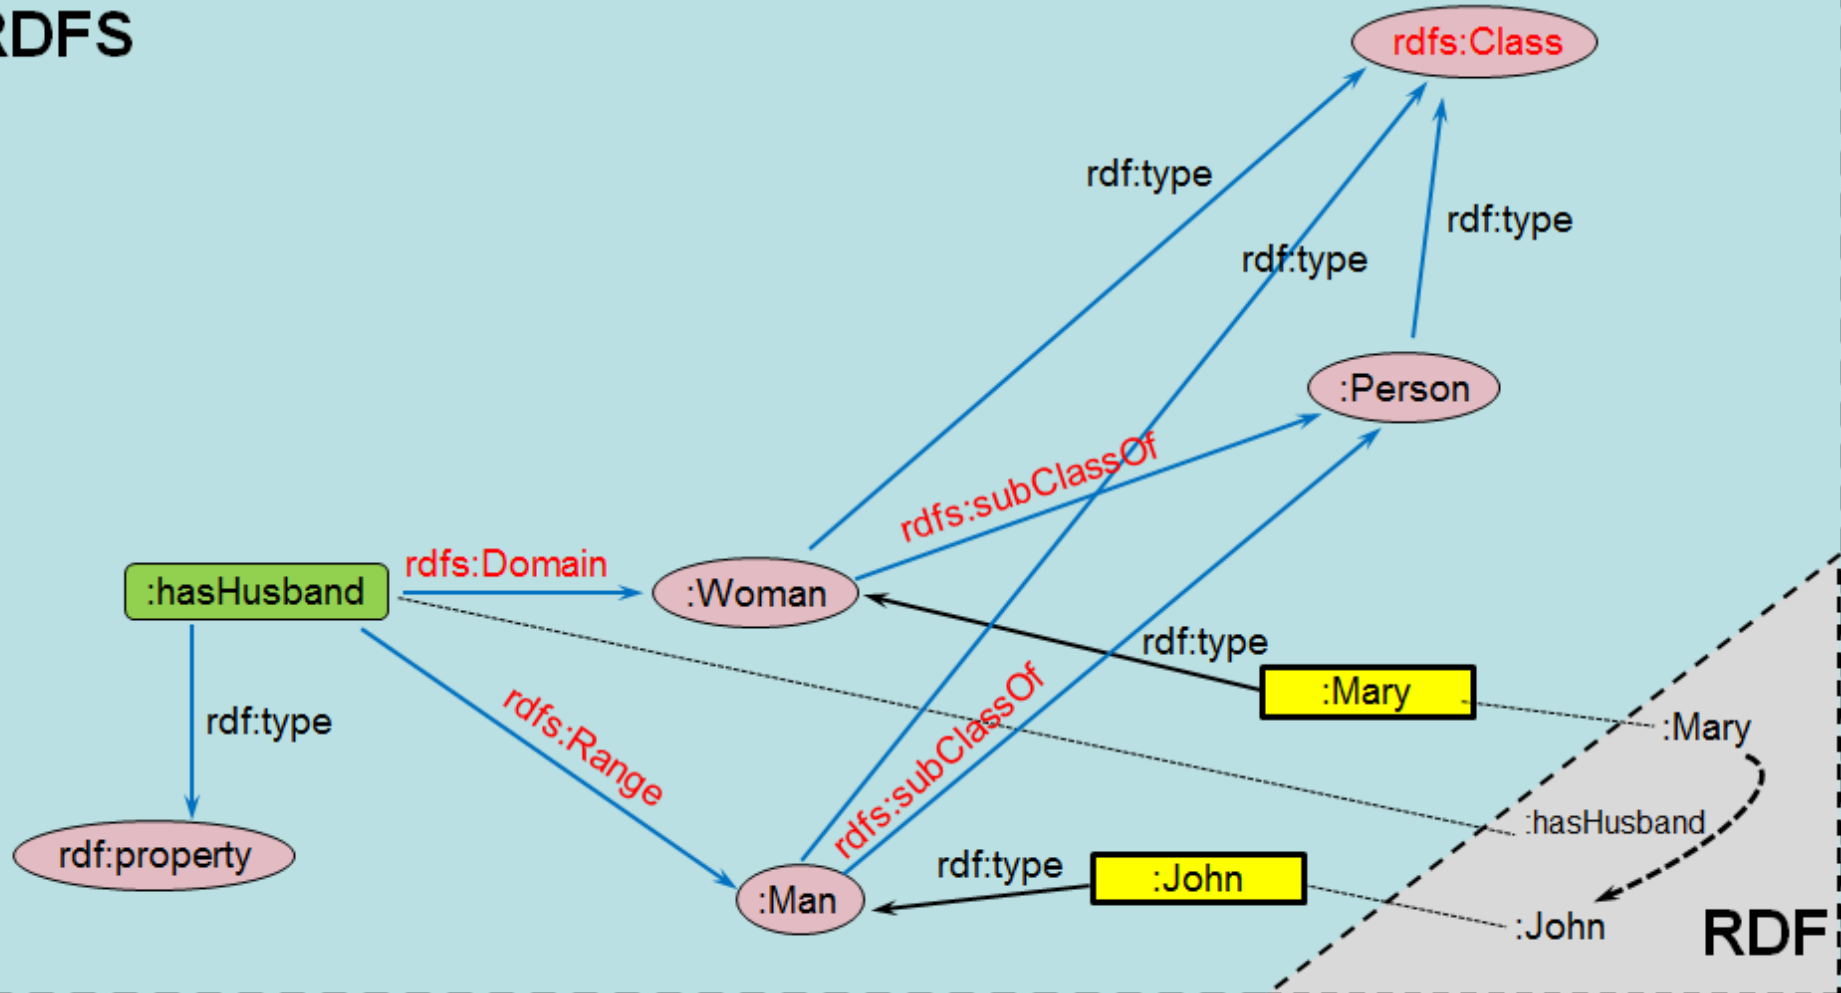

# RDFS example

We can also introduce new (more general one) property `:hasSpooth`, which domain and range both belong to class `:Person`


## RDFS

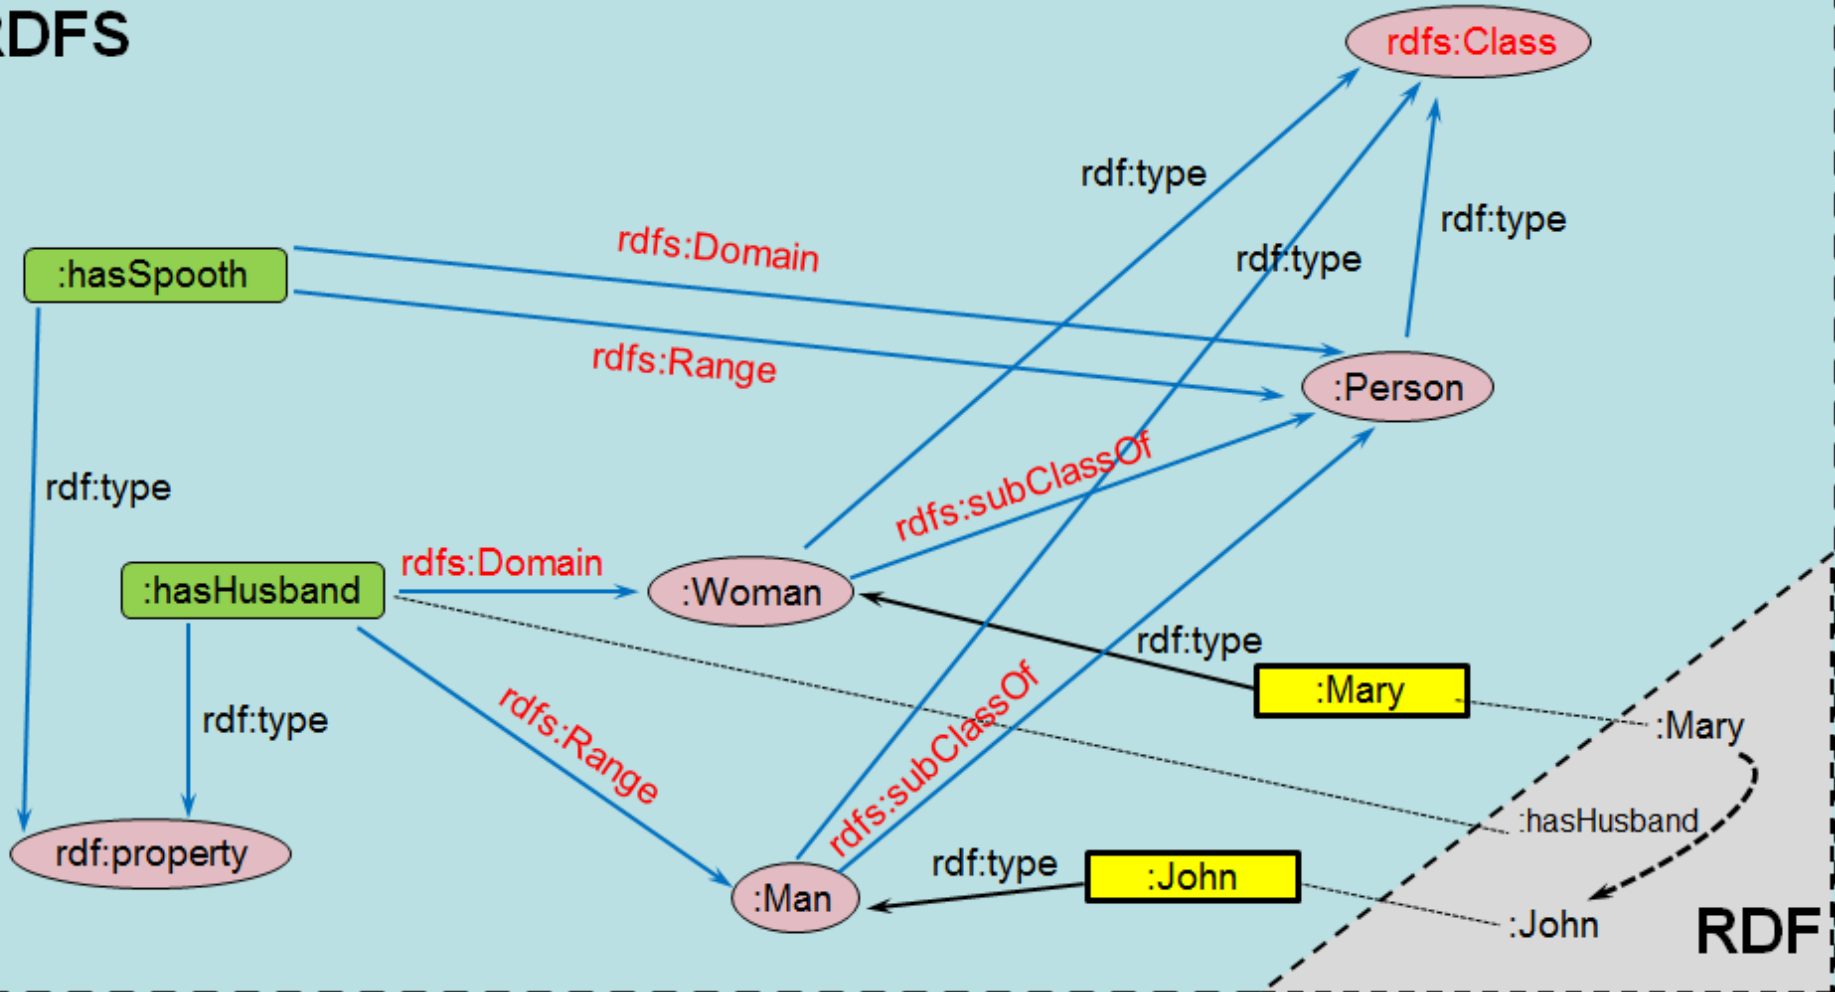

# RDFS example


... and we can specify that the `:hasHusband` property is a subproperty of the `:hasSpooth` property

## RDFS

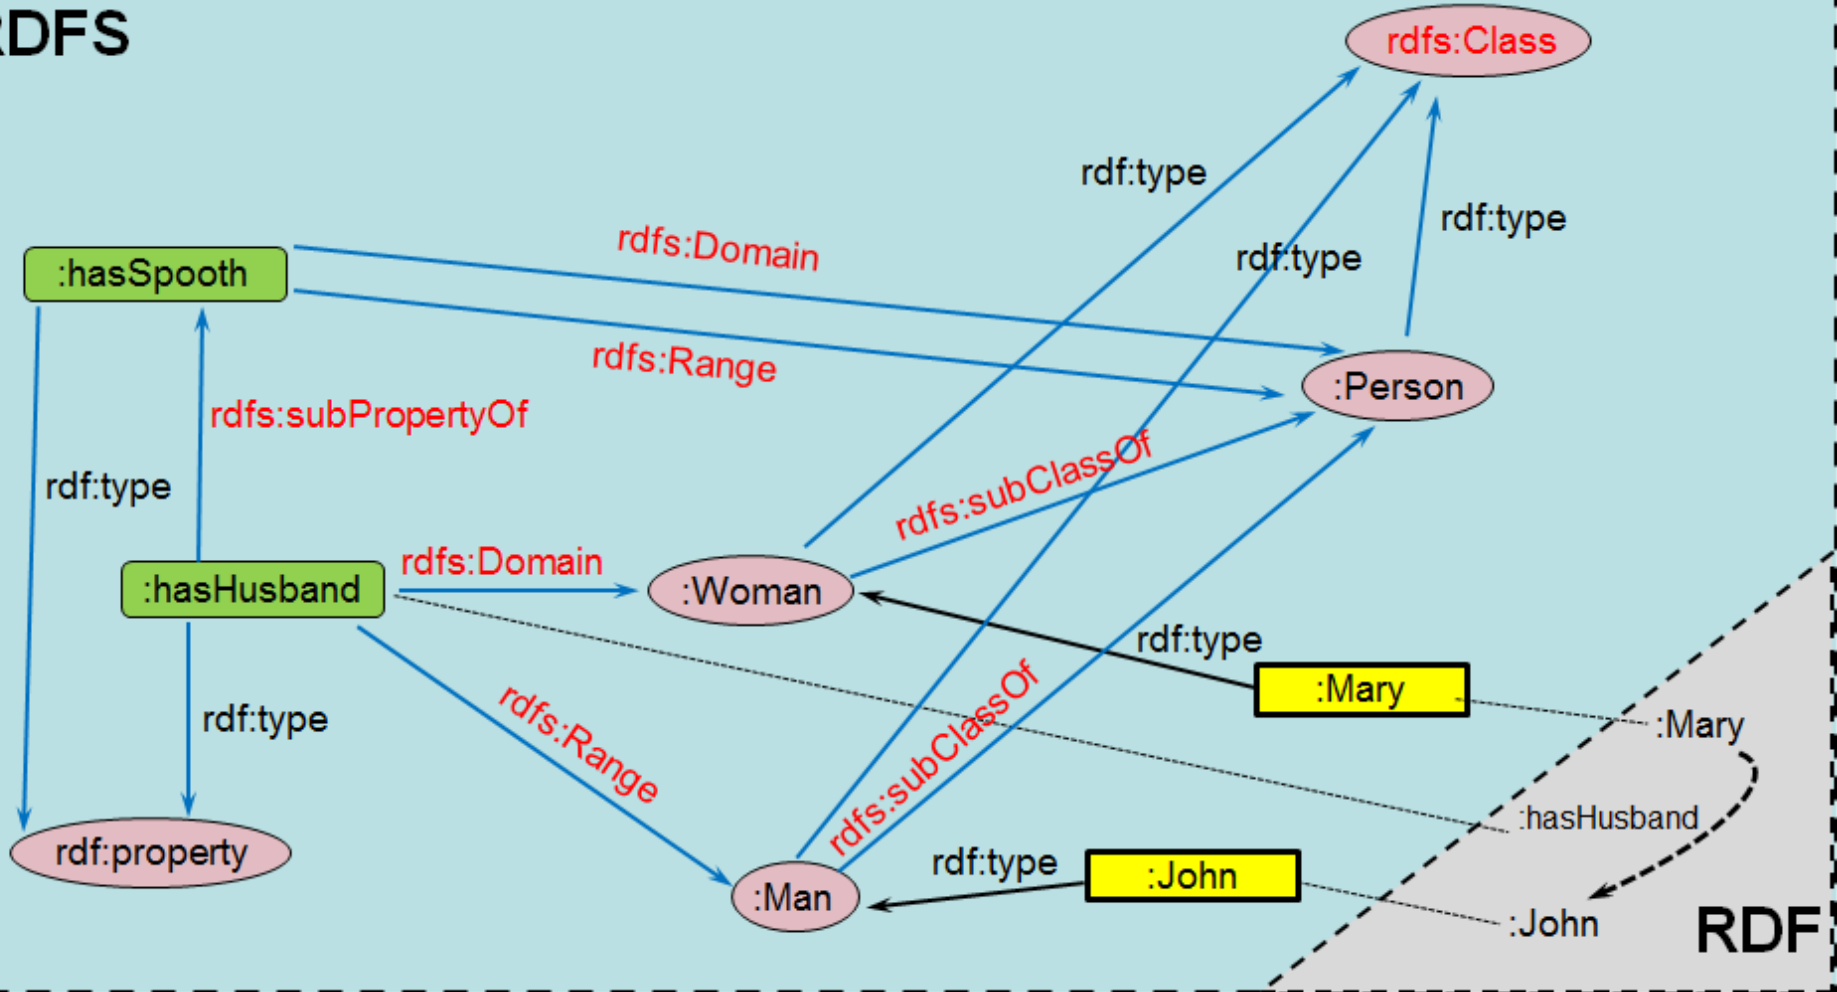

# RDFS example

All the RDF and RDFS statements can be easily written within one “story” using RDF (N3) notation:

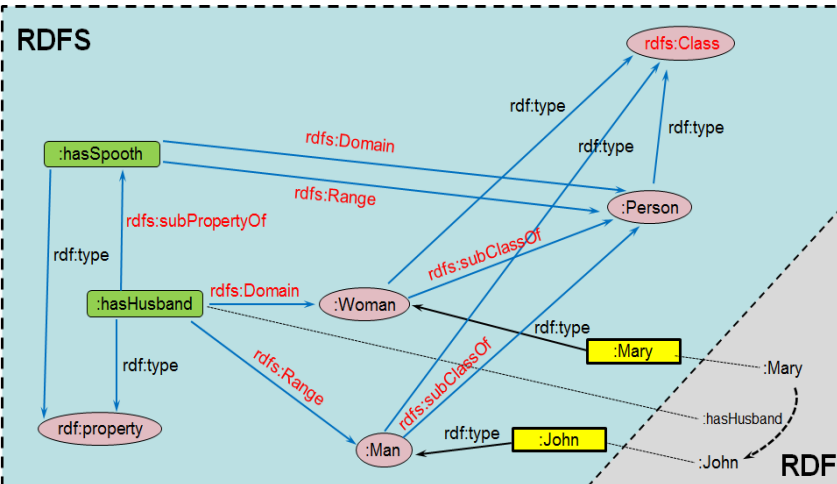


```
@prefix rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
@prefix rdfs: <http://www.w3.org/2000/01/rdf-schema#> .
@prefix      : <http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#> .
```

```
:Person a rdfs:Class .
:Woman a rdfs:Class .
:Man a rdfs:Class .
:Woman rdfs:subClassOf :Person .
:Man rdfs:subClassOf :Person .
:hasHusband a rdf:Property
```


```
:hasSpooth a rdf:Property .
:hasHusband rdfs:subPropertyOf :hasSpooth .
:hasSpooth rdfs:domain :Person .
:hasSpooth rdfs:range :Person .
:hasHusband rdfs:domain :Woman .
:hasHusband rdfs:range :Man .
:John a :Man .
:Mary a :Woman .
:Mary :hasHusband :John .
```

# RDFS example (translate to RDF/XML)

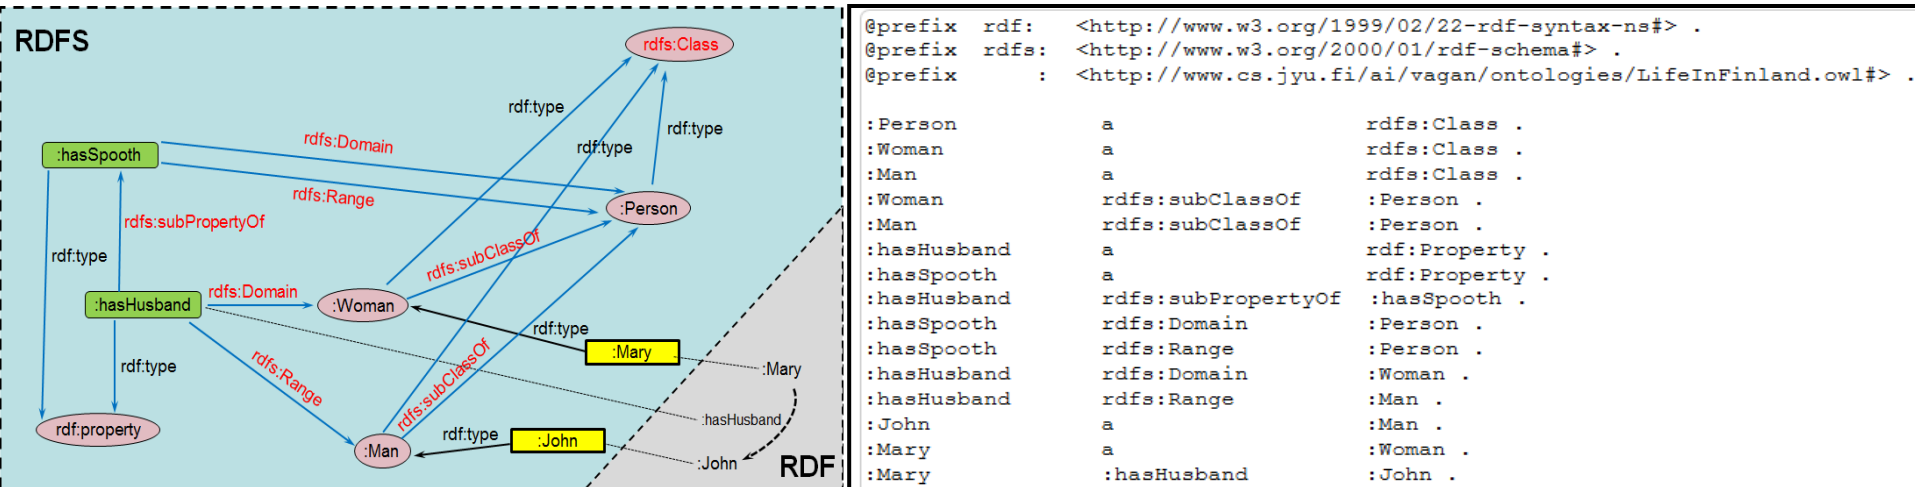

```

<?xml version="1.0" encoding="UTF-8"?>
<rdf:RDF
  xmlns="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#"
  xmlns:rdf="http://www.w3.org/1999/02/22-rdf-syntax-ns#"
  xmlns:rdfs="http://www.w3.org/2000/01/rdf-schema#"
>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Mary">
    <rdf:type rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Woman"/>
    <hasHusband rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#John"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#John">
    <rdf:type rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Man"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Woman">
    <rdf:type rdf:resource="http://www.w3.org/2000/01/rdf-schema#Class"/>
    <rdfs:subClassOf rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person">
    <rdf:type rdf:resource="http://www.w3.org/2000/01/rdf-schema#Class"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Man">
    <rdf:type rdf:resource="http://www.w3.org/2000/01/rdf-schema#Class"/>
    <rdfs:subClassOf rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasSpooth">
    <rdf:type rdf:resource="http://www.w3.org/1999/02/22-rdf-syntax-ns#Property"/>
    <rdfs:Range rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person"/>
    <rdfs:Domain rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasHusband">
    <rdfs:Domain rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Woman"/>
    <rdfs:subPropertyOf rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasSpooth"/>
    <rdfs:Range rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Man"/>
    <rdf:type rdf:resource="http://www.w3.org/1999/02/22-rdf-syntax-ns#Property"/>
  </rdf:Description>
</rdf:RDF>
  
```



Submit


Input  Output

<http://rdf-translator.appspot.com/>

... and the more complicated RDF/XML representation can be obtained automatically from RDF (N3) by using the RDF translation tool



# ... and validate RDF/XML

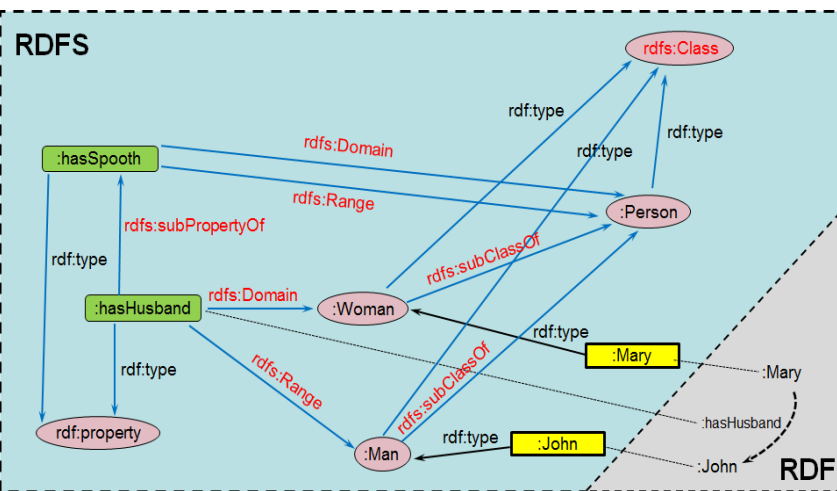

```
<?xml version="1.0" encoding="UTF-8"?>
<rdf:RDF
  xmlns="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#"
  xmlns:rdf="http://www.w3.org/1999/02/22-rdf-syntax-ns#"
  xmlns:rdfs="http://www.w3.org/2000/01/rdf-schema#"
>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Mary">
    <rdf:type rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Woman"/>
    <hasHusband rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#John"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#John">
    <rdf:type rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Man"/>
  </rdf:Description>
  <rdf:Description>
    <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Woman">
      <rdf:type rdf:resource="http://www.w3.org/2000/01/rdf-schema#Class"/>
      <rdfs:subClassOf rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person"/>
    </rdf:Description>
    <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person">
      <rdf:type rdf:resource="http://www.w3.org/2000/01/rdf-schema#Class"/>
    </rdf:Description>
    <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Man">
      <rdf:type rdf:resource="http://www.w3.org/2000/01/rdf-schema#Class"/>
    </rdf:Description>
    <rdfs:subClassOf rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasSpooth">
    <rdf:type rdf:resource="http://www.w3.org/1999/02/22-rdf-syntax-ns#Property"/>
    <rdfs:Range rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person"/>
    <rdfs:Domain rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasHusband">
    <rdfs:Domain rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Woman"/>
    <rdfs:subPropertyOf rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasSpooth"/>
    <rdfs:Range rdf:resource="http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Man"/>
    <rdf:type rdf:resource="http://www.w3.org/1999/02/22-rdf-syntax-ns#Property"/>
  </rdf:Description>
</rdf:RDF>
```

<http://www.w3.org/RDF/Validator/>

**W3C RDF Validation Service**

Home Documentation Feedback

## Validation Results

Your RDF document validated successfully.


## Triples of the Data Model

Number	Subject	Predicate	Object
1	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Mary	http://www.w3.org/1999/02/22-rdf-syntax-ns#type	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Woman
2	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Mary	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasHusband	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#John
3	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#John	http://www.w3.org/1999/02/22-rdf-syntax-ns#type	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Man
4	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Woman	http://www.w3.org/1999/02/22-rdf-syntax-ns#type	http://www.w3.org/2000/01/rdf-schema#Class
5	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Woman	http://www.w3.org/2000/01/rdf-schema#subClassOf	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person
6	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person	http://www.w3.org/1999/02/22-rdf-syntax-ns#type	http://www.w3.org/2000/01/rdf-schema#Class
7	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Man	http://www.w3.org/1999/02/22-rdf-syntax-ns#type	http://www.w3.org/2000/01/rdf-schema#Class
8	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Man	http://www.w3.org/2000/01/rdf-schema#subClassOf	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person
9	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasSpooth	http://www.w3.org/1999/02/22-rdf-syntax-ns#type	http://www.w3.org/1999/02/22-rdf-syntax-ns#Property
10	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasSpooth	http://www.w3.org/2000/01/rdf-schema#Range	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person
11	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasSpooth	http://www.w3.org/2000/01/rdf-schema#Domain	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Person
12	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasHusband	http://www.w3.org/2000/01/rdf-schema#Domain	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Woman
13	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasHusband	http://www.w3.org/1999/02/22-rdf-syntax-ns#subPropertyOf	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasSpooth
14	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasHusband	http://www.w3.org/2000/01/rdf-schema#Range	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#Man
15	http://www.cs.jyu.fi/ai/vagan/ontologies/LifeInFinland.owl#hasHusband	http://www.w3.org/1999/02/22-rdf-syntax-ns#type	http://www.w3.org/1999/02/22-rdf-syntax-ns#Property



# RDFS example (continue)

Adding some “cosmetics” from OWL  
(Web Ontology Language):

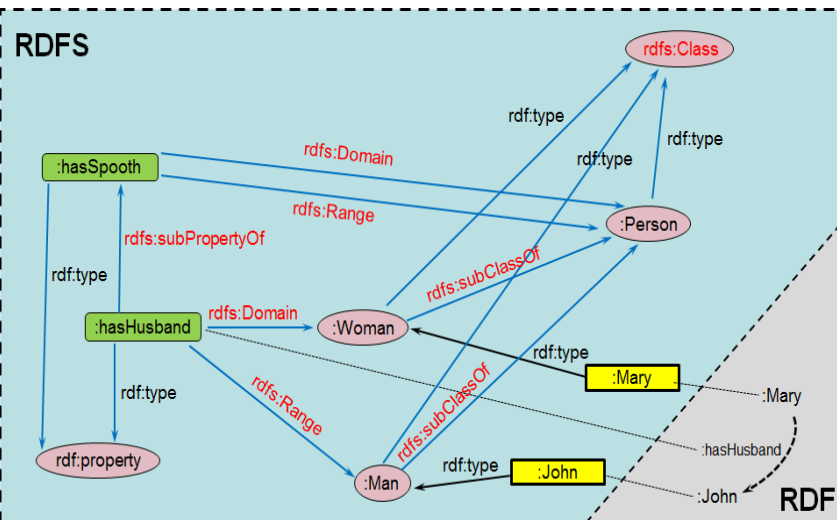

@base

<<http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl>> .

@prefix rdf: <<http://www.w3.org/1999/02/22-rdf-syntax-ns#>> .

@prefix rdfs: <<http://www.w3.org/2000/01/rdf-schema#>> .

@prefix owl: <<http://www.w3.org/2002/07/owl#>> .

@prefix :

<<http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#>> .

:Person a rdfs:Class .

:Woman a rdfs:Class .

:Man a rdfs:Class .

:Woman rdfs:subClassOf :Person .

:Man rdfs:subClassOf :Person .

:hasSpooth a

owl:ObjectProperty .

:hasHusband a

# ... then we got translation to RDF/XML

<http://rdf-translator.appspot.com/>

URI	Input Field
@base	<http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl> .
@prefix rdf:	<http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
@prefix rdfs:	<http://www.w3.org/2000/01/rdf-schema#> .
@prefix owl:	<http://www.w3.org/2002/07/owl#> .
@prefix	: <http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#> .
:Person	a rdfs:Class .
:Woman	a rdfs:Class .
:Man	a rdfs:Class .
:Woman	rdfs:subClassOf :Person .
:Man	rdfs:subClassOf :Person .
:hasSpooth	a owl:ObjectProperty .
:hasHusband	a owl:ObjectProperty .
:hasHusband	rdfs:subPropertyOf :hasSpooth .
:hasSpooth	rdfs:domain :Person .
:hasSpooth	rdfs:range :Person .
:hasHusband	rdfs:domain :Woman .
:hasHusband	rdfs:range :Man .
:John	a :Man .
:Mary	a :Woman .
:Mary	:hasHusband :John .



```
<?xml version="1.0" encoding="UTF-8"?>
<rdf:RDF
  xmlns="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#"
  xmlns:rdf="http://www.w3.org/1999/02/22-rdf-syntax-ns#"
  xmlns:rdfs="http://www.w3.org/2000/01/rdf-schema#"
>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#John">
    <rdf:type rdf:resource="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Man"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#hasHusband">
    <rdf:type rdf:resource="http://www.w3.org/2002/07/owl#ObjectProperty"/>
    <rdfs:domain rdf:resource="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Woman"/>
    <rdfs:subPropertyOf rdf:resource="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#hasSpooth"/>
    <rdfs:range rdf:resource="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Man"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Mary">
    <rdf:type rdf:resource="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Woman"/>
    <hasHusband rdf:resource="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#John"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#hasSpooth">
    <rdf:type rdf:resource="http://www.w3.org/2002/07/owl#ObjectProperty"/>
    <rdfs:domain rdf:resource="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Person"/>
    <rdfs:range rdf:resource="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Person"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Man">
    <rdf:type rdf:resource="http://www.w3.org/2000/01/rdf-schema#Class"/>
    <rdfs:subClassOf rdf:resource="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Person"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Woman">
    <rdfs:subClassOf rdf:resource="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Person"/>
    <rdf:type rdf:resource="http://www.w3.org/2000/01/rdf-schema#Class"/>
  </rdf:Description>
  <rdf:Description rdf:about="http://www.cs.jyu.fi/ai/vagan/LifeInFinland.owl#Person">
    <rdf:type rdf:resource="http://www.w3.org/2000/01/rdf-schema#Class"/>
  </rdf:Description>
</rdf:RDF>
```

# Subclasses

- In order to express that every textbook is a book, e.g., that every instance of the class `ex:Textbook` is “automatically” an instance of the class `ex:Book`

Use `rdfs:subClassOf` property: `ex:Textbook`  
`rdfs:subClassOf ex:Book` .

- `rdfs:subClassOf` is defined to be transitive and reflexive
- rule of thumb:
  - `rdf:type` means  $\in$  is an instance of
  - `rdfs:subClassOf` means  $\subseteq$  is a subclass of

# Example of Class Hierarchies

- Classes can be organised in hierarchies.
  - A is a **subclass** of B if every instance of A is also an instance of B.
  - Then B is a **superclass** of A.
- A subclass graph need not be a tree.
- A class may have multiple superclasses .




# RDF Schema in RDF

- To declare that “**lecturer**” is a subclass of “**academic staff member**”.
  - Define classes **lecturer**, **academicStaffMember**
  - Use key element **subClassOf**
  - Write triple  
(**lecturer**,**subClassOf**,**academicStaffMember**)

# Inheritance in Class Hierarchies

- **Courses must be taught by academic staff members only.**
  - Michael Maher is a **professor**.
  - He **inherits** the ability to teach from the class of **academic staff** members.
- This is done in RDF Schema by fixing the semantics of “**is a subclass of**”.

# RDF Layer vs RDF Schema Layer

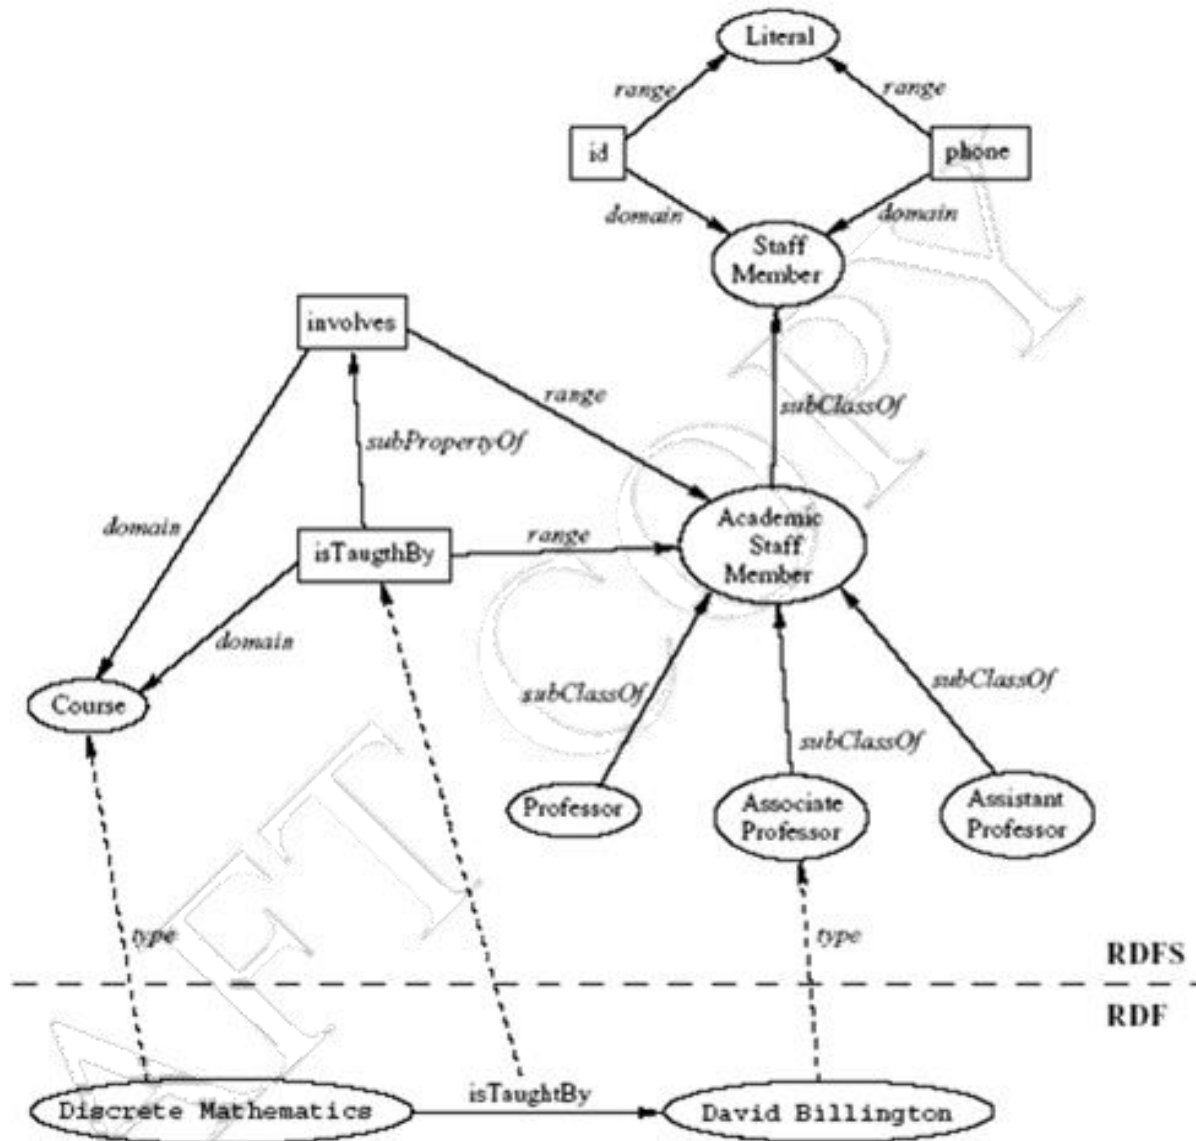



# Property Core elements

- **rdfs:range**
  - rdfs:range is an instance of **rdf:Property** that is used to state that the values of a property are instances of one or more classes.
- **rdfs:domain**
  - **rdfs:domain** is an instance of **rdf:Property** that is used to state that any resource that has a given property is an instance of one or more classes.
- More detailed syntax definitions are available at:
  - <http://www.w3.org/TR/rdf-schema/>
- You need to be familiar with them but don't need to remember all of them.

# Example

```
<rdf:Class rdf:ID="staffMember">  
</rdf:Class>
```

```
<rdf:Class rdf:ID="lecturer">  
  <rdf:subClassOf rdf:resource="#staffMember"/>  
</rdf:Class>
```

```
<rdf:Description rdf:ID="DavidBillingtonURI">  
  <rdf:type rdf:resource="#lecturer"/>  
  <uni:name>David Billington</uni:name>  
</rdf:Description>
```

```
<rdf:Property rdf:ID="hasPhoneNumber">  
  <rdf:domain rdf:resource="#staffMember"/>  
  <rdf:range rdf:resource="http://www.w3.org/  
    2000/01/rdf-schema#Literal"/>  
</rdf:Property>
```

# Property Hierarchies

- The **`rdfs:subPropertyOf`** property may be used to state that one property is a subproperty of another.
- Hierarchical relationships for properties
  - E.g., “is taught by” is a **subproperty** of “involves”.
  - If a course C involves an academic staff member A, then C also is taught by A.
- The converse is not necessarily true
  - E.g., A may be the teacher of the course C, or
  - A tutor who marks student homework but does not teach C.

# Utility Properties

- **rdfs:seeAlso** relates a resource to another resource that explains it.
- **rdfs:isDefinedBy** is a subproperty of **rdfs:seeAlso** and relates a resource to the place where its definition, typically an RDF schema, is found.
- **rdfs:comment**. Comments, typically longer text, can be associated with a resource.
- **rdfs:label**. A human-friendly label (name) is associated with a resource.

# Example: A University

```
<rdfs:Class rdf:ID="lecturer">  
  <rdfs:comment>  
    The class of lecturers. All lecturers are  
    academic staff members.  
  </rdfs:comment>  
  <rdfs:subClassOf  
    rdf:resource="#academicStaffMember"/>  
</rdfs:Class>
```

# Example: A University (2)

```
<rdfs:Class rdf:ID="course">  
  <rdfs:comment>The class of courses</rdfs:comment>  
</rdfs:Class>  
  
<rdf:Property rdf:ID="isTaughtBy">  
  <rdfs:comment>  
    Inherits its domain ("course") and range ("lecturer")  
    from its superproperty "involves"  
  </rdfs:comment>  
  <rdfs:subPropertyOf rdf:resource="#involves"/>  
</rdf:Property>
```

# Example: A University (3)

```
<rdf:Property rdf:ID="phone">  
  <rdfs:comment>  
    It is a property of staff members  
    and takes literals as values.  
  </rdfs:comment>  
  <rdfs:domain rdf:resource="#staffMember"/>  
  <rdfs:range rdf:resource="http://www.w3.org/2000/01/rdf-  
    schema#Literal"/>  
</rdf:Property>
```

# Nonsensical Statements disallowed through the Use of Classes

- “Discrete Maths is **taught by** Concrete Maths”
  - We want courses to be taught by lecturers only
  - Restriction on values of the property “is taught by” (**range restriction**)
- “Room MZH5760 is **taught by** David Billington”
  - Only courses can be taught
  - This imposes a restriction on the objects to which the property can be applied (**domain restriction**)



# Limitations of RDFS

- **Local scope of properties**
  - **rdfs:range** defines the range of a property (e.g. eats) for **all classes**
  - In RDF Schema we cannot declare range restrictions that apply to some classes only
  - E.g. we cannot say that cows eat only plants, while other animals may eat meat, too
  - E.g. we cannot say:
    - Animals eat things
    - Herbivores are animals that eat only plants

# Limitations of RDFS

- **Disjointness of classes**

- Sometimes we wish to say that classes are disjoint (e.g. male and female).

- **Boolean combinations of classes**

- Sometimes we wish to build new classes by combining other classes using union, intersection, and complement.
- E.g. person is the union of the classes male and female.

# Limitations of RDFS

- **Cardinality restrictions**

- E.g. a person has exactly two parents, a course is taught by at least one lecturer.

- **Special characteristics of properties**

- Transitive property (like “greater than”).
- A property is the inverse of another property (like “eats” and “is eaten by”).

# Summary

- RDF provides a foundation for representing and processing metadata
- RDF has a graph-based data model
- RDF has an XML-based syntax to support syntactic interoperability
  - XML and RDF complement each other because RDF supports semantic interoperability
- RDF has a decentralized philosophy and allows incremental building of knowledge, and its sharing and reuse

# Summary (2)

- RDF is domain-independent
  - RDF Schema provides a mechanism for describing specific domains
- RDF Schema is a primitive ontology language
  - It offers certain modelling primitives with fixed meaning
- Key concepts of RDF Schema are class, subclass relations, property, subproperty relations, and domain and range restrictions
- There exist query languages for RDF and RDFS, including SPARQL

# Further Reading

- I encourage you to look at the complete specification of RDF and RDFS.
  - RDF primer: <http://www.w3.org/TR/rdf-syntax/>
  - RDFS introduction <http://www.w3.org/TR/rdf-schema/>
- W3C formal definitions
  - <http://www.w3.org/RDF/>
  - <http://www.w3.org/TR/rdf-schema/>