Project Report

Distributed Control Systems

Table of Contents

Table of Contents **2**
1. Specifications **3**
a. Assigned Map 3
b. Simplified map 4
2. Design **5**
a. OETPN Model 5
i. Intersection 1 (roundabout) 5
ii. Intersection 2 6
3. Implementation **8**
4. Testing **9**

1. Specifications

a. Assigned Map

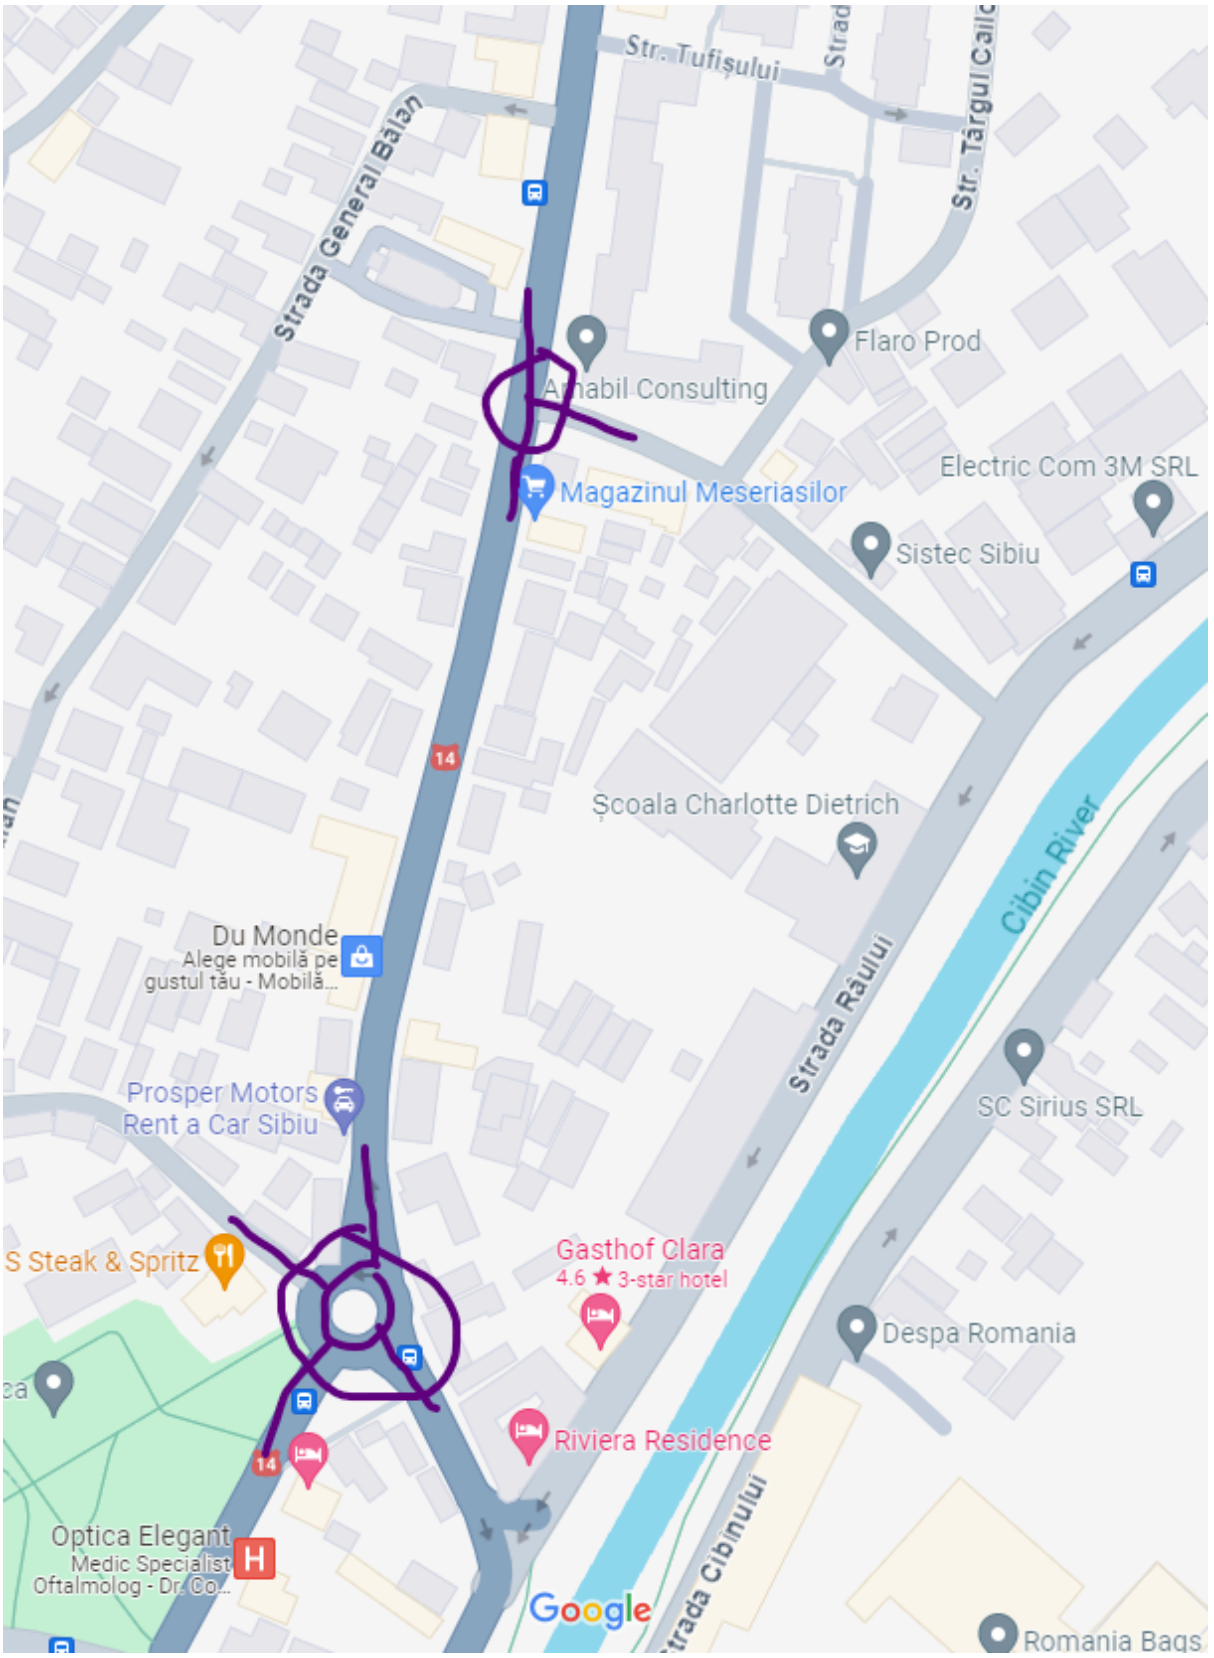

b. Simplified map

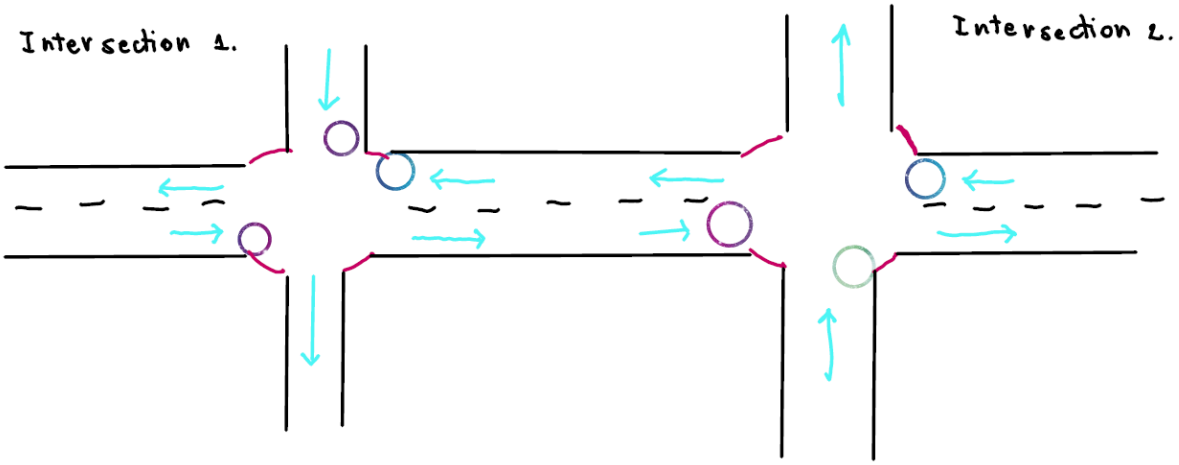

2. Design

a. OETPN Model

i. Intersection 1 (roundabout)

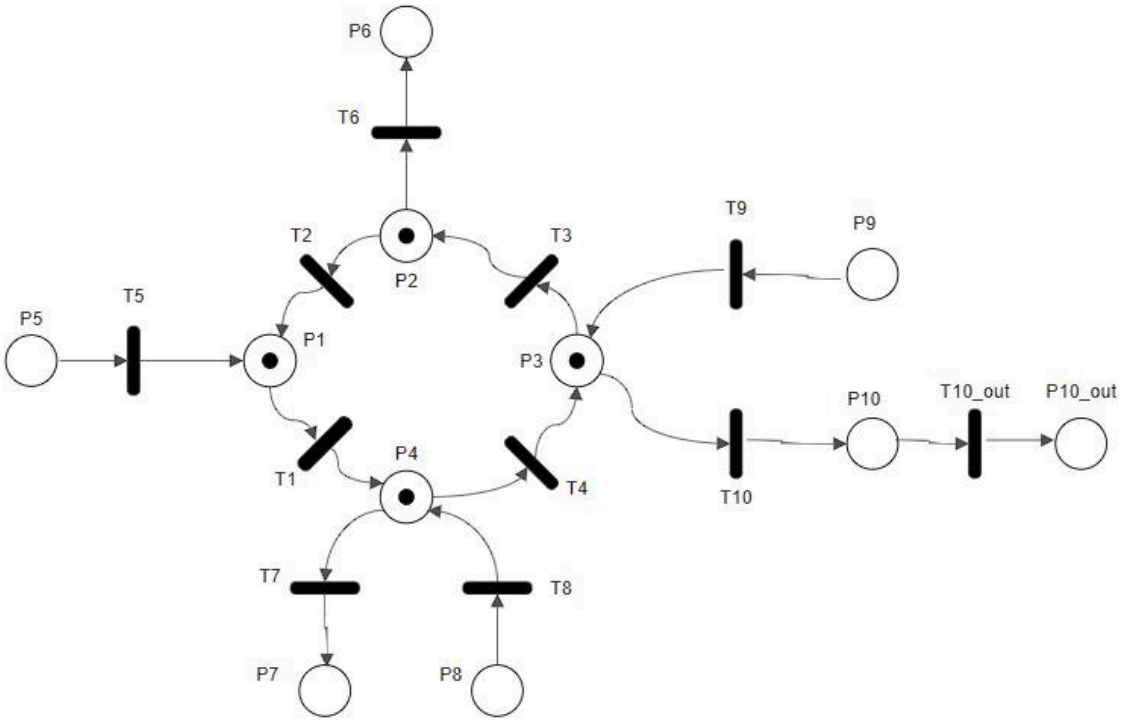

Place Types	
P1, P2, P3, P4	DataCarQueue
P5, P6, P7, P8, P9, P10	DataCar
P10_out	DataTransfer

Guards and Maps	
T5 (same for T8, T9)	(P5 != null && P1.CanAddCars)
	P1.AddElement(P5)
T1 (same for T2, T3, T4)	(p1.HaveCarForMe && P4.CanAddCars)
	P1.PopElementWIthTargetToQueue(P4)
T6 (same for T7, T10)	(P2.HaveCarForMe && P6.CanAddCars)
	P2.PopElementWithTarget(P6)
T10_out	P10 != null
	P10_out.SendOverNetwork(P10)

ii. Intersection 2

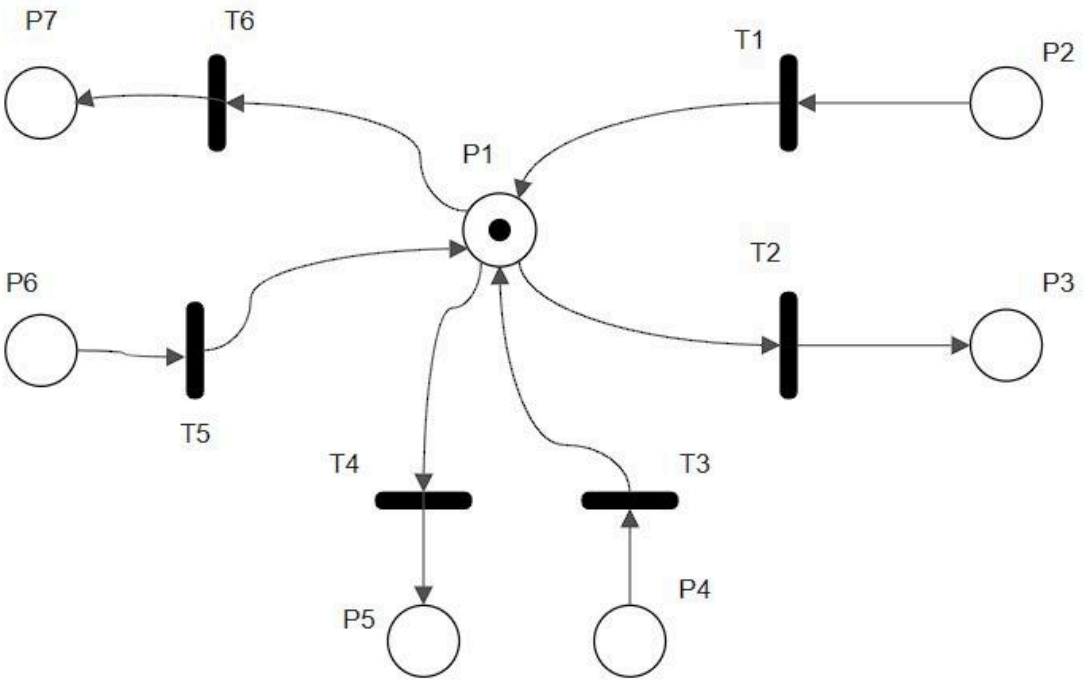

Place Types	
P1	DataCarQueue
P2, P3, P4, P5, P6	DataCar

Guards and Maps	
T1 (same for T3, T5)	`(P2 != null && P1.CanAddCars)`
	`P2.PopElementWithTargetToQueue(P1)`
T2 (same for T4, T6)	`(p1.HaveCarForMe && P3.CanAddCars)`
	`P3.AddElement(P1)`

3. Implementation

View code on GitHub

4. Testing

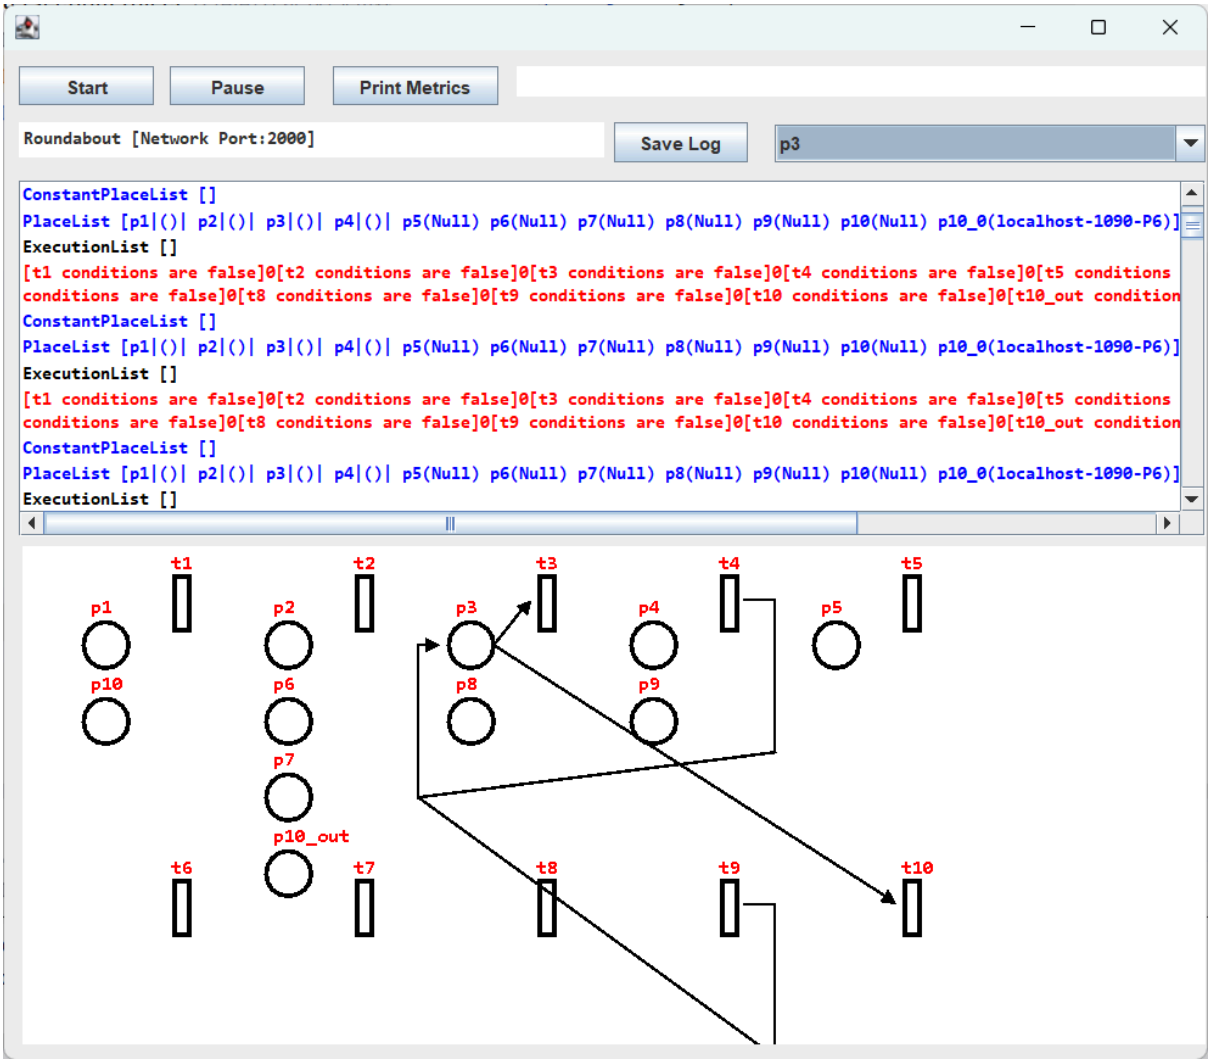
Start
Pause
Print Metrics
Roundabout [Network Port:2000]
Save Log
p3
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out condition
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out condition
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
t1
t2
t3
t4
t5
p1
p2
p3
p4
p5
p10
p6
p8
p9
p7
p10_out
t6
t7
t8
t9
t10

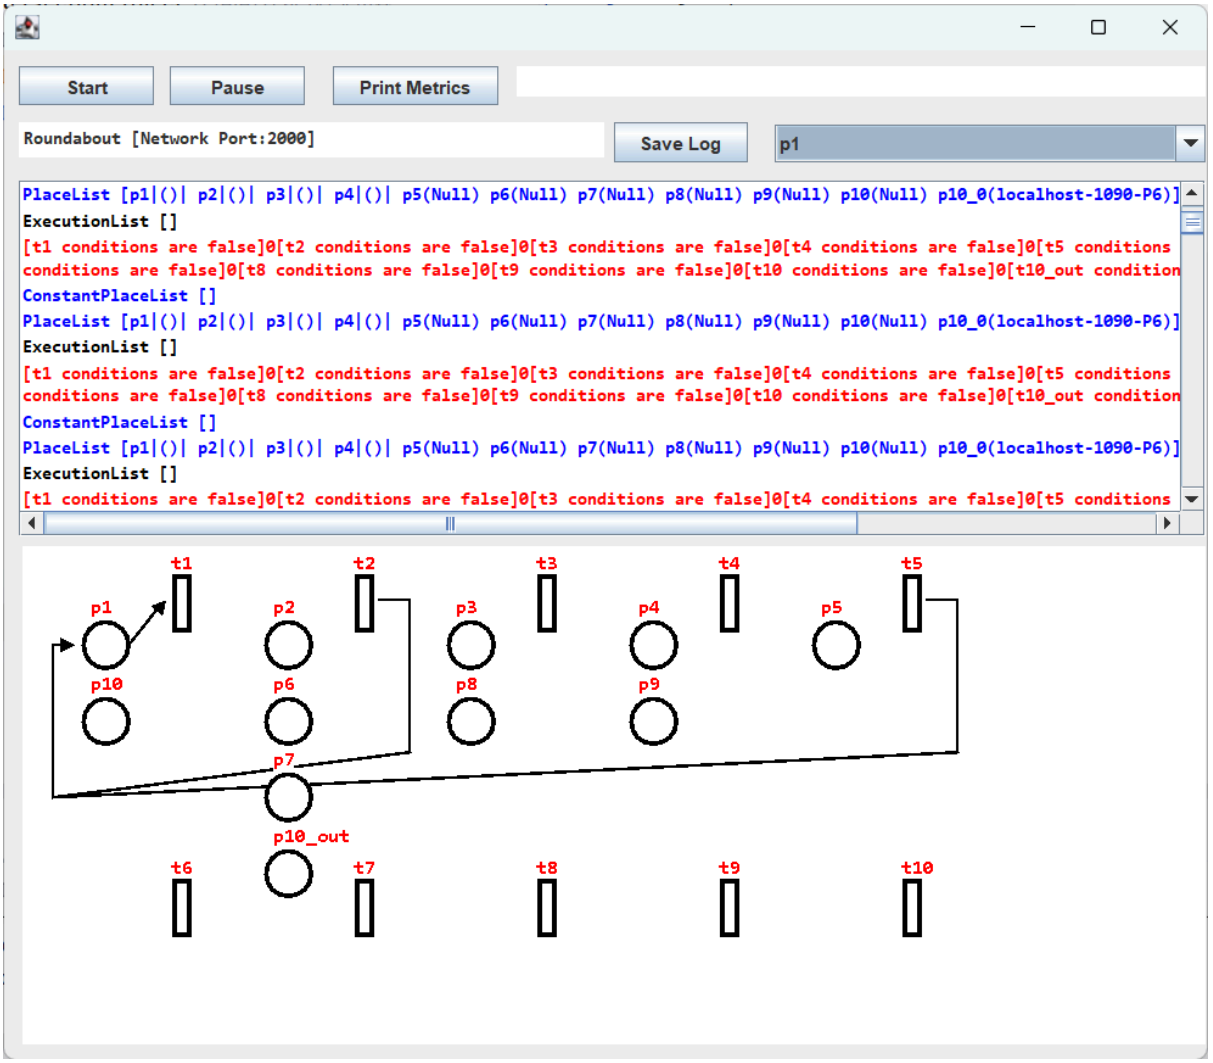
Start
Pause
Print Metrics
Roundabout [Network Port:2000]
Save Log
p1
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out condition
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out condition
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
t1
t2
t3
t4
t5
p1
p2
p3
p4
p5
p10
p6
p8
p9
p7
p10_out
t6
t7
t8
t9
t10

Start Pause Print Metrics

Roundabout [Network Port:2000] Save Log t7

```
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out condition
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out condition
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
```

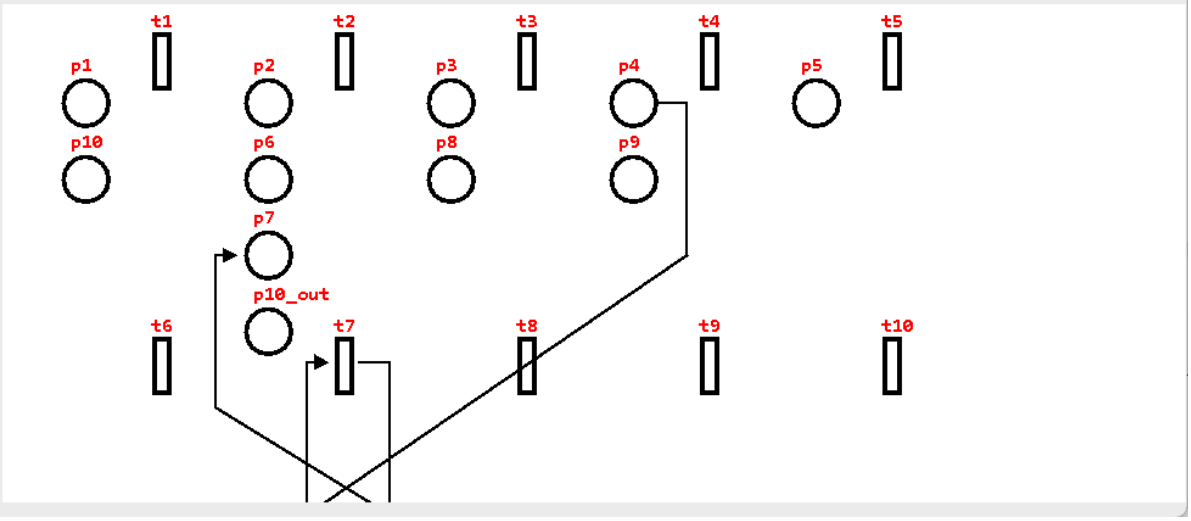

Start Pause Print Metrics

Roundabout [Network Port:2000] Save Log t10_out

```
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions are false]0[t6 conditions are false]0[t7
conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out conditions are false]0
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions are false]0[t6 conditions are false]0[t7
conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out conditions are false]0
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions are false]0[t6 conditions are false]0[t7
conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out conditions are false]0
```

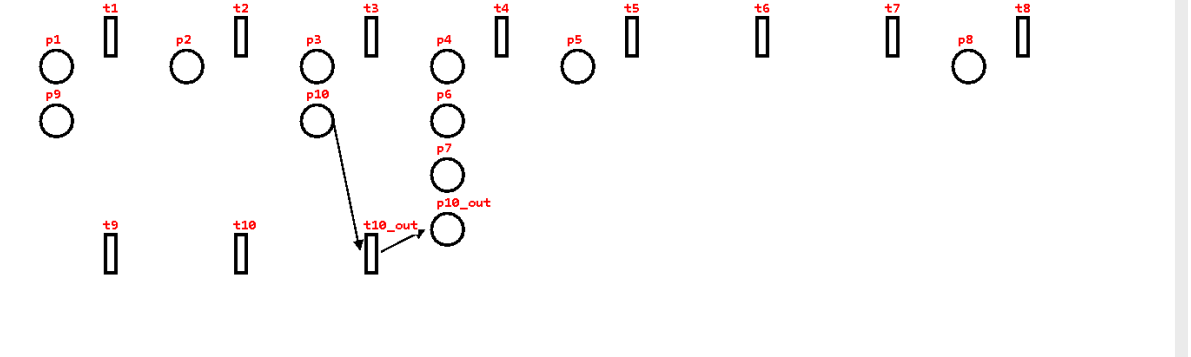

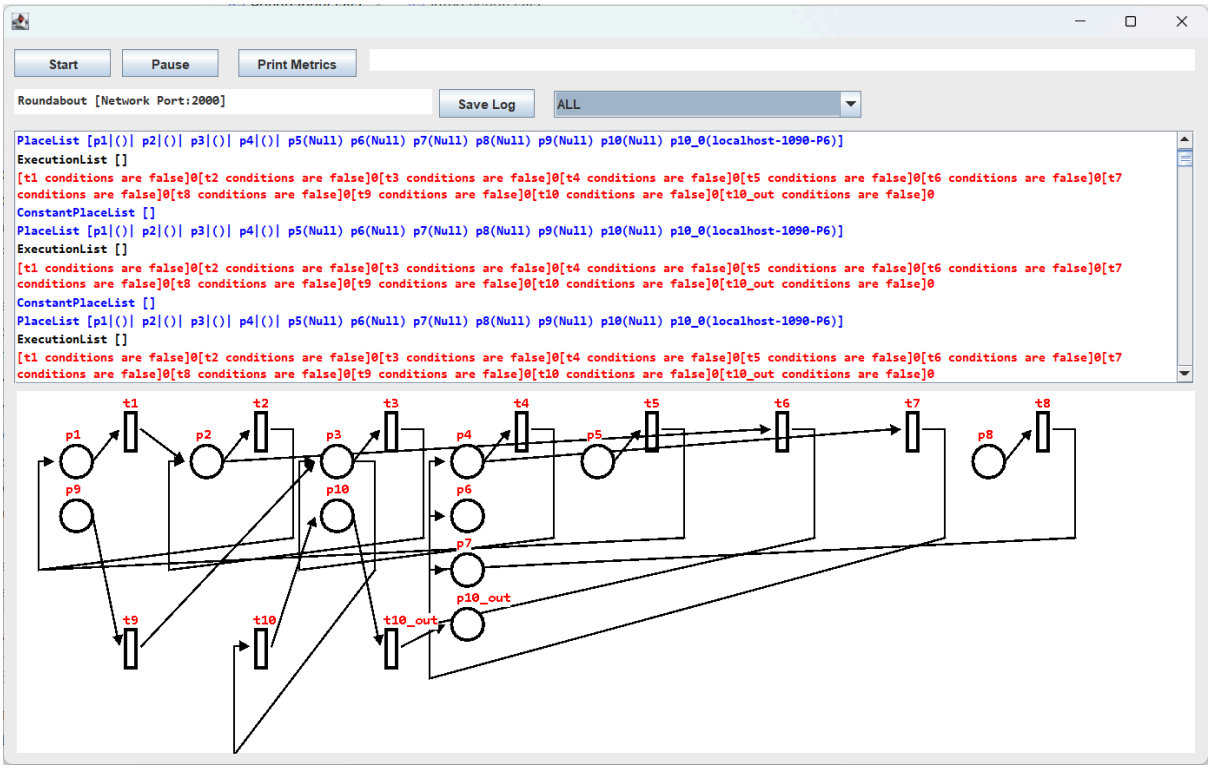
Start
Pause
Print Metrics
Roundabout [Network Port:2000]
Save Log
ALL
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions are false]0[t6 conditions are false]0[t7 conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out conditions are false]0
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions are false]0[t6 conditions are false]0[t7 conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out conditions are false]0
ConstantPlaceList []
PlaceList [p1|()| p2|()| p3|()| p4|()| p5(Null) p6(Null) p7(Null) p8(Null) p9(Null) p10(Null) p10_0(localhost-1090-P6)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions are false]0[t6 conditions are false]0[t7 conditions are false]0[t8 conditions are false]0[t9 conditions are false]0[t10 conditions are false]0[t10_out conditions are false]0
t1
t2
t3
t4
t5
t6
t7
t8
p1
p2
p3
p4
p5
p8
p9
p10
p6
p7
p10_out
t9
t10
t10_out

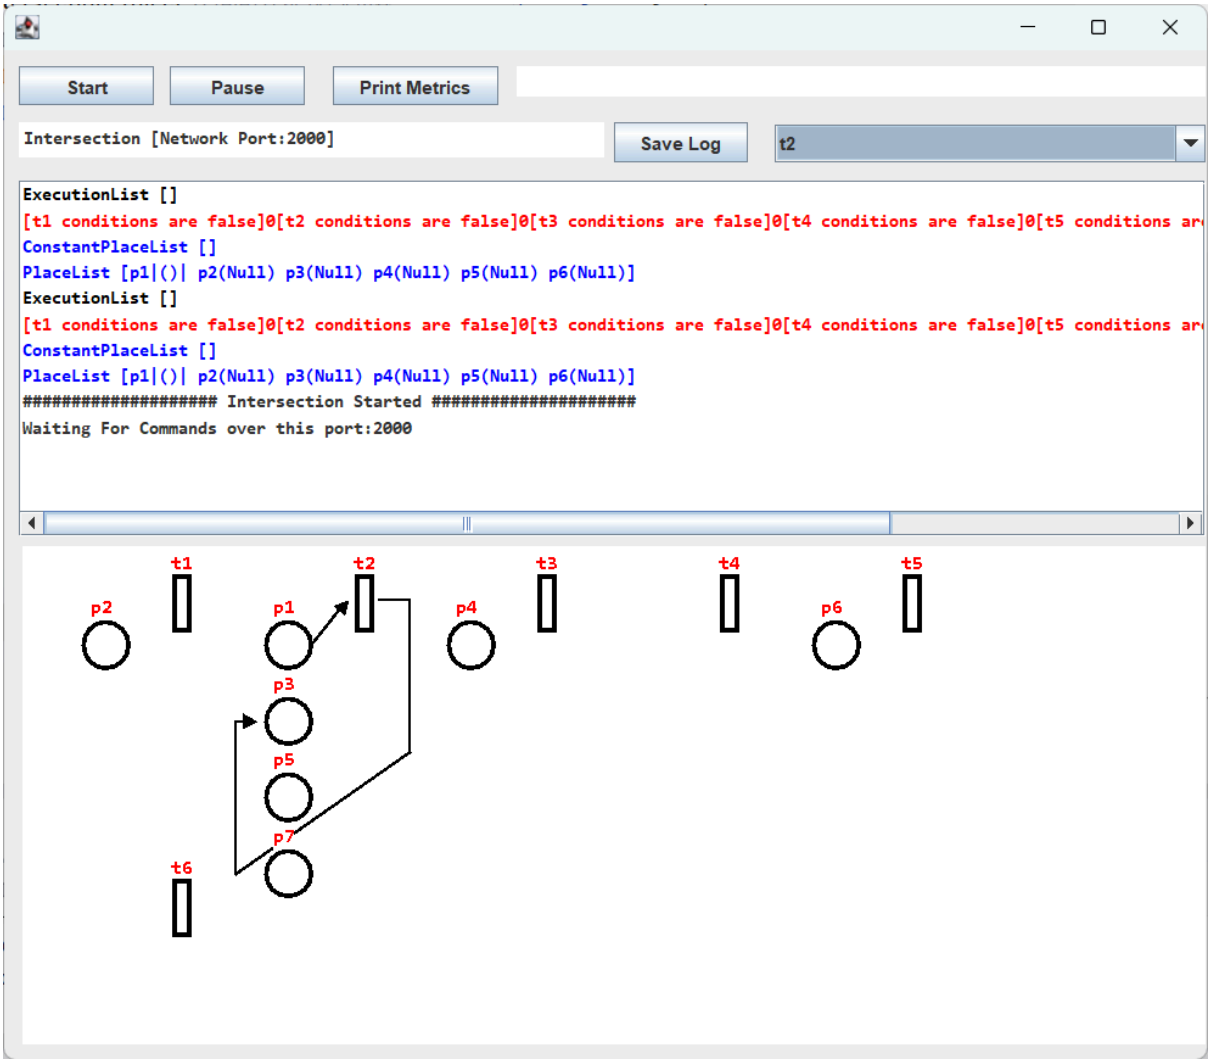
Start
Pause
Print Metrics
Intersection [Network Port:2000]
Save Log
t2
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions ar
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions ar
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
##################### Intersection Started ####################
Waiting For Commands over this port:2000
t1
t2
t3
t4
t5
p2
p1
p4
p6
p3
p5
p7
t6

Start Pause Print Metrics

Intersection [Network Port:2000] Save Log t6

```
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
ExecutionList []
```

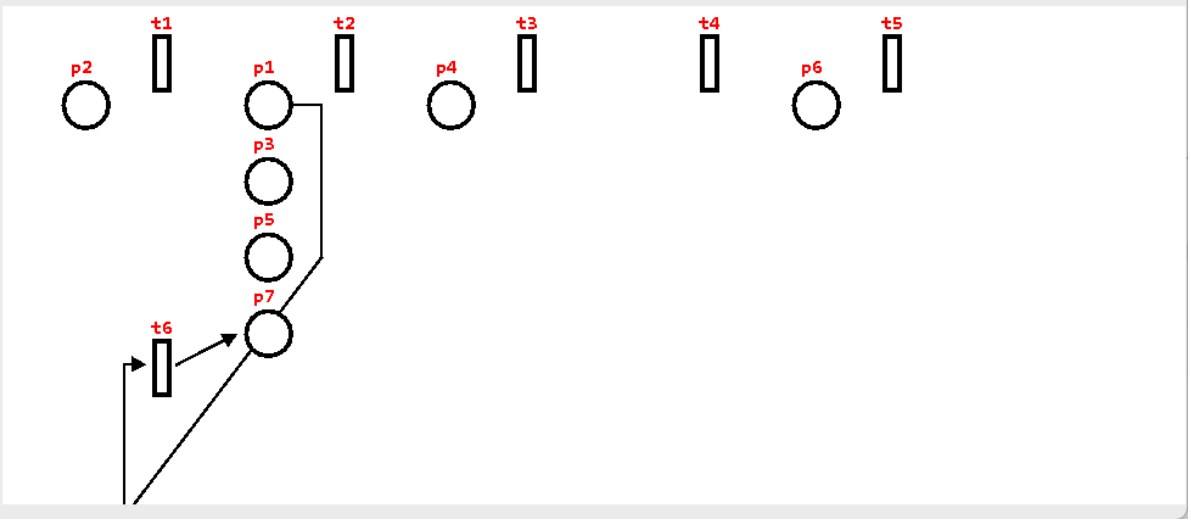

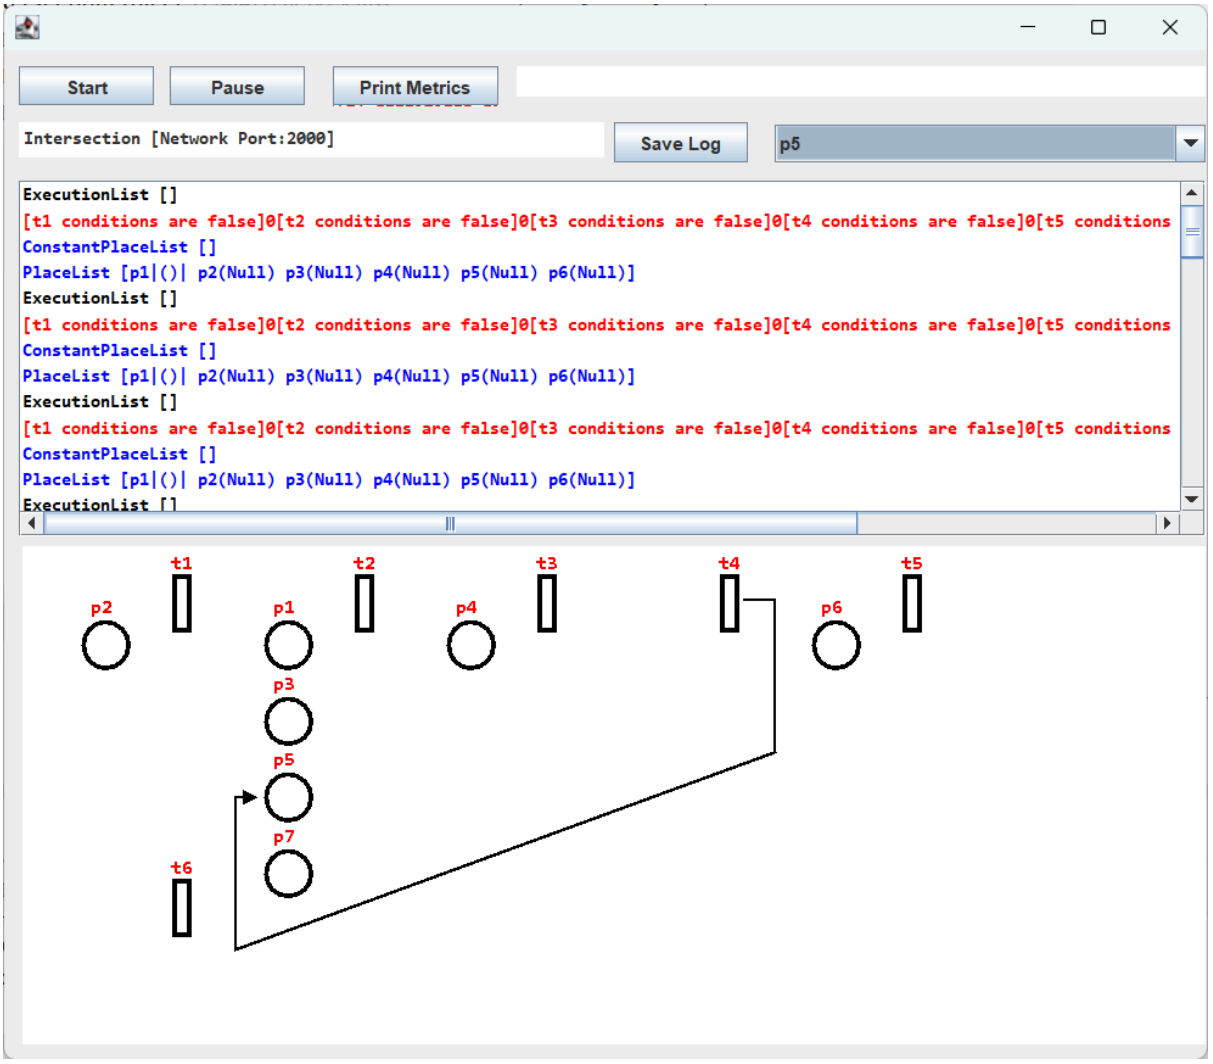
Start
Pause
Print Metrics
Intersection [Network Port:2000]
Save Log
p5
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
ExecutionList []
t1
t2
t3
t4
t5
p2
p1
p4
p6
p3
p5
p7
t6

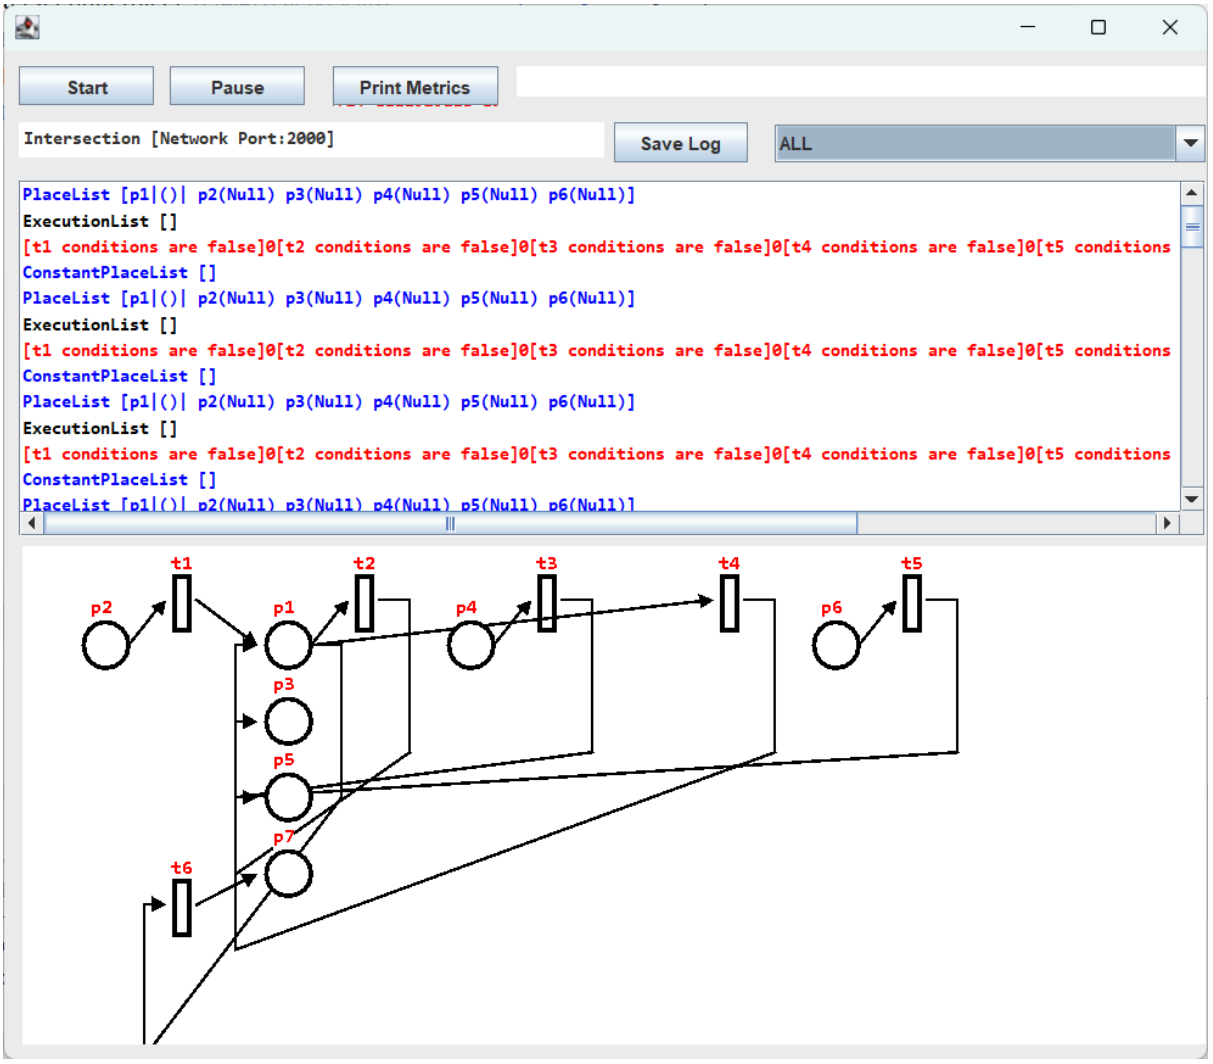
Start
Pause
Print Metrics
Intersection [Network Port:2000]
Save Log
ALL
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
ExecutionList []
[t1 conditions are false]0[t2 conditions are false]0[t3 conditions are false]0[t4 conditions are false]0[t5 conditions
ConstantPlaceList []
PlaceList [p1|()| p2(Null) p3(Null) p4(Null) p5(Null) p6(Null)]
t1
t2
t3
t4
t5
p2
p1
p4
p6
p3
p5
p7
t6