

Project Context: snort-rag-rule-generator-main

Project root: /mnt/d/Games/snort-rag-rule-generator-main

This PDF is structured for LLM ingestion: file paths are explicit and text blocks are wrapped in code fences.

1. Project Tree

```
snort-rag-rule-generator-main/
├── snort-rag-rule-generator-main/
│   ├── data/
│   ├── docs/
│   │   ├── dataset_methodology.md
│   │   ├── dataset_validation_report.md
│   │   ├── rapport_snort_rag_devoir3.docx
│   │   ├── rapport_snort_rag_devoir3.pdf
│   │   ├── report_section_dataset_kb.md
│   │   └── rule_validation_notes.md
│   ├── notebooks/
│   │   └── devoir3_snort_rag_architectures.ipynb
│   ├── results/
│   │   ├── comparison_metrics.csv
│   │   ├── detailed_devoir3_results.csv
│   │   └── embedding_tsne.png
│   ├── scripts/
│   │   ├── fetch_real_sources.py
│   │   └── validate_dataset.py
│   └── src/
│       ├── snort_rag/
│       │   ├── __init__.py
│       │   ├── app_gradio.py
│       │   ├── architectures.py
│       │   ├── evaluation.py
│       │   ├── generate_dataset.py
│       │   ├── generator.py
│       │   ├── knowledge_base.py
│       │   ├── retrieval.py
│       │   ├── rule_parser.py
│       │   ├── run_devoir3.py
│       │   ├── source_manifest.py
│       │   └── templates.py
│       ├── tests/
│       │   ├── test_generate_dataset.py
│       │   └── test_rule_parser.py
│       ├── .gitignore
│       ├── most_important_file.pdf
│       ├── pyproject.toml
│       ├── README.md
│       ├── requirements.txt
│       └── snort_rag_rule_generator.pdf
```

2. Source And Text Files

snort-rag-rule-generator-main/.gitignore

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/.gitignore

```
FILE: snort-rag-rule-generator-main/.gitignore
```text
__pycache__/
*.pyc
*.pcap
*.cap
*.log
.env
venv/
.venv/
build/
dist/
*.sqlite3
```
```

snort-rag-rule-generator-main/pyproject.toml

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/pyproject.toml

```
FILE: snort-rag-rule-generator-main/pyproject.toml
```toml
[build-system]
requires = ["setuptools>=61"]
build-backend = "setuptools.build_meta"

[project]
name = "snort-rag-rule-generator"
version = "1.0.0"
description = "Defensive NLP/RAG Snort rule generator for Devoir 3"
requires-python = ">=3.10"
dependencies = ["pandas", "numpy", "scikit-learn", "matplotlib", "gradio", "pypdf"]

[tool.setuptools.packages.find]
where = ["src"]
```
```

snort-rag-rule-generator-main/README.md

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/README.md

```
FILE: snort-rag-rule-generator-main/README.md
```markdown
Snort RAG Rule Generator - NLP Mini Project + Devoir 3

Defensive NLP/RAG project for generating valid Snort IDS rules from natural-language network-attack descriptions.

What this project contains

- An official Person 1 retrieval dataset stored in `data/processed/final_snort_dataset.csv`.
- A trusted-source knowledge base of real Snort rules stored in `data/knowledge_base/`.
- A legacy script to expand trusted rules into experiment rows: `python -m snort_rag.generate_dataset --multiplier 20`.
- Seven Devoir 3 architectures:
 - baseline without RAG
 - classic RAG
 - RAG with re-ranking
 - hybrid RAG (TF-IDF dense fallback + BM25 fusion)
 - multi-hop RAG
 - graph RAG
 - agentic RAG
- Metrics and comparison table in `results/comparison_metrics.csv`.
- t-SNE embedding visualization in `results/embedding_tsne.png`.
- Gradio dashboard with PDF upload to extend the knowledge base.
- Technical report in `docs/`.

Important academic constraint

The assignment forbids direct black-box LLM use and forbids OpenAI/Mistral/Ollama API usage for Devoir 3. Therefore this project is implemented using only open-source models.

Installation

```bash
python -m venv .venv
```
```

```
source .venv/bin/activate # Windows: .venv\Scripts\activate
pip install -r requirements.txt
pip install -e .
```

```

Build the real-rule knowledge base

```
```bash
python scripts/fetch_real_sources.py
```
```

Outputs:

```
- `data/knowledge_base/trusted_rule_kb.csv`
- `data/knowledge_base/trusted_rule_kb.jsonl`
- `data/knowledge_base/fetch_summary.json`
```

Official Person 1 dataset

The official dataset used by the application, Devoir 3 runner, and retrieval layer is:

```
- `data/processed/final_snort_dataset.csv`
- `data/processed/final_snort_dataset.jsonl`
- `data/processed/dataset_summary.json`
- `data/processed/person1_rules.rules`
```

This dataset is personal, controlled, manually reviewable, and is the main dataset for Person 1 and the default retrieval context.

Submission status:

```
- The official Person 1 dataset is `data/processed/final_snort_dataset.csv`.
- The final dataset is personal, controlled, balanced across 10 attack types, and contains 200 rows.
- The legacy trusted-rule expansion generator remains in the repository only as experimental code.
- The old 500k-row generated files are not included in the final submitted project.
```

Legacy dataset generator

The legacy generator requires the trusted real-rule knowledge base and creates multiple natural-language rows per real rule for older experiments only.

```
```bash
python -m snort_rag.generate_dataset --multiplier 10
bigger dataset
python -m snort_rag.generate_dataset --multiplier 30
```
```

Legacy outputs if you run the experiment manually:

```
- `data/experiments/legacy_generated/snort_generated_dataset.csv`
- `data/experiments/legacy_generated/snort_generated_dataset.json`
- `data/experiments/legacy_generated/snort_generated_dataset.jsonl`
- `data/experiments/legacy_generated/snort_generated_dataset_summary.json`
```

These files are legacy experimental artifacts only. The legacy generator no longer writes into `data/processed/` and must not be used for new experiments.

Run Devoir 3 comparison

```
```bash
python -m snort_rag.run_devoir3
```
```

Outputs:

```
- `results/comparison_metrics.csv`
- `results/detailed_devoir3_results.csv`
- `results/embedding_tsne.png`
```

Launch dashboard

```
```bash
python -m snort_rag.app_gradio
```
```

The dashboard lets you choose a RAG architecture, generate a Snort rule, inspect retrieved documents and add a PDF as a new document.

Project structure

```
```text
src/snort_rag/ package source code
data/knowledge_base/ persisted trusted-source real Snort rules
data/raw/ source manifest
data/processed/ official Person 1 dataset
data/experiments/legacy_generated/ legacy trusted-rule expansion outputs only
notebooks/ Devoir 3 notebook
results/ metrics and t-SNE plot
docs/ report files
scripts/fetch_real_sources.py trusted-source rule ingestion
```
```

```

...

## Example

```python
from snort_rag.architectures import SnortRAGArchitectures
rag = SnortRAGArchitectures("data/processed/final_snort_dataset.csv")
result = rag.agentic_rag("Detect SQL injection with UNION SELECT in HTTP URI")
print(result["generated_rule"])
print(result["explanation"])
```

## Disclaimer

This is a defensive IDS rule generation project for education. Every generated rule must still be validated in a real Snort
...

```

snort-rag-rule-generator-main/requirements.txt

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/requirements.txt

```

FILE: snort-rag-rule-generator-main/requirements.txt
```text
pandas>=2.0
numpy>=1.23
scikit-learn>=1.2
matplotlib>=3.7
gradio>=4.0
pypdf>=4.0
python-docx>=1.1
nbformat>=5.9
Optional, if you want true embedding/FAISS instead of the built-in offline fallback:
sentence-transformers>=2.6
faiss-cpu>=1.8
...

```

## snort-rag-rule-generator-main/docs/dataset\_methodology.md

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/docs/dataset\_methodology.md

```

FILE: snort-rag-rule-generator-main/docs/dataset_methodology.md
```markdown
# Méthodologie du dataset

## Pourquoi le dataset est personnel
Le dataset officiel de Person 1 a été construit à la main pour ce projet. Les descriptions, logs simulés, contextes de faux

## Création des exemples manuels
Les lignes `manual` correspondent aux exemples de base les plus importants pour chaque type d'attaque. Chaque exemple conti

## Création des variations `synthetic_manual_variation`
Les variations `synthetic_manual_variation` ont été écrites à partir des exemples manuels, sans copier un dataset public. C

## Labels utilisés
Les labels métier utilisés sont `port_scan`, `ssh_bruteforce`, `sql_injection`, `xss`, `command_injection`, `directory_trav

## Simulation des logs
Les logs ont été simulés dans plusieurs formats réalistes: Apache access log, Nginx access log, SSH auth log, firewall log,

## Règles Snort-like
Les règles de `snort_rule_reference` sont des règles Snort-like éducatives, écrites pour rester simples et lisibles. Elles

## Séparation avec la base de connaissance de règles fiables
Les règles Snort de confiance stockées dans `data/knowledge_base/` restent une base de connaissance de référence séparée. E

## Utilité pour la récupération RAG
Le dataset est utile pour la récupération parce qu'il relie des descriptions naturelles variées, des logs simulés, des fami

## Limites
Le dataset reste petit et pédagogique. Les logs sont simulés, pas collectés depuis une infrastructure réelle. Les règles Sn
...

```

snort-rag-rule-generator-main/docs/dataset_validation_report.md

Type: text | Source:

/mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/docs/dataset_validation_report.md

```
FILE: snort-rag-rule-generator-main/docs/dataset_validation_report.md
```markdown
Rapport de validation du dataset

Schema validation
Le fichier `data/processed/final_snort_dataset.csv` contient exactement les 13 colonnes attendues, sans colonne supplémentaire.

Label validation
Les 200 lignes utilisent uniquement les labels autorisés:
- `port_scan`
- `ssh_bruteforce`
- `sql_injection`
- `xss`
- `command_injection`
- `directory_traversal`
- `dns_tunneling`
- `icmp_sweep`
- `malware_c2`
- `benign_traffic`

La répartition finale est de 20 lignes par `attack_type`.

Source_type validation
Les valeurs de `source_type` sont limitées à `manual` et `synthetic_manual_variation`. Le dataset contient 80 lignes manuelles.

Port/protocol validation
Les couples protocole/port ont été vérifiés par script:
- `ssh_bruteforce` reste sur `tcp` vers `22` ou `2222`
- `dns_tunneling` cible le port `53`
- `icmp_sweep` utilise `icmp` avec `dst_port = N/A`
- les attaques web utilisent `http`, `https` ou `tcp` sur `80`, `443` ou `8080`
- `benign_traffic` reste sur des protocoles et ports plausibles

Snort SID uniqueness validation
Chaque ligne malveillante contient une règle Snort-like avec `sid` et `rev`. Les SID sont uniques dans le CSV et dans `data`.

Benign traffic validation
Les lignes `benign_traffic` ont une sévérité `none` ou `low` et utilisent toutes `NO_RULE_RECOMMENDED`. Elles ne servent pas à l'entraînement.

Manual review checklist
- descriptions naturelles variées en français et en anglais
- formats de logs variés et cohérents avec le label
- contexte de faux positifs renseigné sur chaque ligne
- explication attendue non vide sur chaque ligne
- séparation respectée entre dataset personnel et base de connaissance Snort de confiance

Final validation result
Commande exécutée:

```bash
python3 scripts/validate_dataset.py
```

Résultat: `VALIDATION PASSED`

Formulation projet:

Dataset vérifié structurellement et cohérent pour RAG. Les règles Snort-like doivent encore être testées dans un environnement de production.
```
```

snort-rag-rule-generator-main/docs/report_section_dataset_kb.md

Type: text | Source:

/mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/docs/report_section_dataset_kb.md

```
FILE: snort-rag-rule-generator-main/docs/report_section_dataset_kb.md
```markdown
Construction du dataset et base de connaissance

Le dataset principal a été construit comme un corpus personnel, petit et contrôlé, afin de respecter la contrainte académique.

Les exemples `manual` servent de noyau de référence. Les lignes `synthetic_manual_variation` sont des variations rédigées localement.

Les logs ont été simulés dans plusieurs formats proches d'un SOC: Apache, Nginx, firewall, WAF, proxy, Zeek-like, SSH auth, etc.

La base de connaissance de règles Snort de confiance est gardée séparée du dataset personnel. Cette séparation évite de confondre les deux.
```
```

snort-rag-rule-generator-main/docs/rule_validation_notes.md

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/docs/rule_validation_notes.md

```
FILE: snort-rag-rule-generator-main/docs/rule_validation_notes.md
```markdown
Notes de validation des règles

Les règles de `data/processed/person1_rules.rules` sont des références Snort-like éducatives. Elles ont été écrites pour servir de référence.

Le script `scripts/validate_dataset.py` vérifie leur structure minimale:
- présence de `alert`
- présence de `msg`
- présence d'au moins une condition de détection
- présence de `classtype`
- présence de `sid`
- présence de `rev`
- unicité des SID

Commande Snort à utiliser si Snort est installé:

```bash
snort -c /usr/local/etc/snort/snort.lua -R data/processed/person1_rules.rules --warn-all --pedantic
```

Limitation actuelle: `snort` n'est pas installé dans cet environnement de travail, donc seule une validation structurelle est possible.
```
```

snort-rag-rule-generator-main/notebooks/devoir3_snort_rag_architectures.ipynb

Type: text | Source:

/mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/notebooks/devoir3_snort_rag_architectures.ipynb

```
FILE: snort-rag-rule-generator-main/notebooks/devoir3_snort_rag_architectures.ipynb
```json
{
 "cells": [
 {
 "cell_type": "markdown",
 "id": "aed38c4c",
 "metadata": {},
 "source": [
 "# Devoir 3 - Implémentation et comparaison des architectures RAG\n",
 "\n",
 "Sujet personnel: Génération de règles Snort à partir de descriptions en langage naturel.\n",
 "\n",
 "Ce notebook suit le TP: baseline sans RAG, RAG classique, re-ranking, hybride, multi-hop, graph RAG et agentic RAG. Le but est de générer des règles Snort à partir de descriptions en langage naturel."
]
 },
 {
 "cell_type": "code",
 "execution_count": null,
 "id": "022a8022",
 "metadata": {},
 "outputs": [],
 "source": [
 "import sys\n",
 "from pathlib import Path\n",
 "PROJECT_ROOT = Path.cwd().parent if Path.cwd().name == \"notebooks\" else Path.cwd()\n",
 "sys.path.insert(0, str(PROJECT_ROOT / \"src\"))\n",
 "PROJECT_ROOT"
]
 },
 {
 "cell_type": "markdown",
 "id": "7591f3bb",
 "metadata": {},
 "source": [
 "## 1. Préparation du dataset\n",
 "\n",
 "Le notebook ne régénère pas le dataset. Il charge uniquement le dataset officiel Person 1 dans `data/processed/final_snort_rules.rules`."
]
 },
 {
 "cell_type": "code",
 "execution_count": null,
 "id": "d918a0b0",
 "metadata": {},
 "outputs": [],
 "source": [

```

```

"import pandas as pd\n",
"df = pd.read_csv(PROJECT_ROOT / \"data\" / \"processed\" / \"final_snort_dataset.csv\")\n",
"df.head(3)"
],
{
"cell_type": "code",
"execution_count": null,
"id": "2f08e1fa",
"metadata": {},
"outputs": [],
"source": [
"df[\"attack_type\"].value_counts()"
]
},
{
"cell_type": "markdown",
"id": "ad7e6ac4",
"metadata": {},
"source": [
"## 2. Initialisation des architectures RAG"
]
},
{
"cell_type": "code",
"execution_count": null,
"id": "ba641cfb",
"metadata": {},
"outputs": [],
"source": [
"from snort_rag.architectures import SnortRAGArchitectures\n",
"rag = SnortRAGArchitectures(PROJECT_ROOT / \"data\" / \"processed\" / \"final_snort_dataset.csv\")"
]
},
{
"cell_type": "markdown",
"id": "ca8f2f05",
"metadata": {},
"source": [
"## 3. Test sur une requête Snort"
]
},
{
"cell_type": "code",
"execution_count": null,
"id": "b68be99c",
"metadata": {},
"outputs": [],
"source": [
"query = \"Detect SQL injection with UNION SELECT in HTTP URI\"\n",
"results = rag.run_all(query)\n",
"for name, res in results.items():\n",
" print(\"=\", name)\n",
" print(\"attack_type:\", res[\"attack_type\"])\n",
" print(\"rule:\", res[\"generated_rule\"])\n",
" print(\"retrieved:\", res[\"retrieved_ids\"][:3])\n",
" print()"
]
},
{
"cell_type": "markdown",
"id": "06adaa46",
"metadata": {},
"source": [
"## 4. Comparaison avec les métriques du Devoir 3\n",
"\n",
"Métriques utilisées: accuracy de classification du type d'attaque, precision/recall/F1 macro, validité syntaxique des
]
},
{
"cell_type": "code",
"execution_count": null,
"id": "6758277a",
"metadata": {},
"outputs": [],
"source": [
"from snort_rag.evaluation import evaluate_architectures, plot_tsne\n",
"summary = evaluate_architectures(rag, PROJECT_ROOT / \"results\")\n",
"summary"
]
},
{
"cell_type": "markdown",
"id": "49c47758",
"metadata": {},
"source": [
"## 5. Visualisation t-SNE des embeddings"
]
}

```

```

]
 },
 {
 "cell_type": "code",
 "execution_count": null,
 "id": "524bdd96",
 "metadata": {},
 "outputs": [],
 "source": [
 "plot_tsne(rag, PROJECT_ROOT / \"results\" / \"embedding_tsne.png\")\n",
 "from IPython.display import Image\n",
 "Image(filename=str(PROJECT_ROOT / \"results\" / \"embedding_tsne.png\"))"
]
 },
 {
 "cell_type": "markdown",
 "id": "2f35173a",
 "metadata": {},
 "source": [
 "## 6. Analyse critique finale\n",
 "\n",
 "Dans ces tests, les architectures RAG atteignent une meilleure robustesse que la baseline parce qu'elles récupèrent de
]
 }
},
"metadata": {
 "kernelspec": {
 "display_name": "Python 3",
 "language": "python",
 "name": "python3"
 },
 "language_info": {
 "name": "python",
 "version": "3.11"
 }
},
"nbformat": 4,
"nbformat_minor": 5
}
...

```

## snort-rag-rule-generator-main/results/comparison\_metrics.csv

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/results/comparison\_metrics.csv

```

FILE: snort-rag-rule-generator-main/results/comparison_metrics.csv
```text
architecture,attack_accuracy,macro_precision,macro_recall,macro_f1,valid_rule_rate,retrieval_hit_at_3,avg_option_coverage,avg_option_accuracy
graph_rag,1.0,1.0,1.0,1.0,1.0,0.7111111111111111,0.0
rag_classic,1.0,1.0,1.0,1.0,1.0,0.7111111111111111,0.0
rag_hybrid,1.0,1.0,1.0,1.0,1.0,0.7111111111111111,0.0
rag_rerank,1.0,1.0,1.0,1.0,1.0,0.7111111111111111,0.0
baseline,1.0,1.0,1.0,1.0,0.9,0.0,0.7333333333333333,0.335
agentic_rag,0.9,0.85,0.9,0.8666666666666666,1.0,1.0,0.7222222222222221,0.0
multi_hop,0.9,0.85,0.9,0.8666666666666666,1.0,1.0,0.7777777777777777,0.0
...

```

snort-rag-rule-generator-main/results/detailed_devoir3_results.csv

Type: text | Source:

/mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/results/detailed_devoir3_results.csv

```

FILE: snort-rag-rule-generator-main/results/detailed_devoir3_results.csv
```text
query,expected_attack_type,architecture,predicted_attack_type,attack_type_correct,valid_rule_or_benign,retrieval_hit_at_3,option_coverage,option_accuracy
Detect a TCP SYN port scan against our web server with many ports touched in one minute,port_scan,baseline,port_scan,True,True,0.0,0.0
Detect a TCP SYN port scan against our web server with many ports touched in one minute,port_scan,rag_classic,port_scan,True,True,0.0,0.0
Detect a TCP SYN port scan against our web server with many ports touched in one minute,port_scan,rag_rerank,port_scan,True,True,0.0,0.0
Detect a TCP SYN port scan against our web server with many ports touched in one minute,port_scan,rag_hybrid,port_scan,True,True,0.0,0.0
Detect a TCP SYN port scan against our web server with many ports touched in one minute,port_scan,multi_hop,port_scan,True,True,0.0,0.0
Detect a TCP SYN port scan against our web server with many ports touched in one minute,port_scan,graph_rag,port_scan,True,True,0.0,0.0
Detect a TCP SYN port scan against our web server with many ports touched in one minute,port_scan,agentic_rag,port_scan,True,True,0.0,0.0
Generate a Snort rule for repeated SSH brute force attempts on port 22,ssh_bruteforce,baseline,ssh_bruteforce,True,True,False,False,0.0,0.0
Generate a Snort rule for repeated SSH brute force attempts on port 22,ssh_bruteforce,rag_classic,ssh_bruteforce,True,True,False,False,0.0,0.0
... [truncated to first 10 rows]
...

```



## snort-rag-rule-generator-main/scripts/fetch\_real\_sources.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/scripts/fetch\_real\_sources.py

```
FILE: snort-rag-rule-generator-main/scripts/fetch_real_sources.py
```python
"""Download trusted real Snort rule sources into the local knowledge base."""
from __future__ import annotations

import json

from snort_rag.knowledge_base import DEFAULT_KB_DIR, fetch_trusted_rule_kb

def main() -> None:
    summary = fetch_trusted_rule_kb(DEFAULT_KB_DIR)
    print(json.dumps(summary, indent=2))

if __name__ == "__main__":
    main()
...

```

snort-rag-rule-generator-main/scripts/validate_dataset.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/scripts/validate_dataset.py

```
FILE: snort-rag-rule-generator-main/scripts/validate_dataset.py
```python
from __future__ import annotations

import csv
import json
import re
import sys
from collections import Counter
from pathlib import Path

PROJECT_ROOT = Path(__file__).resolve().parents[1]
DATASET_PATH = PROJECT_ROOT / "data" / "processed" / "final_snort_dataset.csv"
JSONL_PATH = PROJECT_ROOT / "data" / "processed" / "final_snort_dataset.jsonl"
RULES_PATH = PROJECT_ROOT / "data" / "processed" / "person1_rules.rules"
SUMMARY_PATH = PROJECT_ROOT / "data" / "processed" / "dataset_summary.json"

REQUIRED_COLUMNS = [
 "id",
 "description_naturelle",
 "attack_type",
 "attack_family",
 "protocol",
 "src_port",
 "dst_port",
 "severity",
 "log_example",
 "snort_rule_reference",
 "false_positive_context",
 "source_type",
 "expected_explanation",
]

ALLOWED_ATTACK_TYPES = {
 "port_scan",
 "ssh_bruteforce",
 "sql_injection",
 "xss",
 "command_injection",
 "directory_traversal",
 "dns_tunneling",
 "icmp_sweep",
 "malware_c2",
 "benign_traffic",
}

ALLOWED_SOURCE_TYPES = {"manual", "synthetic_manual_variation"}
ALLOWED_SEVERITIES = {"none", "low", "medium", "high", "critical"}
ALLOWED_PROTOCOLS = {"tcp", "udp", "icmp", "http", "https", "dns", "mixed"}
ATTACK_FAMILY_MAP = {
 "port_scan": "reconnaissance",
 "ssh_bruteforce": "credential_access",
 "sql_injection": "web_attack",
 "xss": "web_attack",
}

```

```

 "command_injection": "web_attack_execution",
 "directory_traversal": "web_attack_file_access",
 "dns_tunneling": "exfiltration_command_control",
 "icmp_sweep": "reconnaissance",
 "malware_c2": "command_and_control",
 "benign_traffic": "benign",
 }

SID_RE = re.compile(r"\bsid\s*:\s*(\d+)\s*;")
REV_RE = re.compile(r"\brev\s*:\s*(\d+)\s*;")
RULE_PROTOCOL_RE = re.compile(r"^\s*alert\s+([a-z]+\s+)", re.IGNORECASE)

LOCAL_RULE_SID_MIN = 1000000

def load_csv_rows(path: Path) -> list[dict[str, str]]:
 with path.open(newline="", encoding="utf-8") as handle:
 reader = csv.DictReader(handle)
 if reader.fieldnames != REQUIRED_COLUMNS:
 raise ValueError(
 f"Invalid CSV columns. Expected {REQUIRED_COLUMNS}, got {reader.fieldnames}"
)
 return [{key: (value or "").strip() for key, value in row.items()} for row in reader]

def _port_ok(value: str) -> bool:
 if value in {"any", "N/A"}:
 return True
 if not value.isdigit():
 return False
 return 0 <= int(value) <= 65535

def _balanced_snort_options(rule: str) -> bool:
 """
 Basic parser-safe validation for Snort option blocks.
 """
 inside_quotes = False

 for char in rule:
 if char == "'":
 inside_quotes = not inside_quotes

 return not inside_quotes

def _validate_rule_structure(rule: str, expected_protocol: str) -> list[str]:
 errors: list[str] = []

 # -----
 # Basic structure
 # -----

 if not rule.startswith("alert "):
 errors.append("rule must start with 'alert'")

 if "(" not in rule or ")" not in rule:
 errors.append("rule must contain parentheses")

 outside_quotes = re.sub(r'"[^"]*"', '', rule)

 if outside_quotes.count("(") != outside_quotes.count(")"):
 errors.append("unbalanced parentheses")

 if not _balanced_snort_options(rule):
 errors.append("unterminated or unbalanced quoted string")

 if "msg:" not in rule:
 errors.append("rule must contain msg")

 if "classtype:" not in rule:
 errors.append("rule must contain classtype")

 if not SID_RE.search(rule):
 errors.append("rule must contain sid")

 if not REV_RE.search(rule):
 errors.append("rule must contain rev")

 # -----
 # Rule protocol validation
 # -----

 match = RULE_PROTOCOL_RE.match(rule)

 if not match:
 errors.append("rule protocol is missing")
 return errors

```

```

rule_protocol = match.group(1).lower()

if expected_protocol in {"http", "https"}:
 if rule_protocol != "tcp":
 errors.append("http/https dataset rows must map to tcp rule protocol")

elif expected_protocol not in {"http", "https", "mixed"}:
 if rule_protocol != expected_protocol:
 errors.append(
 f"rule protocol {rule_protocol} does not match dataset protocol {expected_protocol}"
)

Direction validation

valid_directions = ["->", "<>", "<-"]

if not any(direction in rule for direction in valid_directions):
 errors.append("rule direction operator missing")

Detection logic validation

detectors = (
 "content:",
 "pcrc:",
 "flags:",
 "flow:",
 "detection_filter:",
 "threshold:",
 "dsize:",
 "byte_test:",
 "itype:",
 "icode:",
)

if not any(token in rule for token in detectors):
 errors.append("rule must contain at least one detection condition")

Weak rule detection
strong_detectors = (
 "content:",
 "pcrc:",
 "detection_filter:",
 "flow:",
 "http_uri",
 "http_header",
 "byte_test:",
 "dsize:",
 "flags:",
)

if not any(token in rule for token in strong_detectors):
 errors.append("weak detection logic")

SID / REV validation

sid_match = SID_RE.search(rule)
if sid_match:
 sid_value = sid_match.group(1)

 if not sid_value.isdigit():
 errors.append("sid must be numeric")

 sid_int = int(sid_value)

 if sid_int < LOCAL_RULE_SID_MIN:
 errors.append("sid should use local/custom range >= 1000000")

rev_match = REV_RE.search(rule)
if rev_match:
 rev_value = rev_match.group(1)

 if not rev_value.isdigit():
 errors.append("rev must be numeric")

 if int(rev_value) < 1:
 errors.append("rev must be >= 1")

TCP specific validation

```

```

if rule_protocol == "tcp":

 tcp_required = (
 "flags:",
 "flow:",
 "content:",
 "pcr:",
 "detection_filter:",
)

 if not any(token in rule for token in tcp_required):
 errors.append(
 "tcp rule should contain flags, flow, content, pcr or detection_filter"
)

ICMP specific validation

if rule_protocol == "icmp":

 forbidden_icmp = (
 "flags:",
 "flow:",
 "http_uri",
 "http_header",
)

 for token in forbidden_icmp:
 if token in rule:
 errors.append(f"icmp rule cannot contain {token}")

 if "itype:" not in rule and "icode:" not in rule:
 errors.append("icmp rule should contain itype or icode")

UDP specific validation

if rule_protocol == "udp":

 if "flags:" in rule:
 errors.append("udp rule cannot contain tcp flags")

HTTP option validation

http_options = (
 "http_uri",
 "http_header",
 "http_method",
 "http_client_body",
)

if any(option in rule for option in http_options):

 if rule_protocol != "tcp":
 errors.append("http options require tcp protocol")

 if expected_protocol not in {"http", "https", "tcp"}:
 errors.append("http options used with non-web dataset protocol")

Port sanity checks

suspicious_ports = [
 "21",
 "23",
 "25",
 "110",
 "161",
]

if expected_protocol in {"http", "https"}:

 for port in suspicious_ports:
 if f"{port} " in rule:
 errors.append(
 f"suspicious port {port} used in web-related rule"
)

Snort variable validation

```

```

if "$HOME_NET" not in rule and "$EXTERNAL_NET" not in rule:
 errors.append(
 "rule should use Snort variables like $HOME_NET or $EXTERNAL_NET"
)

Classtype validation

if "classtype:" in rule:

 classtype_match = re.search(
 r"classtype\s*:\s*([a-zA-Z0-9\-_]+\s*;",
 rule,
 re.IGNORECASE,
)

 if not classtype_match:
 errors.append("invalid classtype format")

Dangerous generic any-any rule detection

if " any any -> any any " in rule.lower():

 if "content:" not in rule and "pcre:" not in rule:
 errors.append(
 "overly generic any-any rule without payload restriction"
)

return errors

def _log_supports_row(row: dict[str, str]) -> bool:
 text = " ".join(
 [
 row["description_naturelle"].lower(),
 row["log_example"].lower(),
 row["expected_explanation"].lower(),
 row["snort_rule_reference"].lower(),
]
)
 required_tokens = {
 "port_scan": ["syn", "scan", "dpt=", "connection attempts"],
 "ssh_bruteforce": ["ssh", "failed password", "authentication failure", "invalid user"],
 "sql_injection": ["union", "select", "or 1=1", "sql", "sleep("],
 "xss": ["script", "onerror", "xss", "<svg", "javascript:"],
 "command_injection": [";", "wget", "curl", "/bin/sh", "cmd="],
 "directory_traversal": ["/../", "..%2f", "/etc/passwd", "win.ini"],
 "dns_tunneling": ["dns", "query", "txt", "long subdomain", "base64"],
 "icmp_sweep": ["icmp", "echo", "sweep", "multiple hosts"],
 "malware_c2": ["beacon", "c2", "periodic", "callback", "heartbeat"],
 "benign_traffic": ["normal", "health", "backup", "monitoring", "benign"],
 }
 return any(token in text for token in required_tokens[row["attack_type"]])

def validate_rows(rows: list[dict[str, str]], rules_lines: list[str]) -> tuple[list[str], dict[str, object]]:
 errors: list[str] = []
 ids = [row["id"] for row in rows]
 if len(ids) != len(set(ids)):
 errors.append("Dataset IDs are not unique.")

 sids: list[str] = []
 manual_rows = 0
 source_type_counts = Counter()
 attack_counts = Counter()
 family_counts = Counter()
 severity_counts = Counter()
 protocol_counts = Counter()

 for idx, row in enumerate(rows, 2):
 attack_type = row["attack_type"]
 protocol = row["protocol"]
 source_type = row["source_type"]
 severity = row["severity"]
 attack_counts[attack_type] += 1
 family_counts[row["attack_family"]] += 1
 severity_counts[severity] += 1
 protocol_counts[protocol] += 1
 source_type_counts[source_type] += 1
 if source_type == "manual":
 manual_rows += 1

 for key in REQUIRED_COLUMNS:
 if not row[key]:

```

```

 errors.append(f"Row {idx} has empty field: {key}")

 if attack_type not in ALLOWED_ATTACK_TYPES:
 errors.append(f"Row {idx} has invalid attack_type: {attack_type}")
 if row["attack_family"] != ATTACK_FAMILY_MAP.get(attack_type, ""):
 errors.append(f"Row {idx} has inconsistent attack_family for {attack_type}")
 if source_type not in ALLOWED_SOURCE_TYPES:
 errors.append(f"Row {idx} has invalid source_type: {source_type}")
 if severity not in ALLOWED_SEVERITIES:
 errors.append(f"Row {idx} has invalid severity: {severity}")
 if protocol not in ALLOWED_PROTOCOLS:
 errors.append(f"Row {idx} has invalid protocol: {protocol}")
 if not _port_ok(row["src_port"]):
 errors.append(f"Row {idx} has invalid src_port: {row['src_port']}")
 if not _port_ok(row["dst_port"]):
 errors.append(f"Row {idx} has invalid dst_port: {row['dst_port']}")

 if attack_type == "benign_traffic":
 if severity not in {"none", "low"}:
 errors.append(f"Row {idx} benign_traffic severity must be none or low")
 if row["snort_rule_reference"] != "NO_RULE_RECOMMENDED":
 errors.append(f"Row {idx} benign_traffic must use NO_RULE_RECOMMENDED")
 else:
 if row["snort_rule_reference"] == "NO_RULE_RECOMMENDED":
 errors.append(f"Row {idx} malicious row cannot use NO_RULE_RECOMMENDED")
 else:
 rule_errors = _validate_rule_structure(row["snort_rule_reference"], protocol)
 errors.extend([f"Row {idx} {error}" for error in rule_errors])
 match = SID_RE.search(row["snort_rule_reference"])
 if match:
 sids.append(match.group(1))

 if attack_type == "ssh_bruteforce" and not (protocol == "tcp" and row["dst_port"] in {"22", "2222"}):
 errors.append(f"Row {idx} ssh_bruteforce must use tcp to 22 or 2222")
 if attack_type == "dns_tunneling" and not (protocol in {"dns", "udp", "tcp"} and row["dst_port"] == "53"):
 errors.append(f"Row {idx} dns_tunneling must target port 53 with dns/udp/tcp")
 if attack_type == "icmp_sweep" and not (protocol == "icmp" and row["dst_port"] in {"N/A", "any"}):
 errors.append(f"Row {idx} icmp_sweep must use icmp and dst_port N/A or any")
 if attack_type in {"sql_injection", "xss", "command_injection", "directory_traversal"}:
 if protocol not in {"http", "https", "tcp"} or row["dst_port"] not in {"80", "443", "8080"}:
 errors.append(f"Row {idx} web attack must use http/https/tcp with port 80/443/8080")
 if attack_type == "port_scan" and protocol not in {"tcp", "mixed"}:
 errors.append(f"Row {idx} port_scan must use tcp or mixed")
 if attack_type == "malware_c2" and row["dst_port"] not in {"80", "443", "8080", "53", "8443"}:
 errors.append(f"Row {idx} malware_c2 must use expected destination ports")

 if not _log_supports_row(row):
 errors.append(f"Row {idx} log_example/explanation do not support the assigned label strongly enough")

if len(sids) != len(set(sids)):
 errors.append("Snort SID values are not unique in dataset rows.")

exported_sids: list[str] = []
for line_no, line in enumerate(rules_lines, 1):
 if not line.strip():
 continue
 if "NO_RULE_RECOMMENDED" in line:
 errors.append(f"Rule export line {line_no} contains benign placeholder")
 continue
 if not SID_RE.search(line):
 errors.append(f"Rule export line {line_no} is missing sid")
 else:
 exported_sids.append(SID_RE.search(line).group(1))
 if not REV_RE.search(line):
 errors.append(f"Rule export line {line_no} is missing rev")
if len(exported_sids) != len(set(exported_sids)):
 errors.append("Snort SID values are not unique in exported rules.")
if set(exported_sids) != set(sids):
 errors.append("Exported rules SIDs do not exactly match malicious dataset SIDs.")

metrics = {
 "total_rows": len(rows),
 "manual_rows": manual_rows,
 "synthetic_manual_variation_rows": source_type_counts["synthetic_manual_variation"],
 "rows_per_attack_type": dict(sorted(attack_counts.items())),
 "rows_per_attack_family": dict(sorted(family_counts.items())),
 "severity_distribution": dict(sorted(severity_counts.items())),
 "protocol_distribution": dict(sorted(protocol_counts.items())),
 "source_type_distribution": dict(sorted(source_type_counts.items())),
 "rules_exported_count": len(rules_lines),
}

return errors, metrics

def validate_jsonl(rows: list[dict[str, str]]) -> list[str]:
 errors: list[str] = []
 with JSONL_PATH.open(encoding="utf-8") as handle:

```

```

 jsonl_rows = [json.loads(line) for line in handle if line.strip()]
 if len(jsonl_rows) != len(rows):
 errors.append("JSONL row count does not match CSV row count.")
 for idx, row in enumerate(jsonl_rows, 1):
 if list(row.keys()) != REQUIRED_COLUMNS:
 errors.append(f"JSONL row {idx} columns do not match the required schema.")
 break
 return errors

def main() -> int:
 for path in [DATASET_PATH, JSONL_PATH, RULES_PATH, SUMMARY_PATH]:
 if not path.exists():
 print(f"Missing required file: {path}")
 return 1

 try:
 rows = load_csv_rows(DATASET_PATH)
 except Exception as exc:
 print(f"CSV validation failed: {exc}")
 return 1

 rules_lines = [
 line.strip()
 for line in RULES_PATH.read_text(
 encoding="utf-8",
 errors="ignore"
).splitlines()
 if line.strip()
]

 errors, metrics = validate_rows(rows, rules_lines)
 errors.extend(validate_jsonl(rows))

 try:
 summary = json.loads(SUMMARY_PATH.read_text(encoding="utf-8"))
 except json.JSONDecodeError as exc:
 errors.append(f"dataset_summary.json is invalid JSON: {exc}")
 summary = {}

 if summary:
 if summary.get("total_rows") != metrics["total_rows"]:
 errors.append("dataset_summary.json total_rows does not match the dataset.")
 if summary.get("rules_exported_count") != metrics["rules_exported_count"]:
 errors.append("dataset_summary.json rules_exported_count does not match exported rules.")

 if errors:
 print("VALIDATION FAILED")
 for error in errors:
 print(f"- {error}")
 return 1

 print("VALIDATION PASSED")
 print(json.dumps(metrics, indent=2, ensure_ascii=False))
 return 0

if __name__ == "__main__":
 sys.exit(main())
...

```

## snort-rag-rule-generator-main/src/snort\_rag/\_\_init\_\_.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort\_rag/\_\_init\_\_.py

```

FILE: snort-rag-rule-generator-main/src/snort_rag/__init__.py
```python
"""Snort RAG Rule Generator package."""
__version__ = "1.0.0"
...

```

snort-rag-rule-generator-main/src/snort_rag/app_gradio.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort_rag/app_gradio.py

```

FILE: snort-rag-rule-generator-main/src/snort_rag/app_gradio.py
```python
"""Gradio dashboard for the Snort RAG Rule Generator."""
from __future__ import annotations

```

```

from pathlib import Path
import tempfile

import gradio as gr

from snort_rag.architectures import SnortRAGArchitectures

PROJECT_ROOT = Path(__file__).resolve().parents[2]
DATASET = PROJECT_ROOT / "data" / "processed" / "final_snort_dataset.csv"
rag = SnortRAGArchitectures(DATASET)

def generate(query: str, architecture: str, k: int):
 if not query.strip():
 return "", "", "", ""
 mapping = {
 "Baseline sans RAG": rag.llm_no_rag,
 "RAG classique": rag.rag_classic,
 "RAG + re-ranking": rag.rag_rerank,
 "RAG hybride": rag.rag_hybrid,
 "Multi-hop RAG": rag.multi_hop_rag,
 "Graph RAG": rag.graph_rag,
 "Agentic RAG": rag.agentic_rag,
 }
 fn = mapping[architecture]
 result = fn(query)
 retrieved = "\n".join(
 f"{i+1}. {doc_id} | {atype} | score={score}"
 for i, (doc_id, atype, score) in enumerate(zip(result.get("retrieved_ids", []), result.get("retrieved_attack_types", [])))
)
 return result["generated_rule"], result["attack_type"], result["explanation"], retrieved

def add_pdf(pdf_file):
 if pdf_file is None:
 return "No PDF uploaded."
 try:
 count = rag.kb.add_pdf_to_kb(pdf_file.name, source_name=Path(pdf_file.name).name)
 return f"Added {count} PDF chunks to the in-memory knowledge base."
 except Exception as exc:
 return f"PDF import failed: {exc}"

def dataset_stats():
 df = rag.kb.df
 counts = df["attack_type"].value_counts().to_string()
 return f"Rows: {len(df)}\n\nAttack type counts:\n{counts}"

with gr.Blocks(title="Snort RAG Rule Generator") as demo:
 gr.Markdown("# Snort RAG Rule Generator\n\nDefensive NLP/RAG system for generating Snort rules from natural-language attacks")
 with gr.Row():
 with gr.Column(scale=2):
 query = gr.Textbox(label="Attack description", lines=4, placeholder="Detect SQL injection with UNION SELECT in MySQL")
 architecture = gr.Dropdown(
 ["Baseline sans RAG", "RAG classique", "RAG + re-ranking", "RAG hybride", "Multi-hop RAG", "Graph RAG", "Agentic RAG"],
 value="Agentic RAG",
 label="Architecture"
)
 k = gr.Slider(2, 10, value=5, step=1, label="Top-k retrieval")
 btn = gr.Button("Generate rule")
 with gr.Column(scale=1):
 pdf = gr.File(label="Ajouter un PDF à la base de connaissance", file_types=[".pdf"])
 add_btn = gr.Button("Index uploaded PDF")
 pdf_status = gr.Textbox(label="PDF status")
 stats_btn = gr.Button("Dataset stats")
 stats = gr.Textbox(label="Stats", lines=10)
 rule = gr.Textbox(label="Generated Snort rule", lines=5)
 attack_type = gr.Textbox(label="Detected attack type")
 explanation = gr.Textbox(label="Explanation", lines=4)
 retrieved = gr.Textbox(label="Retrieved documents", lines=8)
 btn.click(generate, inputs=[query, architecture, k], outputs=[rule, attack_type, explanation, retrieved])
 add_btn.click(add_pdf, inputs=[pdf], outputs=[pdf_status])
 stats_btn.click(dataset_stats, outputs=[stats])

 if __name__ == "__main__":
 demo.launch()

```

## snort-rag-rule-generator-main/src/snort\_rag/architectures.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort\_rag/architectures.py



```

FILE: snort-rag-rule-generator-main/src/snort_rag/architectures.py
```python
"""Implementation of the Devoir 3 RAG architectures for the Snort topic."""
from __future__ import annotations

from collections import defaultdict
from pathlib import Path
from typing import Dict, List

from snort_rag.generator import generate_from_context
from snort_rag.retrieval import RetrievedDoc, SnortKnowledgeBase
from snort_rag.templates import ATTACK_KEYWORDS, detect_attack_type, generate_snort_rule
from snort_rag.rule_parser import validate_rule, option_coverage

DEFAULT_DATASET = Path(__file__).resolve().parents[2] / "data" / "processed" / "final_snort_dataset.csv"

class SnortRAGArchitectures:
    def __init__(self, dataset_path: str | Path = DEFAULT_DATASET):
        self.kb = SnortKnowledgeBase(dataset_path)
        self.graph = self._build_graph()

    def _pack(self, architecture: str, result: Dict[str, object], docs: List[RetrievedDoc]) -> Dict[str, object]:
        result = dict(result)
        result["architecture"] = architecture
        result["retrieved_ids"] = [d.id for d in docs]
        result["retrieved_attack_types"] = [d.attack_type for d in docs]
        result["retrieval_scores"] = [round(d.score, 4) for d in docs]
        return result

    def llm_no_rag(self, query: str) -> Dict[str, object]:
        # Baseline: no retrieval, only direct query keywords and template generation.
        attack_type = detect_attack_type(query)
        if attack_type == "benign":
            rule = "NO_RULE_RECOMMENDED"
            valid, errors = False, ["Benign request"]
        else:
            rule = generate_snort_rule(attack_type, query)
            valid, errors = validate_rule(rule)
        result = {
            "query": query,
            "attack_type": attack_type,
            "generated_rule": rule,
            "valid_rule": valid,
            "validation_errors": errors,
            "option_coverage": option_coverage(rule) if rule != "NO_RULE_RECOMMENDED" else 0.0,
            "explanation": "Baseline without retrieval: generated only from query keywords, so context control is weak.",
            "prompt": f"User request only: {query}",
            "hallucination_risk": 0.35 if attack_type != "benign" else 0.20,
        }
        return self._pack("baseline_no_rag", result, [])

    def rag_classic(self, query: str, k: int = 5) -> Dict[str, object]:
        docs = self.kb.dense_retrieve(query, k=k)
        return self._pack("rag_classic", generate_from_context(query, docs), docs)

    def rag_rerank(self, query: str, k: int = 8) -> Dict[str, object]:
        initial = self.kb.dense_retrieve(query, k=k)
        docs = self.kb.rerank(query, initial, k=5)
        return self._pack("rag_rerank", generate_from_context(query, docs), docs)

    def rag_hybrid(self, query: str, k: int = 5) -> Dict[str, object]:
        docs = self.kb.hybrid_retrieve(query, k=k)
        return self._pack("rag_hybrid", generate_from_context(query, docs), docs)

    def multi_hop_rag(self, query: str, k: int = 4) -> Dict[str, object]:
        first = self.kb.hybrid_retrieve(query, k=k)
        inferred = first[0].attack_type if first else detect_attack_type(query)
        refined_query = query + " " + inferred.replace("_", " ") + " " + ".join(ATTACK_KEYWORDS.get(inferred, []))[:3])
        second = self.kb.hybrid_retrieve(refined_query, k=k)
        docs = self.kb.rerank(refined_query, first + second, k=5)
        return self._pack("multi_hop_rag", generate_from_context(query, docs, force_attack_type=inferred), docs)

    def _build_graph(self) -> Dict[str, List[RetrievedDoc]]:
        graph: Dict[str, List[RetrievedDoc]] = defaultdict(list)
        for _, row in self.kb.df.iterrows():
            doc = RetrievedDoc(
                rank=0,
                score=1.0,
                id=str(row.get("id", "")),
                text=self.kb._description(row),
                attack_type=str(row.get("attack_type", "")),
                rule=self.kb._rule(row),
                source_name=self.kb._source_name(row),
                source_url=self.kb._source_url(row, self.kb.dataset_path),
            )
            graph[doc.attack_type].append(doc)

```

```

        graph[doc.attack_type].append(doc)
    return graph

def graph_rag(self, query: str, k: int = 5) -> Dict[str, object]:
    attack_type = detect_attack_type(query)
    candidate_docs = self.graph.get(attack_type, [])[k]
    # If graph node is weak, fallback to hybrid retrieval.
    docs = candidate_docs if candidate_docs else self.kb.hybrid_retrieve(query, k=k)
    for i, doc in enumerate(docs, 1):
        doc.rank = i
        doc.score = max(doc.score, 0.8)
    return self._pack("graph_rag", generate_from_context(query, docs, force_attack_type=attack_type), docs)

def agentic_rag(self, query: str, k: int = 5) -> Dict[str, object]:
    # Simple agent policy: decide retrieval strategy based on query ambiguity.
    attack_type = detect_attack_type(query)
    specific = any(kw in query.lower() for kw in ATTACK_KEYWORDS.get(attack_type, []))
    if attack_type == "benign":
        docs = self.kb.hybrid_retrieve(query, k=k)
        result = generate_from_context(query, docs, force_attack_type="benign")
    elif specific and len(query.split()) > 7:
        docs = self.kb.hybrid_retrieve(query, k=k)
        docs = self.kb.rerank(query, docs, k=k)
        result = generate_from_context(query, docs, force_attack_type=attack_type)
        result["explanation"] += " Agent decision: direct hybrid retrieval because the query was specific."
    else:
        # Ambiguous request: do a first hop, expand with top category, then rerank.
        first = self.kb.hybrid_retrieve(query, k=k)
        inferred = first[0].attack_type if first else attack_type
        expanded = query + " " + inferred.replace("_", " ")
        second = self.kb.hybrid_retrieve(expanded, k=k)
        docs = self.kb.rerank(expanded, first + second, k=k)
        result = generate_from_context(query, docs, force_attack_type=inferred)
        result["explanation"] += " Agent decision: query was ambiguous, so it used retrieval + query expansion."
    # Agent has lower hallucination if it retrieved valid same-type evidence.
    if docs and any(d.attack_type == result["attack_type"] for d in docs[:3]):
        result["hallucination_risk"] = max(0.0, float(result["hallucination_risk"]) - 0.15)
    return self._pack("agentic_rag", result, docs)

def run_all(self, query: str) -> Dict[str, Dict[str, object]]:
    return {
        "baseline": self.llm_no_rag(query),
        "rag_classic": self.rag_classic(query),
        "rag_rerank": self.rag_rerank(query),
        "rag_hybrid": self.rag_hybrid(query),
        "multi_hop": self.multi_hop_rag(query),
        "graph_rag": self.graph_rag(query),
        "agentic_rag": self.agentic_rag(query),
    }

```

snort-rag-rule-generator-main/src/snort_rag/evaluation.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort_rag/evaluation.py

```

FILE: snort-rag-rule-generator-main/src/snort_rag/evaluation.py
```python
"""Metrics and visualizations for Devoir 3."""
from __future__ import annotations

from pathlib import Path
from typing import Dict, List

import matplotlib.pyplot as plt
import numpy as np
import pandas as pd
from sklearn.manifold import TSNE
from sklearn.decomposition import TruncatedSVD
from sklearn.metrics import accuracy_score, precision_recall_fscore_support

from snort_rag.architectures import SnortRAGArchitectures

TEST_QUERIES = [
 {"query": "Detect a TCP SYN port scan against our web server with many ports touched in one minute", "expected_attack_type": "tcp_syn_scan"},
 {"query": "Generate a Snort rule for repeated SSH brute force attempts on port 22", "expected_attack_type": "ssh_bruteforce"},
 {"query": "D tecter une injection SQL UNION SELECT dans une URL HTTP", "expected_attack_type": "sql_injection"},
 {"query": "Detect XSS attack where the URI contains <script>alert(1)</script>", "expected_attack_type": "xss"},
 {"query": "Detect command injection with cmd parameter and whoami in HTTP request", "expected_attack_type": "command_injection"},
 {"query": "Alert when someone tries .././../etc/passwd directory traversal", "expected_attack_type": "directory_traversal"},
 {"query": "Detect DNS tunneling using long encoded subdomains", "expected_attack_type": "dns_tunneling"},
 {"query": "Detect ICMP ping sweep against internal network", "expected_attack_type": "icmp_sweep"},
 {"query": "Detect malware command and control beacon to /gate.php", "expected_attack_type": "malware_c2"},
 {"query": "Normal HTTP health check from the monitoring server, no attack", "expected_attack_type": "benign_traffic"},

```

```
]

```

```
def _normalize_attack_type(label: str) -> str:
 if label == "benign":
 return "benign_traffic"
 return label

def evaluate_architectures(rag: SnortRAGArchitectures, out_dir: Path) -> pd.DataFrame:
 out_dir.mkdir(parents=True, exist_ok=True)
 rows: List[Dict[str, object]] = []
 detailed: List[Dict[str, object]] = []
 architectures = ["baseline", "rag_classic", "rag_rerank", "rag_hybrid", "multi_hop", "graph_rag", "agentic_rag"]

 for item in TEST_QUERIES:
 query = item["query"]
 expected = item["expected_attack_type"]
 results = rag.run_all(query)
 for arch in architectures:
 res = results[arch]
 predicted = _normalize_attack_type(str(res["attack_type"]))
 retrieved_types = [_normalize_attack_type(str(label)) for label in res.get("retrieved_attack_types", [])[:3]]
 valid_rule = bool(res["valid_rule"]) or predicted == "benign_traffic"
 retrieval_hit = expected in retrieved_types if arch != "baseline" else False
 detailed.append({
 "query": query,
 "expected_attack_type": expected,
 "architecture": arch,
 "predicted_attack_type": predicted,
 "attack_type_correct": predicted == expected,
 "valid_rule_or_benign": valid_rule,
 "retrieval_hit_at_3": retrieval_hit,
 "option_coverage": float(res.get("option_coverage", 0.0)),
 "hallucination_risk": float(res.get("hallucination_risk", 0.0)),
 "generated_rule": res.get("generated_rule", ""),
 })

 detail_df = pd.DataFrame(detailed)
 detail_df.to_csv(out_dir / "detailed_devoir3_results.csv", index=False)

 for arch, group in detail_df.groupby("architecture"):
 y_true = group["expected_attack_type"].tolist()
 y_pred = group["predicted_attack_type"].tolist()
 precision, recall, f1, _ = precision_recall_fscore_support(y_true, y_pred, average="macro", zero_division=0)
 rows.append({
 "architecture": arch,
 "attack_accuracy": accuracy_score(y_true, y_pred),
 "macro_precision": precision,
 "macro_recall": recall,
 "macro_f1": f1,
 "valid_rule_rate": group["valid_rule_or_benign"].mean(),
 "retrieval_hit_at_3": group["retrieval_hit_at_3"].mean(),
 "avg_option_coverage": group["option_coverage"].mean(),
 "avg_hallucination_risk": group["hallucination_risk"].mean(),
 })

 summary = pd.DataFrame(rows).sort_values(["macro_f1", "retrieval_hit_at_3"], ascending=False)
 summary.to_csv(out_dir / "comparison_metrics.csv", index=False)
 return summary

def plot_tsne(rag: SnortRAGArchitectures, out_path: Path) -> None:
 out_path.parent.mkdir(parents=True, exist_ok=True)
 n = min(80, len(rag.kb.texts))
 X_sparse = rag.kb.tfidf[:n]
 labels = rag.kb.df.iloc[:n]["attack_type"].tolist()
 n_components = min(30, max(2, n - 1), X_sparse.shape[1] - 1)
 X = TruncatedSVD(n_components=n_components, random_state=42).fit_transform(X_sparse)
 perplexity = max(5, min(15, n // 5))
 coords = TSNE(n_components=2, random_state=42, init="random", perplexity=perplexity, max_iter=300, learning_rate="auto")
 unique = sorted(set(labels))
 plt.figure(figsize=(10, 7))
 for label in unique:
 idx = [i for i, lab in enumerate(labels) if lab == label]
 plt.scatter(coords[idx, 0], coords[idx, 1], s=20, label=label, alpha=0.75)
 plt.title("t-SNE visualization of Snort RAG dataset vectors")
 plt.xlabel("t-SNE 1")
 plt.ylabel("t-SNE 2")
 plt.legend(fontsize=7, loc="best")
 plt.tight_layout()
 plt.savefig(out_path, dpi=160)
 plt.close()
...

```

## snort-rag-rule-generator-main/src/snort\_rag/generate\_dataset.py

Type: text | Source:

/mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort\_rag/generate\_dataset.py

```
FILE: snort-rag-rule-generator-main/src/snort_rag/generate_dataset.py
```python
"""Legacy experimental generator for trusted-rule expansion.

This module is kept only for older experiments that expanded a trusted Snort-rule
knowledge base into large synthetic retrieval corpora. It is not part of the
official Person 1 dataset workflow. The submitted project uses
`data/processed/final_snort_dataset.csv` as the official personal dataset, and
the application, notebook, runner, and validation flow must not depend on the
`snort_generated_dataset.*` outputs produced here.
"""
from __future__ import annotations

import argparse
import csv
import itertools
import json
import random
from pathlib import Path
from typing import Dict, Iterable, Iterator, List

from snort_rag.knowledge_base import DEFAULT_KB_CSV, load_rule_kb
from snort_rag.rule_parser import option_coverage, parse_rule, validate_rule
from snort_rag.source_manifest import TRUSTED_SOURCES
from snort_rag.templates import SEVERITY

PROJECT_ROOT = Path(__file__).resolve().parents[2]
LEGACY_OUT_DIR = PROJECT_ROOT / "data" / "experiments" / "legacy_generated"
LEGACY_SUMMARY_NAME = "snort_generated_dataset_summary.json"

STYLE_PREFIXES = [
    "Formal analyst request:",
    "SOC alert description:",
    "Detection engineering note:",
    "Blue-team scenario:",
    "Security monitoring query:",
    "Incident triage request:",
]

TARGET_HINTS = [
    "internal web server",
    "DNS resolver",
    "mail gateway",
    "domain controller",
    "user workstation segment",
    "DMZ application host",
    "server VLAN",
]

def _trusted_source_map() -> Dict[str, Dict[str, str]]:
    return {source["name"]: source for source in TRUSTED_SOURCES}

def _source_manifest_fieldnames() -> List[str]:
    fieldnames = set()
    for source in TRUSTED_SOURCES:
        fieldnames.update(source.keys())
    return sorted(fieldnames)

def _decode_keywords(raw: str) -> List[str]:
    if not raw:
        return []
    try:
        parsed = json.loads(raw)
    except json.JSONDecodeError:
        return []
    return [str(item) for item in parsed if str(item).strip()]

def _msg_without_local_tokens(msg: str) -> str:
    return msg.replace("ET ", "").replace("GPL ", "").replace("COMMUNITY ", "").strip()

def _severity_for(attack_type: str, classtype: str) -> str:
    if attack_type in SEVERITY:
        return SEVERITY[attack_type]
    lower = classtype.lower()
    if "trojan" in lower or "attempted-admin" in lower:
        return "high"
```

```

    if "web-application-attack" in lower:
        return "high"
    if "policy" in lower:
        return "medium"
    if "recon" in lower:
        return "medium"
    return "medium"

def _log_example(parsed_rule, keywords: List[str]) -> str:
    tokens = []
    if parsed_rule.protocol:
        tokens.append(f"PROTO={parsed_rule.protocol.upper()}")
    if parsed_rule.src:
        tokens.append(f"SRC={parsed_rule.src}")
    if parsed_rule.dst:
        tokens.append(f"DST={parsed_rule.dst}")
    if parsed_rule.dst_port:
        tokens.append(f"DPT={parsed_rule.dst_port}")
    if keywords:
        tokens.append("KEYWORDS=" + " ".join(keywords[:3]))
    return " ".join(tokens)

def _descriptions(rule_row: Dict[str, str], idx_seed: int, multiplier: int) -> List[str]:
    parsed = parse_rule(rule_row["rule"])
    msg = _msg_without_local_tokens(rule_row.get("msg", "") or "Snort alert")
    keywords = _decode_keywords(rule_row.get("content_keywords", ""))
    target = TARGET_HINTS[idx_seed % len(TARGET_HINTS)]
    protocol = parsed.protocol.upper()
    dst_port = parsed.dst_port
    source_file = Path(rule_row.get("source_file", "")).name
    classtype = rule_row.get("classtype", "")
    keyword_text = " ".join(keywords[:3]) if keywords else "rule-specific payload indicators"
    variants = [
        f"{STYLE_PREFIXES[0]} Detect traffic matching the real Snort rule '{msg}' against the {target}.",
        f"{STYLE_PREFIXES[1]} Build an alert for {msg}. Protocol {protocol}, destination port {dst_port}, based on the trusted source {source_file}.",
        f"{STYLE_PREFIXES[2]} We need a Snort signature equivalent to the real rule '{msg}' with classtype {classtype}.",
        f"{STYLE_PREFIXES[3]} Suspicious activity resembles {msg}. Focus on payload markers such as {keyword_text}.",
        f"{STYLE_PREFIXES[4]} Use the trusted-source rule semantics for {msg}. Keep the alert aligned with {protocol} traffic.",
        f"{STYLE_PREFIXES[5]} Investigate an event that should match the real rule '{msg}' from {source_file}."
    ]
    return [variants[i % len(variants)] for i in range(multiplier)]

def iter_rows(multiplier: int = 6, seed: int = 42, kb_path: Path | str = DEFAULT_KB_CSV) -> Iterator[Dict[str, object]]:
    random.seed(seed)
    kb_rows = load_rule_kb(kb_path)
    if not kb_rows:
        raise ValueError("Trusted rule knowledge base is empty. Fetch real sources first.")
    trusted = _trusted_source_map()
    row_id = 1
    for kb_index, kb_row in enumerate(kb_rows):
        descriptions = _descriptions(kb_row, kb_index + seed, multiplier)
        valid, errors = validate_rule(kb_row["rule"])
        parsed = parse_rule(kb_row["rule"])
        keywords = _decode_keywords(kb_row.get("content_keywords", ""))
        source_meta = trusted.get(kb_row["source_name"], {})
        for local_index, description in enumerate(descriptions, 1):
            row = {
                "id": f"SNORT-RAG-{row_id:07d}",
                "kb_id": kb_row["kb_id"],
                "description_nl": description,
                "normalized_description": description.lower(),
                "label": "malicious",
                "attack_type": kb_row.get("attack_type", ""),
                "attack_family": kb_row.get("classtype", "") or kb_row.get("attack_type", ""),
                "severity": _severity_for(kb_row.get("attack_type", ""), kb_row.get("classtype", "")),
                "rule": kb_row["rule"],
                "base_rule": kb_row["rule"],
                "rule_valid_by_parser": valid,
                "rule_validation_errors": " | ".join(errors),
                "option_coverage": option_coverage(kb_row["rule"]),
                "source_name": kb_row["source_name"],
                "source_url": kb_row["source_url"],
                "source_archive": kb_row.get("archive_name", ""),
                "source_file": kb_row.get("source_file", ""),
                "source_license_note": source_meta.get("license_note", ""),
                "source_usage": "generated from a persisted trusted-source real Snort rule",
                "generation_method": "real_rule_paraphrase_expansion",
                "log_example": _log_example(parsed, keywords),
                "base_rule_sid": kb_row.get("sid", ""),
                "base_rule_rev": kb_row.get("rev", ""),
                "base_rule_msg": kb_row.get("msg", ""),
                "content_keywords": json.dumps(keywords, ensure_ascii=False),
                "augmentation_index": local_index,
            }
            row_id += 1

```

```

        yield row
        row_id += 1

def build_rows(multiplier: int = 6, seed: int = 42, kb_path: Path | str = DEFAULT_KB_CSV) -> List[Dict[str, object]]:
    return list(iter_rows(multiplier=multiplier, seed=seed, kb_path=kb_path))

def export_dataset(rows: List[Dict[str, object]], out_dir: Path) -> None:
    out_dir.mkdir(parents=True, exist_ok=True)
    fieldnames = list(rows[0].keys()) if rows else []
    with (out_dir / "snort_generated_dataset.csv").open("w", newline="", encoding="utf-8") as handle:
        writer = csv.DictWriter(handle, fieldnames=fieldnames)
        writer.writeheader()
        writer.writerows(rows)
    (out_dir / "snort_generated_dataset.json").write_text(
        json.dumps(rows, indent=2, ensure_ascii=False),
        encoding="utf-8",
    )
    with (out_dir / "snort_generated_dataset.jsonl").open("w", encoding="utf-8") as handle:
        for row in rows:
            handle.write(json.dumps(row, ensure_ascii=False) + "\n")

    source_manifest = TRUSTED_SOURCES
    raw_dir = PROJECT_ROOT / "data" / "raw"
    raw_dir.mkdir(parents=True, exist_ok=True)
    with (raw_dir / "trusted_sources_manifest.csv").open("w", newline="", encoding="utf-8") as handle:
        writer = csv.DictWriter(handle, fieldnames=_source_manifest_fieldnames())
        writer.writeheader()
        writer.writerows(source_manifest)

    attack_types = sorted({str(row["attack_type"]) for row in rows})
    valid_rows = [row for row in rows if row["rule_valid_by_parser"]]
    source_names = sorted({str(row["source_name"]) for row in rows})
    summary = {
        "rows": len(rows),
        "trusted_rule_rows": len({str(row["kb_id"]) for row in rows}),
        "rows_per_rule": len(rows) // max(1, len({str(row["kb_id"]) for row in rows})),
        "attack_types": attack_types,
        "valid_rule_rate": len(valid_rows) / max(1, len(rows)),
        "sources": source_names,
    }
    (out_dir / LEGACY_SUMMARY_NAME).write_text(json.dumps(summary, indent=2), encoding="utf-8")

def export_dataset_streaming(multiplier: int, seed: int, kb_path: Path | str, out_dir: Path) -> Dict[str, object]:
    out_dir.mkdir(parents=True, exist_ok=True)
    rows_iter = iter_rows(multiplier=multiplier, seed=seed, kb_path=kb_path)
    first_row = next(rows_iter, None)
    if first_row is None:
        raise ValueError("No rows generated from the trusted rule knowledge base.")

    csv_path = out_dir / "snort_generated_dataset.csv"
    json_path = out_dir / "snort_generated_dataset.json"
    jsonl_path = out_dir / "snort_generated_dataset.jsonl"
    fieldnames = list(first_row.keys())
    source_names = set()
    attack_types = set()
    kb_ids = set()
    row_count = 0
    valid_count = 0

    def update_summary(row: Dict[str, object]) -> None:
        nonlocal row_count, valid_count
        row_count += 1
        if row["rule_valid_by_parser"]:
            valid_count += 1
            source_names.add(str(row["source_name"]))
            attack_types.add(str(row["attack_type"]))
            kb_ids.add(str(row["kb_id"]))

    with csv_path.open("w", newline="", encoding="utf-8") as csv_handle, \
        json_path.open("w", encoding="utf-8") as json_handle, \
        jsonl_path.open("w", encoding="utf-8") as jsonl_handle:
        writer = csv.DictWriter(csv_handle, fieldnames=fieldnames)
        writer.writeheader()
        json_handle.write("[\n")
        for index, row in enumerate(itertools.chain([first_row], rows_iter)):
            writer.writerow(row)
            jsonl_handle.write(json.dumps(row, ensure_ascii=False) + "\n")
            json_handle.write((" " if index == 0 else ",\n ") + json.dumps(row, ensure_ascii=False))
            update_summary(row)
        json_handle.write("\n]\n")

    source_manifest = TRUSTED_SOURCES
    raw_dir = PROJECT_ROOT / "data" / "raw"
    raw_dir.mkdir(parents=True, exist_ok=True)

```

```

with (raw_dir / "trusted_sources_manifest.csv").open("w", newline="", encoding="utf-8") as handle:
    writer = csv.DictWriter(handle, fieldnames=_source_manifest_fieldnames())
    writer.writeheader()
    writer.writerows(source_manifest)

summary = {
    "rows": row_count,
    "trusted_rule_rows": len(kb_ids),
    "rows_per_rule": row_count // max(1, len(kb_ids)),
    "attack_types": sorted(attack_types),
    "valid_rule_rate": valid_count / max(1, row_count),
    "sources": sorted(source_names),
}
(out_dir / LEGACY_SUMMARY_NAME).write_text(json.dumps(summary, indent=2), encoding="utf-8")
return summary

def main() -> None:
    parser = argparse.ArgumentParser()
    parser.add_argument("--multiplier", type=int, default=6, help="Rows to generate per trusted base rule.")
    parser.add_argument("--seed", type=int, default=42)
    parser.add_argument("--kb", type=Path, default=DEFAULT_KB_CSV, help="Trusted rule knowledge-base CSV path.")
    parser.add_argument("--out", type=Path, default=LEGACY_OUT_DIR)
    args = parser.parse_args()
    summary = export_dataset_streaming(
        multiplier=args.multiplier,
        seed=args.seed,
        kb_path=args.kb,
        out_dir=args.out,
    )
    print(f"Generated {summary['rows']} rows in {args.out} from {args.kb}")

if __name__ == "__main__":
    main()

```

snort-rag-rule-generator-main/src/snort_rag/generator.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort_rag/generator.py

```

FILE: snort-rag-rule-generator-main/src/snort_rag/generator.py
```python
"""Local generation module for Snort rules.

This is a controlled local generator that behaves like the generation stage of RAG,
but without prohibited external LLM APIs. It builds a transparent prompt, uses
retrieved context, classifies the attack type, fills a valid Snort template and
returns an explanation.
"""
from __future__ import annotations

from typing import Dict, List, Sequence

from snort_rag.rule_parser import validate_rule, option_coverage
from snort_rag.templates import CLASSTYPE, detect_attack_type, generate_snort_rule
from snort_rag.retrieval import RetrievedDoc

def build_prompt(query: str, retrieved_docs: Sequence[RetrievedDoc]) -> str:
 context_lines = []
 for doc in retrieved_docs:
 context_lines.append(
 f"[{doc.rank}] id={doc.id}; type={doc.attack_type}; source={doc.source_name}; rule={doc.rule}"
)
 context = "\n".join(context_lines)
 return (
 "You are a defensive Snort rule generator. Use only the retrieved context and Snort syntax.\n"
 "Generate one rule, explain the rule, and avoid overly broad signatures.\n\n"
 f"User request: {query}\n\nRetrieved context:\n{context}"
)

def choose_attack_type(query: str, retrieved_docs: Sequence[RetrievedDoc]) -> str:
 direct = detect_attack_type(query)
 if direct != "suspicious_user_agent":
 return direct
 if retrieved_docs:
 counts: Dict[str, float] = {}
 for doc in retrieved_docs[:3]:
 counts[doc.attack_type] = counts.get(doc.attack_type, 0.0) + doc.score
 if counts:
 return max(counts, key=counts.get)

```

```

 return direct

def explain_rule(rule: str, attack_type: str, docs: Sequence[RetrievedDoc]) -> str:
 if rule == "NO_RULE_RECOMMENDED":
 return "The request appears benign, so the system recommends no alert rule to avoid false positives."
 valid, errors = validate_rule(rule)
 source_ids = ", ".join(doc.id for doc in docs[:3]) or "no retrieved source"
 status = "valid by internal parser" if valid else "needs Snort -T validation: " + "; ".join(errors)
 return (
 f"Attack type: {attack_type}. The rule uses a conservative classtype "
 f"({CLASSTYPE.get(attack_type, 'unknown')}) and includes msg/sid/rev. "
 f"It was selected or adapted after retrieving similar examples: {source_ids}. Parser status: {status}."
)

def choose_rule(query: str, attack_type: str, retrieved_docs: Sequence[RetrievedDoc]) -> str:
 for doc in retrieved_docs:
 if doc.attack_type == attack_type and doc.rule and doc.rule != "NO_RULE_RECOMMENDED":
 valid, _ = validate_rule(doc.rule)
 if valid:
 return doc.rule
 return generate_snort_rule(attack_type, query)

def generate_from_context(query: str, retrieved_docs: Sequence[RetrievedDoc], force_attack_type: str | None = None) -> Dict:
 attack_type = force_attack_type or choose_attack_type(query, retrieved_docs)
 if attack_type == "benign":
 rule = "NO_RULE_RECOMMENDED"
 valid = False
 errors = ["Benign request"]
 else:
 rule = choose_rule(query, attack_type, retrieved_docs)
 valid, errors = validate_rule(rule)
 prompt = build_prompt(query, retrieved_docs)
 hallucination_risk = 0.0
 if not retrieved_docs:
 hallucination_risk += 0.4
 if not valid and rule != "NO_RULE_RECOMMENDED":
 hallucination_risk += 0.4
 if attack_type == "suspicious_user_agent" and "user" not in query.lower() and "agent" not in query.lower():
 hallucination_risk += 0.2
 return {
 "query": query,
 "attack_type": attack_type,
 "generated_rule": rule,
 "valid_rule": valid,
 "validation_errors": errors,
 "option_coverage": option_coverage(rule) if rule != "NO_RULE_RECOMMENDED" else 0.0,
 "explanation": explain_rule(rule, attack_type, retrieved_docs),
 "prompt": prompt,
 "hallucination_risk": min(1.0, hallucination_risk),
 }
...

```

## snort-rag-rule-generator-main/src/snort\_rag/knowledge\_base.py

Type: text | Source:

/mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort\_rag/knowledge\_base.py

```

FILE: snort-rag-rule-generator-main/src/snort_rag/knowledge_base.py
```python
"""Trusted real-rule knowledge base ingestion and loading utilities."""
from __future__ import annotations

import csv
import io
import json
import re
import tarfile
import urllib.request
from pathlib import Path
from typing import Dict, Iterable, List

from snort_rag.rule_parser import extract_sid, parse_rule
from snort_rag.source_manifest import TRUSTED_SOURCES
from snort_rag.templates import detect_attack_type

PROJECT_ROOT = Path(__file__).resolve().parents[2]
DEFAULT_KB_DIR = PROJECT_ROOT / "data" / "knowledge_base"
DEFAULT_KB_CSV = DEFAULT_KB_DIR / "trusted_rule_kb.csv"
DEFAULT_KB_JSONL = DEFAULT_KB_DIR / "trusted_rule_kb.jsonl"
DEFAULT_FETCH_SUMMARY = DEFAULT_KB_DIR / "fetch_summary.json"

```



```

ARCHIVE_SOURCES = [
    source for source in TRUSTED_SOURCES
    if source.get("access") == "archive"
]

RULE_LINE_RE = re.compile(r"^(alert|drop|reject|pass|log|sdrop)\s+(tcp|udp|icmp|ip)\s+.\s+(\.+\)\s*$", re.IGNORECASE)

def _rule_msg(rule: str) -> str:
    try:
        parsed = parse_rule(rule)
    except Exception:
        return ""
    values = parsed.options.get("msg", [])
    if not values:
        return ""
    return values[0].strip().strip('\'')

def _rule_rev(rule: str) -> str:
    try:
        parsed = parse_rule(rule)
    except Exception:
        return ""
    values = parsed.options.get("rev", [])
    return values[0].strip() if values else ""

def _rule_classtype(rule: str) -> str:
    try:
        parsed = parse_rule(rule)
    except Exception:
        return ""
    values = parsed.options.get("classtype", [])
    return values[0].strip() if values else ""

def _extract_content_keywords(rule: str, limit: int = 3) -> List[str]:
    keywords: List[str] = []
    try:
        parsed = parse_rule(rule)
    except Exception:
        return keywords
    for item in parsed.options.get("content", []):
        value = item.strip().strip('\'')
        if value and value not in keywords:
            keywords.append(value)
            if len(keywords) >= limit:
                break
    return keywords

def _normalize_rule_line(raw_line: str) -> str:
    line = raw_line.strip()
    if line.startswith("#"):
        line = line[1:].strip()
    return line

def _build_kb_record(source: Dict[str, str], archive_name: str, member_name: str, rule: str) -> Dict[str, str]:
    msg = _rule_msg(rule)
    attack_context = " ".join(part for part in [msg, member_name, rule] if part)
    return {
        "kb_id": f"{archive_name}:{member_name}:{extract_sid(rule) or 'nosid'}",
        "source_name": source["name"],
        "source_url": source["url"],
        "source_type": source["type"],
        "archive_name": archive_name,
        "archive_url": source["url"],
        "source_file": member_name,
        "sid": str(extract_sid(rule) or ""),
        "rev": _rule_rev(rule),
        "msg": msg,
        "classtype": _rule_classtype(rule),
        "attack_type": detect_attack_type(attack_context),
        "content_keywords": json.dumps(_extract_content_keywords(rule), ensure_ascii=False),
        "rule": rule,
    }

def fetch_trusted_rule_kb(out_dir: Path = DEFAULT_KB_DIR, timeout: int = 60) -> Dict[str, object]:
    out_dir.mkdir(parents=True, exist_ok=True)
    rows: List[Dict[str, str]] = []
    summary: Dict[str, object] = {"sources": [], "rows": 0}
    for source in ARCHIVE_SOURCES:
        archive_name = source["archive_name"]
        source_summary = {

```

```

        "name": source["name"],
        "url": source["url"],
        "archive_name": archive_name,
        "downloaded": False,
        "rule_count": 0,
    }
    data = urllib.request.urlopen(source["url"], timeout=timeout).read()
    source_summary["downloaded"] = True
    archive_path = out_dir / f"{archive_name}.tar.gz"
    archive_path.write_bytes(data)
    with tarfile.open(fileobj=io.BytesIO(data), mode="r:gz") as tar:
        for member in tar.getmembers():
            if not member.name.endswith(".rules"):
                continue
            extracted = tar.extractfile(member)
            if not extracted:
                continue
            for raw_line in extracted.read().decode("latin1", errors="ignore").splitlines():
                line = _normalize_rule_line(raw_line)
                if not RULE_LINE_RE.match(line):
                    continue
                try:
                    parse_rule(line)
                except Exception:
                    continue
                rows.append(_build_kb_record(source, archive_name, member.name, line))
                source_summary["rule_count"] += 1
    summary["sources"].append(source_summary)

summary["rows"] = len(rows)
write_rule_kb(rows, out_dir)
(out_dir / DEFAULT_FETCH_SUMMARY.name).write_text(json.dumps(summary, indent=2), encoding="utf-8")
return summary

def write_rule_kb(rows: Iterable[Dict[str, str]], out_dir: Path = DEFAULT_KB_DIR) -> None:
    out_dir.mkdir(parents=True, exist_ok=True)
    rows = list(rows)
    fieldnames = [
        "kb_id",
        "source_name",
        "source_url",
        "source_type",
        "archive_name",
        "archive_url",
        "source_file",
        "sid",
        "rev",
        "msg",
        "classtype",
        "attack_type",
        "content_keywords",
        "rule",
    ]
    with (out_dir / "trusted_rule_kb.csv").open("w", newline="", encoding="utf-8") as handle:
        writer = csv.DictWriter(handle, fieldnames=fieldnames)
        writer.writeheader()
        writer.writerows(rows)
    with (out_dir / "trusted_rule_kb.jsonl").open("w", encoding="utf-8") as handle:
        for row in rows:
            handle.write(json.dumps(row, ensure_ascii=False) + "\n")

def load_rule_kb(path: Path | str = DEFAULT_KB_CSV) -> List[Dict[str, str]]:
    kb_path = Path(path)
    if not kb_path.exists():
        raise FileNotFoundError(
            f"Trusted rule knowledge base not found at {kb_path}. "
            "Run scripts/fetch_real_sources.py first."
        )
    with kb_path.open(newline="", encoding="utf-8") as handle:
        return list(csv.DictReader(handle))
...

```

snort-rag-rule-generator-main/src/snort_rag/retrieval.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort_rag/retrieval.py

```

FILE: snort-rag-rule-generator-main/src/snort_rag/retrieval.py
```python
"""Retrieval layer: dense fallback, BM25, hybrid fusion, and PDF extension."""
from __future__ import annotations

```

```

import math
from dataclasses import dataclass
from pathlib import Path
from typing import Iterable, List, Sequence

import numpy as np
import pandas as pd
from sklearn.feature_extraction.text import TfidfVectorizer
from sklearn.metrics.pairwise import cosine_similarity

try:
 from pypdf import PdfReader
except Exception: # pragma: no cover
 PdfReader = None

@dataclass
class RetrievedDoc:
 rank: int
 score: float
 id: str
 text: str
 attack_type: str
 rule: str
 source_name: str
 source_url: str

class BM25Retriever:
 def __init__(self, documents: Sequence[str], k1: float = 1.5, b: float = 0.75):
 self.documents = list(documents)
 self.k1 = k1
 self.b = b
 self.tokens = [self._tokenize(doc) for doc in self.documents]
 self.avgdl = sum(len(t) for t in self.tokens) / max(1, len(self.tokens))
 self.df = {}
 for toks in self.tokens:
 for tok in set(toks):
 self.df[tok] = self.df.get(tok, 0) + 1
 self.N = len(self.documents)

 @staticmethod
 def _tokenize(text: str) -> List[str]:
 return [t.lower() for t in text.replace("/", " ").replace("_", " ").split() if len(t) > 1]

 def scores(self, query: str) -> np.ndarray:
 q_tokens = self._tokenize(query)
 scores = np.zeros(self.N, dtype=float)
 for i, doc_tokens in enumerate(self.tokens):
 dl = len(doc_tokens) or 1
 freqs = {}
 for tok in doc_tokens:
 freqs[tok] = freqs.get(tok, 0) + 1
 for tok in q_tokens:
 if tok not in self.df:
 continue
 idf = math.log(1 + (self.N - self.df[tok] + 0.5) / (self.df[tok] + 0.5))
 tf = freqs.get(tok, 0)
 denom = tf + self.k1 * (1 - self.b + self.b * dl / self.avgdl)
 scores[i] += idf * ((tf * (self.k1 + 1)) / denom) if denom else 0.0
 return scores

class SnortKnowledgeBase:
 def __init__(self, dataset_path: Path | str):
 self.dataset_path = Path(dataset_path)
 self.df = pd.read_csv(self.dataset_path)
 self.df = self.df.fillna("")
 self._rebuild()

 @staticmethod
 def _description(row: pd.Series) -> str:
 return str(row.get("description_naturelle") or row.get("description_nl") or "")

 @staticmethod
 def _rule(row: pd.Series) -> str:
 return str(row.get("snort_rule_reference") or row.get("rule") or "")

 @staticmethod
 def _source_name(row: pd.Series) -> str:
 return str(row.get("source_name") or row.get("source_type") or "person1_dataset")

 @staticmethod
 def _source_url(row: pd.Series, dataset_path: Path) -> str:
 return str(row.get("source_url") or dataset_path)

 def _compose_text(self, row: pd.Series) -> str:

```

```

 return " ".join([
 self._description(row),
 str(row.get("attack_type", "")),
 str(row.get("attack_family", "")),
 str(row.get("severity", "")),
 self._rule(row),
 str(row.get("log_example", "")),
 str(row.get("false_positive_context", "")),
 str(row.get("expected_explanation", "")),
])

def _rebuild(self) -> None:
 self.texts = [self._compose_text(row) for _, row in self.df.iterrows()]
 self.vectorizer = TfidfVectorizer(ngram_range=(1, 2), min_df=1, max_features=12000)
 self.tfidf = self.vectorizer.fit_transform(self.texts)
 self.bm25 = BM25Retriever(self.texts)

def _to_docs(self, indices: Sequence[int], scores: Sequence[float]) -> List[RetrievedDoc]:
 docs = []
 for rank, (idx, score) in enumerate(zip(indices, scores), 1):
 row = self.df.iloc[int(idx)]
 docs.append(RetrievedDoc(
 rank=rank,
 score=float(score),
 id=str(row.get("id", idx)),
 text=self._description(row),
 attack_type=str(row.get("attack_type", "")),
 rule=self._rule(row),
 source_name=self._source_name(row),
 source_url=self._source_url(row, self.dataset_path),
))
 return docs

def dense_retrieve(self, query: str, k: int = 5) -> List[RetrievedDoc]:
 qv = self.vectorizer.transform([query])
 sims = cosine_similarity(qv, self.tfidf).ravel()
 idx = np.argsort(sims)[::-1][:k]
 return self._to_docs(idx, sims[idx])

def bm25_retrieve(self, query: str, k: int = 5) -> List[RetrievedDoc]:
 scores = self.bm25.scores(query)
 idx = np.argsort(scores)[::-1][:k]
 return self._to_docs(idx, scores[idx])

@staticmethod
def _normalize(scores: np.ndarray) -> np.ndarray:
 if scores.max() == scores.min():
 return np.zeros_like(scores)
 return (scores - scores.min()) / (scores.max() - scores.min())

def hybrid_retrieve(self, query: str, k: int = 5, alpha: float = 0.55) -> List[RetrievedDoc]:
 qv = self.vectorizer.transform([query])
 dense = cosine_similarity(qv, self.tfidf).ravel()
 sparse = self.bm25.scores(query)
 fused = alpha * self._normalize(dense) + (1 - alpha) * self._normalize(sparse)
 idx = np.argsort(fused)[::-1][:k]
 return self._to_docs(idx, fused[idx])

def rerank(self, query: str, docs: List[RetrievedDoc], k: int = 5) -> List[RetrievedDoc]:
 q = query.lower()
 reranked = []
 for doc in docs:
 keyword_bonus = 0.0
 for token in doc.attack_type.replace("_", " ").split():
 if token in q:
 keyword_bonus += 0.15
 validity_bonus = 0.10 if doc.rule != "NO_RULE_RECOMMENDED" and "sid:" in doc.rule else 0.0
 source_bonus = 0.05 if doc.source_url else 0.0
 score = doc.score + keyword_bonus + validity_bonus + source_bonus
 reranked.append((score, doc))
 reranked.sort(key=lambda x: x[0], reverse=True)
 output = []
 for rank, (score, doc) in enumerate(reranked[:k], 1):
 doc.rank = rank
 doc.score = float(score)
 output.append(doc)
 return output

def add_pdf_to_kb(self, pdf_path: Path | str, source_name: str = "uploaded_pdf") -> int:
 if PdfReader is None:
 raise RuntimeError("pypdf is not installed")
 path = Path(pdf_path)
 reader = PdfReader(str(path))
 new_rows = []
 for page_no, page in enumerate(reader.pages, 1):
 text = page.extract_text() or ""
 chunks = [text[i:i+1200] for i in range(0, len(text), 1200) if text[i:i+1200].strip()]

```

```

 for j, chunk in enumerate(chunks, 1):
 new_rows.append({
 "id": f"PDF-{path.stem}-{page_no}-{j}",
 "description_naturelle": chunk,
 "attack_type": "external_pdf_knowledge",
 "attack_family": "knowledge_base",
 "severity": "none",
 "snort_rule_reference": "NO_RULE_RECOMMENDED",
 "false_positive_context": "external document chunk",
 "source_type": "uploaded_pdf",
 "expected_explanation": "Chunk imported from an uploaded PDF to extend retrieval context.",
 "source_name": source_name,
 "source_url": str(path),
 "log_example": "",
 })
 if new_rows:
 self.df = pd.concat([self.df, pd.DataFrame(new_rows)], ignore_index=True).fillna("")
 self._rebuild()
 return len(new_rows)
...

```

## snort-rag-rule-generator-main/src/snort\_rag/rule\_parser.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort\_rag/rule\_parser.py

```

FILE: snort-rag-rule-generator-main/src/snort_rag/rule_parser.py
```python
"""Small Snort rule parser/validator used by the dataset generator and evaluation.

It validates a practical subset of Snort 2/3-compatible rule syntax. The goal is
not to replace Snort's own -T validation, but to catch fake outputs before they
enter the RAG dataset or the final generated response.
"""
from __future__ import annotations

from dataclasses import dataclass
import re
from typing import Dict, List, Tuple

RULE_RE = re.compile(
    r"^(?P<action>alert|log|pass|drop|reject|sdrop)\s+"
    r"(?P<protocol>tcp|udp|icmp|ip)\s+"
    r"(?P<src>\S+)\s+(?P<src_port>\S+)\s+"
    r"(?P<direction>->|<>|<-|->)\s+"
    r"(?P<dst>\S+)\s+(?P<dst_port>\S+)\s+"
    r"\((?P<options>.*))\s*$",
    re.IGNORECASE,
)

REQUIRED_OPTIONS = {"msg", "sid", "rev"}
RECOMMENDED_OPTIONS = {"classtype"}

@dataclass
class ParsedRule:
    action: str
    protocol: str
    src: str
    src_port: str
    direction: str
    dst: str
    dst_port: str
    options: Dict[str, List[str]]
    raw_options: List[str]

def split_options(options: str) -> List[str]:
    """Split Snort options by semicolon while respecting quoted strings."""
    chunks: List[str] = []
    buf: List[str] = []
    in_quotes = False
    escaped = False
    for char in options:
        if char == '"' and not escaped:
            in_quotes = not in_quotes
        if char == ";" and not in_quotes:
            item = "".join(buf).strip()
            if item:
                chunks.append(item)
            buf = []
        else:
            buf.append(char)
        escaped = (char == "\\" and not escaped)

```

```

tail = "".join(buf).strip()
if tail:
    chunks.append(tail)
return chunks

def parse_options(options: str) -> Tuple[Dict[str, List[str]], List[str]]:
    parsed: Dict[str, List[str]] = {}
    raw = split_options(options)
    for item in raw:
        if ":" in item:
            key, value = item.split(":", 1)
            key = key.strip().lower()
            value = value.strip()
        else:
            key, value = item.strip().lower(), "true"
        parsed.setdefault(key, []).append(value)
    return parsed, raw

def parse_rule(rule: str) -> ParsedRule:
    rule = rule.strip().replace("→", "->")
    match = RULE_RE.match(rule)
    if not match:
        raise ValueError("Rule header does not match Snort syntax.")
    options, raw_options = parse_options(match.group("options"))
    return ParsedRule(
        action=match.group("action").lower(),
        protocol=match.group("protocol").lower(),
        src=match.group("src"),
        src_port=match.group("src_port"),
        direction=match.group("direction"),
        dst=match.group("dst"),
        dst_port=match.group("dst_port"),
        options=options,
        raw_options=raw_options,
    )

def validate_rule(rule: str) -> Tuple[bool, List[str]]:
    errors: List[str] = []
    try:
        parsed = parse_rule(rule)
    except ValueError as exc:
        return False, [str(exc)]

    missing = sorted(REQUIRED_OPTIONS - set(parsed.options))
    if missing:
        errors.append("Missing required options: " + ", ".join(missing))
    sid_values = parsed.options.get("sid", [])
    for sid in sid_values:
        if not re.match(r"^\d+$", sid.strip()):
            errors.append("sid must be numeric")
    rev_values = parsed.options.get("rev", [])
    for rev in rev_values:
        if not re.match(r"^\d+$", rev.strip()):
            errors.append("rev must be numeric")
    msg_values = parsed.options.get("msg", [])
    for msg in msg_values:
        if not (msg.startswith("'") and msg.endswith("'")):
            errors.append("msg should be quoted")
    if "content" not in parsed.options and parsed.protocol in {"tcp", "udp"}:
        # A TCP/UDP rule can be valid without content, but for generated rules this is risky.
        if "detection_filter" not in parsed.options and "flags" not in parsed.options:
            errors.append("Generated TCP/UDP rule has no content, flags or detection_filter")
    return len(errors) == 0, errors

def option_coverage(rule: str) -> float:
    """Return a simple quality score based on useful rule options."""
    try:
        parsed = parse_rule(rule)
    except ValueError:
        return 0.0
    useful = [
        "msg", "flow", "content", "http_uri", "http_header", "pcre", "flags",
        "detection_filter", "classtype", "sid", "rev", "metadata", "reference",
        "nocase", "fast_pattern", "itype", "icode", "dsize", "byte_test",
    ]
    present = sum(1 for key in useful if key in parsed.options)
    return min(1.0, present / 9.0)

def extract_sid(rule: str) -> int | None:
    try:
        parsed = parse_rule(rule)
        sid = parsed.options.get("sid", [None])[0]
    
```

```

        return int(sid) if sid is not None and sid.isdigit() else None
    except Exception:
        return None
    """

```

snort-rag-rule-generator-main/src/snort_rag/run_devoir3.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort_rag/run_devoir3.py

```

FILE: snort-rag-rule-generator-main/src/snort_rag/run_devoir3.py
"""python
from __future__ import annotations

from pathlib import Path

from snort_rag.architectures import SnortRAGArchitectures
from snort_rag.evaluation import evaluate_architectures, plot_tsne

PROJECT_ROOT = Path(__file__).resolve().parents[2]

def main() -> None:
    dataset = PROJECT_ROOT / "data" / "processed" / "final_snort_dataset.csv"
    if not dataset.exists():
        raise SystemExit("Dataset not found. Expected official Person 1 dataset at data/processed/final_snort_dataset.csv")
    rag = SnortRAGArchitectures(dataset)
    out_dir = PROJECT_ROOT / "results"
    summary = evaluate_architectures(rag, out_dir)
    plot_tsne(rag, out_dir / "embedding_tsne.png")
    print(summary.to_string(index=False))

if __name__ == "__main__":
    main()
"""

```

snort-rag-rule-generator-main/src/snort_rag/source_manifest.py

Type: text | Source:

/mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort_rag/source_manifest.py

```

FILE: snort-rag-rule-generator-main/src/snort_rag/source_manifest.py
"""python
"""Trusted source manifest for the Snort rule generator project.

The project does not ship a copied public ruleset as a dataset. The public sources
below are used as rule-writing references and optional seed extraction sources.
Students can run scripts/fetch_real_sources.py on a machine with Internet access
to reproduce extraction of real Snort/ET rule skeletons, then generate the final
student-owned synthetic dataset.
"""

TRUSTED_SOURCES = [
    {
        "name": "Snort 3 Rule Writing Guide - Cisco Talos",
        "url": "https://docs.snort.org/",
        "type": "official_documentation",
        "access": "reference",
        "use_in_project": "Rule syntax, required options, supported detection keywords, validation rules.",
        "license_note": "Documentation reference only; no bulk copying into the dataset.",
    },
    {
        "name": "Snort Rules and IDS Software Downloads",
        "url": "https://www.snort.org/downloads",
        "type": "official_rules_download_page",
        "access": "reference",
        "use_in_project": "Official community/registered rules source reference and optional manual validation.",
        "license_note": "Community Ruleset is referenced as a real Snort source; do not redistribute proprietary/subscriber",
    },
    {
        "name": "Snort Registered vs Subscriber documentation",
        "url": "https://snort.org/documents/registered-vs-subscriber",
        "type": "official_documentation",
        "access": "reference",
        "use_in_project": "Ruleset availability and licensing context.",
        "license_note": "Used only for source justification.",
    },
    {
        "name": "Emerging Threats Open Rules",

```

```

        "url": "https://rules.emergingthreats.net/open/snort-2.9.0/emerging.rules.tar.gz",
        "type": "open_ruleset_optional_extraction",
        "access": "archive",
        "archive_name": "emerging_threats_open",
        "use_in_project": "Optional extraction of rule skeletons/categories to inspire student-generated data.",
        "license_note": "ET Open is commonly distributed as open rules; keep attribution and avoid submitting copied full d
    },
    {
        "name": "Snort Community Rules",
        "url": "https://www.snort.org/downloads/community/community-rules.tar.gz",
        "type": "official_open_ruleset",
        "access": "archive",
        "archive_name": "snort_community",
        "use_in_project": "Trusted real-rule base knowledge for dataset generation and retrieval.",
        "license_note": "Use the public community rules only and preserve source attribution.",
    },
    {
        "name": "Emerging Threats FAQ",
        "url": "https://community.emergingthreats.net/t/frequently-asked-questions/56",
        "type": "source_documentation",
        "access": "reference",
        "use_in_project": "Explains ET Open and community-maintained ruleset context.",
        "license_note": "Reference only.",
    },
]

SOURCE_URLS = {source["name"]: source["url"] for source in TRUSTED_SOURCES}
...

```

snort-rag-rule-generator-main/src/snort_rag/templates.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/src/snort_rag/templates.py

```

FILE: snort-rag-rule-generator-main/src/snort_rag/templates.py
```python
"""Deterministic Snort rule templates for defensive generation.

These templates are intentionally conservative and are used as the local generation
module in the Devoir 3 implementation because the assignment explicitly forbids
OpenAI/Mistral/Ollama API usage for the TP. The templates are filled only after
retrieval, so generation is not a black-box response.
"""
from __future__ import annotations

import hashlib
import random
from typing import Dict, List

CLASSTYPE = {
 "port_scan": "attempted-recon",
 "ssh_bruteforce": "attempted-admin",
 "ftp_bruteforce": "attempted-admin",
 "rdp_bruteforce": "attempted-admin",
 "sql_injection": "web-application-attack",
 "xss": "web-application-attack",
 "directory_traversal": "web-application-attack",
 "command_injection": "web-application-attack",
 "log4shell": "web-application-attack",
 "shellshock": "web-application-attack",
 "dns_tunneling": "policy-violation",
 "dns_axfr": "attempted-recon",
 "icmp_sweep": "attempted-recon",
 "malware_c2": "trojan-activity",
 "smb_exploit": "attempted-admin",
 "suspicious_user_agent": "web-application-attack",
 "webshell_upload": "trojan-activity",
 "benign": "not-suspicious",
}

SEVERITY = {
 "port_scan": "medium",
 "ssh_bruteforce": "high",
 "ftp_bruteforce": "medium",
 "rdp_bruteforce": "high",
 "sql_injection": "high",
 "xss": "medium",
 "directory_traversal": "high",
 "command_injection": "critical",
 "log4shell": "critical",
 "shellshock": "critical",
 "dns_tunneling": "medium",
 "dns_axfr": "medium",
 "icmp_sweep": "low",
}

```



```

"malware_c2": "critical",
"smb_exploit": "critical",
"suspicious_user_agent": "medium",
"webshell_upload": "high",
"benign": "none",
}

ATTACK_KEYWORDS: Dict[str, List[str]] = {
 "port_scan": ["scan", "nmap", "ports", "reconnaissance", "syn scan", "balayage"],
 "ssh_bruteforce": ["ssh", "bruteforce", "brute force", "login attempts", "22"],
 "ftp_bruteforce": ["ftp", "bruteforce", "USER", "PASS", "21"],
 "rdp_bruteforce": ["rdp", "3389", "remote desktop", "bruteforce"],
 "sql_injection": ["sql", "injection", "or 1=1", "union select", "sqli"],
 "xss": ["xss", "script", "cross site", "javascript", "<script"],
 "directory_traversal": [".../", "traversal", "etc/passwd", "path traversal", "%2e%2e"],
 "command_injection": ["command injection", ";id", "cmd=", "whoami", "wget", "curl"],
 "log4shell": ["log4j", "jndi", "ldap", "log4shell"],
 "shellshock": ["shellshock", "() {", "cgi-bin", "bash"],
 "dns_tunneling": ["dns tunnel", "tunneling", "long domain", "exfiltration dns"],
 "dns_axfr": ["axfr", "zone transfer", "dns transfer"],
 "icmp_sweep": ["icmp", "ping sweep", "echo request", "ping scan"],
 "malware_c2": ["c2", "command and control", "beacon", "malware", "botnet"],
 "smb_exploit": ["smb", "eternalblue", "445", "ms17-010", "smb exploit"],
 "suspicious_user_agent": ["sqlmap", "nikto", "acunetix", "scanner user-agent", "user agent"],
 "webshell_upload": ["webshell", "upload php", "multipart", ".php upload"],
 "benign": ["normal", "legitimate", "backup", "health check", "authorized", "benign"],
}

DESCRIPTION_TEMPLATES = {
 "port_scan": [
 "Detect a TCP SYN port scan against an internal web server.",
 "A host sends many SYN packets to several ports on $HOME_NET.",
 "Détecter un balayage de ports TCP vers un serveur interne.",
],
 "ssh_bruteforce": [
 "Detect repeated SSH login attempts against port 22.",
 "An external client is brute forcing SSH authentication.",
 "Détecter une attaque brute force SSH sur un serveur Linux.",
],
 "ftp_bruteforce": [
 "Detect repeated FTP USER commands suggesting brute force.",
 "Multiple FTP login attempts target an internal FTP server.",
 "Détecter des tentatives répétées de connexion FTP.",
],
 "rdp_bruteforce": [
 "Detect many RDP connection attempts to port 3389.",
 "External host tries to brute force Remote Desktop.",
 "Détecter une attaque brute force RDP vers un serveur Windows.",
],
 "sql_injection": [
 "Detect SQL injection in an HTTP URI using UNION SELECT.",
 "User sends ' OR 1=1 in a web request.",
 "Détecter une injection SQL dans l'URL HTTP.",
],
 "xss": [
 "Detect reflected XSS using script tag in HTTP URI.",
 "HTTP request contains javascript payload in a parameter.",
 "Détecter une tentative XSS dans une requête web.",
],
 "directory_traversal": [
 "Detect directory traversal attempting to read /etc/passwd.",
 "A web request contains encoded ../ sequences.",
 "Détecter une traversée de répertoires dans l'URI.",
],
 "command_injection": [
 "Detect command injection in HTTP parameter using semicolon and whoami.",
 "A request tries to execute system command through cmd parameter.",
 "Détecter une injection de commande via une URL HTTP.",
],
 "log4shell": [
 "Detect Log4Shell style ${jndi:ldap://...} in HTTP headers.",
 "HTTP traffic contains a JNDI LDAP lookup payload.",
 "Détecter une tentative Log4Shell dans les entêtes HTTP.",
],
 "shellshock": [
 "Detect Shellshock Bash function payload in HTTP header.",
 "CGI request contains () { payload in User-Agent.",
 "Détecter Shellshock dans les entêtes HTTP.",
],
 "dns_tunneling": [
 "Detect DNS tunneling using unusually long DNS query names.",
 "DNS requests show long encoded subdomains indicating exfiltration.",
 "Détecter un tunnel DNS avec des domaines très longs.",
],
 "dns_axfr": [
 "Detect DNS AXFR zone transfer attempt.",
 "Client asks for full DNS zone transfer from internal DNS server.",
],
}

```

```

 "Détecter une tentative de transfert de zone DNS AXFR.",
],
 "icmp_sweep": [
 "Detect ICMP ping sweep across internal hosts.",
 "Many ICMP echo requests target the internal network.",
 "Détecter un balayage ICMP de type ping sweep.",
],
 "malware_c2": [
 "Detect malware command and control HTTP beacon.",
 "Infected host sends periodic HTTP beacon to external server.",
 "Détecter une activité C2 malware dans le trafic HTTP.",
],
 "smb_exploit": [
 "Detect suspicious SMB exploit attempt against port 445.",
 "Possible EternalBlue style SMB transaction targets internal host.",
 "Détecter une tentative d'exploitation SMB sur le port 445.",
],
 "suspicious_user_agent": [
 "Detect suspicious scanner User-Agent such as sqlmap or Nikto.",
 "A web scanner user-agent appears in HTTP headers.",
 "Détecter un User-Agent d'outil de scan web.",
],
 "webshell_upload": [
 "Detect suspicious PHP web shell upload through multipart form.",
 "HTTP file upload contains .php filename and suspicious content.",
 "Détecter un upload de webshell PHP.",
],
 "benign": [
 "Normal HTTP health check from monitoring server.",
 "Legitimate DNS query to public resolver.",
 "Traffic backup autorisé entre deux serveurs internes.",
],
}

```

```

def stable_sid(text: str, base: int = 9000000, modulo: int = 900000) -> int:
 digest = hashlib.sha256(text.encode("utf-8")).hexdigest()
 return base + (int(digest[:10], 16) % modulo)

```

```

def detect_attack_type(text: str) -> str:
 lower = text.lower()
 scores: Dict[str, int] = {}
 for attack, keywords in ATTACK_KEYWORDS.items():
 scores[attack] = sum(1 for kw in keywords if kw.lower() in lower)
 best = max(scores, key=scores.get)
 return best if scores[best] > 0 else "suspicious_user_agent"

```

```

def generate_snort_rule(attack_type: str, query: str = "", sid: int | None = None, rev: int = 1) -> str:
 sid = sid or stable_sid(f"{attack_type}:{query}")
 msg = f"LOCAL {attack_type.replace('_', ' ').upper()} detected"
 classtype = CLASSTYPE.get(attack_type, "attempted-recon")
 if attack_type == "port_scan":
 return (f'alert tcp $EXTERNAL_NET any -> $HOME_NET any (msg:"{msg}"; flags:S; '
 f'detection_filter:track by_src, count 20, seconds 60; classtype:{classtype}; sid:{sid}; rev:{rev};)')
 if attack_type == "ssh_bruteforce":
 return (f'alert tcp $EXTERNAL_NET any -> $HOME_NET 22 (msg:"{msg}"; flow:to_server; flags:S; '
 f'detection_filter:track by_src, count 8, seconds 60; classtype:{classtype}; sid:{sid}; rev:{rev};)')
 if attack_type == "ftp_bruteforce":
 return (f'alert tcp $EXTERNAL_NET any -> $HOME_NET 21 (msg:"{msg}"; flow:to_server,established; '
 f'content:"USER "; nocase; detection_filter:track by_src, count 6, seconds 60; classtype:{classtype}; sid:{sid}; rev:{rev};)')
 if attack_type == "rdp_bruteforce":
 return (f'alert tcp $EXTERNAL_NET any -> $HOME_NET 3389 (msg:"{msg}"; flags:S; '
 f'detection_filter:track by_src, count 10, seconds 120; classtype:{classtype}; sid:{sid}; rev:{rev};)')
 if attack_type == "sql_injection":
 payload = random.choice(['"union select"', '"or 1=1"', '"select%20"'])
 return (f'alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"{msg}"; flow:to_server,established; '
 f'content:{payload}; http_uri; nocase; classtype:{classtype}; sid:{sid}; rev:{rev};)')
 if attack_type == "xss":
 return (f'alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"{msg}"; flow:to_server,established; '
 f'content:"<script"; http_uri; nocase; classtype:{classtype}; sid:{sid}; rev:{rev};)')
 if attack_type == "directory_traversal":
 return (f'alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"{msg}"; flow:to_server,established; '
 f'content:"../"; http_uri; content:"/etc/passwd"; http_uri; nocase; classtype:{classtype}; sid:{sid}; rev:{rev};)')
 if attack_type == "command_injection":
 return (f'alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"{msg}"; flow:to_server,established; '
 f'content:"cmd="; http_uri; content:""; http_uri; pcre:"/(whoami|id|wget|curl)/Ui"; classtype:{classtype}; sid:{sid}; rev:{rev};)')
 if attack_type == "log4shell":
 return (f'alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"{msg}"; flow:to_server,established; '
 f'content:"${jndi}"; http_header; nocase; pcre:"/\\$\\{jndi:(ldap|rmi|dns):/Hi"; classtype:{classtype}; sid:{sid}; rev:{rev};)')
 if attack_type == "shellshock":
 return (f'alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"{msg}"; flow:to_server,established; '
 f'content:"()" {" "; http_header; content:"/bin/"; http_header; nocase; classtype:{classtype}; sid:{sid}; rev:{rev};)')
 if attack_type == "dns_tunneling":
 return (f'alert udp $HOME_NET any -> $EXTERNAL_NET 53 (msg:"{msg}"; dsize:>120; '
 f'pcre:"/[A-Za-z0-9]{{40,}}\\.\\./"; classtype:{classtype}; sid:{sid}; rev:{rev};)')

```

```

if attack_type == "dns_axfr":
 return (f'alert udp $EXTERNAL_NET any -> $HOME_NET 53 (msg:"{msg}"; content:"|00 FC 00 01|"; '
 f'offset:12; depth:4; classtype:{classtype}; sid:{sid}; rev:{rev};)')
if attack_type == "icmp_sweep":
 return (f'alert icmp $EXTERNAL_NET any -> $HOME_NET any (msg:"{msg}"; itype:8; '
 f'detection_filter:track by_src, count 15, seconds 60; classtype:{classtype}; sid:{sid}; rev:{rev};)')
if attack_type == "malware_c2":
 return (f'alert tcp $HOME_NET any -> $EXTERNAL_NET $HTTP_PORTS (msg:"{msg}"; flow:to_server,established; '
 f'content: "/gate.php"; http_uri; content: "User-Agent|3A|"; http_header; nocase; classtype:{classtype}; sid:{sid}; rev:{rev};)')
if attack_type == "smb_exploit":
 return (f'alert tcp $EXTERNAL_NET any -> $HOME_NET 445 (msg:"{msg}"; flow:to_server,established; '
 f'content: "|FF|SMB"; depth:4; content: "|25 00 00 00|"; distance:0; within:80; classtype:{classtype}; sid:{sid}; rev:{rev};)')
if attack_type == "suspicious_user_agent":
 agent = random.choice(["sqlmap", "Nikto", "acunetix"])
 return (f'alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"{msg}"; flow:to_server,established; '
 f'content: "User-Agent|3A| {agent}"; http_header; nocase; classtype:{classtype}; sid:{sid}; rev:{rev};)')
if attack_type == "webshell_upload":
 return (f'alert tcp $EXTERNAL_NET any -> $HTTP_SERVERS $HTTP_PORTS (msg:"{msg}"; flow:to_server,established; '
 f'content: "Content-Disposition|3A| form-data"; http_header; content: ".php"; http_client_body; nocase; classtype:{classtype}; sid:{sid}; rev:{rev};)')
return (f'alert tcp $EXTERNAL_NET any -> $HOME_NET any (msg:"{msg}"; flags:S; '
 f'classtype:{classtype}; sid:{sid}; rev:{rev};)')

```

## snort-rag-rule-generator-main/tests/test\_generate\_dataset.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/tests/test\_generate\_dataset.py

```

FILE: snort-rag-rule-generator-main/tests/test_generate_dataset.py
```python
import csv

from snort_rag.generate_dataset import build_rows

def test_build_rows_uses_real_rule_as_target(tmp_path):
    kb_path = tmp_path / "trusted_rule_kb.csv"
    rule = (
        'alert tcp $EXTERNAL_NET any -> $HOME_NET 80 '
        '(msg:"ET WEB_SERVER SQL Injection attempt"; flow:to_server,established; '
        'content:"union select"; http_uri; classtype:web-application-attack; sid:20111111; rev:3;)'
    )
    with kb_path.open("w", newline="", encoding="utf-8") as handle:
        writer = csv.DictWriter(
            handle,
            fieldnames=[
                "kb_id",
                "source_name",
                "source_url",
                "source_type",
                "archive_name",
                "archive_url",
                "source_file",
                "sid",
                "rev",
                "msg",
                "classtype",
                "attack_type",
                "content_keywords",
                "rule",
            ],
        )
        writer.writeheader()
        writer.writerow(
            {
                "kb_id": "et:test.rules:20111111",
                "source_name": "Emerging Threats Open Rules",
                "source_url": "https://rules.emergingthreats.net/open/snort-2.9.0/emerging.rules.tar.gz",
                "source_type": "open_ruleset_optional_extraction",
                "archive_name": "emerging_threats_open",
                "archive_url": "https://rules.emergingthreats.net/open/snort-2.9.0/emerging.rules.tar.gz",
                "source_file": "emerging-web_server.rules",
                "sid": "20111111",
                "rev": "3",
                "msg": "ET WEB_SERVER SQL Injection attempt",
                "classtype": "web-application-attack",
                "attack_type": "sql_injection",
                "content_keywords": '["union select"]',
                "rule": rule,
            }
        )

    rows = build_rows(multiplier=3, seed=7, kb_path=kb_path)

    assert len(rows) == 3
    assert all(row["rule"] == rule for row in rows)

```

```
    assert all(row["base_rule"] == rule for row in rows)
    assert all(row["generation_method"] == "real_rule_paraphrase_expansion" for row in rows)
    assert all(row["source_usage"] == "generated from a persisted trusted-source real Snort rule" for row in rows)
    assert {row["augmentation_index"] for row in rows} == {1, 2, 3}
    ...
```

snort-rag-rule-generator-main/tests/test_rule_parser.py

Type: text | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/tests/test_rule_parser.py

```
FILE: snort-rag-rule-generator-main/tests/test_rule_parser.py
```python
from snort_rag.rule_parser import validate_rule

def test_valid_rule():
 rule = 'alert tcp $EXTERNAL_NET any -> $HOME_NET 22 (msg:"LOCAL SSH"; flags:S; sid:9000001; rev:1;)'
 valid, errors = validate_rule(rule)
 assert valid, errors


def test_invalid_rule():
 rule = 'this is not a rule'
 valid, errors = validate_rule(rule)
 assert not valid
 ...
```

### 3. Images

snort-rag-rule-generator-main/results/embedding\_tsne.png

Type: image | Source: /mnt/d/Games/snort-rag-rule-generator-main/snort-rag-rule-generator-main/results/embedding\_tsne.png

FILE: snort-rag-rule-generator-main/results/embedding\_tsne.png (embedded preview)

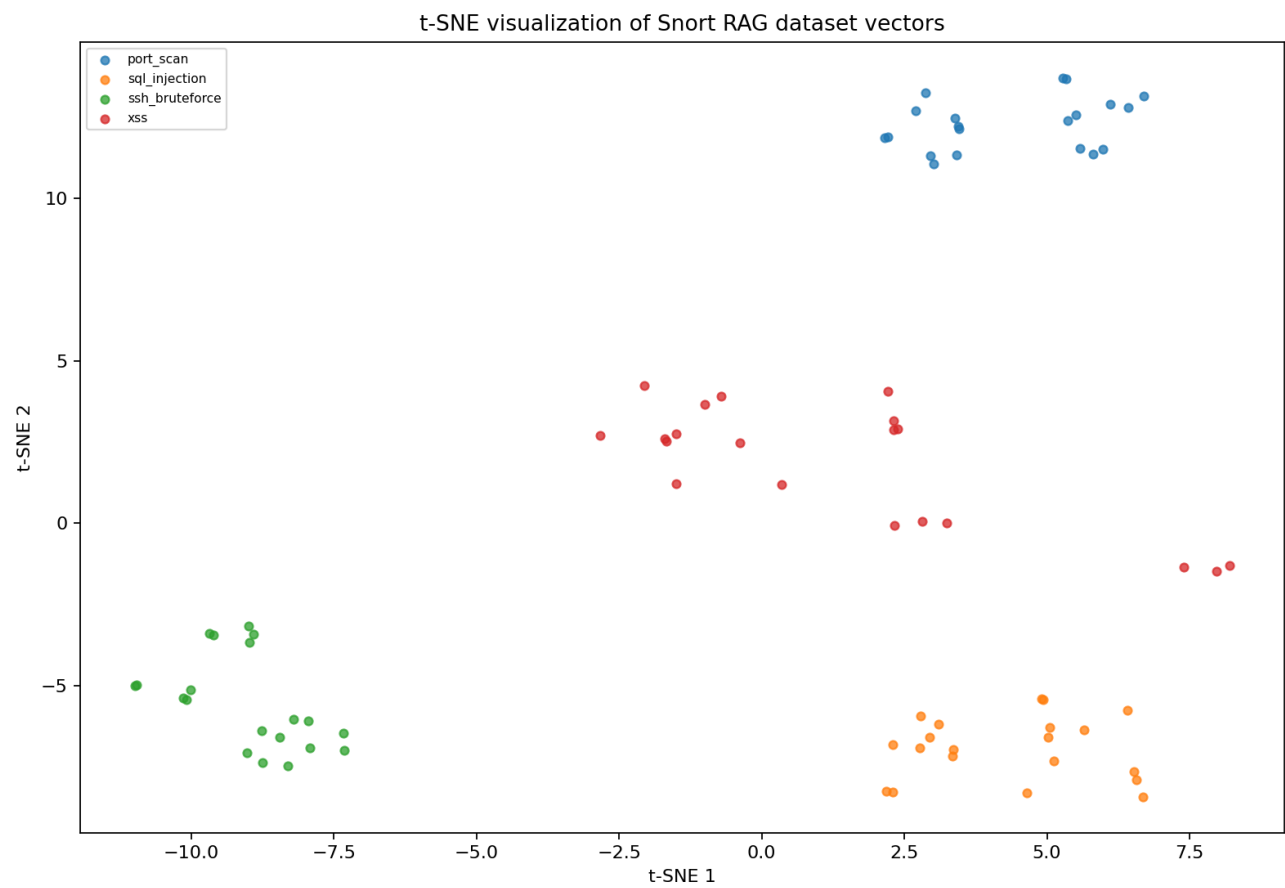

## 4. Skipped Binary Files

- snort-rag-rule-generator-main/most\_important\_file.pdf [application/pdf]
- snort-rag-rule-generator-main/snort\_rag\_rule\_generator.pdf [application/pdf]
- snort-rag-rule-generator-main/docs/rapport\_snort\_rag\_devoir3.docx [application/vnd.openxmlformats-officedocument.wordprocessingml.document]
- snort-rag-rule-generator-main/docs/rapport\_snort\_rag\_devoir3.pdf [application/pdf]

## 5. Export Summary

- Included files count: 28
- Skipped files count: 16
- Skipped binary files: 4
- Skipped large files: 0
- Warning: no image embed failures