


Adfind 的使用

本文部分节选于《域渗透攻防指南》，购买请长按如下图片扫码

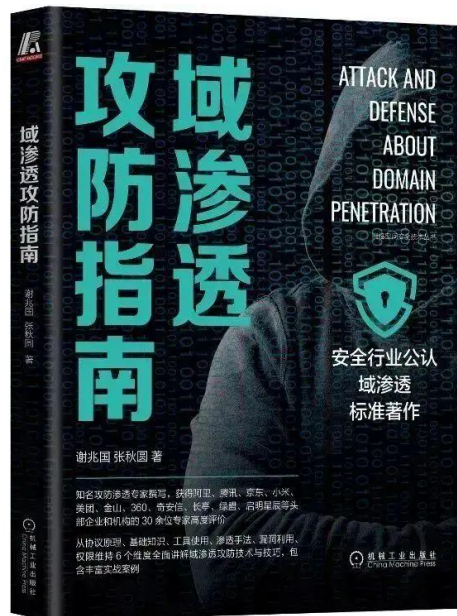

小谢1997521 为你推荐

【限量签名版】《域渗透攻防指南》

¥99 ¥129



本商品由 放心购 提供保障

谢公子学安全

Adfind 是一个使用 C++ 语言写的活动目录查询工具，它允许用户轻松地搜索各种活动目录信息。它不需要安装，因为它是基于命令行的。它提供了许多选项，可以细化搜索并返回相关细节。下面讲解 Adfind 的参数以及其使用。

参数

执行如下命令即可查看 Adfind 的所有参数。

```
AdFind.exe /?
```

如图所示，可以看到 adfind 的参数。

```
e:\>AdFind.exe /?

AdFind V01.56.00cpp Joe Richards (support@joeware.net) April 2021

-help          Basic help.
-?             Basic help.
-??           Advanced/Expert help.
-????         Shortcut help.
-sc?           Shortcut help.
-meta?         Metadata help.
-regex?        Regular Expressions help.
-gui           Combine with help switch to open that output in text editor.

Usage:
AdFind [switches] [-b basedn] [-f filter] [attr list]

    basedn      RFC 2253 DN to base search from.
                If no base specified, defaults to default NC.
                Base DN can also be specified as a SID, GUID, or IID.
    filter      RFC 2254 LDAP filter.
                If no filter specified, defaults to objectclass=*.
    attr list   List of specific attributes to return, if nothing specified
                returns 'default' attributes, aka * set.

Switches: (designated by - or /)
```

1. 连接选项

下面这几个是连接选项，也就是在连接的时候指定的参数。如果是在域内机器上执行 adfind 的话，则不需要连接参数。如果是域外机器执行 adfind 的话，则需要指定连接参数。如下：

- -h: 指定主机与端口 (ip:port)
- -p: 也可以单独使用-p 参数指定端口
- -u: 指定用户
- -up: 指定密码

2. 过滤选项

下面这几个是过滤参数，也就是进行查询的时候需要过滤的一些条件。如下：

- -b: 指定要查询的根节点 basedn
- -bit: 指定位查询
- -f: LDAP 过滤条件, 指定 ldap 语法

3. 显示选项

下面这几个是显示参数, 也就是查询出来之后如何显示的一些参数。如下:

- -appver: 显示 adfind 版本信息
- -c: 只统计数量
- -csv: 导出为 csv 格式
- -dn: 只显示 dn, 不返回详细信息
- -s: 搜索的范围, 有 one(当前层级)/sub(一层一层递归), 默认是 sub
- -sdna: 非域管查询 sd 信息
- -recmute: 如果所有属性都为空, 则禁止显示 DN。这主要适用于 -sddl 过滤器选项。
- -t: 查询超时时间, 默认 120 秒

4. 查看帮助

下面这几个是帮助参数, 也就是使用过程的一些帮助。如下:

- -help: 基础的帮助
- -?: 基础的帮助
- -??: 高级帮助
- -????: 快捷方式帮助

- -sc?: 快捷方式帮助
- -meta?: 元数据帮助
- -regex?: 固定表达式帮助

使用

adfind 工具使用的结构如下：其中 switches 是连接参数，-b 是指定要查询的根节点 basedn，-f 是指定过滤的条件，attr 是指定要显示的属性。

```
AdFind.exe [switches] [-b basedn] [-f filter] [attr list]
```

1. [switches]

该选项是连接参数，如果 adfind 是在域内主机上运行，则无需该选项。如果是域外机器上执行，则需要指定域控和提供一个有效的域用户和密码。

执行如下命令，连接域控 10.211.55.4 的 389 端口。提供的用户名是 xie\hack，密码是 P@ss1234，需要查询的数据是域控列表。

```
AdFind.exe -h 10.211.55.4:389 -u xie\hack -up P@ss1234 -sc dclist
```

如图所示，通过指定域控以及账号密码，成功查询出目标域的域控。

```
C:\Users\administrator\Desktop>AdFind.exe -h 10.211.55.4:389 -u xie\hack -up P@ss1234 -sc dclist
AD01.xie.com
```

注：本文以后查询条件均是在域内机器查询，故不显示连接参数。

2. [-b basedn]

该选项指定要查询的根节点 basedn。如下命令


#查询 dn dc=xie,dc=com 下的所有机器

```
Adfind.exe -b dc=xie,dc=com -f "objectcategory=computer" dn
```

#查询 dn CN=Computers,DC=xie,DC=com 下的所有机器

Adfind.exe -b CN=Computers,DC=xie,DC=com -f "objectcategory=computer" dn

如图所示，在 dn 为 dc=xie,dc=com 下查询所有机器，可以查询出 3 个对象。而在 dn 为 CN=Computers,DC=xie,DC=com 下查询所有机器，可以查询出 2 个对象。原因在于域控在 OU=Domain Controllers,DC=xie,DC=com dn 下，使用 CN=Computers,DC=xie,DC=com 为根节点时查询不出域控机器。

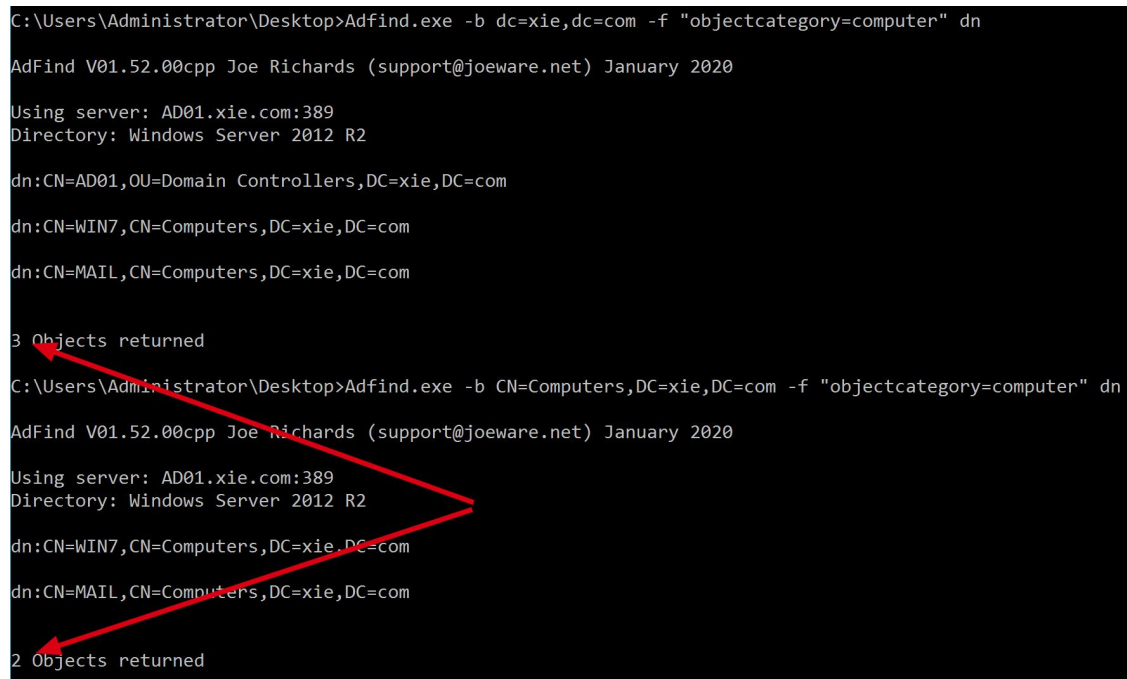

```
C:\Users\Administrator\Desktop>Adfind.exe -b dc=xie,dc=com -f "objectcategory=computer" dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
dn:CN=WIN7,CN=Computers,DC=xie,DC=com
dn:CN=MAIL,CN=Computers,DC=xie,DC=com

3 Objects returned

C:\Users\Administrator\Desktop>Adfind.exe -b CN=Computers,DC=xie,DC=com -f "objectcategory=computer" dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=WIN7,CN=Computers,DC=xie,DC=com
dn:CN=MAIL,CN=Computers,DC=xie,DC=com

2 Objects returned
```

3. [-f filter]

该选项指定查询的过滤条件。如下命令，使用 -f 参数过滤不同的查询条件

#查询域内所有机器

Adfind.exe -f "objectcategory=computer" dn

#查询域内所有用户

AdFind.exe -f "(&(objectCategory=person)(objectClass=user))" dn

如图所示，当过滤条件不同时，查询结果的不同。

```

C:\Users\Administrator\Desktop>Adfind.exe -f "objectcategory=computer" dn

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
dn:CN=WIN7,CN=Computers,DC=xie,DC=com
dn:CN=MAIL,CN=Computers,DC=xie,DC=com

3 Objects returned

C:\Users\Administrator\Desktop>AdFind.exe -f "(&(objectCategory=person)(objectClass=user))" dn

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=Administrator,CN=Users,DC=xie,DC=com
dn:CN=Guest,CN=Users,DC=xie,DC=com
dn:CN=krbtgt,CN=Users,DC=xie,DC=com
dn:CN=Exchange Online-ApplicationAccount,CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{1f05a927-617d-4362-be07-8a7175347545},CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{bb558c35-97f1-4cb9-8ff7-d53741dc928c},CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{e0dc1c29-89c3-4034-b678-e6c29d823ed9},CN=Users,DC=xie,DC=com

```

4. [attr list]

该选项用于指定查询出来的结果显示哪个属性。当不使用该参数时，会显示查询对象的所有属性。

#查询域内所有机器，显示所有机器的所有属性

Adfind.exe -f "objectcategory=computer"

#查询域内所有机器，显示所有机器的 dn 属性

Adfind.exe -f "objectcategory=computer" dn

#查询域内所有机器，显示所有机器的 dn 属性,这样查询的结果直接没有换行。只有 dn 属

性能在前面加个-

```
Adfind.exe -f "objectcategory=computer" -dn
```

#查询域内所有机器, 显示所有机器的 name 属性

```
Adfind.exe -f "objectcategory=computer" name
```

如图所示, 当不指定显示哪个属性时, 默认显示所有属性。

```
C:\Users\Administrator\Desktop>Adfind.exe -f "objectcategory=computer"

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
>objectClass: top
>objectClass: person
>objectClass: organizationalPerson
>objectClass: user
>objectClass: computer
>cn: AD01
>distinguishedName: CN=AD01,OU=Domain Controllers,DC=xie,DC=com
>instanceType: 4
>whenCreated: 20210227124136.0Z
>whenChanged: 20210903020412.0Z
>uSNCreated: 12293
>uSNChanged: 47711
>name: AD01
>objectGUID: {67357FAD-1630-469D-AAE5-57110B1BCC7C}
>userAccountControl: 532480
>badPwdCount: 0
>codePage: 0
>countryCode: 0
>badPasswordTime: 132696193438779201
>lastLogoff: 0
>lastLogon: 132752841591248652
>localPolicyFlags: 0
>pwdLastSet: 132751082521581581
>primaryGroupID: 516
>objectSid: S-1-5-21-1313979556-3624129433-4055459191-1002
>accountExpires: 9223372036854775807
>logonCount: 57
>sAMAccountName: AD01$
>sAMAccountType: 805306369
>operatingSystem: Windows Server 2012 R2 Standard
>operatingSystemVersion: 6.3 (9600)
>serverReferenceBL: CN=AD01,CN=Servers,CN=Default-First-Site-Name,CN=Sites,CN=Configuration,DC=xie,DC=com
>dNSHostName: AD01.xie.com
>rIDSetReferences: CN=RID Set,CN=AD01,OU=Domain Controllers,DC=xie,DC=com
>servicePrincipalName: exchangeAB/AD01
```

如图所示, 当指定了属性时, 只显示指定属性。

```
C:\Users\Administrator\Desktop>Adfind.exe -f "objectcategory=computer" dn

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
dn:CN=WIN7,CN=Computers,DC=xie,DC=com
dn:CN=MAIL,CN=Computers,DC=xie,DC=com

3 Objects returned

C:\Users\Administrator\Desktop>Adfind.exe -f "objectcategory=computer" -dn

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
dn:CN=WIN7,CN=Computers,DC=xie,DC=com
dn:CN=MAIL,CN=Computers,DC=xie,DC=com

3 Objects returned

C:\Users\Administrator\Desktop>Adfind.exe -f "objectcategory=computer" name

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
>name: AD01

dn:CN=WIN7,CN=Computers,DC=xie,DC=com
>name: WIN7
```

查询示例

以下演示一些在实战中经常用到的一些查询语法。

1. 查询域信任关系

如下命令是查询域信任关系。

```
adfind.exe -f objectclass=trusteddomain -dn
```

如图所示，可以看到当前域与 shanghai.xie.com、beijing.xie.com 具有信任关系。

```
C:\Users\Administrator\Desktop>adfind.exe -f objectclass=trusteddomain -dn
AdFind V01.56.00cpp Joe Richards (support@joeware.net) April 2021

Using server: AD.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=shanghai.xie.com,CN=System,DC=xie,DC=com
dn:CN=beijing.xie.com,CN=System,DC=xie,DC=com

2 Objects returned
```

2. 查询域控

以下命令是查询域控的一些信息。

#查询域控名称

```
AdFind.exe -sc dclist
```

#查询域控版本

```
AdFind.exe -schema -s base objectversion
```

备注(域控版本 数字对用的版本)

- Windows 2000 Server operating system: 13
- Windows Server 2003 operating system: 30
- Windows Server 2003 R2 operating system: 31
- Windows Server 2008 operating system (AD DS): 44
- Windows Server 2008 R2 operating system (AD DS): 47

- Windows Server 2012 operating system (AD DS): 56
- Windows Server 2012 R2 operating system (AD DS): 69
- Windows Server 2016 operating system (AD DS): 87
- Windows Server v1709 operating system (AD DS): 87
- Windows Server v1803 operating system (AD DS): 88
- Windows Server v1809 operating system (AD DS): 88
- Windows Server 2019 operating system (AD DS): 88
- Active Directory Application Mode (ADAM): 30
- Windows Server 2008 (AD LDS): 30
- Windows Server 2008 R2 (AD LDS): 31
- Windows Server 2012 (AD LDS): 31
- Windows Server 2012 R2 (AD LDS): 31
- Windows Server 2016 (AD LDS): 31
- Windows Server v1709 (AD LDS): 31
- Windows Server v1803 (AD LDS): 31
- Windows Server v1809 (AD LDS): 31
- Windows Server 2019 (AD LDS): 31

如图所示，可以看到查询到域控的一些相关信息。

C:\Users\Administrator\Desktop>AdFind.exe -sc dclist
AD01.xie.com

C:\Users\Administrator\Desktop>AdFind.exe -schema -s base objectversion

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: CN=Schema,CN=Configuration,DC=xie,DC=com

dn:CN=Schema,CN=Configuration,DC=xie,DC=com
>objectVersion: 69

1 Objects returned

3. 机器相关

下面这几个是与机器相关的查询命令。

(1) 查询域中所有机器

以下命令是查询域中所有的机器。

#查询域中所有机器,只显示 dn

AdFind.exe -f "objectcategory=computer" dn

#查询域中所有机器,显示机器名和操作系统

AdFind.exe -f "objectcategory=computer" name operatingSystem

如图所示, 可以看到当指定参数不同时, 查询出的域中所有机器显示信息也不同。

```

C:\Users\Administrator\Desktop>AdFind.exe -f "objectcategory=computer" dn

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
dn:CN=WIN7,CN=Computers,DC=xie,DC=com
dn:CN=MAIL,CN=Computers,DC=xie,DC=com

3 Objects returned

C:\Users\Administrator\Desktop>AdFind.exe -f "objectcategory=computer" name operatingSystem

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
>name: AD01
>operatingSystem: Windows Server 2012 R2 Standard

dn:CN=WIN7,CN=Computers,DC=xie,DC=com
>name: WIN7
>operatingSystem: Windows 7 64-bit

dn:CN=MAIL,CN=Computers,DC=xie,DC=com
>name: MAIL
>operatingSystem: Windows Server 2012 R2 Standard

3 Objects returned

```

(2) 查询域中活跃机器

以下命令是查询域中活跃的机器。

#查询域中活跃机器，只显示 dn

```
AdFind.exe -sc computers_active dn
```

#查询域中活跃机器，显示机器名和操作系统

```
AdFind.exe -sc computers_active name operatingSystem
```

如图所示，可以看到当指定参数不同时，查询出的域中活跃机器显示信息也不同。

```

C:\Users\Administrator\Desktop>AdFind.exe -sc computers_active dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Transformed Filter: (&(objectcategory=computer)(!(useraccountcontrol:1.2.840.113556.1.4.803:=2))(pwdlastset>=132675093790700000)(!(lastlogontimestamp=*)(&(lastlogon
2675093790700000))))
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
dn:CN=MAIL,CN=Computers,DC=xie,DC=com

2 Objects returned

C:\Users\Administrator\Desktop>AdFind.exe -sc computers_active name operatingSystem
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Transformed Filter: (&(objectcategory=computer)(!(useraccountcontrol:1.2.840.113556.1.4.803:=2))(pwdlastset>=132675094007840000)(!(lastlogontimestamp=*)(&(lastlogon
2675094007840000))))
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
>name: AD01
>operatingSystem: Windows Server 2012 R2 Standard

dn:CN=MAIL,CN=Computers,DC=xie,DC=com
>name: MAIL
>operatingSystem: Windows Server 2012 R2 Standard

2 Objects returned

```

(3) 查询指定机器详细信息

以下命令是查询域中机器的详细信息。

#查询指定机器 mail 详细信息

AdFind.exe -f "&(objectcategory=computer)(name=mail)"

如图所示，查询指定 mail 机器的详细信息。



```
C:\Users\Administrator\Desktop>AdFind.exe -f "&(objectcategory=computer)(name=mail)"

AdFind V01.56.00cpp Joe Richards (support@joeware.net) April 2021

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=MAIL,CN=Computers,DC=xie,DC=com
>objectClass: top
>objectClass: person
>objectClass: organizationalPerson
>objectClass: user
>objectClass: computer
>cn: MAIL
>distinguishedName: CN=MAIL,CN=Computers,DC=xie,DC=com
>instanceType: 4
>whenCreated: 20210307080618.0Z
>whenChanged: 20211111142118.0Z
>uSNCreated: 20499
>memberOf: CN=Exchange Install Domain Servers,CN=Microsoft Exchange System Objects,DC=xie,DC=com
>memberOf: CN=Managed Availability Servers,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
>memberOf: CN=Exchange Trusted Subsystem,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
>memberOf: CN=Exchange Servers,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
>uSNChanged: 53856
>name: MAIL
>objectGUID: {C7013A79-8AE0-4EEC-8DF6-224B90F36AE0}
>userAccountControl: 4096
>badPwdCount: 0
>codePage: 0
>countryCode: 0
>badPasswordTime: 132696194460428923
>lastLogoff: 0
>lastLogon: 132811167676919264
>localPolicyFlags: 0
>pwdLastSet: 132811140783301802
>primaryGroupID: 515
>objectSid: S-1-5-21-1313979556-3624129433-4055459191-1107
>accountExpires: 9223372036854775807
>logonCount: 162
>sAMAccountName: MAIL$
>sAMAccountType: 805306369
>operatingSystem: Windows Server 2012 R2 Standard
>operatingSystemVersion: 6.3 (9600)
>dNSHostName: mail.xie.com
>servicePrincipalName: IMAP/MAIL
>servicePrincipalName: IMAP/mail.xie.com
>servicePrincipalName: IMAP4/MAIL
>servicePrincipalName: IMAP4/mail.xie.com
>servicePrincipalName: POP/MAIL
>servicePrincipalName: POP/mail.xie.com
```

4. 用户相关

下面这几个是与用户相关的查询命令。

(1) 查询域管理员

以下命令是查询域管理员组中含有哪些用户。

```
Adfind.exe -b "CN=Domain Admins,CN=Users,DC=xie,DC=com" member
```

如图所示，可以看到查询到域管理员组中有 admin 和 administrator 两个用户。

```
C:\Users\Administrator\Desktop>Adfind.exe -b "CN=Domain Admins,CN=Users,DC=xie,DC=com" member
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=Domain Admins,CN=Users,DC=xie,DC=com
>member: CN=admin,CN=Users,DC=xie,DC=com
>member: CN=Administrator,CN=Users,DC=xie,DC=com

1 Objects returned
```

(2) 查询域内所有用户

以下命令是查询域内所有用户。

```
adfind.exe -b dc=xie,dc=com -f "(&(objectCategory=person)(objectClass=user))" -dn
```

如图所示，可以看到查询到域内的所有用户。



```
C:\Users\Administrator\Desktop>adfind.exe -b dc=xie,dc=com -f "(&(objectCategory=person)(objectClass=user))" -dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=Administrator,CN=Users,DC=xie,DC=com
dn:CN=Guest,CN=Users,DC=xie,DC=com
dn:CN=krbtgt,CN=Users,DC=xie,DC=com
dn:CN=Exchange Online-ApplicationAccount,CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{1f05a927-617d-4362-be07-8a7175347545},CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{bb558c35-97f1-4cb9-8fff-d53741dc928c},CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{e0dc1c29-89c3-4034-b678-e6c29d823ed9},CN=Users,DC=xie,DC=com
dn:CN=DiscoverySearchMailbox {D919BA05-46A6-415f-80AD-7E09334BB852},CN=Users,DC=xie,DC=com
dn:CN=Migration.8f3e7716-2011-43e4-96b1-aba62d229136,CN=Users,DC=xie,DC=com
dn:CN=FederatedEmail.4c1f4d8b-8179-4148-93bf-00a95fa1e042,CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{8cc370d3-822a-4ab8-a926-bb94bd0641a9},CN=Users,DC=xie,DC=com
dn:CN=HealthMailboxa20a8789a5ed452f8a13bb8f825a26bc,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com
dn:CN=HealthMailbox99523f51f7dc44b19b2aff9e1f742916,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com
dn:CN=HealthMailbox7e99ca4c80414ff39e0d804efc16cbbd,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com
dn:CN=HealthMailbox619a0417337f48ddb8ec9cafc5abcf9a,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com
dn:CN=HealthMailboxff45b942bb4f417195c2840bdc65c48e,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com
dn:CN=HealthMailboxb5ebb96761ba45efaf9aef7dd176cf6a,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com
dn:CN=HealthMailbox5eba7b043c3f42f285634b70e9d26952,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com
dn:CN=HealthMailbox7a7183d6b31e4d668d5050402be58552,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com
dn:CN=HealthMailboxfea56fbcdc444bc2b431c6e966626103,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com
dn:CN=HealthMailbox66622de54c3f488ca9d75aaeed7d79cb,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com
dn:CN=test,CN=Users,DC=xie,DC=com
dn:CN=hack,CN=Users,DC=xie,DC=com

24 Objects returned
```

(3) 查询指定域用户

以下命令是查询域内指定用户。

#查询指定域用户 test 的信息

```
adfind -sc u:test
```

如图所示，可以看到查询到域内指定用户 test 的信息。



```
C:\Users\Administrator\Desktop>adfind -sc u:test
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:3268
Directory: Windows Server 2012 R2

dn:CN=test,CN=Users,DC=xie,DC=com
>objectClass: top
>objectClass: person
>objectClass: organizationalPerson
>objectClass: user
>cn: test
>distinguishedName: CN=test,CN=Users,DC=xie,DC=com
>instancetype: 4
>whenCreated: 20210307103928.0Z
>whenChanged: 20210701134208.0Z
>displayName: test
>uSNCreated: 36773
>memberOf: CN=Domain Admins,CN=Users,DC=xie,DC=com
>uSNChanged: 47703
>proxyAddresses: SMTP:test@xie.com
>name: test
>objectGUID: {8A669AC8-392F-4CD1-9119-017FEFF74A6}
>userAccountControl: 512
>pwdLastSet: 132696195046136902
>primaryGroupID: 513
>objectSid: S-1-5-21-1313979556-3624129433-4055459191-1146
>sAMAccountName: test
>sAMAccountType: 805306368
>showInAddressBook: CN=Mailboxes(VLV),CN=All System Address Lists,CN=Address Lists Container,CN=First Organization,CN=Microsoft Exchange,CN=Services,CN=Configuration
>showInAddressBook: CN=All Mailboxes(VLV),CN=All System Address Lists,CN=Address Lists Container,CN=First Organization,CN=Microsoft Exchange,CN=Services,CN=Configuration
>showInAddressBook: CN=All Recipients(VLV),CN=All System Address Lists,CN=Address Lists Container,CN=First Organization,CN=Microsoft Exchange,CN=Services,CN=Configuration
>showInAddressBook: CN=1020500000000,CN=All Global Address Lists,CN=Address Lists Container,CN=First Organization,CN=Microsoft Exchange,CN=Services,CN=Configuration,DC=LegacyExchangeDN,/o=First Organization/ou=Exchange Administrative Group (FYDIBOHF23SPDLT)/cn=Recipients/cn=706d3db8d804705b3fea2814a7ce7f1-test
>objectCategory: CN=Person,CN=Schema,CN=Configuration,DC=xie,DC=com
>dSCorePropagationData: 20210308015217.0Z
>dSCorePropagationData: 16010101000000.0Z
>lastLogonTimestamp: 132696205285036287
>mail: test@xie.com
```

(4) 查询指定域用户的 sid

以下命令是查询域内指定用户 test 的 sid 值。

AdFind.exe -sc u:test objectSid

如图所示，可以看到查询出指定 test 用户的 sid 值。

```
C:\Users\Administrator\Desktop>AdFind.exe -sc u:test objectSid
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:3268
Directory: Windows Server 2012 R2

dn:CN=test,CN=Users,DC=xie,DC=com
>objectSid: S-1-5-21-1313979556-3624129433-4055459191-1146

1 Objects returned
```

(5) 查询指定 sid 对应的用户

以下命令是查询域内指定 sid 值对应的用户。

```
AdFind.exe -sc adsid:S-1-5-21-1313979556-3624129433-4055459191-1146
```

如图所示，可以看到查询出指定 sid 值对应的用户为 test。

```
C:\Users\Administrator\Desktop>AdFind.exe -sc adsid:S-1-5-21-1313979556-3624129433-4055459191-1146 dn  
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020  
  
Transformed Filter: |(objectsid=\01\05\00\00\00\00\05\15\00\00\00\A4\BCQN\99\D3\03\D8we\B9\F1z\04\00\00)(sidhistory=\01\05\00\00\00\00\00)  
Using server: AD01.xie.com:3268  
Directory: Windows Server 2012 R2  
  
dn:CN=test,CN=Users,DC=xie,DC=com  
  
1 Objects returned
```

(6) 查询指定域用户属于哪些组

以下命令是查询指定域用户 administrator 属于哪些组。有两种查询方式，查询的结果一样，但是返回的 objects 数量不一样

adfind.exe -s subtree -b CN=administrator,CN=users,DC=xie,DC=com member

Of

或

adfind.exe -s subtree -f "(member="CN=administrator,CN=users,DC=xie,DC=com")"

" dn

如图所示，两条命令查询的结果是一样，但是返回的 objects 数量却不一样。

C:\Users\Administrator\Desktop>adfind.exe -s subtree -b CN=administrator,CN=users,DC=xie,DC=com memberOf

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=Administrator,CN=Users,DC=xie,DC=com
>memberOf: CN=Organization Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
>memberOf: CN=Group Policy Creator Owners,CN=Users,DC=xie,DC=com
>memberOf: CN=Domain Admins,CN=Users,DC=xie,DC=com
>memberOf: CN=Enterprise Admins,CN=Users,DC=xie,DC=com
>memberOf: CN=Schema Admins,CN=Users,DC=xie,DC=com
>memberOf: CN=Administrators,CN=Builtin,DC=xie,DC=com

1 Objects returned

C:\Users\Administrator\Desktop>adfind.exe -s subtree -f "(member='CN=administrator,CN=users,DC=xie,DC=com')"

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=Administrators,CN=Builtin,DC=xie,DC=com
dn:CN=Schema Admins,CN=Users,DC=xie,DC=com
dn:CN=Enterprise Admins,CN=Users,DC=xie,DC=com
dn:CN=Domain Admins,CN=Users,DC=xie,DC=com
dn:CN=Group Policy Creator Owners,CN=Users,DC=xie,DC=com
dn:CN=Organization Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com

6 Objects returned

(7) 递归查询指定域用户属于哪些组

以下命令是递归查询指定用户属于哪些组。查询指定域用户属性哪些组，并且查询属于的组又属于哪些组，一直递归查询下去。

```
adfind.exe -s subtree -b dc=xie,dc=com -f "(member:INCHAIN:='CN=administrator,CN=users,DC=xie,DC=com')"
```

如图所示，可以看到一直递归查询 administrator 所属的组。

```
C:\Users\Administrator\Desktop>adfind.exe -s subtree -b dc=xie,dc=com -f "(member:INCHAIN:=\"CN=administrator,CN=users,DC=xie,DC=com\")" -bit -dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Transformed Filter: (member:1.2.840.113556.1.4.1941:=CN=administrator,CN=users,DC=xie,DC=com)
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=Administrators,CN=Builtin,DC=xie,DC=com
dn:CN=Schema Admins,CN=Users,DC=xie,DC=com
dn:CN=Enterprise Admins,CN=Users,DC=xie,DC=com
dn:CN=Domain Admins,CN=Users,DC=xie,DC=com
dn:CN=Group Policy Creator Owners,CN=Users,DC=xie,DC=com
dn:CN=Denied RODC Password Replication Group,CN=Users,DC=xie,DC=com
dn:CN=Organization Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com

7 Objects returned
```

(8) 查询域内开启“Do not require Kerberos preauthentication”选项的用户

如下命令是查询域内开启了不需要域认证的用户。

```
adfind -f "useraccountcontrol:1.2.840.113556.1.4.803:=4194304" -dn
```

如图所示，可以看到查询到 hack 用户开启了不需要域认证。

```
C:\Users\Administrator\Desktop>adfind -f "useraccountcontrol:1.2.840.113556.1.4.803:=4194304" -dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=hack,CN=Users,DC=xie,DC=com

1 Objects returned
```

(8) 查询受保护的用戶

如下命令是查询域内受保护的用戶。

```
Adfind -f "&(objectcategory=person)(samaccountname=*)(admincount=1)" -dn
```

如图所示，查询到三个用户在域内受保护。

C:\Users\Administrator\Desktop>Adfind -f "&(objectcategory=person)(samaccountname=*)(admincount=1)" -dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=Administrator,CN=Users,DC=xie,DC=com
dn:CN=krbtgt,CN=Users,DC=xie,DC=com
dn:CN=test,CN=Users,DC=xie,DC=com

3 Objects returned

(9) 查询 users 容器下所有对象

如下命令是查询 users 容器下的所有对象。

AdFind.exe -users -dn

如图所示，可以看到 users 容器下的所有对象。

```

C:\Users\Administrator\Desktop>AdFind.exe -users -dn

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: CN=Users,DC=xie,DC=com

dn:CN=Users,DC=xie,DC=com
dn:CN=Administrator,CN=Users,DC=xie,DC=com
dn:CN=Guest,CN=Users,DC=xie,DC=com
dn:CN=WinRMRemoteWMIUsers_,CN=Users,DC=xie,DC=com
dn:CN=krbtgt,CN=Users,DC=xie,DC=com
dn:CN=Domain Computers,CN=Users,DC=xie,DC=com
dn:CN=Domain Controllers,CN=Users,DC=xie,DC=com
dn:CN=Schema Admins,CN=Users,DC=xie,DC=com
dn:CN=Enterprise Admins,CN=Users,DC=xie,DC=com
dn:CN=Cert Publishers,CN=Users,DC=xie,DC=com
dn:CN=Domain Admins,CN=Users,DC=xie,DC=com
dn:CN=Domain Users,CN=Users,DC=xie,DC=com
dn:CN=Domain Guests,CN=Users,DC=xie,DC=com
dn:CN=Group Policy Creator Owners,CN=Users,DC=xie,DC=com
dn:CN=RAS and IAS Servers,CN=Users,DC=xie,DC=com
dn:CN=Allowed RODC Password Replication Group,CN=Users,DC=xie,DC=com
dn:CN=Denied RODC Password Replication Group,CN=Users,DC=xie,DC=com
dn:CN=Read-only Domain Controllers,CN=Users,DC=xie,DC=com
dn:CN=Enterprise Read-only Domain Controllers,CN=Users,DC=xie,DC=com
dn:CN=Cloneable Domain Controllers,CN=Users,DC=xie,DC=com
dn:CN=Protected Users,CN=Users,DC=xie,DC=com
dn:CN=DnsAdmins,CN=Users,DC=xie,DC=com
dn:CN=DnsUpdateProxy,CN=Users,DC=xie,DC=com
dn:CN=Exchange Online-ApplicationAccount,CN=Users,DC=xie,DC=com
dn:CN=test,CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{1f05a927-617d-4362-be07-8a7175347545},CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{bb558c35-97f1-4cb9-8ff7-d53741dc928c},CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{e0dc1c29-89c3-4034-b678-e6c29d823ed9},CN=Users,DC=xie,DC=com
dn:CN=DiscoverySearchMailbox {D919BA05-46A6-415f-80AD-7E09334BB852},CN=Users,DC=xie,DC=com
dn:CN=Migration.8f3e7716-2011-43e4-96b1-aba62d229136,CN=Users,DC=xie,DC=com
dn:CN=FederatedEmail.4c1f4d8b-8179-4148-93bf-00a95fa1e042,CN=Users,DC=xie,DC=com
dn:CN=SystemMailbox{8cc370d3-822a-4ab8-a926-bb94bd0641a9},CN=Users,DC=xie,DC=com
dn:CN=hack,CN=Users,DC=xie,DC=com

```

5. 组相关

下面这几个是与组相关的查询命令。

(1) 查询域内所有的组

```
adfind.exe -f "objectClass=group" -dn
```

```
C:\Users\Administrator\Desktop>adfind.exe -f "objectClass=group" -dn
AdFind V01.56.00cpp Joe Richards (support@joeware.net) April 2021

Using server: DC01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=WinRMRemoteWMIUsers__,CN=Users,DC=xie,DC=com
dn:CN=Administrators,CN=Builtin,DC=xie,DC=com
dn:CN=Users,CN=Builtin,DC=xie,DC=com
dn:CN=Guests,CN=Builtin,DC=xie,DC=com
dn:CN=Print Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Backup Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Replicator,CN=Builtin,DC=xie,DC=com
dn:CN=Remote Desktop Users,CN=Builtin,DC=xie,DC=com
dn:CN=Network Configuration Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Performance Monitor Users,CN=Builtin,DC=xie,DC=com
dn:CN=Performance Log Users,CN=Builtin,DC=xie,DC=com
dn:CN=Distributed COM Users,CN=Builtin,DC=xie,DC=com
dn:CN=IIS_IUSRS,CN=Builtin,DC=xie,DC=com
dn:CN=Cryptographic Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Event Log Readers,CN=Builtin,DC=xie,DC=com
dn:CN=Certificate Service DCOM Access,CN=Builtin,DC=xie,DC=com
dn:CN=RDS Remote Access Servers,CN=Builtin,DC=xie,DC=com
dn:CN=RDS Endpoint Servers,CN=Builtin,DC=xie,DC=com
dn:CN=RDS Management Servers,CN=Builtin,DC=xie,DC=com
dn:CN=Hyper-V Administrators,CN=Builtin,DC=xie,DC=com
```

(2) 查询域内所有的全局组

以下命令是查询域内所有的全局组。

```
adfind.exe -f "(grouptype=-2147483646)" -dn
```

如图所示，可以看到查询出域内所有的全局组。

C:\Users\Administrator\Desktop>adfind.exe -f "(groupype=-2147483646)" -dn

AdFind V01.56.00cpp Joe Richards (support@joeware.net) April 2021

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=Domain Computers,CN=Users,DC=xie,DC=com
dn:CN=Domain Controllers,CN=Users,DC=xie,DC=com
dn:CN=Domain Admins,CN=Users,DC=xie,DC=com
dn:CN=Domain Users,CN=Users,DC=xie,DC=com
dn:CN=Domain Guests,CN=Users,DC=xie,DC=com
dn:CN=Group Policy Creator Owners,CN=Users,DC=xie,DC=com
dn:CN=Read-only Domain Controllers,CN=Users,DC=xie,DC=com
dn:CN=Cloneable Domain Controllers,CN=Users,DC=xie,DC=com
dn:CN=Protected Users,CN=Users,DC=xie,DC=com
dn:CN=DnsUpdateProxy,CN=Users,DC=xie,DC=com
dn:CN=Exchange Install Domain Servers,CN=Microsoft Exchange System Objects,DC=xie,DC=com

11 Objects returned

(3) 查询域内所有通用组

以下命令是查询域内所有的通用组。

```
adfind.exe -f "(groupype=-2147483640)" -dn
```

如图所示，可以看到查询出域内所有的通用组。

```
C:\Users\Administrator\Desktop>adfind.exe -f "(grouptype=-2147483640)" -dn
AdFind V01.56.00cpp Joe Richards (support@joeware.net) April 2021

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=Schema Admins,CN=Users,DC=xie,DC=com
dn:CN=Enterprise Admins,CN=Users,DC=xie,DC=com
dn:CN=Enterprise Read-only Domain Controllers,CN=Users,DC=xie,DC=com
dn:CN=Organization Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Recipient Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=View-Only Organization Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Public Folder Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=UM Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Help Desk,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Records Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Discovery Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Server Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Delegated Setup,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Hygiene Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Compliance Management,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Exchange Servers,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Exchange Trusted Subsystem,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Managed Availability Servers,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=Exchange Windows Permissions,OU=Microsoft Exchange Security Groups,DC=xie,DC=com
dn:CN=ExchangeLegacyInterop,OU=Microsoft Exchange Security Groups,DC=xie,DC=com

20 Objects returned
```

(4) 查询域内所有的本地域组

以下命令是查询域内所有的本地域组。

```
adfind.exe -f "(!(&(grouptype=-2147483644)(grouptype=-2147483643)))" -dn
```

如图所示，可以看到查询出域内所有的本地域组。

```

C:\Users\Administrator\Desktop>adfind.exe -f "(! (groupType=-2147483644)(groupType=-2147483643))" -dn
AdFind V01.56.00cpp Joe Richards (support@joeware.net) April 2021

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:CN=Administrators,CN=Builtin,DC=xie,DC=com
dn:CN=Users,CN=Builtin,DC=xie,DC=com
dn:CN=Guests,CN=Builtin,DC=xie,DC=com
dn:CN=Print Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Backup Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Replicator,CN=Builtin,DC=xie,DC=com
dn:CN=Remote Desktop Users,CN=Builtin,DC=xie,DC=com
dn:CN=Network Configuration Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Performance Monitor Users,CN=Builtin,DC=xie,DC=com
dn:CN=Performance Log Users,CN=Builtin,DC=xie,DC=com
dn:CN=Distributed COM Users,CN=Builtin,DC=xie,DC=com
dn:CN=IIS_IUSRS,CN=Builtin,DC=xie,DC=com
dn:CN=Cryptographic Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Event Log Readers,CN=Builtin,DC=xie,DC=com
dn:CN=Certificate Service DCOM Access,CN=Builtin,DC=xie,DC=com
dn:CN=RDS Remote Access Servers,CN=Builtin,DC=xie,DC=com
dn:CN=RDS Endpoint Servers,CN=Builtin,DC=xie,DC=com
dn:CN=RDS Management Servers,CN=Builtin,DC=xie,DC=com
dn:CN=Hyper-V Administrators,CN=Builtin,DC=xie,DC=com
dn:CN=Access Control Assistance Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Remote Management Users,CN=Builtin,DC=xie,DC=com
dn:CN=Server Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Account Operators,CN=Builtin,DC=xie,DC=com
dn:CN=Pre-Windows 2000 Compatible Access,CN=Builtin,DC=xie,DC=com
dn:CN=Incoming Forest Trust Builders,CN=Builtin,DC=xie,DC=com
dn:CN=Windows Authorization Access Group,CN=Builtin,DC=xie,DC=com
dn:CN=Terminal Server License Servers,CN=Builtin,DC=xie,DC=com

```

(5) 查询指定组含有哪些对象

以下命令是查询指定组含有哪些对象。有两种查询方式，查询的结果一样，但是返回的 objects 数量不一样。

```
adfind.exe -s subtree -b "CN=Domain Admins,CN=Users,DC=xie,DC=com" member
```

或

```
adfind.exe -s subtree -b dc=xie,dc=com -f "(memberof='CN='Domain Admins',CN=Users,DC=xie,DC=com')"
```

如图所示，两条命令查询的结果是一样，但是返回的 objects 数量却不一样。

```
C:\Users\Administrator\Desktop>adfind.exe -s subtree -b "CN=Domain Admins,CN=Users,DC=xie,DC=com" member
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=Domain Admins,CN=Users,DC=xie,DC=com
>member: CN=test,CN=Users,DC=xie,DC=com
>member: CN=Administrator,CN=Users,DC=xie,DC=com

1 Objects returned

C:\Users\Administrator\Desktop>adfind.exe -s subtree -b dc=xie,dc=com -f "(memberof='CN=Domain Admins',CN=Users,DC=xie,DC=com)" -dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=Administrator,CN=Users,DC=xie,DC=com
dn:CN=test,CN=Users,DC=xie,DC=com

2 Objects returned
```

(6) 递归查询指定组含有哪些域用户

以下命令会递归查询指定组中含有哪些域用户。

```
adfind.exe -s subtree -b dc=xie,dc=com -f "(memberof:INCHAIN:=\"CN=Domain Admins\",CN=Users,DC=xie,DC=com)" -bit -dn
```

如图所示，可以看到一直递归查询 Domain Admins 组中含有的用户。

```
C:\Users\Administrator\Desktop>adfind.exe -s subtree -b dc=xie,dc=com -f "(memberof:INCHAIN:=\"CN=Domain Admins\",CN=Users,DC=xie,DC=com)" -bit -dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020
Transformed Filter: (memberof:1.2.840.113556.1.4.1941:=CN=Domain Admins,CN=Users,DC=xie,DC=com)
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=Administrator,CN=Users,DC=xie,DC=com
dn:CN=test,CN=Users,DC=xie,DC=com

2 Objects returned
```

6. 委派相关

下面这几个是与委派相关的查询命令。

(1) 非约束性委派

如下命令是查询配置了非约束性委派的主机和服务帐户。

#查询域中配置非约束性委派的主机

```
AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306369)(userAccountControl:1.2.840.113556.1.4.803:=524288))" -dn
```

#查询域中配置非约束性委派的服务帐户

```
AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306368)(userAccountControl:1.2.840.113556.1.4.803:=524288))" -dn
```

如图所示，可以看到查询出配置了非约束性委派的主机和服务帐户。

```
C:\Users\hack\Desktop>AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306368)(userAccountControl:1.2.840.113556.1.4.803:=524288))" -dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
dn:CN=AD01,OU=Domain Controllers,DC=xie,DC=com
dn:CN=AD02,OU=Domain Controllers,DC=xie,DC=com
2 Objects returned
C:\Users\hack\Desktop>AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306368)(userAccountControl:1.2.840.113556.1.4.803:=524288))" -dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020
Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
dn:CN=service_account,CN=Users,DC=xie,DC=com
1 Objects returned
```

(2) 约束性委派

如下命令是查询配置了约束性委派的主机和服务帐户。

#查询域中配置了约束性委派的主机，并可以看到被委派的 SPN

```
AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306369)(msds-allowedtodelegateto=*))" msds-allowedtodelegateto
```

#查询域中配置了约束性委派的服务账户，并可以看到被委派的 SPN

```
AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306368)(msds-allowedtodelegateto=*))" msds-allowedtodelegateto
```

如图所示，可以看到查询出配置了约束性委派的主机和服务帐户。

```
C:\Users\hack\Desktop>AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306369)(msds-allowedtodelegateto=*))" msds-allowedtodelegateto
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=WIN7,CN=Computers,DC=xie,DC=com
>msDS-AllowedToDelegateTo: cifs/AD02.xie.com
>msDS-AllowedToDelegateTo: cifs/AD02
>msDS-AllowedToDelegateTo: cifs/AD02.xie.com/XIE
>msDS-AllowedToDelegateTo: cifs/AD02.xie.com/xie.com
>msDS-AllowedToDelegateTo: cifs/AD02/XIE

1 Objects returned

C:\Users\hack\Desktop>AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306368)(msds-allowedtodelegateto=*))" msds-allowedtodelegateto
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=service_account,CN=Users,DC=xie,DC=com
>msDS-AllowedToDelegateTo: cifs/AD01.xie.com/xie.com
>msDS-AllowedToDelegateTo: cifs/AD01.xie.com
>msDS-AllowedToDelegateTo: cifs/AD01
>msDS-AllowedToDelegateTo: cifs/AD01.xie.com/XIE
>msDS-AllowedToDelegateTo: cifs/AD01/XIE

1 Objects returned
```

(3) 基于资源的约束性委派

如下命令是查询配置了基于资源的约束性委派的主机和服务帐户。

#查询域中配置基于资源的约束性委派的主机

```
AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306369)(msDS-AllowedToActOnBehalfOfOtherIdentity=*))" msDS-AllowedToActOnBehalfOfOtherIdentity
```

#查询域中配置基于资源的约束性委派的服务帐户

```
AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306368)(msDS-AllowedToActOnBehalfOfOtherIdentity=*))" msDS-AllowedToActOnBehalfOfOtherIdentity
```

如图所示，可以看到查询出配置了基于资源的约束性委派的主机和服务帐户。

C:\Users\hack\Desktop>AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306369)(msDS-AllowedToActOnBehalfOfOtherIdentity=*))" msDS-AllowedToActOnBehalfOfOtherIdentity

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=WIN7,CN=Computers,DC=xie,DC=com
>msDS-AllowedToActOnBehalfOfOtherIdentity: {Security Descriptor}

1 Objects returned

C:\Users\hack\Desktop>AdFind.exe -b "DC=xie,DC=com" -f "(&(samAccountType=805306368)(msDS-AllowedToActOnBehalfOfOtherIdentity=*))" msDS-AllowedToActOnBehalfOfOtherIdentity

AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=krbtgt,CN=Users,DC=xie,DC=com
>msDS-AllowedToActOnBehalfOfOtherIdentity: {Security Descriptor}

1 Objects returned

7. 其他

下面这几个是一些其他的实战中比较常用的命令。

(1) 查找域内具备 Dcsync 权限的用户

如下命令是查询域中具备 DCSync 权限的用户。

#查找域中具有复制目录权限的用户

```
AdFind.exe -s subtree -b "DC=xie,DC=com" nTSecurityDescriptor -sddl+++ -sddlfilter ;;"Replicating Directory Changes";; -recmute -resolvesids
```

#查找域中具有复制目录所有项权限的用户

```
AdFind.exe -s subtree -b "DC=xie,DC=com" nTSecurityDescriptor -sddl+++ -sddlfilter ;;"Replicating Directory Changes All";; -recmute -resolvesids
```

如图所示，查询域中具备 Dcsync 权限的用户。

```
C:\Users\Administrator\Desktop>AdFind.exe -s subtree -b "DC=xie,DC=com" nTSecurityDescriptor -sddl+++ -sddlfilter ;;;"Replicating Directory Changes";; -recmute -resolvesids
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD.xie.com:389
Directory: Windows Server 2012 R2

dn:DC=xie,DC=com
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes;;XIE\Enterprise Read-only Domain Controllers
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes All;;XIE\Domain Controllers
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes In Filtered Set;;BUILTIN\Administrators
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes;;BUILTIN\Administrators
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes All;;BUILTIN\Administrators
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes In Filtered Set;;NT AUTHORITY\ENTERPRISE DOMAIN CONTROLLERS
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes;;NT AUTHORITY\ENTERPRISE DOMAIN CONTROLLERS

2 Objects returned

C:\Users\Administrator\Desktop>AdFind.exe -s subtree -b "DC=xie,DC=com" nTSecurityDescriptor -sddl+++ -sddlfilter ;;;"Replicating Directory Changes All";; -recmute -resolvesids
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD.xie.com:389
Directory: Windows Server 2012 R2

dn:DC=xie,DC=com
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes All;;XIE\Domain Controllers
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes All;;BUILTIN\Administrators

dn:CN=Builtin,DC=xie,DC=com
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes All;;XIE\Domain Controllers
nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes All;;BUILTIN\Administrators

2 Objects returned
```

(2) 查询域内的 OU 组织单位

如下命令是查询域中的 OU 组织单位，其会递归查询域内的所有 OU 组织单位

```
adfind.exe -f "objectClass=organizationalUnit" -dn
```

如图所示，可以看到查询出域内的 OU 组织单位。

```
C:\Users\Administrator\Desktop>adfind.exe -f "objectClass=organizationalUnit" -dn
AdFind V01.56.00cpp Joe Richards (support@joeware.net) April 2021

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: DC=xie,DC=com

dn:OU=Domain Controllers,DC=xie,DC=com
dn:OU=Microsoft Exchange Security Groups,DC=xie,DC=com

2 Objects returned
```

(3) 查询域的 ACL

如下命令是查询域的 ACL。

```
adfind.exe -b DC=xie,DC=com -sc getacl
```

如图所示，可以看到查询出域 xie.com 的 ACL。

```
C:\Users\Administrator\Desktop>adfind.exe -b DC=xie,DC=com -sc getacl
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: DC.xie.com:389
Directory: Windows Server 2012 R2

dn:DC=xie,DC=com
>nTSecurityDescriptor: [OWNER] XIE\hack
>nTSecurityDescriptor: [GROUP] BUILTIN\Administrators
>nTSecurityDescriptor: [DACL] (FLAGS:INHERIT)
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Allow a DC to create a clone of itself;;XIE\Cloneable Domain Controllers
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes;XIE\Enterprise Read-only Domain Controllers
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes All;XIE\Domain Controllers
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CONT INHERIT][INHERIT ONLY];[READ PROP];tokenGroups;computer;NT AUTHORITY\ENTERPRISE DOMAIN CONTROLLERS
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CONT INHERIT][INHERIT ONLY];[READ PROP];tokenGroups;group;NT AUTHORITY\ENTERPRISE DOMAIN CONTROLLERS
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CONT INHERIT][INHERIT ONLY];[READ PROP];tokenGroups;user;NT AUTHORITY\ENTERPRISE DOMAIN CONTROLLERS
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CONT INHERIT][INHERIT ONLY];[WRT PROP];msTPM-TpmInformationForComputer;computer;NT AUTHORITY\SELF
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes In Filtered Set;BUILTIN\Administrators
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes;BUILTIN\Administrators
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replication Synchronization;BUILTIN\Administrators
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Manage Replication Topology;BUILTIN\Administrators
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes All;BUILTIN\Administrators
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Read Only Replication Secret Synchronization;BUILTIN\Administrators
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Create Inbound Forest Trust;BUILTIN\Incoming Forest Trust Builders
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CONT INHERIT][INHERIT ONLY];[LIST CHILDREN][READ PROP][LIST OBJ][READ];;inetOrgPerson;BUILTIN\Pre-Windows 2000 Compatible Access
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CONT INHERIT][INHERIT ONLY];[LIST CHILDREN][READ PROP][LIST OBJ][READ];;group;BUILTIN\Pre-Windows 2000 Compatible Access
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Enable Per User Reversibly Encrypted Passwords;NT AUTHORITY\Authenticated Users
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes In Filtered Set;NT AUTHORITY\ENTERPRISE DOMAIN CONTROLLERS
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Unexpire Password;NT AUTHORITY\Authenticated Users
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Update Password Not Required Bit;NT AUTHORITY\Authenticated Users
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replicating Directory Changes;NT AUTHORITY\ENTERPRISE DOMAIN CONTROLLERS
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Replication Synchronization;NT AUTHORITY\ENTERPRISE DOMAIN CONTROLLERS
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Manage Replication Topology;NT AUTHORITY\ENTERPRISE DOMAIN CONTROLLERS
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CTL];Read Only Replication Secret Synchronization;NT AUTHORITY\ENTERPRISE DOMAIN CONTROLLERS
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CONT INHERIT][INHERIT ONLY];[WRT PROP];msDS-AllowedToActOnBehalfOfOtherIdentity;NT AUTHORITY\SELF
>nTSecurityDescriptor: [DACL] 0B3 ALLOW;;[CONT INHERIT][INHERIT ONLY];[READ PROP][WRT PROP][CTL];Private Information;NT AUTHORITY\SELF
```

(4) 查询 rightsGuid 对应的扩展权限

如下命令是查询指定 rightsGuid 对应的扩展权限。

```
Adfind.exe -b CN=Extended-Rights,CN=Configuration,DC=xie,DC=com -f "rightsGuid=1131f6aa-9c07-11d1-f79f-00c04fc2dcd2" dn
```

如图所示，可以看到查询到 rightsGuid 为 1131f6aa-9c07-11d1-f79f-00c04fc2dcd2 对应的扩展权限是 DS-Replication-Get-Changes。

```
C:\Users\Administrator\Desktop>Adfind.exe -b CN=Extended-Rights,CN=Configuration,DC=xie,DC=com -f "rightsGuid=1131f6aa-9c07-11d1-f79f-00c04fc2dcd2" dn
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=DS-Replication-Get-Changes,CN=Extended-Rights,CN=Configuration,DC=xie,DC=com

1 Objects returned
```

(5) 查询域内所有 GPO

如下命令是查询域内所有的 GPO 组策略。

```
AdFind.exe -sc gpodmp
```

如图所示，可以看到查询出域内所有的 GPO 组策略。

```
C:\Users\Administrator\Desktop>AdFind.exe -sc gpodmp
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2
Base DN: CN=Policies,CN=System,DC=xie,DC=com

dn:CN={31B2F340-016D-11D2-945F-00C04FB984F9},CN=Policies,CN=System,DC=xie,DC=com
>whenCreated: 2021/02/27-12:39:29 UTC
>whenChanged: 2021/02/27-12:44:03 UTC
>displayName: Default Domain Policy
>name: {31B2F340-016D-11D2-945F-00C04FB984F9}
>flags: 0
>versionNumber: 3
>objectCategory: CN=Group-Policy-Container,CN=Schema,CN=Configuration,DC=xie,DC=com
>gPCFunctionalityVersion: 2
>gPCFileSysPath: \\xie.com\sysvol\xie.com\Policies\{31B2F340-016D-11D2-945F-00C04FB984F9}
>gPCMachineExtensionNames: [{35378EAC-683F-11D2-A89A-00C04FB8CFA2}][{53D6AB1B-2488-11D1-A28C-00C04FB94F17}][{827D319E-6EAC-11D2-A4EA-00C04F79F83A}][{803E14A0-B4FB-11D0-A1D2-A4EA-00C04F79F83A}][{53D6AB1B-2488-11D1-A28C-00C04FB94F17}]

dn:CN={6AC1786C-016F-11D2-945F-00C04FB984F9},CN=Policies,CN=System,DC=xie,DC=com
>whenCreated: 2021/02/27-12:39:29 UTC
>whenChanged: 2021/03/07-09:28:32 UTC
>displayName: Default Domain Controllers Policy
>name: {6AC1786C-016F-11D2-945F-00C04FB984F9}
>flags: 0
>versionNumber: 2
>objectCategory: CN=Group-Policy-Container,CN=Schema,CN=Configuration,DC=xie,DC=com
>gPCFunctionalityVersion: 2
>gPCFileSysPath: \\xie.com\sysvol\xie.com\Policies\{6AC1786C-016F-11D2-945F-00C04FB984F9}
>gPCMachineExtensionNames: [{827D319E-6EAC-11D2-A4EA-00C04F79F83A}][{803E14A0-B4FB-11D0-A0D0-00A0C90F574B}]

2 Objects returned
```

(6) 查询域内高权限的 SPN

如下命令是查询域内具有高权限的 SPN 的帐户。

```
adfind -b "DC=xie,DC=com" -f "&(servicePrincipalName=*)(admincount=1)" servicePrincipalName
```

如图所示，可以看到查询出具有高权限的 SPN 的帐户 krbtgt。

```
C:\Users\Administrator\Desktop>adfind -b "DC=xie,DC=com" -f "&(servicePrincipalName=*)(admincount=1)" servicePrincipalName
AdFind V01.52.00cpp Joe Richards (support@joeware.net) January 2020

Using server: AD01.xie.com:389
Directory: Windows Server 2012 R2

dn:CN=krbtgt,CN=Users,DC=xie,DC=com
>servicePrincipalName: kadmin/changepw

1 Objects returned
```

(7) 查询域内的所有邮箱以 csv 格式显示

如下命令是将域内所有的邮箱以 csv 的格式显示出来。

```
adfind -f "mail=*" mail -s Subtree -recmute -csv
```

如图所示，可以看到将域内所有的邮箱以 csv 的格式显示出来。

```
C:\Users\Administrator\Desktop>adfind -f "mail=*" mail -s Subtree -recmute -csv mobile
"dn","mail"
"CN=Administrator,CN=Users,DC=xie,DC=com","Administrator@xie.com"
"CN=DiscoverySearchMailbox{0919BA05-46A6-415f-80AD-7E093348B852},CN=Users,DC=xie,DC=com","DiscoverySearchMailbox{0919BA05-46A6-415f-80AD-7E093348B852}@xie.com"
"CN=FederatedEmail1.4c1f4d8b-8179-4148-93bf-00a95fa1e042,CN=Users,DC=xie,DC=com","FederatedEmail1.4c1f4d8b-8179-4148-93bf-00a95fa1e042@xie.com"
"CN=hack,CN=Users,DC=xie,DC=com","hack@xie.com"
"CN=HealthMailbox5eba7b043c3f42f28563ab70e9d26952,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailbox5eba7b043c3f42f28563ab70e9d26952@xie.com"
"CN=HealthMailbox619a0417337f48ddb8ec9caf5abc9a,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailbox619a0417337f48ddb8ec9caf5abc9a@xie.com"
"CN=HealthMailbox66622de54c3f488ca9d75aaeed7d79cb,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailbox66622de54c3f488ca9d75aaeed7d79cb@xie.com"
"CN=HealthMailbox66b93d1708fd4e5d89164c7a2c295aff,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailbox66b93d1708fd4e5d89164c7a2c295aff@xie.com"
"CN=HealthMailbox7a7183d6b31e4d668d5050402be58552,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailbox7a7183d6b31e4d668d5050402be58552@xie.com"
"CN=HealthMailbox7e99ca4c88414ff39e0d804efc16cbbd,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailbox7e99ca4c88414ff39e0d804efc16cbbd@xie.com"
"CN=HealthMailbox99523f51f7dc44b19b2aff9e1f742916,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailbox99523f51f7dc44b19b2aff9e1f742916@xie.com"
"CN=HealthMailboxa20a8789a5ed452f8a13bb8f825a26bc,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailboxa20a8789a5ed452f8a13bb8f825a26bc@xie.com"
"CN=HealthMailboxb5ebb96761ba45efaf9aa7dd176cfe6a,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailboxb5ebb96761ba45efaf9aa7dd176cfe6a@xie.com"
"CN=HealthMailboxfea56fbcdc444bc2ba31c696626103,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailboxfea56fbcdc444bc2ba31c696626103@xie.com"
"CN=HealthMailboxff45b942bb4f417195c2840bdc65c48e,CN=Monitoring Mailboxes,CN=Microsoft Exchange System Objects,DC=xie,DC=com","HealthMailboxff45b942bb4f417195c2840bdc65c48e@xie.com"
"CN=Migration.8f3e7716-2011-43e4-96b1-aba62d229136,CN=Users,DC=xie,DC=com","Migration.8f3e7716-2011-43e4-96b1-aba62d229136@xie.com"
"CN=SystemMailbox{1f05a927-617d-4362-be07-8a7175347545},CN=Users,DC=xie,DC=com","SystemMailbox{1f05a927-617d-4362-be07-8a7175347545}@xie.com"
"CN=SystemMailbox{8cc370d3-822a-4ab8-a926-bb94bd0641a9},CN=Users,DC=xie,DC=com","SystemMailbox{8cc370d3-822a-4ab8-a926-bb94bd0641a9}@xie.com"
"CN=SystemMailbox{bb558c35-97f1-4cb9-8ff7-d53741dc928c},CN=Users,DC=xie,DC=com","SystemMailbox{bb558c35-97f1-4cb9-8ff7-d53741dc928c}@xie.com"
"CN=SystemMailbox{c0c03c91-795e-4dd1-961f-4262547487e4},CN=Microsoft Exchange System Objects,DC=xie,DC=com","SystemMailbox{c0c03c91-795e-4dd1-961f-4262547487e4}@xie.com"
"CN=SystemMailbox{e0dc1c29-89c3-4034-b678-e6c29d823ed9},CN=Users,DC=xie,DC=com","SystemMailbox{e0dc1c29-89c3-4034-b678-e6c29d823ed9}@xie.com"
"CN=test,CN=Users,DC=xie,DC=com","test@xie.com"
```

(8) 查询域内的所有手机号以 csv 格式显示

如下命令是将域内所有的手机号以 csv 的格式显示出来。

```
adfind -f "telephonenumber=*" telephonenumber -s Subtree -recmute -csv mobile
```

如图所示，可以看到将域内所有的手机号以 csv 的格式显示出来。

```
C:\Users\Administrator\Desktop>adfind -f "telephonenumber=*" telephonenumber -s Subtree -recmute -csv
"dn","telephonenumber"
"CN=test,CN=Users,DC=xie,DC=com","8888888888888888"
"CN=hack,CN=Users,DC=xie,DC=com","12345678901"
```

非常感谢您读到现在，由于作者的水平有限，编写时间仓促，文章中难免会出现一些错误或者描述不准确的地方，恳请各位师傅们批评指正。如果你想一起学习 AD 域安全攻防的话，可以加入下面的知识星球一起学习交流。



谢公子

我加入了这个星球，邀你一起学习



域渗透攻防指南

星主：谢公子

60+

成员数量

30+

内容数量

306

运营天数

书籍  《域渗透攻防指南》官方知识星球。
星球讨论与微软AD域相关攻防技术，大家互相交流互相学习，共同进步成长。

现价：¥199

微信扫码加入星球



知识星球

谢公子学安全

