



Open-set detection with progressively larger held-out model sets

Unknown-model traces are pooled into one class. Every colored point and whisker is one held-out subset; m/N gives evaluated/possible subsets.


2WikiMultiHop

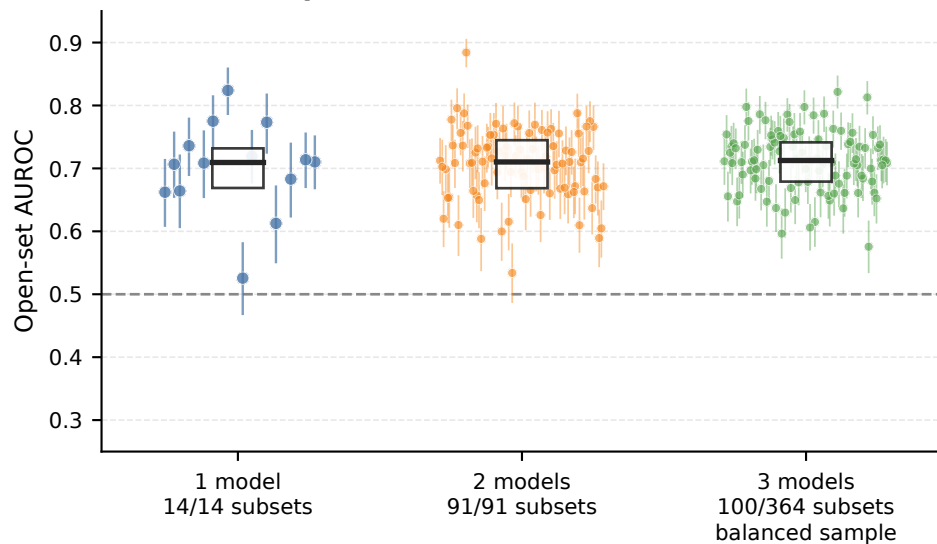


FRAMES

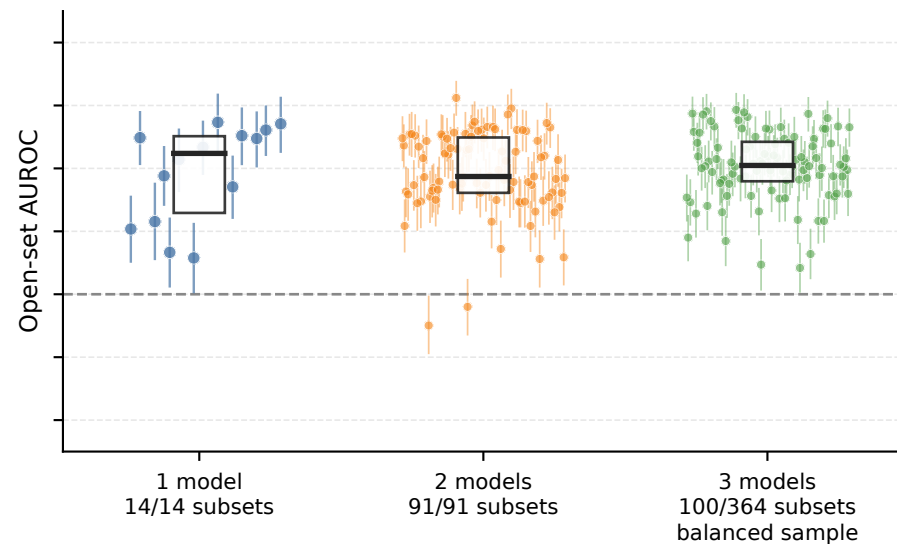

WebShop

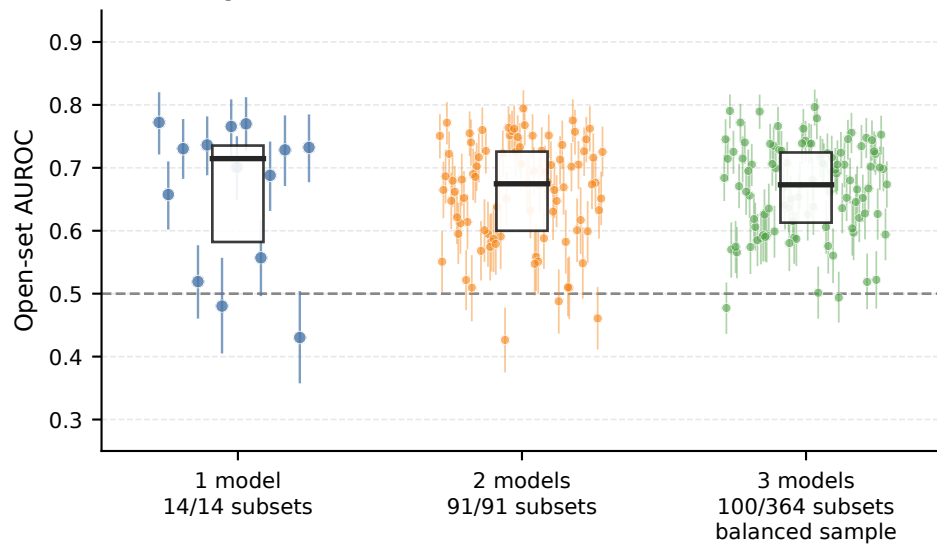

DeepShop

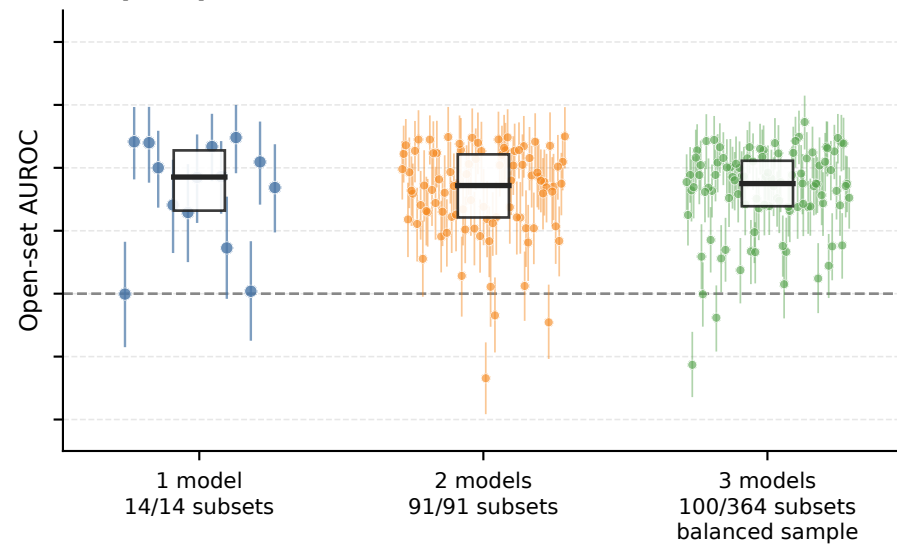

● 1-model subset: estimate + 95% trace-bootstrap CI ● 3-model subset: estimate + 95% trace-bootstrap CI - - Chance (0.5)
● 2-model subset: estimate + 95% trace-bootstrap CI □ Across-subset IQR (descriptive, not a CI)