
FinSight

ER Diagram - Chen notation

Shrikar Desai | **Shreyas P Kulkarni**

Implemented entities and exact attributes - PostgreSQL migrations 010-060 + Mongo telemetry

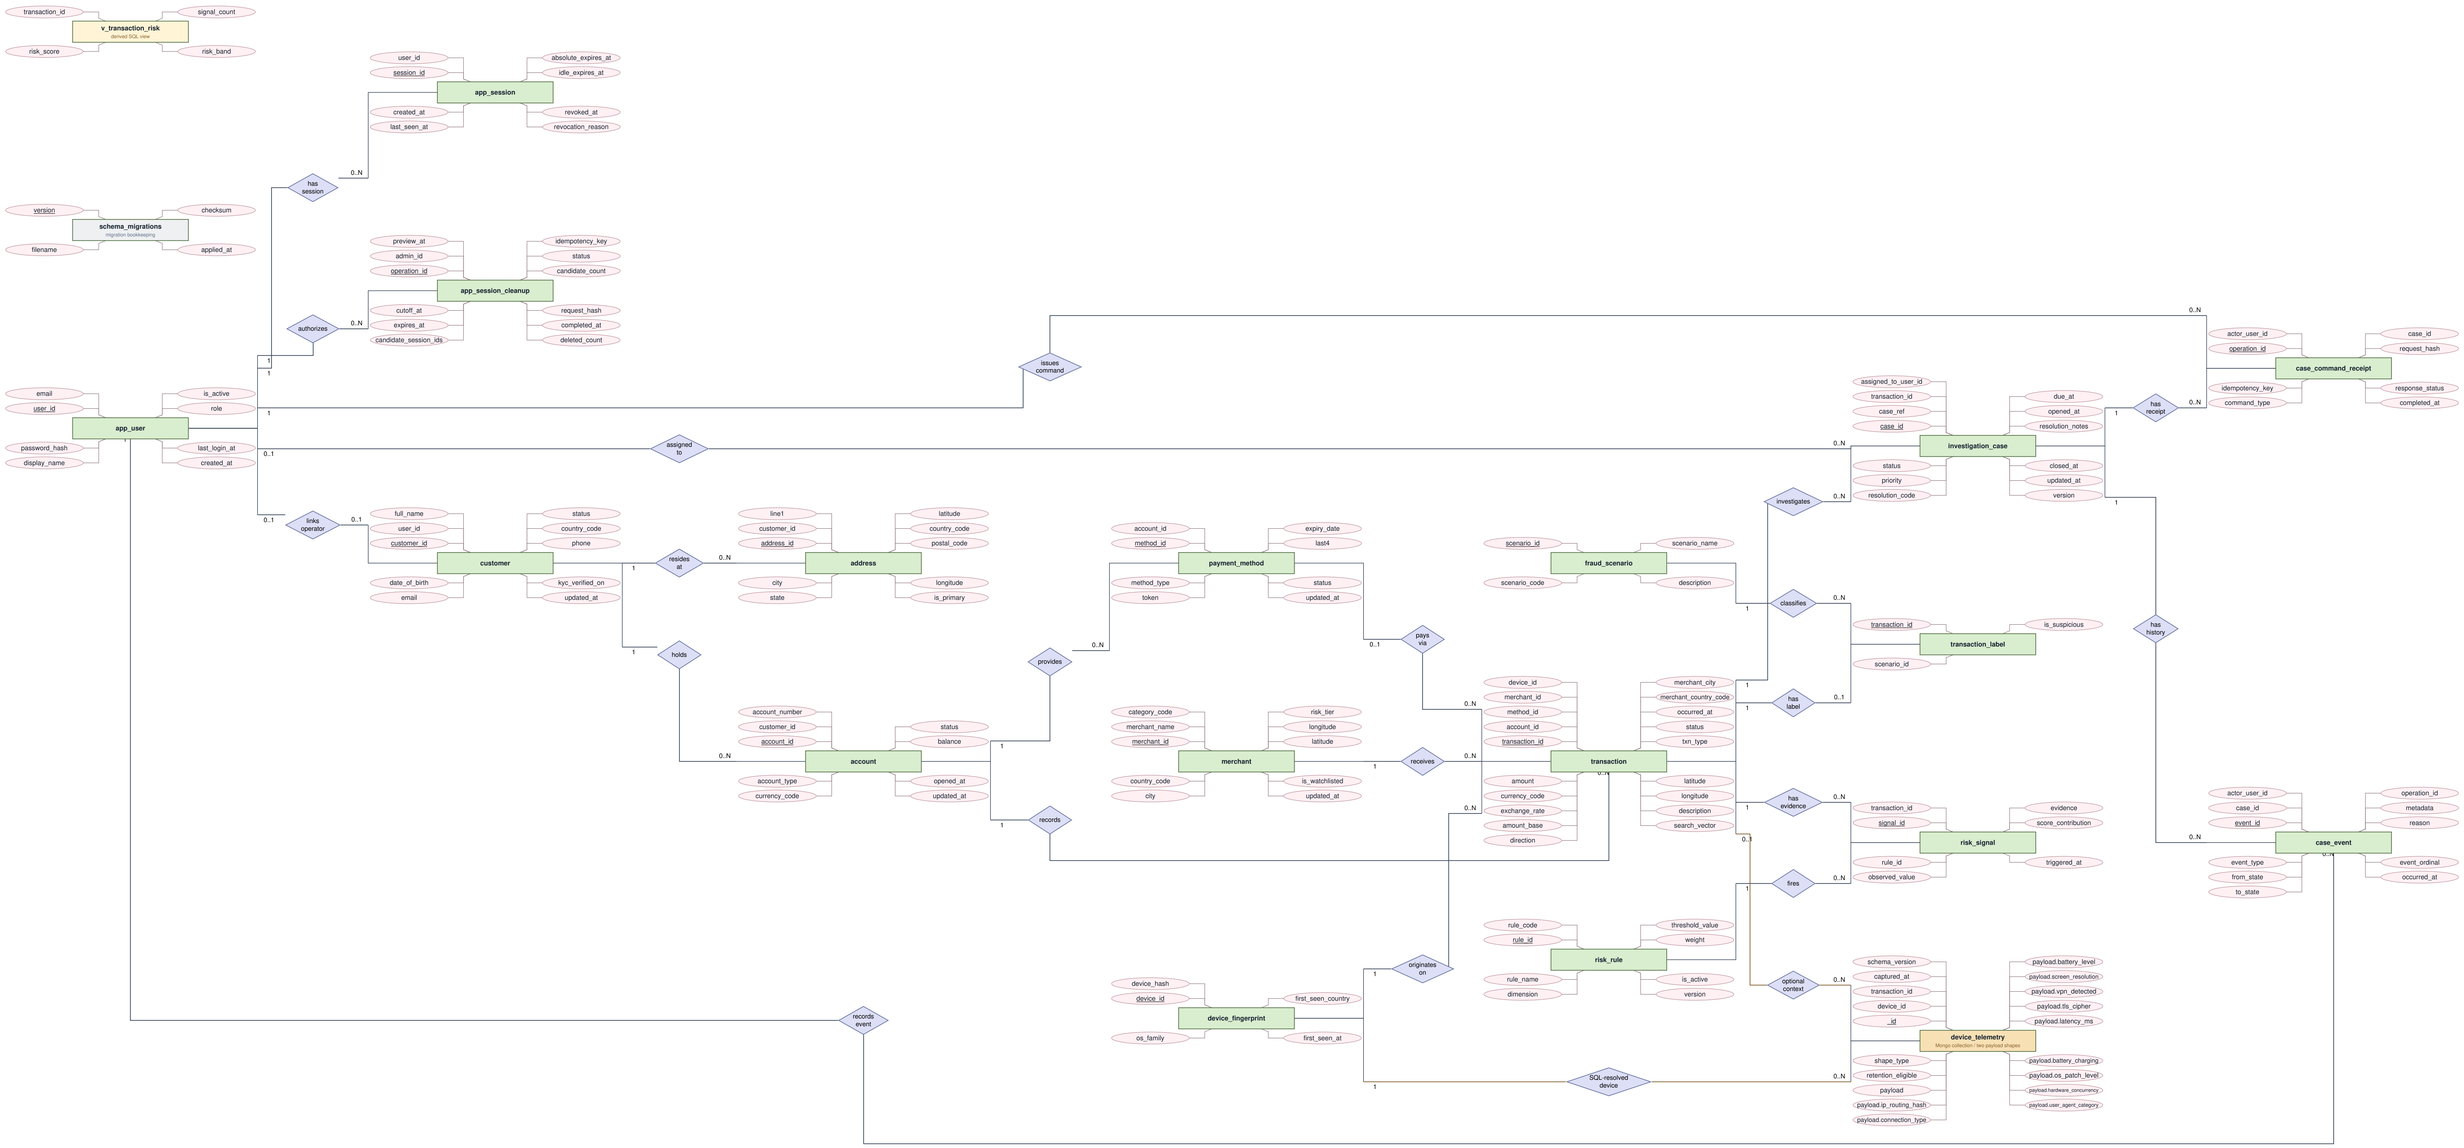

Rectangles: entities | Ellipses: attributes | Diamonds: relationships | Underline: primary key | Dashed ellipse: stored generated column

1 = exactly one; 0..1 = optional one; 0..N = zero or many. Brown dashed links are application-validated Mongo references, not SQL foreign keys.

Mongo payload.*ip_routing_hash* / *connection_type* / *latency_ms* / *tls_cipher* / *vpn_detected* belong to *connection_telemetry*; the other payload fields belong to *client_environment*.

candidate_session_ids is a retained UUID-array snapshot, not an FK. View/tooling blocks are distinguished from the 17 application tables. Source: main 843f0af95974 | 30 October 2026