FinSight

ER Diagram (Chen notation)

Shrikar Desai | Shreyas P Kulkarni

Implemented schema: 17 application tables + bookkeeping + risk view + Mongo telemetry

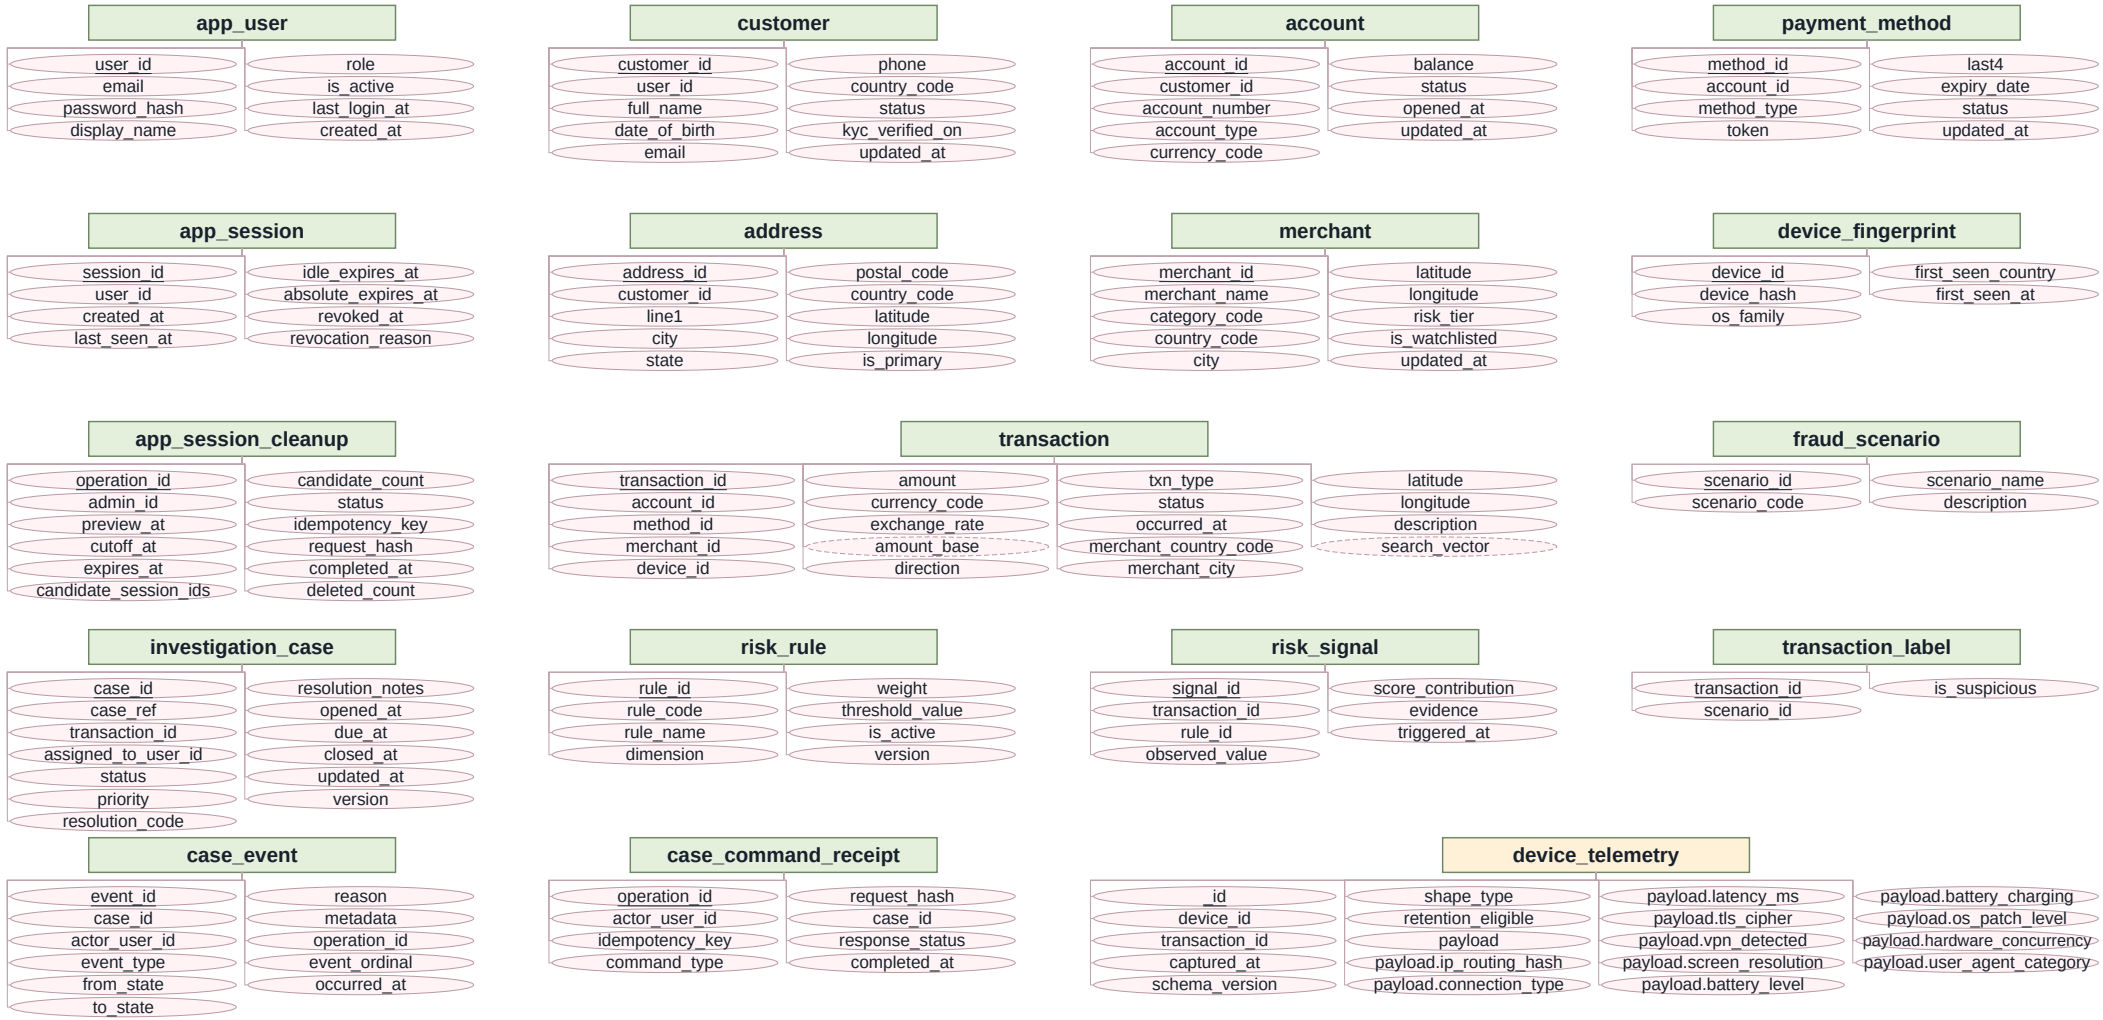

RELATIONSHIPS - repeated entity names refer to the attribute definitions above

customer	1	holds	0..N	account	
customer	1	resides at	0..N	address	
app_user	1	has session	0..N	app_session	
app_user	1	authorizes	0..N	app_session_cleanup	
app_user	1	issues command	0..N	case_command_receipt	
investigation_case	1	has receipt	0..N	case_command_receipt	
app_user	1	records event	0..N	case_event	
investigation_case	1	has history	0..N	case_event	
app_user	0..1	links operator	0..1	customer	
app_user	0..1	assigned to	0..N	investigation_case	
transaction	1	investigates	0..N	investigation_case	
account	1	provides	0..N	payment_method	
risk_rule	1	fires	0..N	risk_signal	
transaction	1	has evidence	0..N	risk_signal	
account	1	records	0..N	transaction	
device_fingerprint	1	originates on	0..N	transaction	
merchant	1	receives	0..N	transaction	
payment_method	0..1	pays via	0..N	transaction	
fraud_scenario	1	classifies	0..N	transaction_label	
transaction	1	has label	0..1	transaction_label	
device_fingerprint	1	device context	0..N	device_telemetry	
transaction	0..1	context	0..N	device_telemetry	

schema_migrations: version filename checksum applied_at

v_transaction_risk: transaction_id risk_score signal_count risk_band

Underline = PK; dashed oval = generated. Each local diamond is a separate relationship; brown dashed connectors are Mongo references, not SQL FKs.