FinSight

ER Diagram (Chen notation)

Shrikar Desai | Shreyas P Kulkarni

Implemented schema: 17 application tables + bookkeeping + risk view + Mongo telemetry

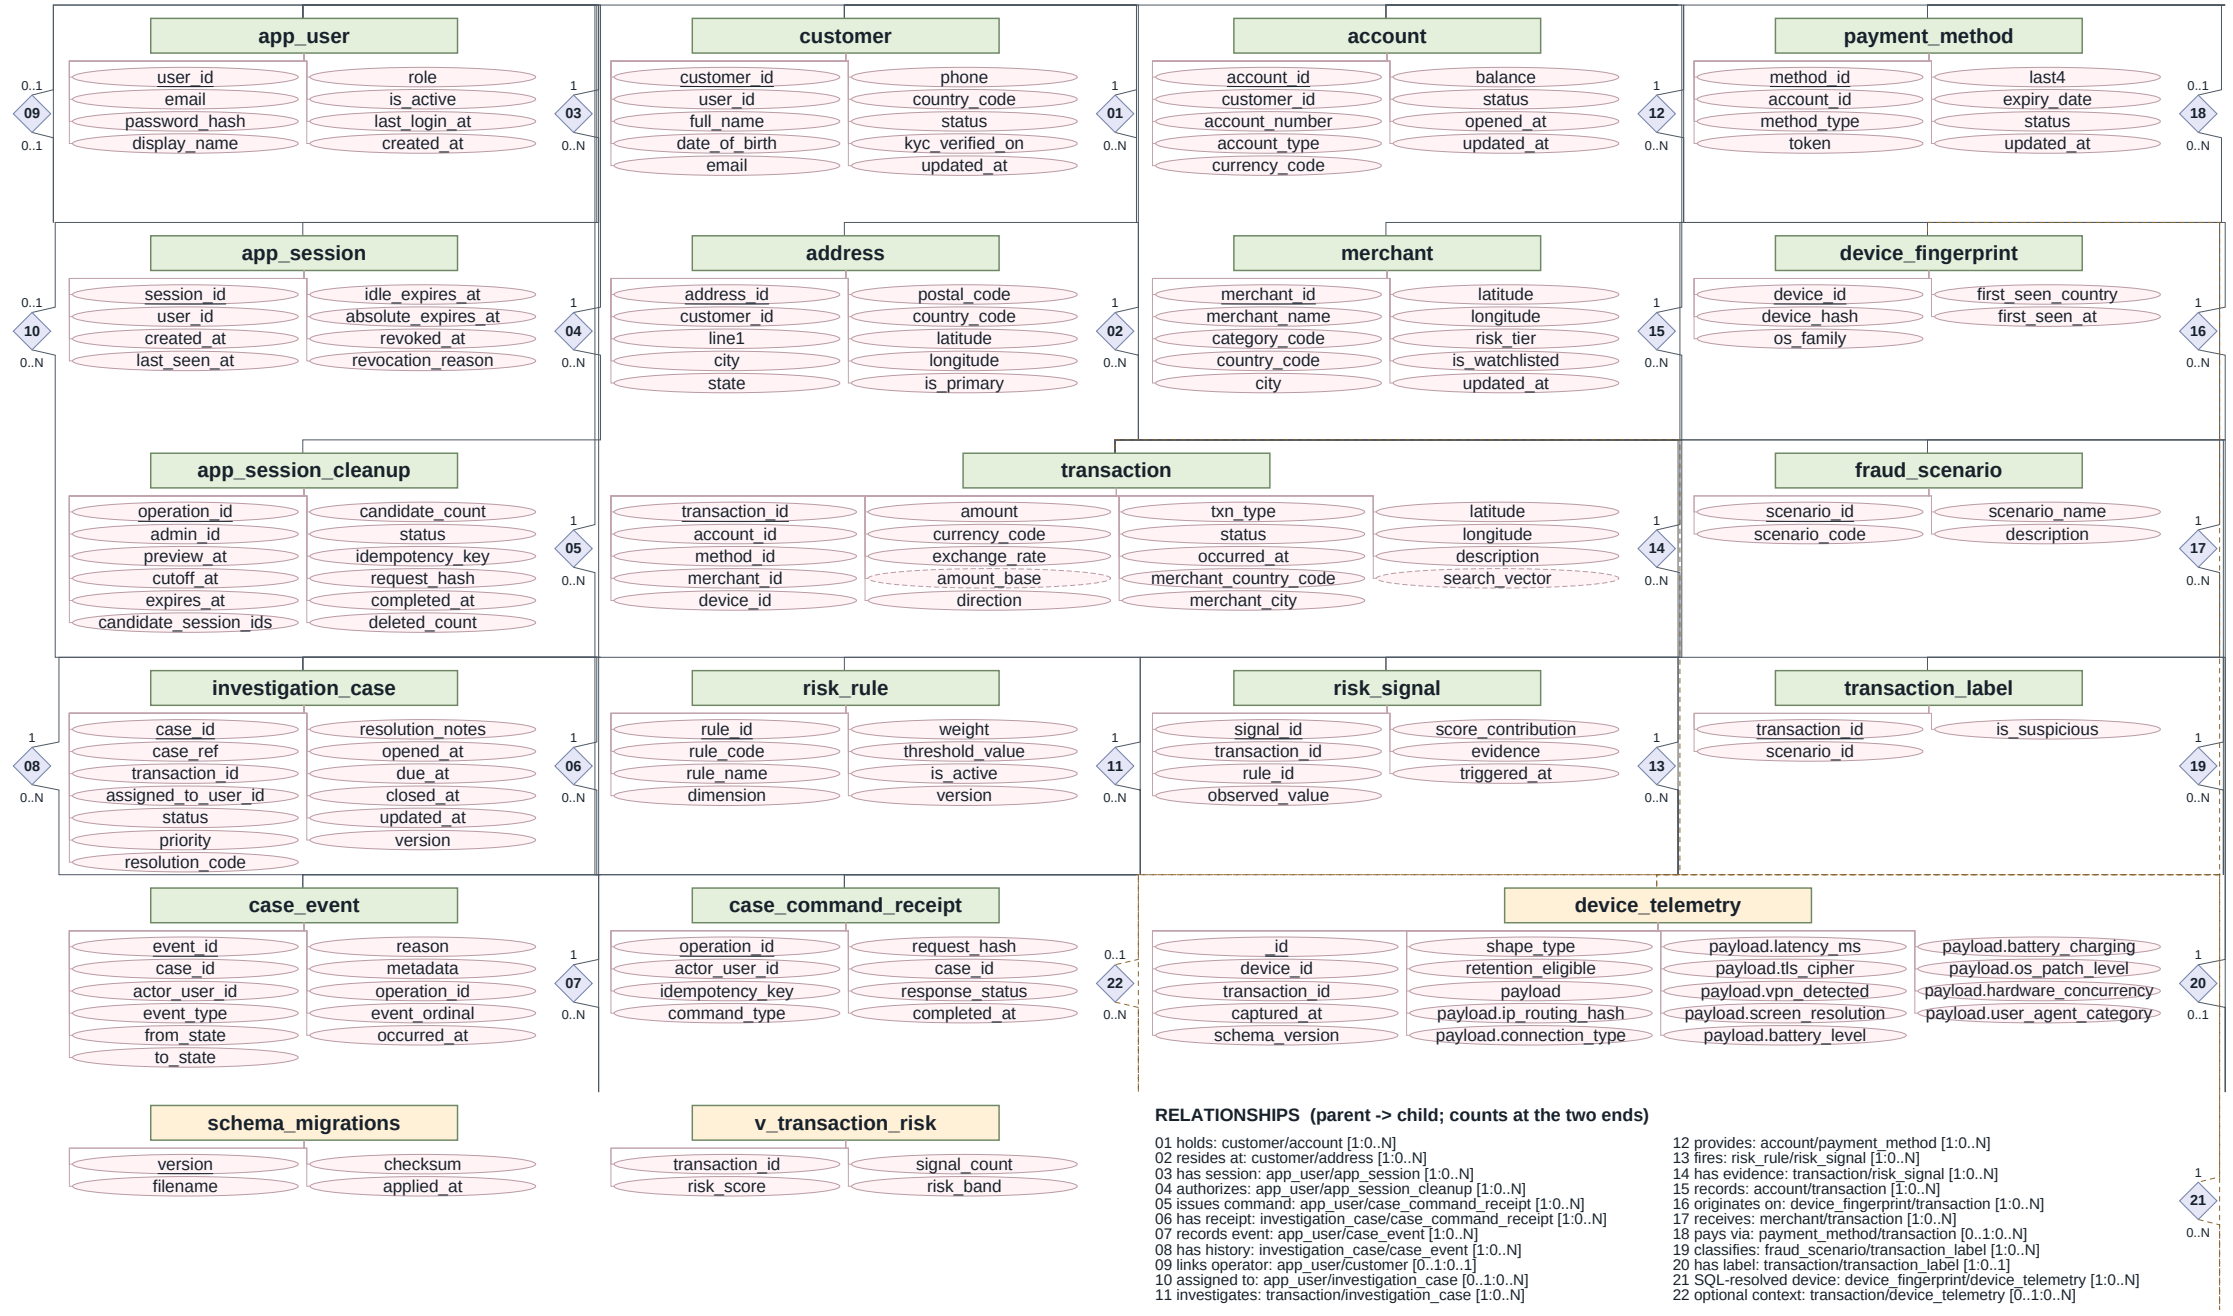

RELATIONSHIPS (parent -> child; counts at the two ends)

01 holds: customer/account [1:0..N]
02 resides at: customer/address [1:0..N]
03 has session: app_user/app_session [1:0..N]
04 authorizes: app_user/app_session_cleanup [1:0..N]
05 issues command: app_user/case_command_receipt [1:0..N]
06 has receipt: investigation_case/case_command_receipt [1:0..N]
07 records event: app_user/case_event [1:0..N]
08 has history: investigation_case/case_event [1:0..N]
09 links operator: app_user/customer [0..1:0..1]
10 assigned to: app_user/investigation_case [0..1:0..N]
11 investigates: transaction/investigation_case [1:0..N]
12 provides: account/payment_method [1:0..N]
13 fires: risk_rule/risk_signal [1:0..N]
14 has evidence: transaction/risk_signal [1:0..N]
15 records: account/transaction [1:0..N]
16 originates on: device_fingerprint/transaction [1:0..N]
17 receives: merchant/transaction [1:0..N]
18 pays via: payment_method/transaction [0..1:0..N]
19 classifies: fraud_scenario/transaction_label [1:0..N]
20 has label: transaction/transaction_label [1:0..1]
21 SQL-resolved device: device_fingerprint/device_telemetry [1:0..N]
22 optional context: transaction/device_telemetry [0..1:0..N]

Underline = PK; dashed oval = generated. Diamonds are numbered in the relationship key. Brown dashed links = validated Mongo references, not SQL FKs.