Advanced OpenACC

John Urbanic

Parallel Computing Specialist Pittsburgh Supercomputing Center

Outline

```
Loop Directives
Data Declaration Directives
Data Regions Directives
Cache directives
Wait / update directives
Runtime Library Routines
Environment variables
```



Outline

- How OpenACC work is organized
 - Gangs/Workers/Threads
 - kernels
 - parallel regions
- Things you didn't know were missing (OpenACC 2.0)
 - Procedure calls
 - Nested Parallelism
- More complex hardware configurations
 - Device Specific Tuning
 - Multi-threading and multiple devices
 - Alternative threading approaches
- Using asynchronous features
- Manual Data Management
- vs. OpenMP 4.0



Targeting the Architecture (But Not Admitting It)


Part of the awesomeness of OpenACC has been that you have been able to ignore the hardware specifics. But, now that you know a little bit more about CUDA/GPU architecture, you might suspect that you can give the compiler still more help in optimizing. In particular, you might know the hardware specifics of a particular model. The compiler might only know which "family" it is compiling for (Fermi, Kepler, etc.).

Indeed, the OpenACC spec has some clauses to target architecture hierarchies, and not just GPUs (think Intel MIC). Let's see how they map to what we know about GPUs.



OpenACC Task Granularity

- The OpenACC execution model has three levels: gang, worker and vector
- This is supposed to map to any architecture that is a collection of Processing Elements (PEs) where each PE is multithreaded and each thread can execute vector instructions.

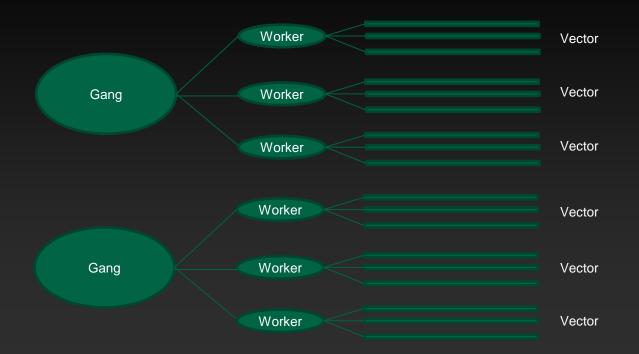




Targeting the Architecture

As we said, OpenACC assumes a device will contain multiple processing elements (PE) that run in parallel. Each PE also has the ability to efficiently perform vector-like operations. For NVIDIA GPUs, it is reasonable to think of a PE as a streaming multiprocessor (SM). Then an OpenACC <u>gang</u> is a threadblock, a <u>worker</u> is effectively a warp, and an OpenACC <u>vector</u> is a CUDA thread. Phi, or similar Intel SMP architectures also map in a logical, but different, fashion.

	<u>GPU</u>	SMP (Phi)
Vector	Thread	SSE Vector
Worker	Warp	Core
Gang	SM	CPU

NVIDIA GPU Task Granularity (Take Notes!)

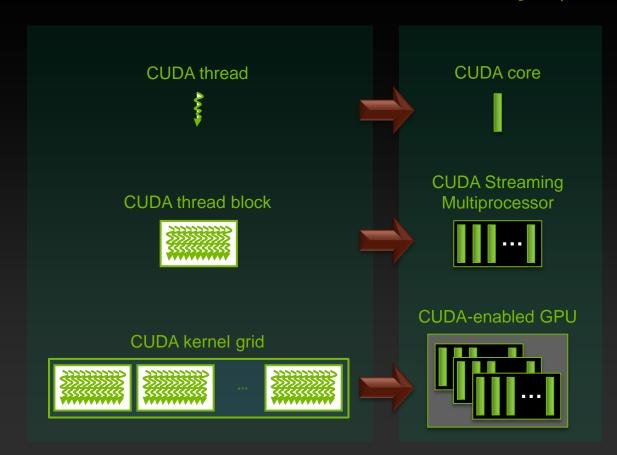

Each thread is executed by a core

- Each block is executed by one SM and does not migrate
- Several concurrent blocks can reside on one SM depending on the blocks' memory requirements and the SM's memory resources
- Each kernel is executed on one device
- Multiple kernels can execute on a device at one time



Warps - on Kepler (Still taking notes?)

- Blocks are divided into 32 thread wide units called warps
 - Size of warps is implementation specific and can change in the future
- The SM creates, manages, schedules and executes threads at warp granularity
 - Each warp consists of 32 threads of contiguous threadIds
- All threads in a warp execute the same instruction
 - If threads of a warp diverge the warp serially executes each branch path taken
- When a warp executes an instruction that accesses global memory it coalesces the memory accesses of the threads within the warp into as few transactions as possible



Determining block size - on Kepler (You can stop now)

- 32 thread wide blocks are good for Kepler, since warps are allocated by row first.
 - 32 thread wide blocks will mean all threads in a warp are reading and writing contiguous pieces of memory
 - Coalescing
- Try to keep total threads in a block to be a multiple of 32 if possible
 - Non-multiples of 32 waste some resources & cycles
- Total number of threads in a block: between 256 and 512 is usually a good number.



Determining grid size - on Kepler

- Most people start with having each thread do one unit of work
- Usually better to have fewer threads so that each thread could do multiple pieces of work.
- What is the limit to how much smaller we can make the number of total blocks?
 - We still want to have at least as many threads as can fill the GPU many times over (for example 4 times). That means we need at least 2880 x 15 x 4 = ~173,000 threads
 - Experiment by decreasing the number of threads



Mapping OpenACC to CUDA Threads and Blocks

```
#pragma acc kernels
for( int i = 0; i < n; ++i )
     y[i] += a*x[i];
#pragma acc kernels loop gang(100) vector(128)
for( int i = 0; i < n; ++i )
     y[i] += a*x[i];
#pragma acc parallel num_gangs(100) vector_length(128)
   #pragma acc loop gang vector
   for( int i = 0; i < n; ++i ) y[i] += a*x[i];
```

16 blocks, 256 threads each.

100 thread blocks, each with 128 threads, each thread executes one iteration of the loop.





SAXPY Returns For Some Fine Tuning

The default (will work OK):

Some suggestions to the compiler:

```
#pragma acc kernels loop gang(100), vector(128)
for( int i = 0; i < n; ++i )
    y[i] += a*x[i];</pre>
```

Specifies that the kernel will use 100 thread blocks, each with 128 threads, where each thread executes one iteration of the loop. This beat the default by ~20% last time I tried...



Rapid Evolution

	Fermi GF100	Fermi GF104	Kepler GK104	Kepler GK110
Compute Capability	2.0	2.1	3.0	3.5
Threads / Warp	32	32	32	32
Max Warps / Multiprocessor	48	48	54	64
Max Threads / Multiprocessor	1536	1536	2048	2048
Max Thread Blocks / Multiprocessor	8	8	16	16
32-bit Registers / Multiprocessor	32768	32768	65536	65536
Max Registers / Thread	63	63	63	255
Max Threads / Thread Block	1024	1024	1024	1024
Shared Memory Size Configurations	16k/48k	16k/48k	16k/32k/48k	16k/32k/48k
Max X Grid Dimension	2^16	2^16	2^32	2^32
Hyper-Q	No	No	No	Yes
Dynamic Parallelism	No	No	No	Yes

- Do you want to have to keep up with this?
- Maybe the compiler knows more about this than you? Is that possible?
- CUDA programmers do have to worry about all of this, and much more.
- But doesn't hurt much to try.



Parallel Regions vs. Kernels

We have been using *kernels* thus far, to great effect. However OpenACC allows us to more explicitly control the creation of tasks via the *gang*, *worker* and *vector* clauses. We can do this inside of *parallel* regions.

These approaches come from different backgrounds.

PGI Accelerator
region

OpenACC
kernels

OpenACC
parallel

parallel



Parallel Construct

Fortran !\$acc parallel [clause ...] structured block !\$acc end parallel

Clauses

```
if( condition )
async( expression )
num_gangs( expression )
num_workers( expression )
vector_length( expression )
```

C

```
#pragma acc parallel [clause ...]
     { structured block }
```

```
private( list )
firstprivate( list )
reduction( operator:list )
Also any data clause
```



Parallel Clauses

```
Controls how many parallel gangs are
num_gangs ( expression )
                            created.
                            Controls how many workers are created
num_workers ( expression )
                            in each gang.
                            Controls vector length of each worker.
vector_length ( list )
                            A copy of each variable in list is
private( list )
                            allocated to each gang.
                            private variables initialized from host.
firstprivate (list)
                            private variables combined across gangs.
reduction( operator:list )
```



Parallel Regions

As in OpenMP, the OpenACC parallel construct creates a number of parallel gangs that immediately begin executing the body of the construct <u>redundantly</u>. When a gang reaches a work-sharing loop, that gang will execute a subset of the loop iterations. One difference between the OpenACC parallel construct and OpenMP is that there is no barrier at the end of a work-sharing loop in a parallel construct.

SAXPY as a parallel region



Compare and Contrast

Let's look at how this plays out in actual code.

```
This
```

Is the same as



Compare and Contrast

But not

```
#pragma acc parallel
{
     for( i = 0; i < n; ++i )
         a[i] = b[i] + c[i];
}</pre>
```

By leaving out the loop directive we get totally redundant execution of the loop by each gang. This is not desirable.



Parallel Regions vs. Kernels

From these simple examples you could get the impression that simply putting in loop directives everywhere would make parallel regions equivalent to kernels. That is not the case.

The sequence of loops here

```
#pragma acc kernels
{
for (i=0; i<n; i++)
            a(i) = b(i)*c(i)
for (i=1; i<n-1; i++)
            d(i) = a(i-1) + a(i+1)
}</pre>
```

Does what you might think. Two kernels are generated and the first completes before the second starts.



```
#pragma acc parallel
                                            Straight from
#pragma acc loop
                                            the pages of
for (i=0; i<n; i++)
                                            our OpenMP
                                                                        slave
         a(i) = b(i)*c(i)
                                            lecture!
#pragma acc loop
for (i=1; i<n-1; i++)
         d(i) = a(i-1) + a(i+1)
The compiler will start some number of gangs, work-share the iterations of the first loop
across those gangs, and work-share the iterations of the second loop across the same
gangs. There is no guarantee that for the same loop iteration, the same value of i will be
executed by the same gang for both loops. In fact, that's likely to be untrue, and some value
of i will be executed by different gangs between the first and second loop. There is also no
```

synchronization between the first and second loop, so there's no guarantee that the

assignment to a(i) from the first loop will be complete before its value is fetched by some

A parallel region will work differently

other gang for the assignment in the second loop.

Loop Level

master

Parallel

Regions

Parallel Regions

PGI Compiler Engineer Michael Wolfe says it best:

"The OpenACC kernels and parallel constructs each try to solve the same problem, identifying loop parallelism and mapping it to the machine parallelism. The kernels construct is more implicit, giving the compiler more freedom to find and map parallelism according to the requirements of the target accelerator. The parallel construct is more explicit, and requires more analysis by the programmer to determine when it is legal and appropriate.

Both constructs allow for automatic vectorization within the loops. The actual behavior may depend on the compiler you are using... As the PGI Accelerator compilers mature, we continue to train them to make better decisions for the specific targets. "



Parallel Regions vs. Kernels (Which is best?)

To put it simply, kernels leave more decision making up to the compiler. There is nothing wrong with trusting the compiler ("trust but verify") and that is probably a reasonable place to start.

If you are an OpenMP programmer, you will notice a strong similarity between the tradeoffs of kernels and regions and that of OpenMP parallel for/do versus parallel regions. We will discuss this later when we talk about OpenMP 4.0.

As you gain experience, you may find that the parallel construct allows you to apply your understanding more explicitly. On the other hand, as the compilers mature, they will also be smarter about just doing the right thing. <u>History tends to favor this second path heavily.</u>

OpenACC 2.0 Things you didn't know were missing.

The latest version of the specification has a lot of improvements. The most anticipated ones remove limitations that you, as new users, might not have known about. However, they may still linger until all of the compilers get up to spec.

- Procedure Calls
- Nested Parallelism

As well as some other things that you might not have thought about

- Device specific tuning
- Multiple host thread support

Don't be afraid to review the full spec at http://www.openacc.org/sites/default/files/OpenACC.2.0a_1.pdf



Procedure Calls

In OpenACC 1.0, all procedures had to be inlined. This limitation has been removed, but you do need to follow some rules.

In this case, the directive tells the compiler that "solver" will be a device executable and that it may have a loop at the worker level. No caller can do worker level parallelism.



Nested Parallelism

The previous example had gangs invoking workers. But, it is now possible to have kernels actually launch new kernels.

Having thousands of lightweight threads launching lightweight threads is probably not the most likely scenario.



Nested Parallelism

This is a more useful case. We have a single thread on the device launching parallelism from its thread.

The objective is to move as much of the application to the accelerator and minimize communication between it and the host.



Device Specific Tuning

I hope from our brief detour into GPU hardware specifics that you have some understanding of how hardware specific these optimizations can be. Maybe one more reason to let kernel do its thing. However, OpenACC does have ways to allow you to account for various hardware details. The most direct is device_type().



Multiple Devices and Multiple Threads

- Multiple threads and one device: fine. You are responsible for making sure that the data is on the multi-core host when it needs to be, and on the accelerator when it needs to be there. But, you have those data clauses in hand already (present_or_copy will be crucial), and OpenMP has its necessary synchronization ability.
- Multiple threads and multiple devices. One might hope that the compilers will eventually make this transparent, but at the moment you need to:
 - Assign threads to devices:
 - omp_get_thread_num
 - call acc_set_device_num
 - Manually break up the data structure into several pieces:
 - !\$acc kernels loop copyin(x(offs(i)+1:offs(i)+nsec),y(offs(i)+1:offs(i)+nsec))
 - From excellent example on Page 15 of the PGI 12.6 OpenACC Getting Started Guide



Asynchronous Behavior

There are synchronization rules associated with each type of loop construct, and some of the data constructs (involving updates and independent data management). You may want to keep them in mind if you drift very far from a *kernels* model. In those cases you have *wait()*, *asynch()* and *atomic* clauses, directives or APIs to manage your flow. There are several variations of each to accommodate multiple types of conditions to continue (one or multiple waits, test or block).



Data Management

Again, as you get farther from a simple *kernels* model, you may find yourself needing to manage data transfers in a more explicit manner. You can manually:

- Create global data:
 - declare create (create on host and device, you will probably use update to manage)
 - declare device_resident (create on device only, only accessible in compute regions)
 - declare link and declare create pointer (pointers are created for data to be copied)
- Create data transfer regions: enter data (in effect until exit data).
 - Like copyin, etc. except that they do not need to apply to a structured block. Can just stick one in some initialization routine.
- Update data directly: update

There are clause, directive and even API versions of these, depending on appropriateness.



OpenACC Things Not Covered

The OpenACC specification has grown quite accommodating as of Version 2.0. You have already seen some redundancy between directives, clauses and APIs, so I have made no attempt to do "laundry lists" of every option along the way. It would be quite repetitive. I think you are well prepared to glance at the OpenACC 2.0 Specification and grasp just about all of it.

We have omitted various and sundry peripheral items. Without attempting to be comprehensive, here are a few topics of potential interest to some of you.

- Environment variables: Useful for different hardware configurations
- if clauses, macros and conditional compilation: allow both runtime and compile time control over host or device control flow.



Credits

Some of these examples are derived from excellent explanations by these gentlemen, and more than a little benefit was derived from their expertise.

Michael Wolfe, PGI Compiler Engineer

Mark Harris, NVIDIA

Cliff Woolley, NVIDIA

