

MSDN Library

Development Tools and Languages

Visual Studio 2013

Visual Basic and Visual C#

Programming Concepts

Asynchronous Programming with Async and Await

Walkthrough: Accessing the Web by Using Async and Await

How to: Extend the Async Walkthrough by Using Task.WhenAll

How to: Make Multiple Web Requests in Parallel by Using Async and Await

Async Return Types

Control Flow in Async Programs

Fine-Tuning Your Async Application

Handling Reentrancy in Async Apps

WhenAny: Bridging between the .NET Framework and the Windows Runtime

Async Cancellation: Bridging between the .NET Framework and the Windows Runtime

Using Async for File Access

# Asynchronous Programming with Async and Await (C# and Visual Basic)

Visual Studio 2013    Other Versions ▾

You can avoid performance bottlenecks and enhance the overall responsiveness of your application by using asynchronous programming. However, traditional techniques for writing asynchronous applications can be complicated, making them difficult to write, debug, and maintain.

Visual Studio 2012 introduces a simplified approach, async programming, that leverages asynchronous support in the .NET Framework and the Windows Runtime. The compiler does the difficult work that the developer used to do, and your application retains a logical structure that resembles synchronous code. As a result, you get all the advantages of asynchronous programming with a fraction of the effort.

This topic contains the following sections.

- [Async Improves Responsiveness](#)
- [Async Methods Are Easier to Write](#)
- [What Happens in an Async Method](#)
- [API Async Methods](#)
- [Threads](#)
- [Async and Await](#)
- [Return Types and Parameters](#)
- [Naming Convention](#)
- [Related Topics](#)
- [Complete Example](#)
- [Related Topics](#)

This topic provides an overview of when and how to use async programming and includes links to support topics that contain details and examples.

## Async Improves Responsiveness

Asynchrony is essential for activities that are potentially blocking, such as when your application accesses the web. Access to a web resource sometimes is slow or delayed. If such an activity is blocked within a synchronous process, the entire application must wait. In an asynchronous process, the application can continue with other work that doesn't depend on the web resource until the potentially blocking task finishes.

The following table shows typical areas where asynchronous programming improves responsiveness. The listed APIs from the .NET Framework 4.5 and the Windows Runtime contain methods that support async programming.

Application area	Supporting APIs that contain async methods
Web access	<a href="#">HttpClient</a> , <a href="#">SyndicationClient</a>
Working with files	<a href="#">StorageFile</a> , <a href="#">StreamWriter</a> , <a href="#">StreamReader</a> , <a href="#">XmlReader</a>
Working with images	<a href="#">MediaCapture</a> , <a href="#">BitmapEncoder</a> , <a href="#">BitmapDecoder</a>
WCF programming	<a href="#">Synchronous and Asynchronous Operations</a>

Asynchrony proves especially valuable for applications that access the UI thread because all UI-related activity usually shares one thread. If any process is blocked in a synchronous application, all are blocked. Your application stops responding, and you might conclude it has failed when instead it's just waiting.

When you use asynchronous methods, the application continues to respond to the UI. You can resize or minimize a window, for example, or you can close the application if you don't want to wait for it to finish.

The async-based approach adds the equivalent of an automatic transmission to the list of options that you can choose from when designing asynchronous operations. That is, you get all the benefits of traditional asynchronous programming but with much less effort from the developer.

## Async Methods Are Easier to Write

The [Async](#) and [Await](#) keywords in Visual Basic and the [async](#) and [await](#) keywords in C# are the heart of async programming. By using those two keywords, you can use resources in the .NET Framework or the Windows Runtime to create an asynchronous method almost as easily as you create a synchronous method. Asynchronous methods that you define by using [async](#) and [await](#) are referred to as [asynchronous methods](#).

The following example shows an async method. Almost everything in the code should look completely familiar to you. The comments call out the features that you add to create the asynchrony.

You can find the complete example file at the end of this topic, and you can download the sample from [Async Sample: Example from MSDN](#).

You can find the complete example file at the end of this topic, and you can download the sample from [Async Sample: Example file: "Asynchronous Programming with Async and Await"](#).

C#	VB
<pre>// Three things to note in the signature: // - The method has an async modifier. // - The return type is Task or Task&lt;T&gt;. (See "Return Types" section.) //   Here, it is Task&lt;int&gt; because the return statement returns an integer. // - The method name ends in "Async." async Task&lt;int&gt; AccessTheWebAsync() {     // You need to add a reference to System.Net.Http to declare client.     HttpClient client = new HttpClient();      // GetStringAsync returns a Task&lt;string&gt;. That means that when you await the     // task you'll get a string (urlContents).     Task&lt;string&gt; getStringTask = client.GetStringAsync("http://msdn.microsoft.com");      // You can do work here that doesn't rely on the string from GetStringAsync.     DoIndependentWork();      // The await operator suspends AccessTheWebAsync.     // - AccessTheWebAsync can't continue until getStringTask is complete.     // - Meanwhile, control returns to the caller of AccessTheWebAsync.     // - Control resumes here when getStringTask is complete.     // - The await operator then retrieves the string result from getStringTask.     string urlContents = await getStringTask;      // The return statement specifies an integer result.     // Any methods that are awaiting AccessTheWebAsync retrieve the length value.     return urlContents.Length; }</pre>	

If `AccessTheWebAsync` doesn't have any work that it can do between calling `GetStringAsync` and awaiting its completion, you can simplify your code by calling and awaiting in the following single statement.

C#	VB
<pre>string urlContents = await client.GetStringAsync();</pre>	

The following characteristics summarize what makes the previous example an async method.

- The method signature includes an **Async** or **async** modifier.
- The name of an async method, by convention, ends with an "Async" suffix.
- The return type is one of the following types:
  - `Task<TResult>` if your method has a return statement in which the operand has type `TResult`.
  - `Task` if your method has no return statement or has a return statement with no operand.
  - `Void` (a `Sub` in Visual Basic) if you're writing an async event handler.

For more information, see "Return Types and Parameters" later in this topic.


- The method usually includes at least one `await` expression, which marks a point where the method can't continue until the awaited asynchronous operation is complete. In the meantime, the method is suspended, and control returns to the method caller. The next section of this topic illustrates what happens at the suspension point.


In async methods, you use the provided keywords and types to indicate what you want to do, and the compiler does the rest, including keeping track of what must happen when control returns to an `await` point in a suspended method. Some routine processes, such as loops and exception handling, can be difficult to handle in traditional asynchronous code. In an async method, you write these elements much as you would in a synchronous solution, and the problem is solved.

For more information about asynchrony in previous versions of the .NET Framework, see [TPL and Traditional .NET Framework Asynchronous Programming](#).

## What Happens in an Async Method

The most important thing to understand in asynchronous programming is how the control flow moves from method to method. The following diagram leads you through the process.

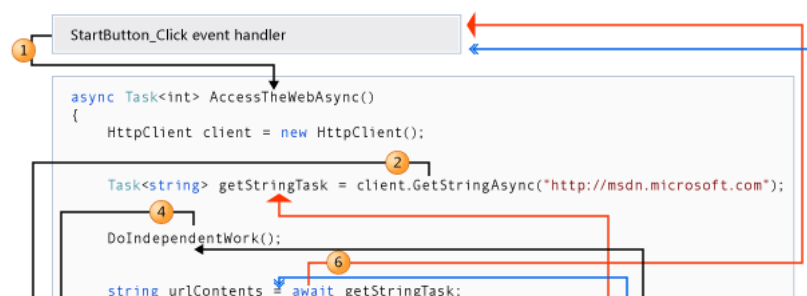

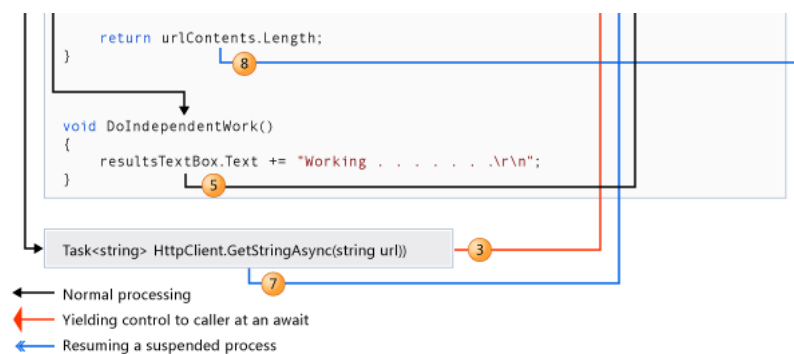

The numbers in the diagram correspond to the following steps.

1. An event handler calls and awaits the `AccessTheWebAsync` async method.
2. `AccessTheWebAsync` creates an `HttpClient` instance and calls the `GetStringAsync` asynchronous method to download the contents of a website as a string.
3. Something happens in `GetStringAsync` that suspends its progress. Perhaps it must wait for a website to download or some blocking activity. To avoid blocking resources, `GetStringAsync` yields control to its caller, `AccessTheWebAsync`.
4. Because `getStringTask` hasn't been awaited yet, `AccessTheWebAsync` can continue with other work that doesn't depend on the final result from `GetStringAsync`. That work is represented by a call to the synchronous method `DoIndependentWork`.
5. `DoIndependentWork` is a synchronous method that does its work and returns to its caller.
6. `AccessTheWebAsync` has run out of work that it can do without a result from `getStringTask`. `AccessTheWebAsync` next waits to calculate and return the length of the downloaded string, but the method can't calculate that value until the method has finished its work.

Therefore, `AccessTheWebAsync` uses an await operator to suspend its progress and to yield control to the method that called `AccessTheWebAsync`. `AccessTheWebAsync` returns a `Task(Of Integer)` or `Task<int>` to the caller. The task represents a process to produce an integer result that's the length of the downloaded string.

#### Note

If `GetStringAsync` (and therefore `getStringTask`) is complete before `AccessTheWebAsync` awaits it, control remains in `AccessTheWebAsync`. The expense of suspending and then returning to `AccessTheWebAsync` would be wasted if the caller's asynchronous process (`getStringTask`) has already completed and `AccessTheWebAsync` doesn't have to wait for the final result.

Inside the caller (the event handler in this example), the processing pattern continues. The caller might do other work that doesn't depend on the result from `AccessTheWebAsync` before awaiting that result, or the caller might await immediately. The event handler is waiting for `AccessTheWebAsync`, and `AccessTheWebAsync` is waiting for `GetStringAsync`.

7. `GetStringAsync` completes and produces a string result. The string result isn't returned by the call to `GetStringAsync` in the way that you might expect. (Remember that the method already returned a task in step 3.) Instead, the string result is stored in the task that represents the completion of the method, `getStringTask`. The await operator retrieves the result from `getStringTask`. The assignment statement assigns the retrieved result to `urlContents`.
8. When `AccessTheWebAsync` has the string result, the method can calculate the length of the string. Then the work of `AccessTheWebAsync` is also complete, and the waiting event handler can resume. In the full example at the end of the topic, you can confirm that the event handler retrieves and prints the value of the length result.

If you are new to asynchronous programming, take a minute to consider the difference between synchronous and asynchronous behavior. A synchronous method returns when its work is complete (step 5), but an async method returns a task value when its work is suspended (steps 3 and 6). When the async method eventually completes its work, the task is marked as completed and the result, if any, is stored in the task.

For more information about control flow, see [Control Flow in Async Programs \(C# and Visual Basic\)](#).

## API Async Methods

You might be wondering where to find methods such as `GetStringAsync` that support async programming. The .NET Framework 4.5 contains many members that work with async and await. You can recognize these members by the "Async" suffix that's attached to member name and a return type of `Task` or `Task<TResult>`. For example, the `System.IO.Stream` class contains methods such as `CopyToAsync`, `ReadAsync`, and `WriteAsync` alongside the synchronous methods `CopyTo`, `Read`, and `Write`.

The Windows Runtime also contains many methods that you can use with async and await in Windows Store apps. For more information and example methods, see [Quickstart: using the await operator for asynchronous programming](#), [Asynchronous programming \(Windows Store apps\)](#), and [WhenAny: Bridging between the .NET Framework and the Windows Runtime \(C# and Visual Basic\)](#).

## Threads

Async methods are intended to be non-blocking operations. An await expression in an async method doesn't block the current thread while the awaited task is running. Instead, the expression signs up the rest of the method as a continuation and returns control to the caller of the async method.

The async and await keywords don't cause additional threads to be created. Async methods don't require multithreading because a async method doesn't run on its own thread. The method runs on the current synchronization context and uses time on the thread when the method is active. You can use [Task.Run](#) to move CPU-bound work to a background thread, but a background thread doesn't help with a process that's just waiting for results to become available.

The async-based approach to asynchronous programming is preferable to existing approaches in almost every case. In particular, this approach is better than [BackgroundWorker](#) for IO-bound operations because the code is simpler and you don't have to guard against race conditions. In combination with [Task.Run](#), async programming is better than [BackgroundWorker](#) for CPU-bound operations because async programming separates the coordination details of running your code from the work that **Task.Run** transfers to the threadpool.

## Async and Await

If you specify that a method is an async method by using an [Async](#) or [async](#) modifier, you enable the following two capabilities.

- The marked async method can use [Await](#) or [await](#) to designate suspension points. The await operator tells the compiler that the async method can't continue past that point until the awaited asynchronous process is complete. In the meantime, control returns to the caller of the async method.

The suspension of an async method at an await expression doesn't constitute an exit from the method, and **finally** blocks don't run.

- The marked async method can itself be awaited by methods that call it.

An async method typically contains one or more occurrences of an await operator, but the absence of await expressions doesn't cause a compiler error. If an async method doesn't use an await operator to mark a suspension point, the method executes as a synchronous method does, despite the async modifier. The compiler issues a warning for such methods.

**Async**, **async**, **Await**, and **await** are contextual keywords. For more information and examples, see the following topics:

- [Async \(Visual Basic\)](#)
- [async \(C# Reference\)](#)
- [Await Operator \(Visual Basic\)](#)
- [await \(C# Reference\)](#)

## Return Types and Parameters

In .NET Framework programming, an async method typically returns a [Task](#) or a [Task<TResult>](#). Inside an async method, an await operator is applied to a task that's returned from a call to another async method.

You specify [Task<TResult>](#) as the return type if the method contains a [Return](#) (Visual Basic) or [return](#) (C#) statement that specifies a return operand of type **TResult**.

You use **Task** as the return type if the method has no return statement or has a return statement that doesn't return an operand.

The following example shows how you declare and call a method that returns a [Task<TResult>](#) or a [Task](#).

C#	VB
<pre>// Signature specifies Task&lt;TResult&gt; async Task&lt;int&gt; TaskOfTResult_MethodAsync() {     int hours;     // . . .     // Return statement specifies an integer result.     return hours; }  // Calls to TaskOfTResult_MethodAsync Task&lt;int&gt; returnedTaskTResult = TaskOfTResult_MethodAsync(); int intResult = await returnedTaskTResult; // or, in a single statement int intResult = await TaskOfTResult_MethodAsync();  // Signature specifies Task async Task Task_MethodAsync() {     // . . .     // The method has no return statement. }  // Calls to Task_MethodAsync</pre>	<pre>' Signature specifies Task(Of TResult) Public Async Task(Of Integer) TaskOfTResult_MethodAsync() {     Dim hours As Integer     ' . . .     ' Return statement specifies an integer result.     Return hours }  ' Calls to TaskOfTResult_MethodAsync Dim returnedTaskTResult As Task(Of Integer) = TaskOfTResult_MethodAsync() Dim intResult As Integer = Await returnedTaskTResult ' or, in a single statement Dim intResult As Integer = Await TaskOfTResult_MethodAsync()  ' Signature specifies Task Public Async Task Task_MethodAsync() {     ' . . .     ' The method has no return statement. }  ' Calls to Task_MethodAsync</pre>

```
Task returnedTask = Task_MethodAsync();
await returnedTask;
// or, in a single statement
await Task_MethodAsync();
```

Each returned task represents ongoing work. A task encapsulates information about the state of the asynchronous process and, eventually, either the final result from the process or the exception that the process raises if it doesn't succeed.

An async method can also be a **Sub** method (Visual Basic) or have a **void** return type (C#). This return type is used primarily to define event handlers, where a **void** return type is required. Async event handlers often serve as the starting point for async programs.

An async method that's a **Sub** procedure or that has a **void** return type can't be awaited, and the caller of a void-returning method catch any exceptions that the method throws.

An async method can't declare [ByRef](#) parameters in Visual Basic or [ref](#) or [out](#) parameters in C#, but the method can call methods that have such parameters.

For more information and examples, see [Async Return Types \(C# and Visual Basic\)](#). For more information about how to catch exceptions in async methods, see [try-catch \(C# Reference\)](#) or [Try...Catch...Finally Statement \(Visual Basic\)](#).

Asynchronous APIs in Windows Runtime programming have one of the following return types, which are similar to tasks:

- [IAsyncOperation](#), which corresponds to [Task<TResult>](#)
- [IAsyncAction](#), which corresponds to [Task](#)
- [IAsyncActionWithProgress](#)
- [IAsyncOperationWithProgress](#)

For more information and an example, see [Quickstart: using the await operator for asynchronous programming](#).

## Naming Convention

By convention, you append "Async" to the names of methods that have an **Async** or **async** modifier.

You can ignore the convention where an event, base class, or interface contract suggests a different name. For example, you should rename common event handlers, such as [Button1\\_Click](#).

## Related Topics

Title	Description	Sample
<a href="#">Walkthrough: Accessing the Web by Using Async and Await (C# and Visual Basic)</a>	Shows how to convert a synchronous WPF solution to an asynchronous WPF solution. The application downloads a series of websites.	<a href="#">Async Sample: Accessing the Web Walkthrough (C# and Visual Basic)</a>
<a href="#">How to: Extend the Async Walkthrough by Using Task.WhenAll (C# and Visual Basic)</a>	Adds <a href="#">Task.WhenAll</a> to the previous walkthrough. The use of <b>WhenAll</b> starts all the downloads at the same time.	
<a href="#">How to: Make Multiple Web Requests in Parallel by Using Async and Await (C# and Visual Basic)</a>	Demonstrates how to start several tasks at the same time.	<a href="#">Async Sample: Make Multiple Web Requests Parallel (C# and Visual Basic)</a>
<a href="#">Async Return Types (C# and Visual Basic)</a>	Illustrates the types that async methods can return and explains when each type is appropriate.	
<a href="#">Control Flow in Async Programs (C# and Visual Basic)</a>	Traces in detail the flow of control through a succession of await expressions in an asynchronous program.	<a href="#">Async Sample: Control Flow in Async Programs (C# and Visual Basic)</a>
<a href="#">Fine-Tuning Your Async Application (C# and Visual Basic)</a>	Shows how to add the following functionality to your async solution: <ul style="list-style-type: none"><li>• <a href="#">Cancel an Async Task or a List of Tasks (C# and Visual Basic)</a></li><li>• <a href="#">Cancel Async Tasks after a Period of Time (C# and Visual Basic)</a></li><li>• <a href="#">Cancel Remaining Async Tasks after One Is Complete (C# and Visual Basic)</a></li><li>• <a href="#">Start Multiple Async Tasks and Process Them As They Complete (C# and Visual Basic)</a></li></ul>	<a href="#">Async Sample: Fine Tuning Your Application (C# and Visual Basic)</a>
<a href="#">Handling Reentrancy in Async Apps (C# and Visual Basic)</a>	Shows how to handle cases in which an active asynchronous operation is restarted while it's running.	
<a href="#">WhenAny: Bridging between the .NET Framework and the Windows Runtime</a>	Shows how to bridge between Task types in the .NET Framework and IAsyncOperations in the Windows Runtime so that you can	<a href="#">Async Sample: Bridging between .NET and Windows Runtime</a>

<a href="#">.NET Framework and the Windows Runtime (C# and Visual Basic)</a>	and <a href="#">IAsyncOperations</a> in the Windows Runtime so that you can use <a href="#">WhenAny</a> with a Windows Runtime method.	<a href="#">between .NET and Windows Runtime (AsTc and WhenAny)</a>
<a href="#">Async Cancellation: Bridging between the .NET Framework and the Windows Runtime (C# and Visual Basic)</a>	Shows how to bridge between Task types in the .NET Framework and <a href="#">IAsyncOperations</a> in the Windows Runtime so that you can use <a href="#">CancellationTokenSource</a> with a Windows Runtime method.	<a href="#">Async Sample: Bridging between .NET and Windows Runtime (AsTc &amp; Cancellation)</a>
<a href="#">Using Async for File Access (C# and Visual Basic)</a>	Lists and demonstrates the benefits of using async and await to access files.	
<a href="#">Walkthrough: Using the Debugger with Async Methods</a>	Demonstrates the control flow at an await statement, and demonstrates the behavior of the <b>Step Into</b> , <b>Step Over</b> , and <b>Step Out</b> commands within async methods.	
<a href="#">Task-based Asynchronous Pattern (TAP)</a>	Describes a new pattern for asynchrony in the .NET Framework. The pattern is based on the <a href="#">Task</a> and <a href="#">Task&lt;TResult&gt;</a> types.	
<a href="#">Quickstart: Calling asynchronous APIs in C# or Visual Basic</a>	Shows how to use async and await in a Windows Store app.	
<a href="#">Asynchronous programming (Windows Store apps)</a>	Provides an overview of asynchronous programming in the Windows Runtime.	
<a href="#">Async Videos on Channel 9</a>	Provides links to a variety of videos about async programming.	

Complete Example

The following code is the MainWindow.xaml.vb or MainWindow.xaml.cs file from the Windows Presentation Foundation (WPF) application that this topic discusses. You can download the sample from [Async Sample: Example from "Asynchronous Programming Async and Await"](#).

C#VB

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows;
using System.Windows.Controls;
using System.Windows.Data;
using System.Windows.Documents;
using System.Windows.Input;
using System.Windows.Media;
using System.Windows.Media.Imaging;
using System.Windows.Navigation;
using System.Windows.Shapes;

// Add a using directive and a reference for System.Net.Http;
using System.Net.Http;

namespace AsyncFirstExample
{
    public partial class MainWindow : Window
    {
        // Mark the event handler with async so you can use await in it.
        private async void StartButton_Click(object sender, RoutedEventArgs e)
        {
            // Call and await separately.
            //Task<int> getLengthTask = AccessTheWebAsync();
            //// You can do independent work here.
            //int contentLength = await getLengthTask;

            int contentLength = await AccessTheWebAsync();

            resultsTextBox.Text +=
                String.Format("\r\nLength of the downloaded string: {0}\r\n", contentLength);
        }

        // Three things to note in the signature:
        // - The method has an async modifier.
        // - The return type is Task or Task<T>. (See "Return Types" section.)
        //   Here, it is Task<int> because the return statement returns an integer.
        // - The method name ends in "Async."
        async Task<int> AccessTheWebAsync()
        {
            // You need to add a reference to System.Net.Http to declare client.
            HttpClient client = new HttpClient();

            // GetStringAsync returns a Task<string>. That means that when you await the
            // task you'll get a string (urlContents).
            Task<string> getStringTask = client.GetStringAsync("http://msdn.microsoft.com");
```

```
// You can do work here that doesn't rely on the string from GetStringAsync.
DoIndependentWork();

// The await operator suspends AccessTheWebAsync.
// - AccessTheWebAsync can't continue until getStringTask is complete.
// - Meanwhile, control returns to the caller of AccessTheWebAsync.
// - Control resumes here when getStringTask is complete.
// - The await operator then retrieves the string result from getStringTask.
string urlContents = await getStringTask;

// The return statement specifies an integer result.
// Any methods that are awaiting AccessTheWebAsync retrieve the length value.
return urlContents.Length;
}

void DoIndependentWork()
{
    resultsTextBox.Text += "Working . . . . .\r\n";
}
}

// Sample Output:

// Working . . . . .

// Length of the downloaded string: 41564.
```

See Also

- Reference**  
[async \(C# Reference\)](#)  
[await \(C# Reference\)](#)  
[Await Operator \(Visual Basic\)](#)  
[Async \(Visual Basic\)](#)  
**Other Resources**  
[Sample: .NET Asynchronous Programming for Windows Store Apps](#)  
[Sample: Making an await WebClient](#)  
[Sample \(C#\): Save a collection to Application Storage](#)  
[Sample \(Visual Basic\): Save a collection to Application Storage](#)

Was this page helpful?

Your feedback about this content is important. Let us know what you think.

Yes

No

Have a suggestion to improve MSDN Library?

Visit our UserVoice Page to submit and vote on ideas!

Make a suggestion

Dev centers

- Windows
- Office
- Visual Studio
- Nokia
- Microsoft Azure
- More...

Learning resources

- [Microsoft Virtual Academy](#)
- [Channel 9](#)
- [Interoperability Bridges](#)
- [MSDN Magazine](#)

Programs

- [BizSpark \(for startups\)](#)
- [DreamSpark](#)
- [Imagine Cup](#)

Community

- [Forums](#)
- [Blogs](#)
- [Codeplex](#)

Support

- [Self support](#)