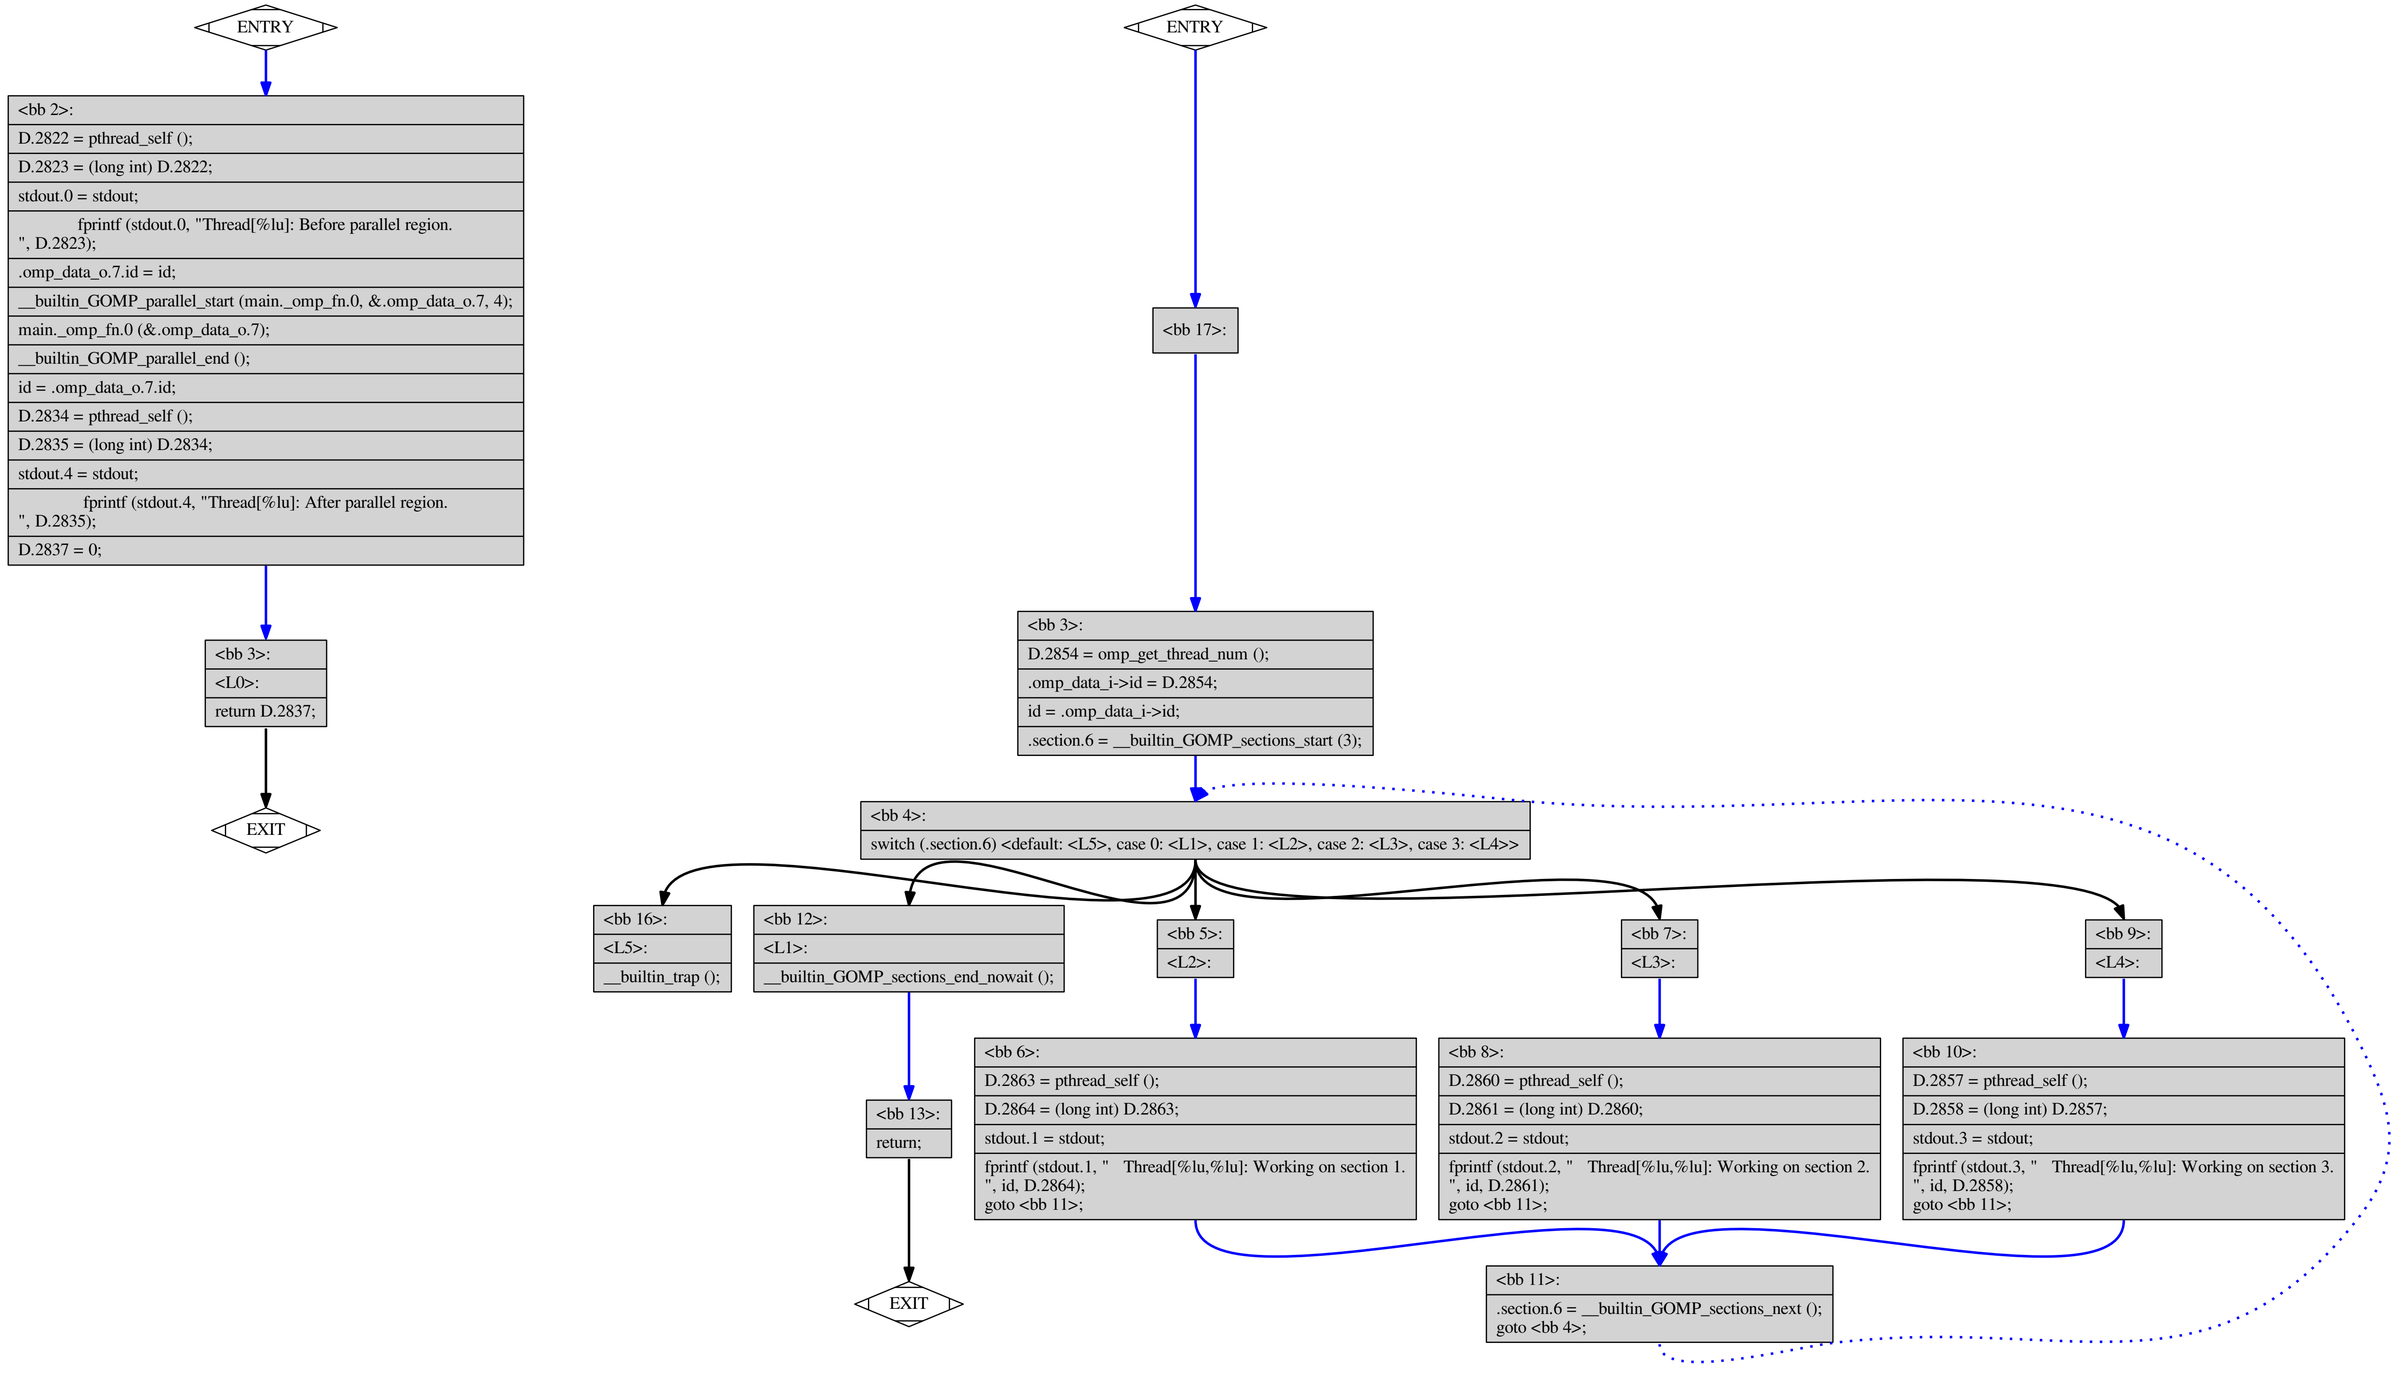
ENTRY
<bb 2>:
D.2822 = pthread_self ();
D.2823 = (long int) D.2822;
stdout.0 = stdout;
fprintf (stdout.0, "Thread[%lu]: Before parallel region.
", D.2823);
.omp_data_o.7.id = id;
__builtin_GOMP_parallel_start (main._omp_fn.0, &.omp_data_o.7, 4);
main._omp_fn.0 (&.omp_data_o.7);
__builtin_GOMP_parallel_end ();
id = .omp_data_o.7.id;
D.2834 = pthread_self ();
D.2835 = (long int) D.2834;
stdout.4 = stdout;
fprintf (stdout.4, "Thread[%lu]: After parallel region.
", D.2835);
D.2837 = 0;
<bb 3>:
<L0>:
return D.2837;
EXIT
ENTRY
<bb 17>:
<bb 3>:
D.2854 = omp_get_thread_num ();
.omp_data_i->id = D.2854;
id = .omp_data_i->id;
.section.6 = __builtin_GOMP_sections_start (3);
<bb 4>:
switch (.section.6) <default: <L5>, case 0: <L1>, case 1: <L2>, case 2: <L3>, case 3: <L4>>
<bb 16>:
<L5>:
__builtin_trap ();
<bb 12>:
<L1>:
__builtin_GOMP_sections_end_nowait ();
<bb 5>:
<L2>:
<bb 7>:
<L3>:
<bb 9>:
<L4>:
<bb 13>:
return;
<bb 6>:
D.2863 = pthread_self ();
D.2864 = (long int) D.2863;
stdout.1 = stdout;
fprintf (stdout.1, " Thread[%lu,%lu]: Working on section 1.
", id, D.2864);
goto <bb 11>;
<bb 8>:
D.2860 = pthread_self ();
D.2861 = (long int) D.2860;
stdout.2 = stdout;
fprintf (stdout.2, " Thread[%lu,%lu]: Working on section 2.
", id, D.2861);
goto <bb 11>;
<bb 10>:
D.2857 = pthread_self ();
D.2858 = (long int) D.2857;
stdout.3 = stdout;
fprintf (stdout.3, " Thread[%lu,%lu]: Working on section 3.
", id, D.2858);
goto <bb 11>;
EXIT
<bb 11>:
.section.6 = __builtin_GOMP_sections_next ();
goto <bb 4>;