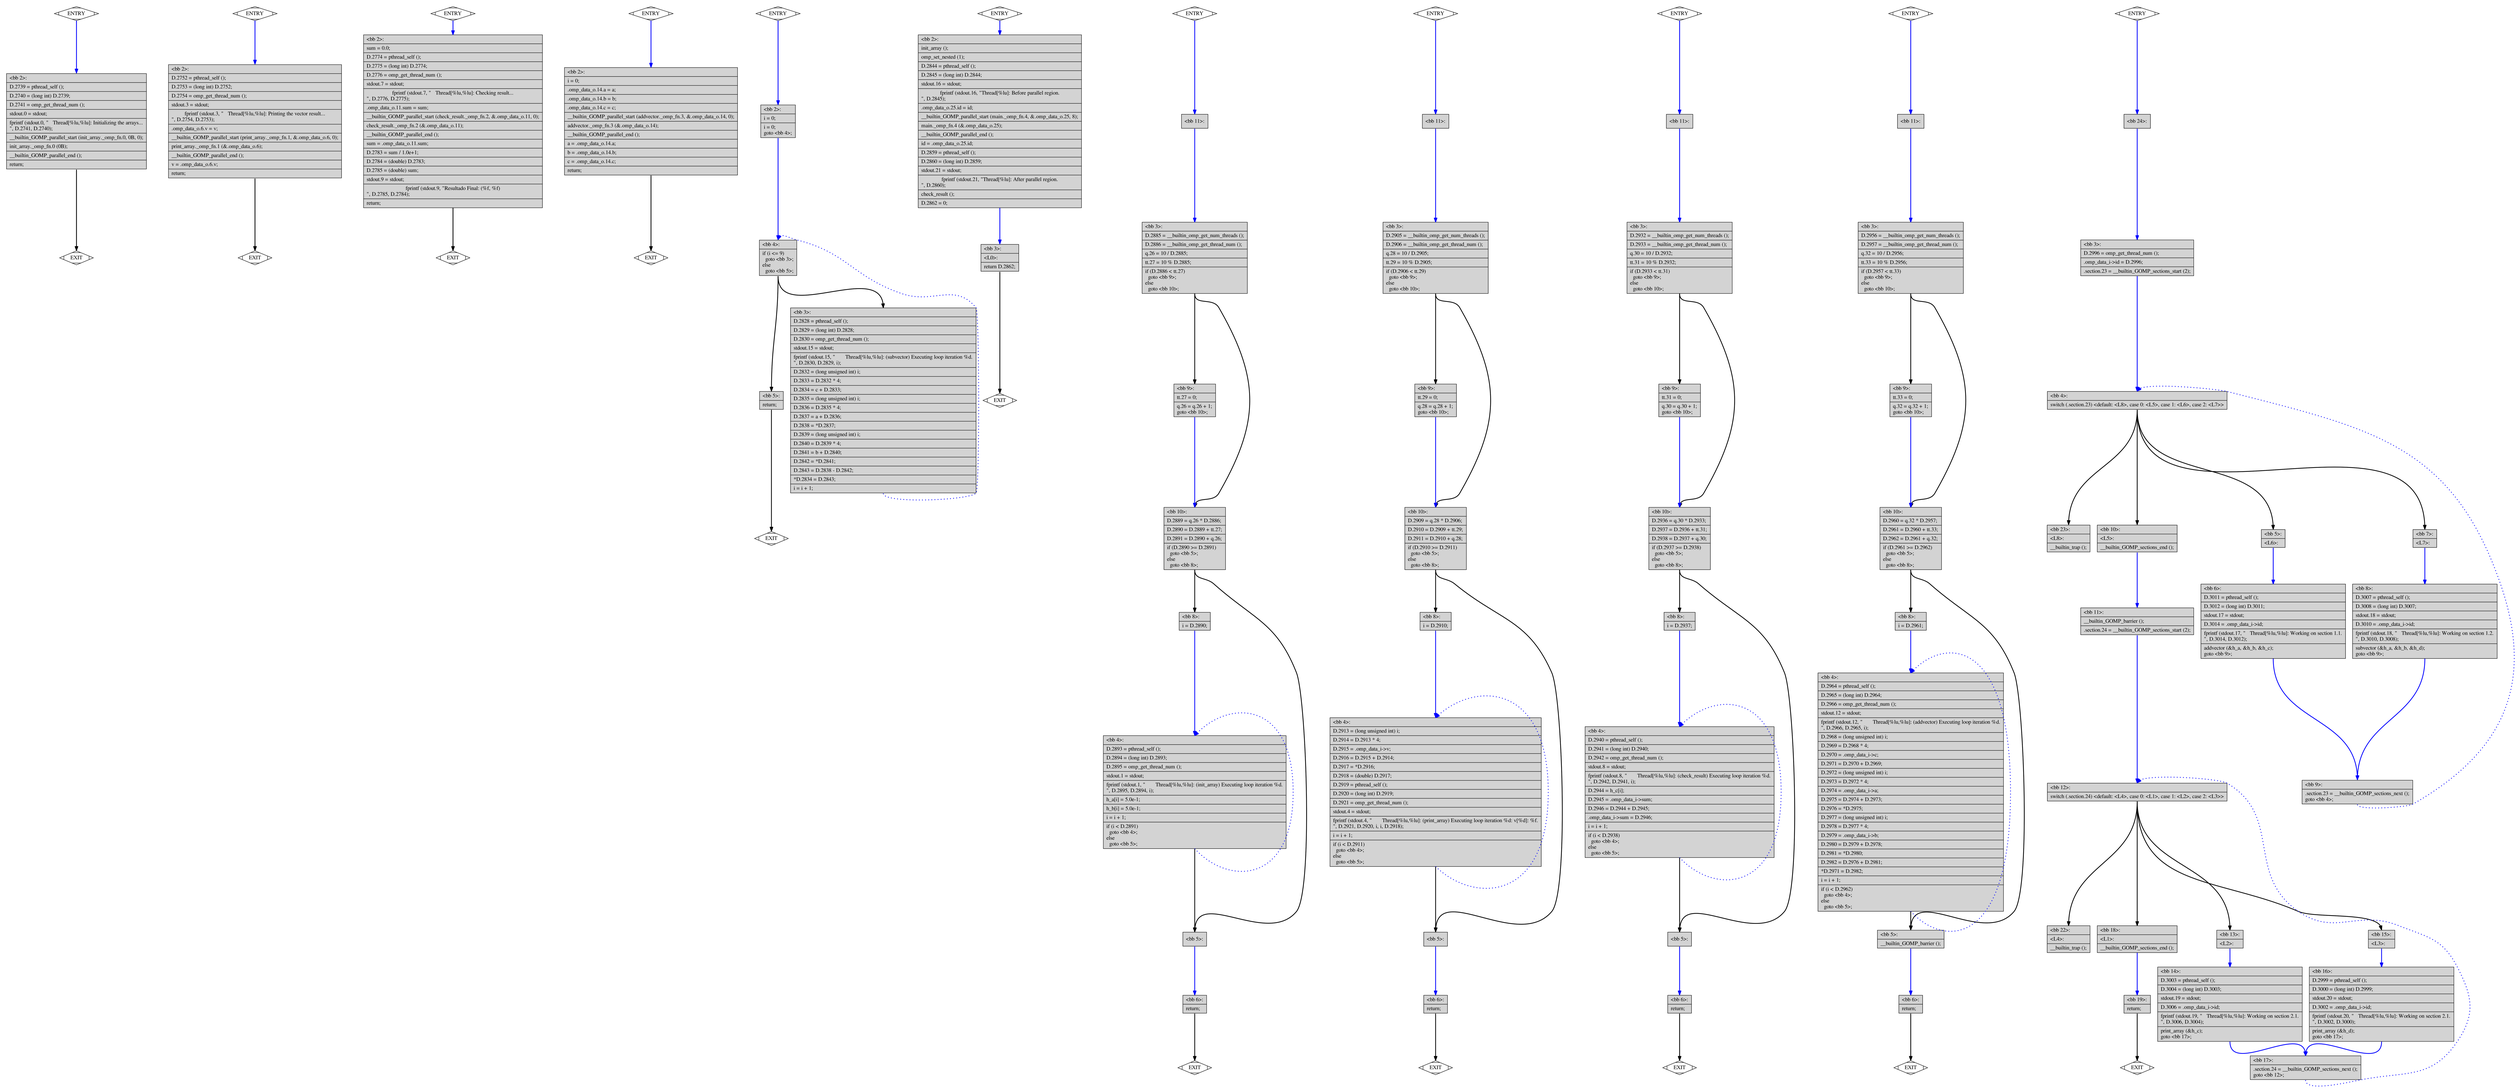
ENTRY
<bb 2>:
D.2739 = pthread_self ();
D.2740 = (long int) D.2739;
D.2741 = omp_get_thread_num ();
nidout.0 = nidout;
fprintf (nidout.0, " Thread[%lu,%lu]: Initializing the arrays...
", D.2741, D.2740);
__builtin_GOMP_parallel_start (init_array._omp_fn.0, 0B, 0);
init_array._omp_fn.0 (0B);
__builtin_GOMP_parallel_end ();
v = v;
return;
EXIT
ENTRY
<bb 2>:
D.2752 = pthread_self ();
D.2753 = (long int) D.2752;
D.2754 = omp_get_thread_num ();
nidout.3 = nidout;
fprintf (nidout.3, " Thread[%lu,%lu]: Printing the vector result...
", D.2754, D.2753);
_omp_data_o.6 = v;
__builtin_GOMP_parallel_start (print_array._omp_fn.1, &_omp_data_o.6, 0);
print_array._omp_fn.1 (&_omp_data_o.6);
__builtin_GOMP_parallel_end ();
v = _omp_data_o.6.v;
return;
EXIT
ENTRY
<bb 2>:
sum = 0.0;
D.2774 = pthread_self ();
D.2775 = (long int) D.2774;
D.2776 = omp_get_thread_num ();
nidout.7 = nidout;
fprintf (nidout.7, " Thread[%lu,%lu]: Checking result...
", D.2776, D.2775);
_omp_data_o.11.sum = sum;
__builtin_GOMP_parallel_start (check_result._omp_fn.2, &_omp_data_o.11, 0);
check_result._omp_fn.2 (&_omp_data_o.11);
__builtin_GOMP_parallel_end ();
sum = _omp_data_o.11.sum;
D.2783 = sum / 1.0e+1;
D.2784 = (double) D.2783;
D.2785 = (double) sum;
nidout.9 = nidout;
fprintf (nidout.9, "Resultado Final: (%f, %f)
", D.2785, D.2784);
return;
EXIT
ENTRY
<bb 2>:
i = 0;
_omp_data_o.14.a = a;
_omp_data_o.14.b = b;
_omp_data_o.14.c = c;
__builtin_GOMP_parallel_start (addvector._omp_fn.3, &_omp_data_o.14, 0);
addvector._omp_fn.3 (&_omp_data_o.14);
__builtin_GOMP_parallel_end ();
a = _omp_data_o.14.a;
b = _omp_data_o.14.b;
c = _omp_data_o.14.c;
return;
EXIT
ENTRY
<bb 2>:
i = 0;
i = 0;
goto <bb 6>;
<bb 3>:
D.2828 = pthread_self ();
D.2829 = (long int) D.2828;
D.2830 = omp_get_thread_num ();
nidout.15 = nidout;
fprintf (nidout.15, " Thread[%lu,%lu]: (subvector) Executing loop iteration %d.
", D.2830, D.2829, i);
D.2832 = (long unsigned int) i;
D.2833 = D.2832 * 4;
D.2834 = c + D.2833;
D.2835 = (long unsigned int) i;
D.2836 = D.2835 * 4;
D.2837 = a + D.2836;
D.2838 = *D.2837;
D.2839 = (long unsigned int) i;
D.2840 = D.2839 * 4;
D.2841 = b + D.2840;
D.2842 = *D.2841;
D.2843 = D.2838 + D.2842;
*D.2834 = D.2843;
i = i + 1;
<bb 6>:
if (i <= 9)
goto <bb 3>;
else
goto <bb 5>;
<bb 5>:
return;
EXIT
ENTRY
<bb 2>:
init_array ();
omp_set_nested (1);
D.2644 = pthread_self ();
D.2645 = (long int) D.2644;
nidout.16 = nidout;
fprintf (nidout.16, "Thread[%lu]: Before parallel region.
", D.2645);
_omp_data_o.25.id = id;
__builtin_GOMP_parallel_start (main._omp_fn.4, &_omp_data_o.25, 0);
main._omp_fn.4 (&_omp_data_o.25);
__builtin_GOMP_parallel_end ();
id = _omp_data_o.25.id;
D.2659 = pthread_self ();
D.2660 = (long int) D.2659;
nidout.21 = nidout;
fprintf (nidout.21, "Thread[%lu]: After parallel region.
", D.2660);
check_result ();
D.2662 = 0;
<bb 3>:
<L0>:
return D.2662;
EXIT
ENTRY
<bb 11>:
<bb 3>:
D.2885 = __builtin_omp_get_num_threads ();
D.2886 = __builtin_omp_get_thread_num ();
q.28 = 10 / D.2885;
n.27 = 10 % D.2885;
if (D.2886 < n.27)
goto <bb 9>;
else
goto <bb 10>;
<bb 9>:
it.27 = 0;
q.28 = q.28 + 1;
goto <bb 10>;
<bb 10>:
D.2889 = q.28 * D.2886;
D.2890 = D.2889 + it.27;
D.2891 = D.2890 + q.28;
if (D.2890 >= D.2891)
goto <bb 5>;
else
goto <bb 6>;
<bb 6>:
i = D.2890;
<bb 4>:
D.2893 = pthread_self ();
D.2894 = (long int) D.2893;
D.2895 = omp_get_thread_num ();
nidout.1 = nidout;
fprintf (nidout.1, " Thread[%lu,%lu]: (init_array) Executing loop iteration %d.
", D.2895, D.2894, i);
b_id[i] = 5.0e-1;
b_h[i] = 5.0e-1;
i = i + 1;
if (i < D.2891)
goto <bb 4>;
else
goto <bb 5>;
<bb 5>:
<bb 6>:
return;
EXIT
ENTRY
<bb 11>:
<bb 3>:
D.2905 = __builtin_omp_get_num_threads ();
D.2906 = __builtin_omp_get_thread_num ();
q.29 = 10 / D.2905;
n.29 = 10 % D.2905;
if (D.2906 < n.29)
goto <bb 9>;
else
goto <bb 10>;
<bb 9>:
it.29 = 0;
q.29 = q.29 + 1;
goto <bb 10>;
<bb 10>:
D.2909 = q.29 * D.2906;
D.2910 = D.2909 + it.29;
D.2911 = D.2910 + q.29;
if (D.2910 >= D.2911)
goto <bb 5>;
else
goto <bb 6>;
<bb 6>:
i = D.2910;
<bb 4>:
D.2913 = (long unsigned int) i;
D.2914 = D.2913 * 4;
D.2915 = _omp_data_i->v;
D.2916 = D.2915 + D.2914;
D.2917 = *D.2916;
D.2918 = (double) D.2917;
D.2919 = pthread_self ();
D.2920 = (long int) D.2919;
D.2921 = omp_get_thread_num ();
nidout.4 = nidout;
fprintf (nidout.4, " Thread[%lu,%lu]: (print_array) Executing loop iteration %d: v[%d]: %f.
", D.2921, D.2920, i, D.2918);
i = i + 1;
if (i < D.2911)
goto <bb 4>;
else
goto <bb 5>;
<bb 5>:
<bb 6>:
return;
EXIT
ENTRY
<bb 11>:
<bb 3>:
D.2932 = __builtin_omp_get_num_threads ();
D.2933 = __builtin_omp_get_thread_num ();
q.30 = 10 / D.2932;
n.31 = 10 % D.2932;
if (D.2933 < n.31)
goto <bb 9>;
else
goto <bb 10>;
<bb 9>:
it.31 = 0;
q.30 = q.30 + 1;
goto <bb 10>;
<bb 10>:
D.2936 = q.30 * D.2933;
D.2937 = D.2936 + it.31;
D.2938 = D.2937 + q.30;
if (D.2937 >= D.2938)
goto <bb 5>;
else
goto <bb 6>;
<bb 6>:
i = D.2937;
<bb 4>:
D.2940 = pthread_self ();
D.2941 = (long int) D.2940;
D.2942 = omp_get_thread_num ();
nidout.8 = nidout;
fprintf (nidout.8, " Thread[%lu,%lu]: (check_result) Executing loop iteration %d.
", D.2942, D.2941, i);
D.2944 = b_c[i];
D.2945 = _omp_data_i->sum;
D.2946 = D.2944 + D.2945;
_omp_data_i->sum = D.2946;
i = i + 1;
if (i < D.2938)
goto <bb 4>;
else
goto <bb 5>;
<bb 5>:
<bb 6>:
return;
EXIT
ENTRY
<bb 11>:
<bb 3>:
D.2956 = __builtin_omp_get_num_threads ();
D.2957 = __builtin_omp_get_thread_num ();
q.32 = 10 / D.2956;
n.33 = 10 % D.2956;
if (D.2957 < n.33)
goto <bb 9>;
else
goto <bb 10>;
<bb 9>:
it.33 = 0;
q.32 = q.32 + 1;
goto <bb 10>;
<bb 10>:
D.2960 = q.32 * D.2957;
D.2961 = D.2960 + it.33;
D.2962 = D.2961 + q.32;
if (D.2961 >= D.2962)
goto <bb 5>;
else
goto <bb 6>;
<bb 6>:
i = D.2961;
<bb 4>:
D.2964 = pthread_self ();
D.2965 = (long int) D.2964;
D.2966 = omp_get_thread_num ();
nidout.12 = nidout;
fprintf (nidout.12, " Thread[%lu,%lu]: (addvector) Executing loop iteration %d.
", D.2966, D.2965, i);
D.2968 = (long unsigned int) i;
D.2969 = D.2968 * 4;
D.2970 = _omp_data_i->c;
D.2971 = D.2970 + D.2969;
D.2972 = (long unsigned int) i;
D.2973 = D.2972 * 4;
D.2974 = _omp_data_i->a;
D.2975 = D.2974 + D.2973;
D.2976 = *D.2975;
D.2977 = (long unsigned int) i;
D.2978 = D.2977 * 4;
D.2979 = _omp_data_i->b;
D.2980 = D.2979 + D.2978;
D.2981 = *D.2980;
D.2982 = D.2976 + D.2981;
*D.2971 = D.2982;
i = i + 1;
if (i < D.2962)
goto <bb 4>;
else
goto <bb 5>;
<bb 5>:
__builtin_GOMP_barrier ();
<bb 6>:
return;
EXIT
ENTRY
<bb 24>:
<bb 3>:
D.2996 = omp_get_thread_num ();
_omp_data_i->id = D.2996;
section.23 = __builtin_GOMP_sections_start (2);
<bb 4>:
switch (section.23) <default: <L8>, case 0: <L5>, case 1: <L6>, case 2: <L7>>
<bb 23>:
<L8>:
__builtin_trap ();
<bb 10>:
<L5>:
__builtin_GOMP_sections_end ();
<bb 5>:
<L6>:
<bb 6>:
D.3011 = pthread_self ();
D.3012 = (long int) D.3011;
nidout.17 = nidout;
D.3014 = _omp_data_i->id;
fprintf (nidout.17, " Thread[%lu,%lu]: Working on section 1.1.
", D.3014, D.3012);
addvector (&b_a, &b_b, &b_c);
goto <bb 9>;
<bb 7>:
<L7>:
<bb 8>:
D.3007 = pthread_self ();
D.3008 = (long int) D.3007;
nidout.18 = nidout;
D.3010 = _omp_data_i->id;
fprintf (nidout.18, " Thread[%lu,%lu]: Working on section 1.2.
", D.3010, D.3008);
subvector (&b_a, &b_b, &b_d);
goto <bb 9>;
<bb 9>:
section.23 = __builtin_GOMP_sections_next ();
goto <bb 4>;
<bb 11>:
__builtin_GOMP_barrier ();
section.24 = __builtin_GOMP_sections_start (2);
<bb 12>:
switch (section.24) <default: <L4>, case 0: <L1>, case 1: <L2>, case 2: <L3>>
<bb 22>:
<L4>:
__builtin_trap ();
<bb 18>:
<L1>:
__builtin_GOMP_sections_end ();
<bb 13>:
<L2>:
<bb 14>:
D.3003 = pthread_self ();
D.3004 = (long int) D.3003;
nidout.19 = nidout;
D.3006 = _omp_data_i->id;
fprintf (nidout.19, " Thread[%lu,%lu]: Working on section 2.1.
", D.3006, D.3004);
print_array (&b_c);
goto <bb 17>;
<bb 15>:
<L3>:
<bb 16>:
D.2999 = pthread_self ();
D.3000 = (long int) D.2999;
nidout.20 = nidout;
D.3002 = _omp_data_i->id;
fprintf (nidout.20, " Thread[%lu,%lu]: Working on section 2.1.
", D.3002, D.3000);
print_array (&b_d);
goto <bb 17>;
<bb 17>:
section.24 = __builtin_GOMP_sections_next ();
goto <bb 12>;
<bb 19>:
<L0>:
return;
EXIT