

API Endpoint Test Report

Factory Management System — REST API

Test Date: June 03, 2026
Base URL: http://localhost:8000
Total Endpoints Tested: 13
All Endpoints Status: **PASSED** ✓

#	Method	Endpoint	Status
1	GET	/api/v1/analytics/overview	200 OK
2	GET	/api/v1/analytics/alerts/stage-spread	200 OK
3	GET	/api/v1/analytics/alerts/freight-risk	200 OK
4	POST	/api/v1/imports/preview	200 OK
5	GET	/api/v1/production/operations	200 OK
6	POST	/api/v1/production/events	200 OK
7	GET	/api/v1/production/events	200 OK
8	GET	/api/v1/production/styles/{id}/progress	200 OK
9	POST	/api/v1/wages/rates	200 OK
10	POST	/api/v1/wages/runs	200 OK
11	GET	/api/v1/wages/runs/{id}	200 OK
12	GET	/api/v1/employees	200 OK
13	POST	/api/v1/employees	201 Created

Endpoint 1 of 13

GET

<http://localhost:8000/api/v1/analytics/overview>

200 OK

Analytics Overview — Returns summary stats: total clients, styles, pieces ordered, and operations logged.

The screenshot shows a REST client interface with the following details:

- URL:** `http://localhost:8000/api/v1/analytics/overview`
- Method:** GET
- Auth Type:** Bearer Token
- Token:** A masked token is displayed in a yellow box.
- Response Status:** 200 OK
- Response Time:** 10 ms
- Response Size:** 209 B
- Response Body (JSON):**

```
1 {
2   "clients": 7,
3   "styles": 45,
4   "total_pieces_ordered": 4983,
5   "total_operations_logged": 2541
6 }
```

Endpoint 2 of 13

GET

<http://localhost:8000/api/v1/analytics/alerts/stage-spread>

200 OK

Analytics Alerts: Stage Spread — Lists styles with large gaps between ordered cut and reached stage quantities.

http://localhost:8000/api/v1/analytics/alerts/stage-spread

SaveShare

GET

http://localhost:8000/api/v1/analytics/alerts/stage-spread

Send

DocsParamsAuthorizationHeaders7BodyScriptsSettings

Cookies

Auth Type

Bearer Token

Token

.....

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

BodyCookiesHeaders4Test Results

200 OK · 30 ms · 636 B · ...

{ } JSON

PreviewVisualize

```
1  [
2    {
3      "style": "CEYLON-HIRMA",
4      "stage": "FUSING",
5      "cut": 178,
6      "reached_stage": 73,
7      "gap": 195,
8      "severity": "medium"
9    },
10   {
11     "style": "CEYLON-HIRMA",
12     "stage": "PASTING",
13     "cut": 178,
14     "reached_stage": 65,
15     "gap": 113,
16     "severity": "medium"
17   },
18   {
19     "style": "CEYLON-HIRMA",
20     "stage": "SHELL",
21     "cut": 178,
22     "reached_stage": 67,
23     "gap": 111,
24     "severity": "medium"
25   },
26 ]
```

Endpoint 3 of 13

GET

http://localhost:8000/api/v1/analytics/alerts/freight-risk

200 OK

Analytics Alerts: Freight Risk — Returns POs at critical risk due to approaching sea cutoff dates with low completion.

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** http://localhost:8000/api/v1/analytics/alerts/freight-risk
- Auth Type:** Bearer Token
- Token:** [Redacted]
- Response:** 200 OK, 6 ms, 253 B
- Body:** JSON array of POs at critical risk.

```
1 [
2   {
3     "po_number": "KJ-P0",
4     "sea_cutoff": "2026-06-05",
5     "days_left": 2,
6     "ordered": 347,
7     "finished": 0,
8     "pct_complete": 0.0,
9     "risk": "critical"
10  }
11 ]
```

Endpoint 4 of 13

POST

http://localhost:8000/api/v1/imports/preview

200 OK

Imports Preview — Previews an import commit, showing clients, order lines, pieces ordered, styles, production cards and warnings.

http://localhost:8000/api/v1/imports/commit

SaveShare

POST

http://localhost:8000/api/v1/imports/preview

Send

DocsParamsAuthorizationHeadersBodyScriptsSettings

Cookies

Auth Type

Bearer Token

Token

XIBJFBOOxu0ny2kP99IM_SrlpZS2b8

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

bodyCookiesHeaders4Test Results

200 OK · 363 ms · 1.94 KB

JSONPreviewVisualize

```
1 {
2   "clients": {
3     "KJ": {
4       "order_lines": 11,
5       "pieces_ordered": 347,
6       "styles": [
7         "CEYLON-HIRMA",
8         "CLINTON-HIRMA",
9         "CLINTON-HTX(ANDRE CHRISTIAN)",
10        "CLINTON-KJ(JILANI)"
11      ],
12       "production_cards": 6,
13       "warnings": []
14     },
15     "GGZ": {
16       "order_lines": 1,
17       "pieces_ordered": 146,
18       "styles": [
19         "BOMBER A"
20      ],
21       "production_cards": 1,
22       "warnings": []
23     },
24     "NIPAL": {
25       "order_lines": 2,
```


Endpoint 5 of 13

GET

<http://localhost:8000/api/v1/production/operations>

200 OK

Production Operations — Retrieves all production operations (Cutting, Fusing, Pasting, Shell stitch, etc.) with their sequence.

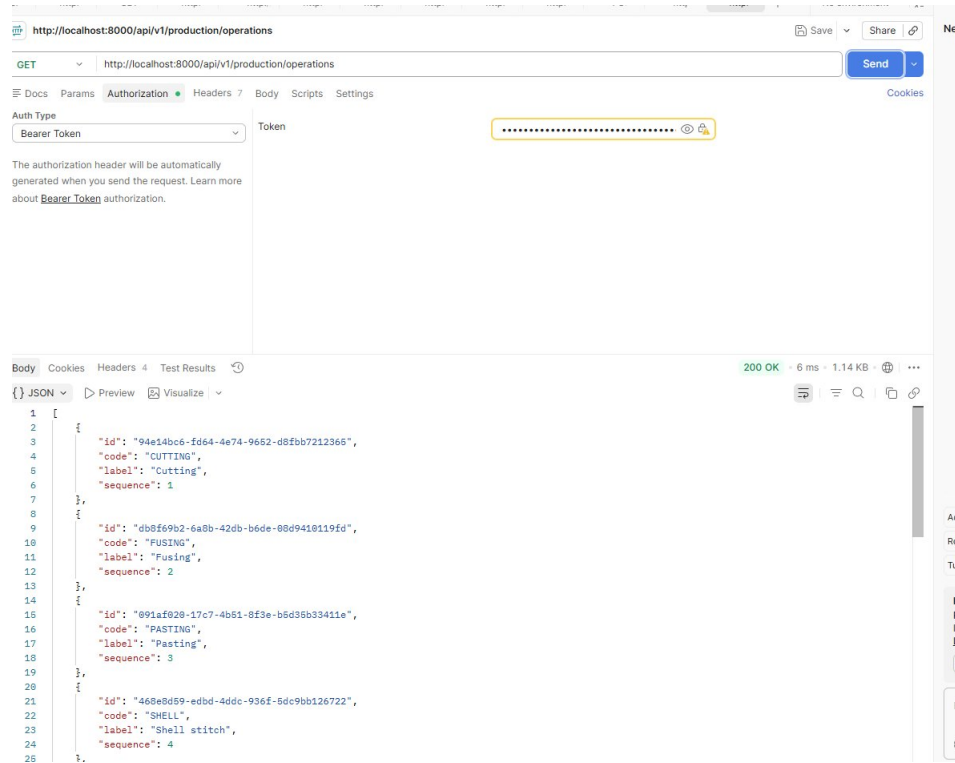

Endpoint 6 of 13

POST

<http://localhost:8000/api/v1/production/events>

200 OK

Log Production Event — Creates a new production event entry with SKU, operation, employee, quantity and bundle reference.

HTTP client interface showing a POST request to `http://localhost:8000/api/v1/production/events`.

Request:

- Method: POST
- URL: `http://localhost:8000/api/v1/production/events`
- Body (raw):

```
1 {
2   "sku_id": "ea628fb3-b3b8-4a77-8ce4-6fc87c64d797",
3   "operation_id": "468e8d59-edbd-4ddc-936f-5dc9bb126722",
4   "employee_id": "0357edf5-54cb-4d55-945b-f1cd1cadb0f3",
5   "work_date": "2026-05-31",
6   "qty": 120,
7   "bundle_ref": "CUT-001"
8 }
```

Response:

- Body (JSON):

```
1 {
2   "id": "dfaf0759-7047-48fb-8bfa-3912f9593b3a",
3   "sku_id": "ea628fb3-b3b8-4a77-8ce4-6fc87c64d797",
4   "operation_id": "468e8d59-edbd-4ddc-936f-5dc9bb126722",
5   "employee_id": "0357edf5-54cb-4d55-945b-f1cd1cadb0f3",
6   "work_date": "2026-05-31",
7   "qty": 120,
8   "entered_by": "Direct Manager",
9   "bundle_ref": "CUT-001"
10 }
```

Endpoint 7 of 13

GET

http://localhost:8000/api/v1/production/events

200 OK

Get Production Events — Lists all logged production events with employee, operation, quantity, entered_by and bundle reference.

The screenshot shows a REST client interface with the following details:

- URL:** http://localhost:8000/api/v1/production/events
- Method:** GET
- Auth Type:** Bearer Token
- Token:** XIBJFBOOOxu0ny2kP99IM_SripZS2b8
- Status:** 200 OK
- Response Body (JSON):**

```
[{"id": "9f0f7261-a5ad-446b-b728-cd27fc3d29a7", "sku_id": "ea628fb3-b3b8-4a77-8ce4-6fc87c64d797", "operation_id": "468e8d59-edbd-4ddc-936f-5dc9bb126722", "employee_id": "0367edf6-54cb-4d55-946b-f1cd1cadb8f3", "work_date": "2026-05-31", "qty": 4, "entered_by": "Zahoor Ahmed C", "bundle_ref": "BND-RAHI-20260531"}, {"id": "02ce9b47-e2ac-4a2c-93c4-2c6453e5760a", "sku_id": "41ba6a4d-615e-413b-a79d-ba3274cafa3", "operation_id": "9fd9196d-bac8-495c-95e1-3d8478265c89", "employee_id": "6f35b888-1ef4-429e-9ab6-5683cf4836b1", "work_date": "2026-05-31", "qty": 15, "entered_by": "K Niyamathullah", "bundle_ref": "BND-BOOP-20260531"}]
```

Endpoint 8 of 13

GET

http://localhost:8000/api/v1/production/styles/{id}/progress

200 OK

Style Production Progress — Returns per-stage piece counts for a given style (Cutting, FF, Fusing, L/A, Lining Stich, Pasting, Shell).

HTTP

http://localhost:8000/api/v1/production/styles/0db7e640-ba30-4d7d-b7e1-5f7e73601c26/progress

Save

Share

GET

http://localhost:8000/api/v1/production/styles/0db7e640-ba30-4d7d-b7e1-5f7e73601c26/progress

Send

Docs

Params

Authorization

Headers

7

Body

Scripts

Settings

Cookie:

Auth Type

Bearer Token

Token

.....

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

Body

Cookies

Headers

4

Test Results

200 OK

8 ms

324 B

...

{}

JSON

Preview

Visualize

```
1  {
2    "style_id": "0db7e640-ba30-4d7d-b7e1-5f7e73601c26",
3    "style_name": "CLINTON-HIRMA",
4    "qty_ordered": 80,
5    "stages": {
6      "CUTTING": 375,
7      "FF": 481,
8      "FUSING": 95,
9      "L/A": 212,
10     "LINING STICH": 298,
11     "PASTING": 119,
12     "SHELL": 374
13   }
14 }
```




Endpoint 9 of 13

POST

http://localhost:8000/api/v1/wages/rates

200 OK

Set Wage Rate — Creates a wage rate for a style+operation combination with an effective date.

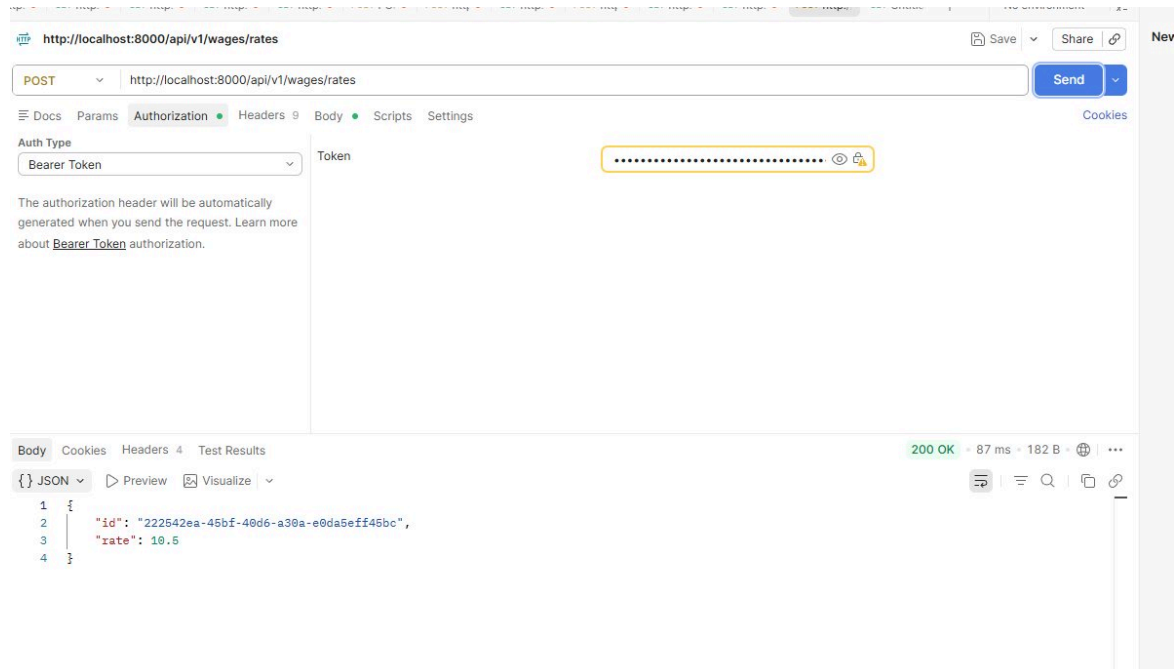

Endpoint 10 of 13

POST

http://localhost:8000/api/v1/wages/runs

200 OK

Create Wage Run — Generates a payroll run for a given period, returning lines per employee with wage type, pieces and amounts.

http://localhost:8000/api/v1/wages/runs

POST http://localhost:8000/api/v1/wages/runs

Docs Params Authorization Headers 10 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "period_start": "2026-05-01",
3   "period_end": "2026-05-30"
4 }
```

Body Cookies Headers 4 Test Results

200 OK · 45 ms · 4.94 KB

{ } JSON Preview Visualize


```
1 {
2   "id": "a5963ecf-c269-413f-a8e0-15071dad1557",
3   "period_start": "2026-05-01",
4   "period_end": "2026-05-30",
5   "status": "closed",
6   "lines": [
7     {
8       "employee_id": "cf6900c1-63ce-45c3-a1d9-ef463ad34355",
9       "wage_type": "piece_rate",
10      "pieces": 36,
11      "amount": 9225.0
12    },
13    {
14      "employee_id": "ff9d18ce-ec9a-4401-b9c9-es6a3939942b",
15      "wage_type": "piece_rate",
16      "pieces": 25,
17      "amount": 1000.0
18    },
19    {
20      "employee_id": "56d6764f-05fc-4a11-bd37-3a810d7c901c",
21      "wage_type": "piece_rate",
22      "pieces": 44,
23      "amount": 13225.0
24    }
25  ]
26 }
```

GET

http://localhost:8000/api/v1/wages/runs/{id}

200 OK

Get Wage Run — Retrieves an existing wage run by ID, showing all employee lines with pieces and calculated amounts.

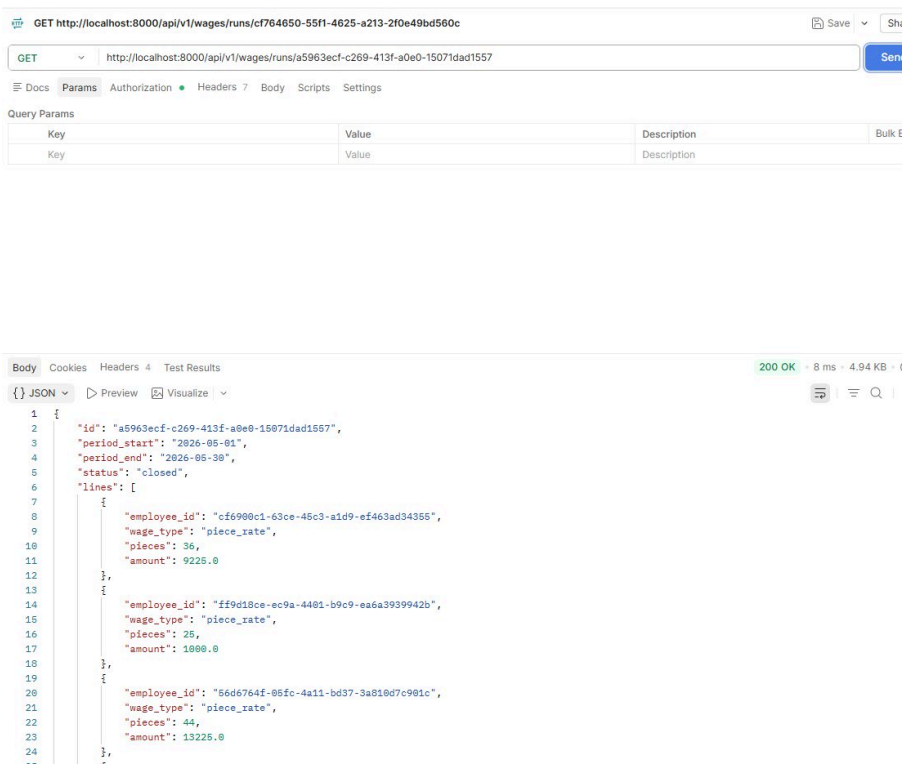

GET

http://localhost:8000/api/v1/employees

200 OK

List Employees — Returns all employees with id, name, designation, wage_type, monthly_salary, active status, phone and email.

http://localhost:8000/api/v1/employees

SaveShareNew Chat

GEThttp://localhost:8000/api/v1/employeesSend

DocsParamsAuthorizationHeaders7BodyScriptsSettingsCookies

Auth TypeBearer TokenToken

The authorization header will be automatically generated when you send the request. Learn more about [Bearer Token](#) authorization.

BodyCookiesHeaders4Test Results200 OK92 ms9.53 KB

JSONPreviewVisualize

```
1 [
2   {
3     "id": "cf764668-55f1-4625-a213-2f0e49bd560c",
4     "name": "A Raheena",
5     "designation": "TAILOR",
6     "wage_type": "monthly",
7     "monthly_salary": 0.0,
8     "is_active": true,
9     "phone": "9100000001",
10    "email": "a.raheena@factory.local"
11  },
12  {
13    "id": "2eaa1834-3ad9-4a93-b7ce-ea0fc9745d87",
14    "name": "Abirami Arivazhagan",
15    "designation": "HR",
16    "wage_type": "monthly",
17    "monthly_salary": 0.0,
18    "is_active": true,
19    "phone": "9100000016",
20    "email": "abirami.arivazhagan@factory.local"
21  },
22  {
23    "id": "10c7d4f9-2d15-4d0f-b67e-84d721348369",
24    "name": "AHSHAN ALI ANSARI",
25    "designation": "CHEMICAL TECHNICIAN",
26  }
27 ]
```

Fix employValidate sRun emplo

IntroducRun longlaptop. \$Learn mGet sta

DescribAut

POST**http://localhost:8000/api/v1/employees****201
Created**

Create Employee — Adds a new employee record with employee_code, name and wage_type. Returns the created employee object.

The screenshot displays a REST client interface with the following details:

- Method:** POST
- URL:** http://localhost:8000/api/v1/employees
- Body (raw):**

```
1 {  
2   "employee_code": "EMP100",  
3   "name": "Mohamed Ismail",  
4   "wage_type": "piece_rate"  
5 }
```
- Response:** 201 Created (11 ms, 309 B)
- Response Body (JSON):**

```
1 {  
2   "id": "9ae5b5f9-96cb-40e5-96ba-2601dd10866b",  
3   "name": "Mohamed Ismail",  
4   "designation": null,  
5   "wage_type": "piece_rate",  
6   "monthly_salary": null,  
7   "is_active": true,  
8   "phone": null,  
9   "email": null  
10 }
```