

First R Markdown

Kyle Wilson

2022-10-26

R Markdown

R Markdown Syntax

To make bullet points, use - (hyphen) and end the line with two spaces. The remaining points will be listed using bullets - for bold **surround text with two asterisks** like this **

- for italics *use a single asterisk* like this *

- for links type the text to be shown in square brackets, followed by the URL in brackets Link:

- to run inline R code use a single back tick "like this" - headings uses #, the number of hashtags indicates the heading level - finally surround a chunk of code with three backticks ``` (see below) or insert it by going to code > insert code chunk.

Trying R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   :  2.00
## 1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##   Mean  :15.4    Mean   : 42.98
## 3rd Qu.:19.0    3rd Qu.: 56.00
##   Max.  :25.0    Max.    :120.00
```


Or this:

```
print("Hello World!")
```

```
## [1] "Hello World!"
```

Including Plots

You can also embed plots, for example:

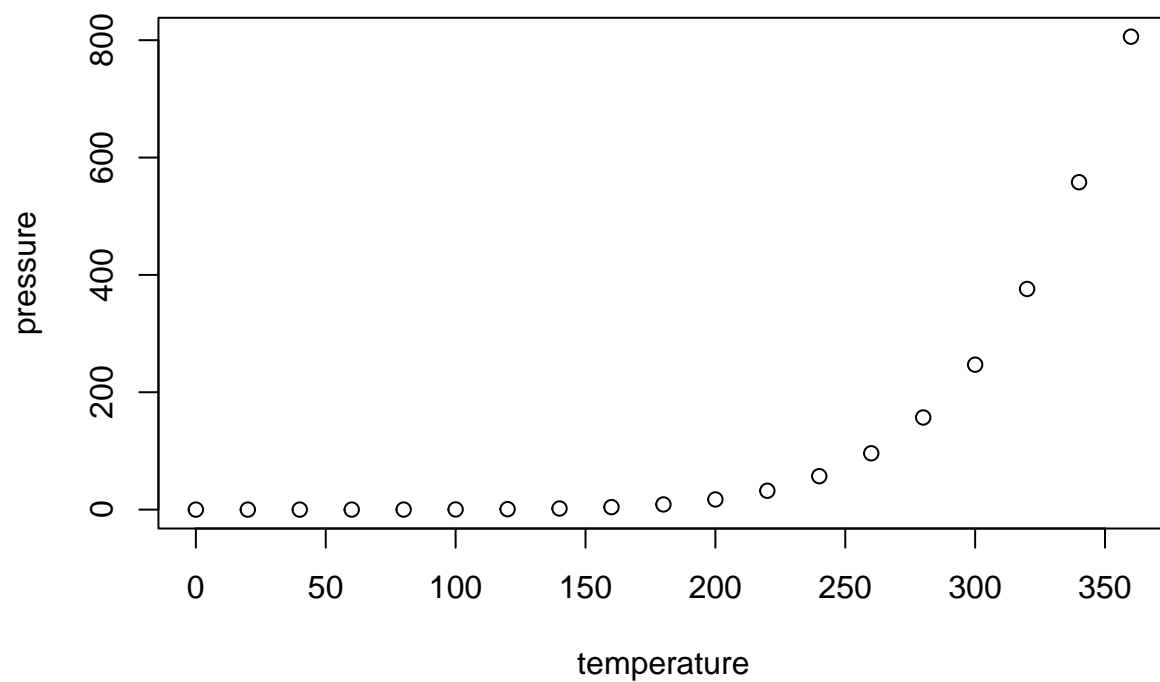

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.