

* select Length ('Prep insta ')
= 10 (space also gets counted)

Alias

* We can use AS in the place of alias.

```
SELECT ORDERS.order-id, ORDERS.order-date,  
CUSTOMERS.name, CUSTOMERS.address  
FROM CUSTOMERS, ORDERS
```

```
WHERE ORDER.DATE = '2026-12-08'
```

```
AND CUSTOMERS.customer-id = ORDERS.customer-id
```

↓ This can be written as

```
SELECT O.order-id, O.order-date, C.name,  
C.address
```

```
FROM CUSTOMERS AS C, ORDERS AS O
```


```
WHERE O.DATE = '2026-08-12'
```

```
AND C.customer-id = O.customer-id
```

↓
This is the usage of alias.


JOINING

Inner Join:- Common records that are there in both the table.




Left Join:-
outer


Unique records from the left table, and the common records b/w two.

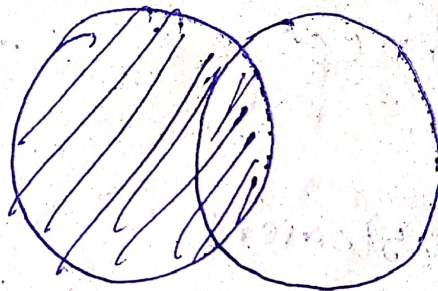

Right Outer Join:- Unique records from the right table, & the records b/w two.

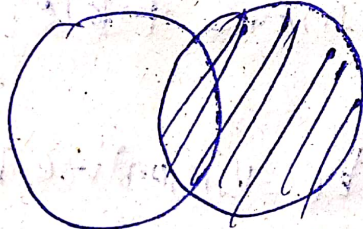

Full Outer Join:- Unique records from right & left table & common records b/w two.

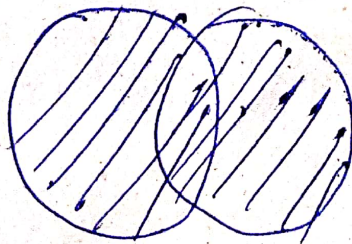

Inner Join

SELECT column-name(s)

FROM table 1

INNER JOIN table 2

ON table1.column-name = table2-column-name;

Ex:-

⇒ Items you have to print

SELECT ORDERS.order-id, Customers.name,
Customers.address

FROM ORDERS

INNER JOIN Customers

ON Orders.customer-id = Customer.

customer-id

* ~~we have to~~ ^{It} searches from Orders table
into the customers table.

Note:- JOINS can be visualized as Cartesian product with some conditions.

* Cartesian product will retrieve all the possible combinations blwn the table.

Left Outer Join

Syntax →

SELECT column-name(s)

FROM table 1

LEFT JOIN table 2

ON table 1.column-name = table 2.

column-
name

Right Join


SELECT column-name(s)

FROM table 1

RIGHT JOIN table 2

ON table 1.column-name = table 2.

column-name;

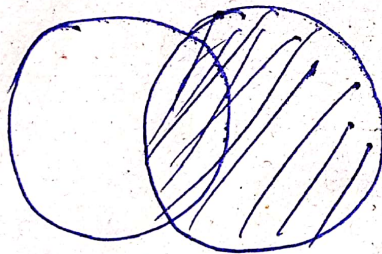

* The retrieved data will be from table 2 (Right).

FULL JOIN

SELECT column-name(s)

FROM table 1

FULL JOIN table 2

ON table 1.column-name = table 2.column-name;

* Retrieves everything from table 1, common things between table 1 & 2 and left over things in table 2.

Self Join

```
SELECT column-name(s)  
FROM TABLE1, TABLE2  
WHERE condition(s);
```

Ex:-

```
SELECT A.name AS Person1, B.name  
AS Person2, A.location
```

```
FROM GOT A, GOT B
```

```
WHERE A.name <> B.name → Should not  
be same
```

```
AND A.location = B.location
```

```
Order By A.location;
```

↓
Should be
same.

*We can find the relationship b/w the people's data.