

Индивидуальный проект

Часть 4

Калашникова Д. В.

29 апреля 2026


Российский университет дружбы народов, Москва, Россия

Информация

- Калашникова Дарья Викторовна
- Студент
- Российский университет дружбы народов
- 1132243108@pfur.ru

Использовать nikto

Для начала откроем терминал и установим nikto

A terminal window with a dark background. The prompt is `(dvkalashnikova@dvkalashnikova)~`. The user has entered `$ nikto -Version`. The output is `Nikto 2.5.0 (LW 2.5)`. In the background, there are faint links to [Kali Docs](#) and [Kali Forums](#).

```
(dvkalashnikova@dvkalashnikova)~  
$ nikto -Version  
Nikto 2.5.0 (LW 2.5)
```


Рис. 1: Открытие

После чего проверим сканирование веб-сервера

```
(dvkashnikova@dvdashnikova)-[~]  
$ nikto -h http://example.com  
- Nikto v2.5.0  
  
+ Multiple IPs found: 8.47.69.0, 8.6.112.0, 2a06:98c1:3123:8000::, 2a06:98c1:  
3122:8000::  
+ Target IP: 8.47.69.0  
+ Target Hostname: example.com  
+ Target Port: 80  
+ Start Time: 2026-05-01 19:52:47 (GMT3)  
  
+ Server: cloudflare  
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https:  
//developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options  
+ /: The X-Content-Type-Options header is not set. This could allow the user  
agent to render the content of the site in a different fashion to the MIME ty  
pe. See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities  
/missing-content-type-header/
```

Рис. 2: Сканирование

Далее проверим детальное сканирование с выводом в файл

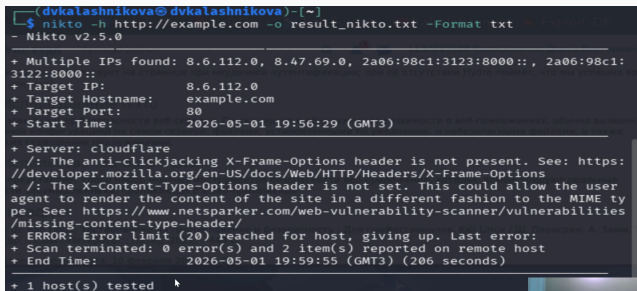

```
(dvkashnikova@dvdashnikova)-[~]
$ nikto -h http://example.com -o result_nikto.txt -Format txt
- Nikto v2.5.0

+ Multiple IPs found: 8.6.112.0, 8.47.69.0, 2a06:98c1:3123:8000::, 2a06:98c1:3122:8000::
+ Target IP: 8.6.112.0
+ Target Hostname: example.com
+ Target Port: 80
+ Start Time: 2026-05-01 19:56:29 (GMT3)

+ Server: cloudflare
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options
+ /: The X-Content-Type-Options header is not set. This could allow the user agent to render the content of the site in a different fashion to the MIME type. See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities/missing-content-type-header/
+ ERROR: Error limit (20) reached for host, giving up. Last error:
+ Scan terminated: 0 error(s) and 2 item(s) reported on remote host
+ End Time: 2026-05-01 19:59:55 (GMT3) (206 seconds)

+ 1 host(s) tested
```


Рис. 3: Сканирование

Затем сделаем сканирование с игнорированием ошибок SSL

```
(dvkalashnikova@dvdalashnikova)~  
$ nikto -h https://example.com -ssl -nointeractive  
- Nikto v2.5.0  
  
+ Multiple IPs found: 8.6.112.0, 8.47.69.0, 2a06:98c1:3122:8000::, 2a06:98c1:  
3123:8000::  
+ Target IP: 8.6.112.0  
+ Target Hostname: example.com  
+ Target Port: 443  
  
+ SSL Info: Subject: /CN=example.com  
Ciphers: TLS_AES_256_GCM_SHA384  
Issuer: /C=US/O=Cloudflare, INC./CN=Cloudflare TLS Issu  
ng ECC CA 1  
+ Start Time: 2026-05-01 20:01:04 (GMT3)  
  
+ Server: cloudflare  
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https:  
//developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options  
+ /: The site uses TLS and the Strict-Transport-Security HTTP header is not d  
efined. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Strict  
-Transport-Security  
+ /: The X-Content-Type-Options header is not set. This could allow the user
```

Рис. 4: Сканирование

После чего сделаем сканирование конкретного порта, например 8080



```
(dvkalashnikova@dvkalashnikova)-[~]  
$ nikto -h http://example.com -p 8080  
- Nikto v2.5.0  
- ERROR: The -port option cannot be used with a full URI
```

Рис. 5: Порт

Далее сделаем ускоренное сканирование

```
(dvkalashnikova@dvdalashnikova)-[~]
$ nikto -h http://example.com -maxtime 60
- Nikto v2.5.0

+ Multiple IPs found: 8.47.69.0, 8.6.112.0, 2a06:98c1:3123:8000::, 2a06:98c1:3123:8000::
+ Target IP: 8.47.69.0
+ Target Hostname: example.com
+ Target Port: 80
+ Start Time: 2026-05-01 20:07:25 (GMT3)

+ Server: cloudflare
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options
+ /: The X-Content-Type-Options header is not set. This could allow the user agent to render the content of the site in a different fashion to the MIME type. See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities/missing-content-type-header/
+ ERROR: Host maximum execution time of 60 seconds reached
+ Scan terminated: 0 error(s) and 2 item(s) reported on remote host
+ End Time: 2026-05-01 20:08:26 (GMT3) (61 seconds)

+ 1 host(s) tested
```


Рис. 6: Ускорение

Затем сделаем проверку конкретной уязвимости или файла

```
(dvkalashnikova@dvdalashnikova)-[~]  
$ nikto -h http://example.com -Tuning 4  
- Nikto v2.5.0  
  
+ Multiple IPs found: 8.47.69.0, 8.6.112.0, 2a06:98c1:3123:8000::, 2a06:98c1:  
3122:8000::  
+ Target IP: 8.47.69.0  
+ Target Hostname: example.com  
+ Target Port: 80  
+ Start Time: 2026-05-01 20:08:48 (GMT3)  
  
+ Server: cloudflare  
+ /: The anti-clickjacking X-Frame-Options header is not present. See: https:  
//developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Frame-Options  
+ /: The X-Content-Type-Options header is not set. This could allow the user  
agent to render the content of the site in a different fashion to the MIME ty  
pe. See: https://www.netsparker.com/web-vulnerability-scanner/vulnerabilities  
/missing-content-type-header/  
+ No CGI Directories found (use '-C all' to force check all possible dirs)  
+ ERROR: Error limit (20) reached for host, giving up. Last error:  
+ Scan terminated: 0 error(s) and 2 item(s) reported on remote host  
+ End Time: 2026-05-01 20:12:13 (GMT3) (205 seconds)  
  
+ 1 host(s) tested
```

Рис. 7: Проверка

И в последней проверке отсканируем конкретный сервер, сохраним отчет в формате html и максимально время 120

A terminal window with a dark background. The prompt is `(dvkalashnikova@dvdalashnikova)~`. The command entered is `$ nikto -h http://192.168.1.100 -o project_scan.html -Format html -maxtime 120`. The output shows `- Nikto v2.5.0` followed by a progress bar and the text `+ 0 host(s) tested`.

```
(dvkalashnikova@dvdalashnikova)~  
$ nikto -h http://192.168.1.100 -o project_scan.html -Format html -maxtime 120  
- Nikto v2.5.0  
+ 0 host(s) tested
```

Рис. 8: Проверка

В результате выполнения лабораторной работы я получила навыки работы с nikto