

# Презентация

## Лабораторная работа №3

---

Калашникова Д. В.

17 сентября 2026

Российский университет дружбы народов, Москва, Россия

## Информация

---

- Калашникова Дарья Викторовна
- Студент
- Российский университет дружбы народов
- 1132243108@pfur.ru

Приобретение практических навыков по установке и конфигурированию DHCP-сервера.

Зайдём под рутом и установим пакет для настройки dhcp - kea.

```
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing      :                                1/1
  Installing     : mariadb-connector-c-config-3.4.4-2.el10_2.noarch 1/6
  Installing     : mariadb-connector-c-3.4.4-2.el10_2.x86_64        2/6
  Installing     : log4cplus-2.1.1-10.el10.x86_64                  3/6
  Installing     : libpq-16.14-1.el10_2.x86_64                     4/6
  Installing     : kea-libs-3.0.3-1.el10_2.x86_64                  5/6
  Running scriptlet: kea-3.0.3-1.el10_2.x86_64                     6/6
  Installing     : kea-3.0.3-1.el10_2.x86_64                      6/6
  Running scriptlet: kea-3.0.3-1.el10_2.x86_64                     6/6

Installed:
  kea-3.0.3-1.el10_2.x86_64
  kea-libs-3.0.3-1.el10_2.x86_64
  libpq-16.14-1.el10_2.x86_64
  log4cplus-2.1.1-10.el10.x86_64
  mariadb-connector-c-3.4.4-2.el10_2.x86_64
  mariadb-connector-c-config-3.4.4-2.el10_2.noarch

Complete!
[root@server.dvkalashnikova.net ~]#
```

**Рис. 1:** Установка kea


Перед изменением конфигурационного файла сделаем бекап и отредактируем его.

A terminal window screenshot showing a root user on a server named dvkalashnikova.net. The user enters two commands: first, to create a backup of the /etc/kea/kea-dhcp4.conf file by copying it to a new file with a timestamp, and second, to open the original file in the nano text editor for editing. A cursor is visible at the end of the second command line.

```
[root@server.dvkalashnikova.net ~]# cp /etc/kea/kea-dhcp4.conf /etc/kea/kea-dhcp4.conf_$(date -I)
[root@server.dvkalashnikova.net ~]# nano /etc/kea/kea-dhcp4.conf
```

**Рис. 2:** Бекап конфига

Меняем изначальные данные на свои — доменное имя и ip нашей машины (192.168.1.1).

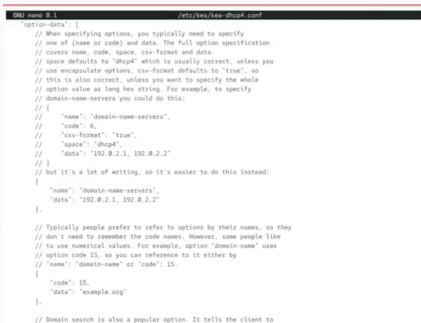

```
GNU nano 0.1 /etc/kea/kea-dhcp4.conf
"option-data": {
  // When specifying options, you typically need to specify
  // one of (name or code) and data. The full option specification
  // covers name, code, space, csv-format and data.
  // space defaults to "dhcp4" which is usually correct, unless you
  // use encapsulate options. csv-format defaults to "true", so
  // this is also correct, unless you want to specify the whole
  // option value as long hex string. For example, to specify
  // domain-name-servers you could do this:
  // {
  //   "name": "domain-name-servers",
  //   "code": 6,
  //   "csv-format": "true",
  //   "space": "dhcp4",
  //   "data": "192.0.2.1, 192.0.2.2"
  // }
  // but it's a lot of writing, so it's easier to do this instead:
  {
    "name": "domain-name-servers",
    "data": "192.0.2.1, 192.0.2.2"
  },

  // Typically people prefer to refer to options by their names, so they
  // don't need to remember the code names. However, some people like
  // to use numerical values. For example, option "domain-name" uses
  // option code 15, so you can reference to it either by
  // "name": "domain-name" or "code": 15.
  {
    "code": 15,
    "data": "example.org"
  },

  // Domain search is also a popular option. It tells the client to
```

**Рис. 3:** Редактирование конфига

Спустимся ниже и настроим свою подсеть.

```
// DHCPv4v6.
"subnet4": [
{
// This defines the whole subnet. Kea will use this information to
// determine where the clients are connected. This is the whole
// subnet in your network.

// Subnet identifier should be unique for each subnet.
"id": 1,

// This is mandatory parameter for each subnet.
"subnet": "192.168.1.0/24",

// Pools define the actual part of your subnet that is governed
// by Kea. Technically this is optional parameter, but it's
// almost always needed for DHCP to do its job. If you omit it,
// clients won't be able to get addresses, unless there are
// host reservations defined for them.
"pools": [ { "pool": "192.168.1.30 - 192.168.1.199" } ],

// This is one of the subnet selectors. Uncomment the "interface"
// parameter and specify the appropriate interface name if the DHCPv4
// server will receive requests from local clients (connected to the
// same subnet as the server). This subnet will be selected for the
// requests received by the server over the specified interface.
// This rule applies to the DORA exchanges and rebinding clients.
// Renewing clients unicast their messages, and the renewed addresses
// are used by the server to determine the subnet they belong to.
// When this parameter is used, the "relay" parameter is typically
// unused.
// "interface": "eth0".
```

**Рис. 4:** Настройка подсети

Установим интерфейс для dhcp как eth1.

```
// The next are ignored by other components.
"Dhcp4": {
  // Add names of your network interfaces to listen on.
  "interfaces-config": {
    // See section 8.2.4 for more details. You probably want to add just
    // interface name (e.g. "eth0" or specific IPv4 address on that
    // interface name (e.g. "eth0/192.0.2.1").
    "interfaces": ["eth1"]

    // Kea DHCPv4 server by default listens using raw sockets. This ensures
    // all packets, including those sent by directly connected clients
    // that don't have IPv4 address yet, are received. However, if your
    // traffic is always relayed, it is often better to use regular
    // UDP sockets. If you want to do that, uncomment this line:
    // "dhcp-socket-type": "udp"
  },

  // Kea supports control channel, which is a way to receive management
  // commands while the server is running. This is a Unix domain socket that
  // receives commands formatted in JSON, e.g. config-set (which sets new
  // configuration), config-reload (which tells Kea to reload its
  // configuration from file), statistic-get (to retrieve statistics) and many
  // more. For detailed description, see Sections 8.8, 16 and 15.
  "control-socket": {
    "socket-type": "unix",
    "socket-name": "kea4-ctrl-socket"
  },
}
```

**Рис. 5:** Установка интерфейса

Загрузим конфиг и убедимся, что нигде нет критических ошибок.

```
[root@server.dvkalashnikova.net ~]# kea-dhcp4 -t /etc/kea/kea-dhcp4.conf
2026-09-15 15:22:49.752 WARN [kea-dhcp4.dhcpsrv/14875.140118497761408] DHCP4_SRV_MT_DISABLED_QUEUE_CONTROL disabling dhcp queue control when multi-threading is enabled.
2026-09-15 15:22:49.754 WARN [kea-dhcp4.dhcp4/14875.140118497761408] DHCP4_RESERVATIONS_LOOKUP_FIRST_ENABLED Multi-threading is enabled and host reservations lookup is always performed first.
2026-09-15 15:22:49.755 INFO [kea-dhcp4.dhcpsrv/14875.140118497761408] DHCP4_SRV_CFGMGR_NEW_SUBNET4 a new subnet has been added to configuration: 192.168.1.0/24 with params: t1=900, t2=1800, valid-lifetime=3600
2026-09-15 15:22:49.759 ERROR [kea-dhcp4.dhcp4/14875.140118497761408] DHCP4_PARSER_FAIL failed to create or run parser for configuration element subnet4: specified reservation '192.0.2.201' is not within the IPv4 subnet '192.168.1.0/24'
2026-09-15 15:22:49.760 INFO [kea-dhcp4.dhcpsrv/14875.140118497761408] DHCP4_SRV_LEASE_MGR_BACKENDS_REGISTERED the following lease backend types are available: memfile
2026-09-15 15:22:49.760 INFO [kea-dhcp4.hosts/14875.140118497761408] HOSTS_BACKENDS_REGISTERED the following host backend types are available:
```

**Рис. 6:** Загрузка конфига

Перезагрузим системные демоны.

```
[root@server.dvkalashnikova.net ~]# systemctl --system daemon-reload
[root@server.dvkalashnikova.net ~]# systemctl enable kea-dhcp4.service
Created symlink '/etc/systemd/system/multi-user.target.wants/kea-dhcp4.service' → '/usr/lib/systemd/system/kea-dhcp4.service'.
```

**Рис. 7:** Перезагрузка демонов

Отредактируем файл с прошлой лабораторной работы в папке fz, добавив запись о dhcp.



```
GNU nano 8.1 /var/named/master/fz/dvkalashnikova.net
$TTL 1D
@      IN SOA  @ server.dvkalashnikova.net. (
                                @      ; serial
                                1D      ; refresh
                                1H      ; retry
                                1W      ; expire
                                3H      ; minimum

        NS      @
        A       192.168.1.1
        AAAA    ::1
$ORIGIN dvkalashnikova.net.
server A 192.168.1.1
ns A 192.168.1.1
dhcp A 192.168.1.1
```

**Рис. 8:** Редактирование fz

То же самое сделаем с rz.



```
GNU nano 8.1 /var/named/master/rz/192.168.1
$TTL 1D
@      IN SOA  @ server.dvkalashnikova.net. (
                                0      ; serial
                                1D     ; refresh
                                1H     ; retry
                                1W     ; expire
                                3H )   ; minimum

      NS      @
      A       192.168.1.1
      AAAA    ::1
      PTR     server.dvkalashnikova.net
$ORIGIN 1.168.192.in-addr.arpa.
1 PTR server.dvkalashnikova.net.
1 PTR ns.dvkalashnikova.net.
1 PTR dhcp.dvkalashnikova.net.
```

**Рис. 9:** rz

Перезагрузим сервер ДНС и убедимся, что можем пингануть dhcp сервер.

```
[root@server.dvkalashnikova.net ~]# systemctl restart named
[root@server.dvkalashnikova.net ~]# ping dhcp.dvkalashnikova.net
PING dhcp.dvkalashnikova.net (192.168.1.1) 56(84) bytes of data:
64 bytes from ns.dvkalashnikova.net (192.168.1.1): icmp_seq=1 ttl=64 time=14.7 ms
64 bytes from ns.dvkalashnikova.net (192.168.1.1): icmp_seq=2 ttl=64 time=3.70 ms
64 bytes from ns.dvkalashnikova.net (192.168.1.1): icmp_seq=3 ttl=64 time=4.14 ms
64 bytes from ns.dvkalashnikova.net (192.168.1.1): icmp_seq=4 ttl=64 time=4.76 ms
64 bytes from ns.dvkalashnikova.net (192.168.1.1): icmp_seq=5 ttl=64 time=7.36 ms
64 bytes from ns.dvkalashnikova.net (192.168.1.1): icmp_seq=6 ttl=64 time=10.9 ms
64 bytes from ns.dvkalashnikova.net (192.168.1.1): icmp_seq=7 ttl=64 time=8.43 ms
```

**Рис. 10:** Пинг dhcp

## Настроим firewall и обновим метки selinux.

```
[root@server.dvkalashnikova.net ~]# firewall-cmd --list-services
cockpit dhcpv6-client dns ssh
[root@server.dvkalashnikova.net ~]# firewall-cmd --get-services
0-AD RH-Satellite-6 RH-Satellite-6-capsule afp alvr amanda-client amanda-k5-client amqp amqps anno-1602 anno-1800 apcupsd
aseqnet audit ausweisapp2 bacula bacula-client bareos-director bareos-filedaemon bareos-storage bb bgp bitcoin bitcoin-rpc
bitcoin-testnet bitcoin-testnet-rpc bittorrent-lsd ceph ceph-exporter ceph-mon cfengine checkmk-agent civilization-iv civ
ilization-v cockpit collectd condor-collector cratedb ctdb dds dds-multicast dds-unicast dhcp dhcpv6 dhcpv6-client distcc
dns dns-over-quick dns-over-tls docker-registry docker-swarm dropbox-lansync elasticsearch etcd-client etcd-server factorio
finger foreman foreman-proxy freeipa-4 freeipa-ldap freeipa-ldaps freeipa-replication freeipa-trust ftp galera ganglia-cl
ient ganglia-master git gitea gpsd grafana gre high-availability http http3 https ident imap imaps iperf2 iperf3 ipfs ipp
ipp-client ipsec irc ircs iscsi-target isns jenkins kadmin kdeconnect kerberos kibana klogin kpasswd kprop kshell kube-api
kube-apiserver kube-control-plane kube-control-plane-secure kube-controller-manager kube-controller-manager-secure kube-n
odeport-services kube-scheduler kube-scheduler-secure kube-worker kubelet kubelet-readonly kubelet-worker ldap ldaps libvir
t libvirt-tls lightning-network llmnr llmnr-client llmnr-tcp llmnr-udp managesieve matrix mdns memcache minecraft minidln
a mndp mongodb mosh mountd mpd mqtt mqtt-tls ms-abt mssql murmur mysql nbd nebula need-for-speed-most-wanted netbios-ns ne
tdata-dashboard nfs nfs3 nmap ntp nut opentelemetry openvpn ovirt-imagelo ovirt-storageconsole ovirt-vmconsole p
lex pncd pmproxy pmwebapi pmwebapis pop3 pop3s postgresql privoxy prometheus prometheus-node-exporter proxy-dhcp proxy-htt
p ps2link ps3netserver ptp pulseaudio puppetmaster quassel radius radsec rdp redis redis-sentinel rootd rpc-bind rquotad rsh
rsyncd rtsp salt-master samba samba-client samba-dc sane settlers-history-collection sip sips slimevr slp smtp smtp-submis
sion smtps snmp snmptls snmptls-trap snmptrap socks spideroak-lansync spotify-sync squid ssdp ssh statserv steam-lan-transf
er steam-streaming stellaris stronghold-crusader stun stuns submission supertuxkart svdrp svn syncthing syncthing-gui sync
thing-relay synergy syscomlan syslog syslog-ng syslog-tls telnet tentacle terraria tftp tile38 tinc tor-socks transmission
-client turn turns upnp-client vdsms vnc-server vrrp warpinator wben-http wben-https wifeguard ws-discovery ws-discovery-cl
ient ws-discovery-host ws-discovery-tcp ws-discovery-udp wssd wssd-http wsmann wsmans xdmcp xmpp-bosh xmpp-client xmpp-loca
l xmpp-server zabbix-agent zabbix-java-gateway zabbix-server zabbix-trapper zabbix-web-service zero-k zerotier
[root@server.dvkalashnikova.net ~]# firewall-cmd --add-service=dhcp
success
[root@server.dvkalashnikova.net ~]# firewall-cmd --add-service=dhcp --permanent
success
[root@server.dvkalashnikova.net ~]# restorecon -vR /etc
[root@server.dvkalashnikova.net ~]# restorecon -vR /var/named
[root@server.dvkalashnikova.net ~]# restorecon -vR /var/lib/kea/
```


**Рис. 11:** firewall и selinux

Убедимся по логам, что сервер DNS работает и не выдаёт ошибок.

```
[dvk@server dvk@server.dvklashnikova.net ~]$ sudo tail -f /var/log/messages
[sudo] password for dvk@server.dvklashnikova.net:
Sep 15 15:36:55 server systemd-coredump[17295]: Process 17290 (VBoxClient) of user 1001 dumped core.
ule libxcb.so.1 from rpm libxcb-1.17.0-3.el10.x86_64#012Module libXau.so.6 from rpm libXau-1.0.11-8.el10.x86_64#012Mod
libffi.so.8 from rpm libffi-3.4.4-10.el10.x86_64#012Module libwayland-client.so.0 from rpm wayland-1.24.0-1.el10.x86_64#01
25stack trace of thread 17293:#012#0 0x00000000041e7eb n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x1e7eb)#012#
1 0x0000000000041e764 n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x1e764)#012#2 0x0000000000458b2c n/a (/opt/VB
oxGuestAdditions-7.2.16/bin/VBoxClient + 0x58b2c)#012#3 0x000000000043b900 n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxCl
ient + 0x3b900)#012#4 0x00007fcec48f28bf start_thread (libc.so.6 + 0x958bf)#012#5 0x00007fcec496343c __clone3 (libc.so.6
+ 0x10643c)#012#012Stack trace of thread 17290:#012#0 0x00007fcec496125d syscall (libc.so.6 + 0x10425d)#012#1 0x0000000
00043a812 n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x3a812)#012#2 0x0000000000458786 n/a (/opt/VBoxGuestAddit
ions-7.2.16/bin/VBoxClient + 0x58786)#012#3 0x00000000004056d8 n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x56d
8)#012#4 0x00007fcec488758e __libc_start_call_main (libc.so.6 + 0x2a58e)#012#5 0x00007fcec4887649 __libc_start_main@@GLI
BC_2.34 (libc.so.6 + 0x2a649)#012#6 0x00000000004044fa n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x44fa)#012EL
F object binary architecture: AMD x86-64
Sep 15 15:36:55 server systemd[1]: systemd-coredump[446-17294-0.service: Deactivated successfully.
Sep 15 15:37:00 server kernel: traps: VBoxClient[17307] trap int3 ip:41e7eb sp:7fceb6235cd0 error:0 in VBoxClient[1e7eb,40
0000+c8000]
Sep 15 15:37:00 server systemd-coredump[17308]: Process 17304 (VBoxClient) of user 1001 terminated abnormally with signal
5/TRAP, processing...
Sep 15 15:37:00 server systemd[1]: Started systemd-coredump[447-17308-0.service - Process Core Dump (PID 17308/UID 0).
Sep 15 15:37:01 server systemd-coredump[17309]: Process 17304 (VBoxClient) of user 1001 dumped core.
ule libxcb.so.1 from rpm libxcb-1.17.0-3.el10.x86_64#012Module libXau.so.6 from rpm libXau-1.0.11-8.el10.x86_64#012Mod
libffi.so.8 from rpm libffi-3.4.4-10.el10.x86_64#012Module libwayland-client.so.0 from rpm wayland-1.24.0-1.el10.x86_64#01
25stack trace of thread 17307:#012#0 0x000000000041e7eb n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x1e7eb)#012#
1 0x0000000000041e764 n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x1e764)#012#2 0x0000000000458b2c n/a (/opt/VB
oxGuestAdditions-7.2.16/bin/VBoxClient + 0x58b2c)#012#3 0x000000000043b900 n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxCl
ient + 0x3b900)#012#4 0x00007fcec48f28bf start_thread (libc.so.6 + 0x958bf)#012#5 0x00007fcec496343c __clone3 (libc.so.6
+ 0x10643c)#012#012Stack trace of thread 17305:#012#0 0x00007fcec496125d syscall (libc.so.6 + 0x10425d)#012#1 0x0000000
00043af60 n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x3af60)#012#2 0x000000000045930b n/a (/opt/VBoxGuestAddit
ions-7.2.16/bin/VBoxClient + 0x5930b)#012#3 0x000000000043b99a n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x3b9
9a)#012#4 0x0000000000458b2c n/a (/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x58b2c)#012#5 0x000000000043b900 n/a
(/opt/VBoxGuestAdditions-7.2.16/bin/VBoxClient + 0x3b900)#012#6 0x00007fcec48f28bf start_thread (libc.so.6 + 0x958bf)#012
#7 0x00007fcec496343c __clone3 (libc.so.6 + 0x10643c)#012#012Stack trace of thread 17304:#012#0 0x00007fcec496125d syscall
```

Рис. 12: Логи сервера


Теперь запускаем dhcp сервер.

A terminal window showing the command 'systemctl start kea-dhcp4.service' being executed. The prompt is '[root@server.dvkalashnikova.net ~]#'.

```
[root@server.dvkalashnikova.net ~]# systemctl start kea-dhcp4.service  
[root@server.dvkalashnikova.net ~]#
```

**Рис. 13:** Запуск dhcp

Убедимся, что в папке клиента в vagrant представлен скрипт для настройки сети, берущей ip по dhcp.

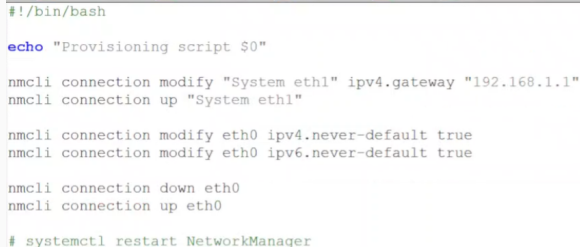A screenshot of a terminal window with a light blue title bar. The terminal shows a shell prompt and a series of commands for configuring network connections using nmcli and systemctl.

```
#!/bin/bash

echo "Provisioning script $0"

nmcli connection modify "System eth1" ipv4.gateway "192.168.1.1"
nmcli connection up "System eth1"

nmcli connection modify eth0 ipv4.never-default true
nmcli connection modify eth0 ipv6.never-default true

nmcli connection down eth0
nmcli connection up eth0

# systemctl restart NetworkManager
```

**Рис. 14:** Скрипт для клиента


В Vagrantfile убедимся, что этот скрипт прописан для запуска.

```
client.vm.provision "client dummy",
  type: "shell",
  preserve_order: true,
  path: "provision/client/01-dummy.sh"

client.vm.provision "client routing",
  type: "shell",
  preserve_order: true,
  run: "always",
  path: "provision/client/01-routing.sh"
```

**Рис. 15:** Vagrantfile

Когда приготовления завершены, запускаем клиент.



```
C:\work\dvkalashnikova\code\vagrant> vagrant up client --provision
Bringing machine 'client' up with 'virtualbox' provider...
==> client: Clearing any previously set forwarded ports...
```

**Рис. 16:** Запуск клиента

Зайдя в клиент, через ifconfig убедимся, что айпи был получен с сервера — 192.168.1.30.

```
[dvkalahnikova@client ~]$ ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1500
    inet 10.0.2.15  netmask 255.255.255.0  broadcast 10.0.2.255
    inet6 fd17:625c:f037:2:a00:27ff:fe64:5285  prefixlen 64  scopeid 0x0<global>
    ether 08:00:27:64:52:85  txqueuelen 1000  (Ethernet)
    RX packets 977  bytes 146887 (143.4 KiB)
    RX errors 0  dropped 0  overruns 0  frame 0
    TX packets 886  bytes 135693 (132.5 KiB)
    TX errors 0  dropped 0  overruns 0  carrier 0  collisions 0

eth1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1500
```

**Рис. 17:** ifconfig

Информация о назначении айпи хранится в файле `/var/lib/kea/kea-leases4.csv` на сервере.



```
GNU nano 8.1 /var/lib/kea/kea-leases4.csv Modified
address,hwaddr,client_id,valid_lifetime,expire,subnet_id,fqdn_fwd,fqdn_rev,hostname,state,user_c
192.168.56.30,08:00:27:8e:21:48,01:08:00:27:8e:21:48,3600,1758375351,1,0,0,client,0,,0
```

**Рис. 18:** Таблица с назначениями

Создадим ключ sha512 и убедимся, что он создан.

```
[root@server.dvkalashnikova.net ~]# mkdir -p /etc/named/keys
[root@server.dvkalashnikova.net ~]# tsig-keygen -a HMAC-SHA512 DHCP_UPDATER > /etc/named/keys/dhcp_updater.key
[root@server.dvkalashnikova.net ~]# cat /etc/named/keys/dhcp_updater.key
key "DHCP_UPDATER" {
    algorithm hmac-sha512;
    secret "ApI0M0/0eMfuPLlVKBuHzcE0JFVBpHB4GwdarD8XIhYN7rj1jcJIqqb7lYOpCXXd0v2qxMMqtHjEWLyP
bo7jQ==";
};
```

**Рис. 19:** Ключ sha512

Этот ключ добавим в /etc/named.conf.

```
logging {  
    channel default_debug {  
        file "data/named.run";  
        severity dynamic;  
    };  
};  
  
zone "." IN {  
    type hint;  
    file "named.ca";  
};  
  
include "/etc/named.rfc1912.zones";  
include "/etc/named.root.key";  
include "/etc/named/dvkalashnikova.net";  
include "/etc/named/keys/dhcp_updater.key";
```

**Рис. 20:** Добавление ключа

Обновим файл /etc/named/nsandryushin.net, добавив туда dhcpr.

GNU nano 8.1 /etc/named/dvkalashnikova.net Modif
// named.rfc1912.zones:
//
// Provided by Red Hat caching-nameserver package
//
// ISC BIND named zone configuration for zones recommended by
// RFC 1912 section 4.1 : localhost TLDs and address zones
// and https://tools.ietf.org/html/rfc6303
// (c)2007 R W Franks
//
// See /usr/share/doc/bind\*/sample/ for example named configuration files.
//
// Note: empty-zones-enable yes; option is default.
// If private ranges should be forwarded, add
// disable-empty-zone "."; into options
//
zone "dvkalashnikova.net" IN {
 type master;
 file "master/fz/dvkalashnikova.net";
 update-policy {
 grant DHCP\_UPDATER wldcard \*.user.net A DHCID;
 };
};

zone "1.168.192.in-addr.arpa" IN {
 type master;
 file "master/rz/192.168.1";
 update-policy {
 grant DHCP\_UPDATER wldcard \*.1.168.192.in-addr.arpa PTR DHCID;
 };
};

**Рис. 21:** Обновление файла

Проверим корректность конфига на синтаксис, перезапустим DNS службу, создадим файл с ключом.

```
[root@server.dvkalashnikova.net ~]# named-checkconf  
[root@server.dvkalashnikova.net ~]# systemctl restart named  
[root@server.dvkalashnikova.net ~]# touch /etc/kea/tsig-keys.json
```

**Рис. 22:** Применение изменений

В созданный файл вставим ключ, который мы сгенерировали ранее.



```
one@one:~$ nano /etc/keel/keel-keys.json
"tsig-keys": [
{
  "name": "DHCP_UPDATER",
  "algorithm": "hmac-sha512",
  "secret": ""tsig-keys": [
    {
      "name": "DHCP_UPDATER",
      "algorithm": "hmac-sha512",
      "secret":
      "psFFSGdUIwK36l1G82LOw15PuIH4W5uB8h/cw7F0XDsjniBbwm/59tM+V3ydcCs15VLpe2pxlUlg+
    }
  ],
}
],
}
```

**Рис. 23:** Порядок монтирования

Поменяем права и владельца созданного файла, предоставив его системному пользователю службы.

```
[root@server.dvkalashnikova.net ~]# chown kea:kea /etc/kea/tsig-keys.json  
[root@server.dvkalashnikova.net ~]# chmod 640 /etc/kea/tsig-keys.json
```

**Рис. 24:** Смена прав файла

# Изменение конфигурации ddns

Заполним файл конфигурации ddns с нуля согласно шаблону, поменяв имя на свой домен.



```
GNU nano 8.1 /etc/kea/kea-dhcp-ddns.conf Modified
[ "DhcpDdns":
{
  "ip-address": "127.0.0.1",
  "port": 53881,
  "control-socket": {
    "socket-type": "unix",
    "socket-name": "/run/kea/kea-ddns-ctrl-socket"
  },
  <?include "/etc/kea/tsig-keys.json"?>
  "forward-ddns" : {
    "ddns-domains" : [
      {
        "name": "dvkashnikova.net.",
        "key-name": "DHCP_UPDATER",
        "dns-servers": [
          { "ip-address": "192.168.1.1" }
        ]
      }
    ],
    "reverse-ddns" : {
      "ddns-domains" : [
        {
          "name": "1.168.192.in-addr.arpa.",
          "key-name": "DHCP_UPDATER",
          "dns-servers": [
            { "ip-address": "192.168.1.1" }
          ]
        }
      ],
      "loggers": [
        {
          "name": "kea-dhcp-ddns",
          "output_options": [
```

**Рис. 25:** Изменение конфигурации

# Перезапуск ddns

Предоставим этот файл во владение системному пользователю, загрузим конфигурацию и перезапустим ddns службу.

```
[root@server.dvkalashnikova.net ~]# systemctl enable --now kea-dhcp-ddns.service
Created symlink '/etc/systemd/system/multi-user.target.wants/kea-dhcp-ddns.service' → '/usr/lib/systemd/system/kea-dhcp-ddns.service'.
[root@server.dvkalashnikova.net ~]# systemctl status kea-dhcp-ddns.service
● kea-dhcp-ddns.service - Kea DHCP-DDNS Server
   Loaded: loaded (/usr/lib/systemd/system/kea-dhcp-ddns.service; enabled; preset: disabled)
   Active: active (running) since Tue 2026-09-15 17:53:42 UTC; 57s ago
  Invocation: e889dec48149f6b6eb89b5a3a68b3e
     Docs: man:kea-dhcp-ddns(8)
    Main PID: 38987 (kea-dhcp-ddns)
      Status: "Dispatching packets..."
        Tasks: 5 (limit: 35588)
      Memory: 2.3M (peak: 6.9M)
         CPU: 158ms
    CGroup: /system.slice/kea-dhcp-ddns.service
            └─38987 /usr/sbin/kea-dhcp-ddns -c /etc/kea/kea-dhcp-ddns.conf

Sep 15 17:53:42 server.dvkalashnikova.net systemd[1]: Starting kea-dhcp-ddns.service - Kea DHCP-DDNS Server...
Sep 15 17:53:42 server.dvkalashnikova.net kea-dhcp-ddns[38987]: 2026-09-15 17:53:42.946 INFO [kea-dhcp-ddns.dctl]
Sep 15 17:53:42 server.dvkalashnikova.net kea-dhcp-ddns[38987]: INFO COMMAND_ACCEPTOR_START Starting to accept
Sep 15 17:53:42 server.dvkalashnikova.net kea-dhcp-ddns[38987]: INFO DCTL_CONFIG_COMPLETE server has completed
Sep 15 17:53:42 server.dvkalashnikova.net kea-dhcp-ddns[38987]: INFO DHCP_DDNS_STARTED Kea DHCP-DDNS server ver
```

**Рис. 26:** Перезапуск ddns

# Добавление информации о ddns

Добавим информацию о ddns в наш файл с конфигурацией dhcp.

```
GNU nano 0.1 /etc/kea/kea-dhcp-ddns.conf
[ "DhcpDdns":
{
  "ip-address": "127.0.0.1",
  "port": 53801,
  "control-socket": {
    "socket-type": "unix",
    "socket-name": "/var/run/kea/kea-ddns-ctrl-socket"
  },
  <?include "/etc/kea/tsig-keys.json"?>
  "forward-dns" : {
    "ddns-domains" : [
      {
        "name": "dvkashnikova.net.",
        "key-name": "DHCP_UPDATER",
        "dns-servers": [
          { "ip-address": "192.168.1.1" }
        ]
      }
    ],
    "reverse-dns" : {
      "ddns-domains" : [
        {
          "name": "1.168.192.in-addr.arpa.",
          "key-name": "DHCP_UPDATER",
          "dns-servers": [
            { "ip-address": "192.168.1.1" }
          ]
        }
      ]
    },
    "loggers": [
      {
        "name": "kea-dhcp-ddns",
        "output_options": [
          {
            "output": "stdout",
            "pattern": "%-5p %m\n"
          }
        ],
        "severity": "INFO",
        "debuglevel": 0
      }
    ]
  }
}
```

**Рис. 27:** Добавление информации о ddns

Вновь загрузим конфигурацию и перезапустим службу dhcp.

```
[root@server.dvkalashnikova.net ~]# systemctl restart kea-dhcp4.service
[root@server.dvkalashnikova.net ~]# systemctl status kea-dhcp4.service
● kea-dhcp4.service - Kea DHCPv4 Server
   Loaded: loaded (/usr/lib/systemd/system/kea-dhcp4.service; enabled; preset: disabled)
   Active: active (running) since Tue 2026-09-15 18:15:44 UTC; 17s ago
     Invocation: ee4b4e727b5a40c1b428191240546c56
       Docs: man:kea-dhcp4(8)
    Main PID: 43238 (kea-dhcp4)
      Status: "Dispatching packets..."
        Tasks: 9 (limit: 35588)
      Memory: 2.6M (peak: 7M)
         CPU: 184ms
    CGroup: /system.slice/kea-dhcp4.service
            └─43238 /usr/sbin/kea-dhcp4 -c /etc/kea/kea-dhcp4.conf

Sep 15 18:15:44 server.dvkalashnikova.net systemd[1]: Starting kea-dhcp4.service - Kea DHCPv4 Server...
Sep 15 18:15:44 server.dvkalashnikova.net kea-dhcp4[43238]: 2026-09-15 18:15:44.658 INFO [kea-dhcp4.dhcp4/43238]
Sep 15 18:15:44 server.dvkalashnikova.net kea-dhcp4[43238]: 2026-09-15 18:15:44.678 WARN [kea-dhcp4.dhcp4/43238]
Sep 15 18:15:44 server.dvkalashnikova.net kea-dhcp4[43238]: 2026-09-15 18:15:44.679 INFO [kea-dhcp4.commands/43238]
Sep 15 18:15:44 server.dvkalashnikova.net systemd[1]: Started kea-dhcp4.service - Kea DHCPv4 Server.
```

**Рис. 28:** Перезапуск службы с применением изменений

Теперь на клиенте перезапустим интернет, чтобы обновить данные.

```
[dvkalashnikova@client ~]$ nmcli connection down eth1
Connection 'eth1' successfully deactivated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/7)
[dvkalashnikova@client ~]$ nmcli connection up eth1
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/8)
[dvkalashnikova@client ~]$ █
```

**Рис. 29:** Обновление данных

Через dig получим информацию о нашем сервере.

```
;; no servers could be reached
[dvkalashnikova@client ~]$ dig @192.168.56.1 client.dvkalashnikova.net
;; communications error to 192.168.56.1#53: timed out
;; communications error to 192.168.56.1#53: timed out
;; communications error to 192.168.56.1#53: timed out

; <<>> DiG 9.18.33 <<>> @192.168.56.1 client.dvkalashnikova.net
; (1 server found)
;; global options: +cmd
;; no servers could be reached
[dvkalashnikova@client ~]$ dig @192.168.56.1 client.dvkalashnikova.net
;; communications error to 192.168.56.1#53: timed out
;; communications error to 192.168.56.1#53: timed out
;; communications error to 192.168.56.1#53: timed out

; <<>> DiG 9.18.33 <<>> @192.168.56.1 client.dvkalashnikova.net
; (1 server found)
;; global options: +cmd
;; no servers could be reached
[dvkalashnikova@client ~]$
```


Рис. 30: dig

Переместим данные созданных ранее конфигураций в vagrant, после чего создадим скрипт.

```
root@server.dvkalashnikova.net dns]# cd /vagrant/provision/server
root@server.dvkalashnikova.net server]# ouch dhcp.sh
dash: ouch: command not found...
root@server.dvkalashnikova.net server]# touch dhcp.sh
root@server.dvkalashnikova.net server]# chmod +x dhcp.sh
```

**Рис. 31:** Перенос конфигурации

В скрипте напишем алгоритм настройки dhcp.

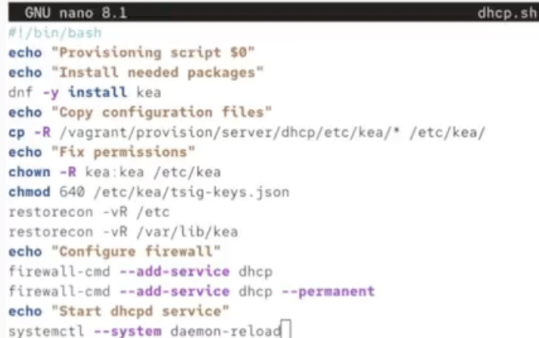

```
GNU nano 8.1                                     dhcp.sh
#!/bin/bash
echo "Provisioning script $0"
echo "Install needed packages"
dnf -y install kea
echo "Copy configuration files"
cp -R /vagrant/provision/server/dhcp/etc/kea/* /etc/kea/
echo "Fix permissions"
chown -R kea:kea /etc/kea
chmod 640 /etc/kea/tsig-keys.json
restorecon -vR /etc
restorecon -vR /var/lib/kea
echo "Configure firewall"
firewall-cmd --add-service dhcp
firewall-cmd --add-service dhcp --permanent
echo "Start dhcpd service"
systemctl --system daemon-reload
```

**Рис. 32:** Скрипт vagrant

В результате выполнения работы были получены навыки настройки dhcp.