Lesson 02 Demo 02

Creating a React Application Using Event Handler

Objective: To develop a React component that binds its event handler context using Vite for a fast and optimized development experience

Tools required: Visual Studio Code and Node.js

Prerequisites: None

Steps to be followed:

1. Set up a new React project using Vite
2. Create a React component
3. Implement and use the component
4. Run and test the application

Step 1: Set up a new React project using Vite

1.1 Navigate to VS Code and open the terminal

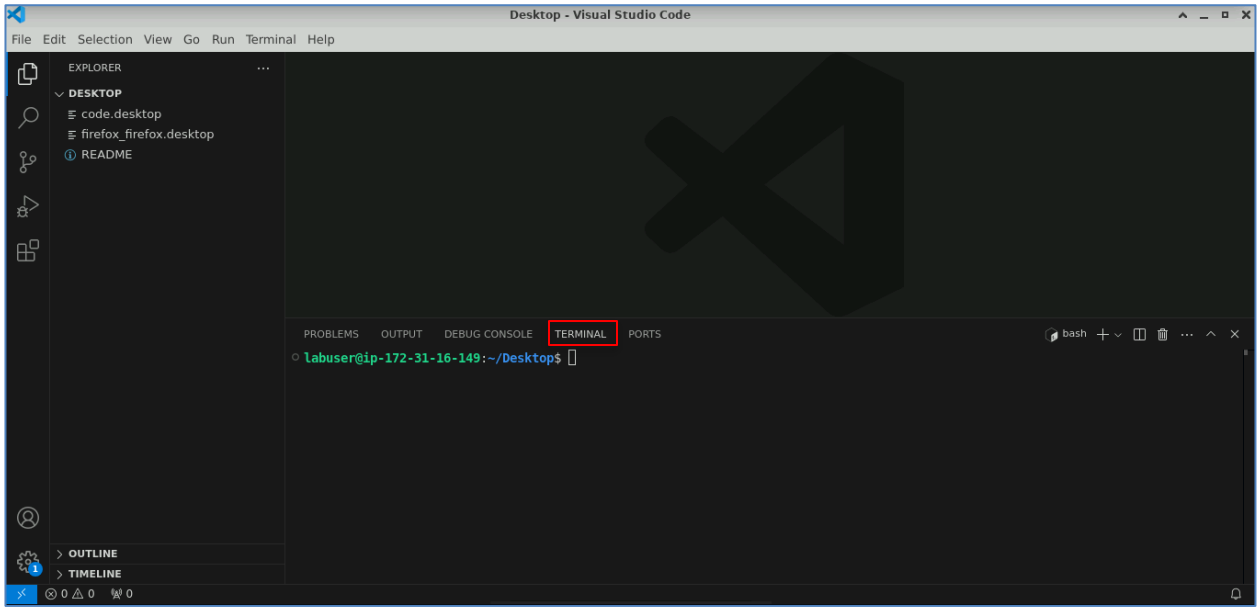

1.2 Run the following command to create a new React project using Vite:

npm create vite@latest my-react-app

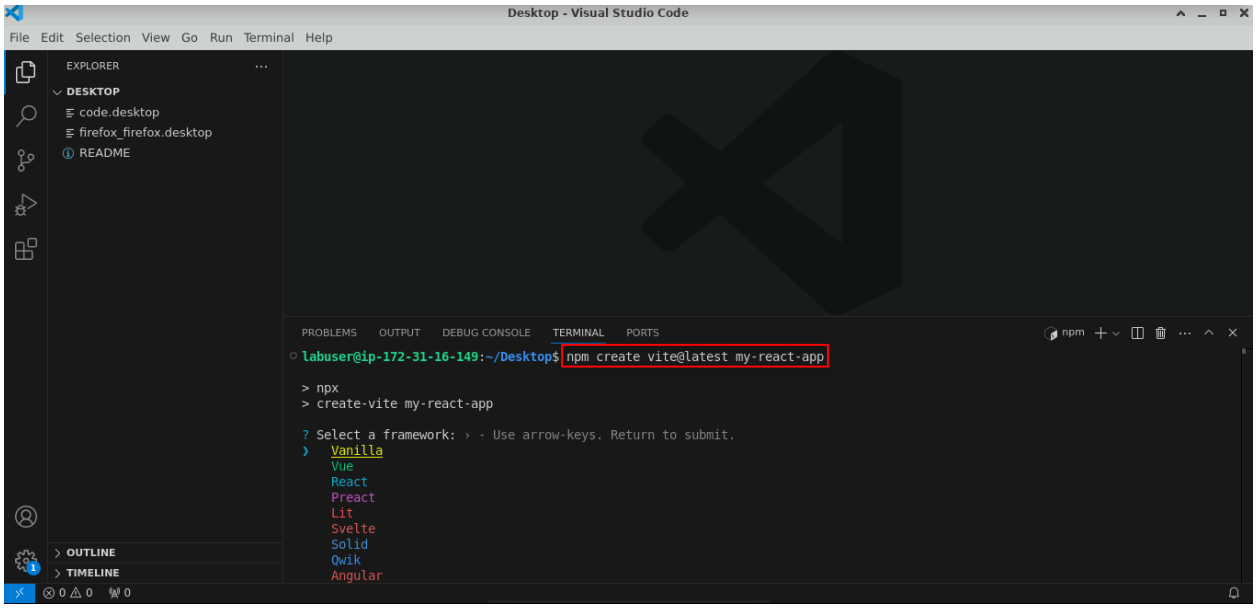

1.3 Select **React** and press enter

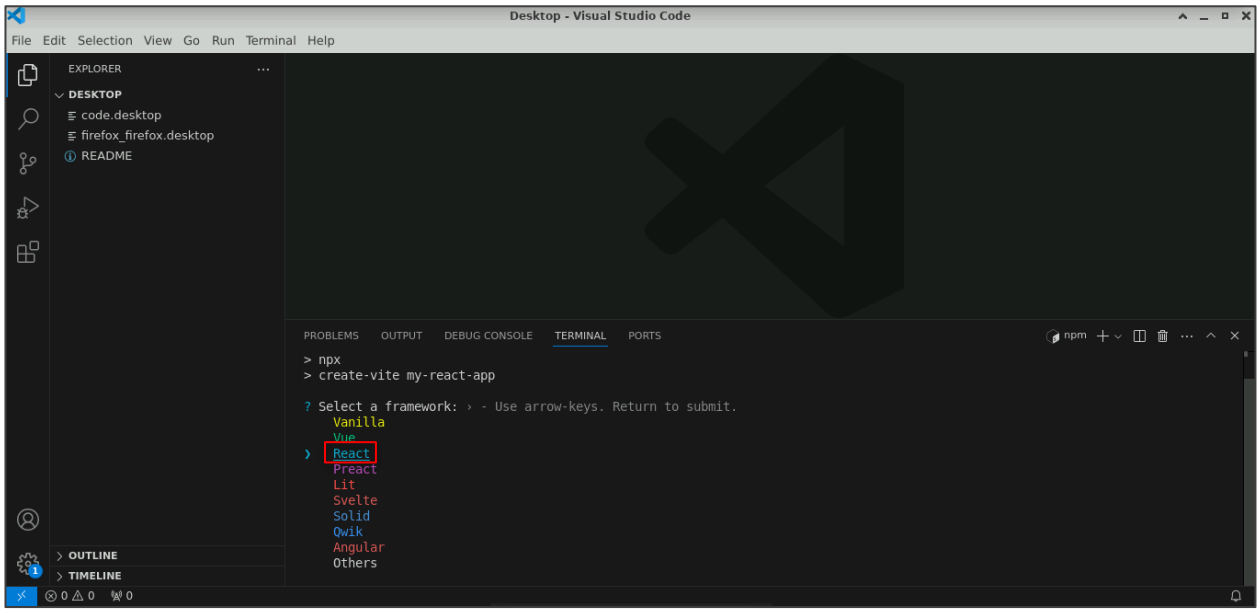

1.4 Select **JavaScript** and press enter

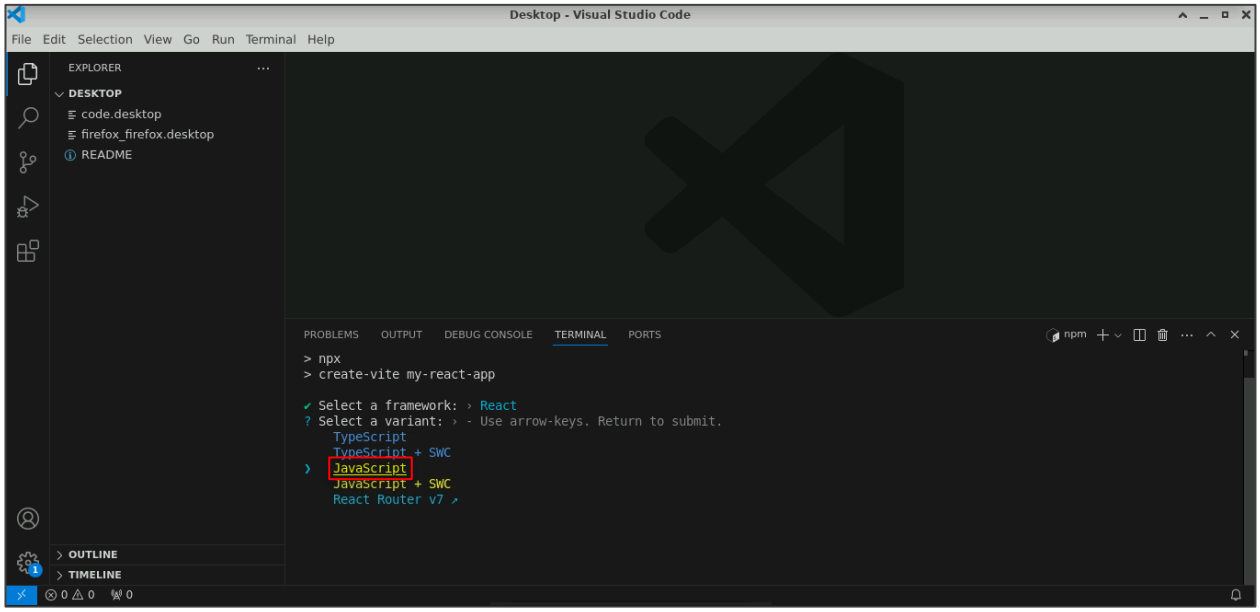

1.5 Run the following command to navigate to the project folder:

cd my-react-app

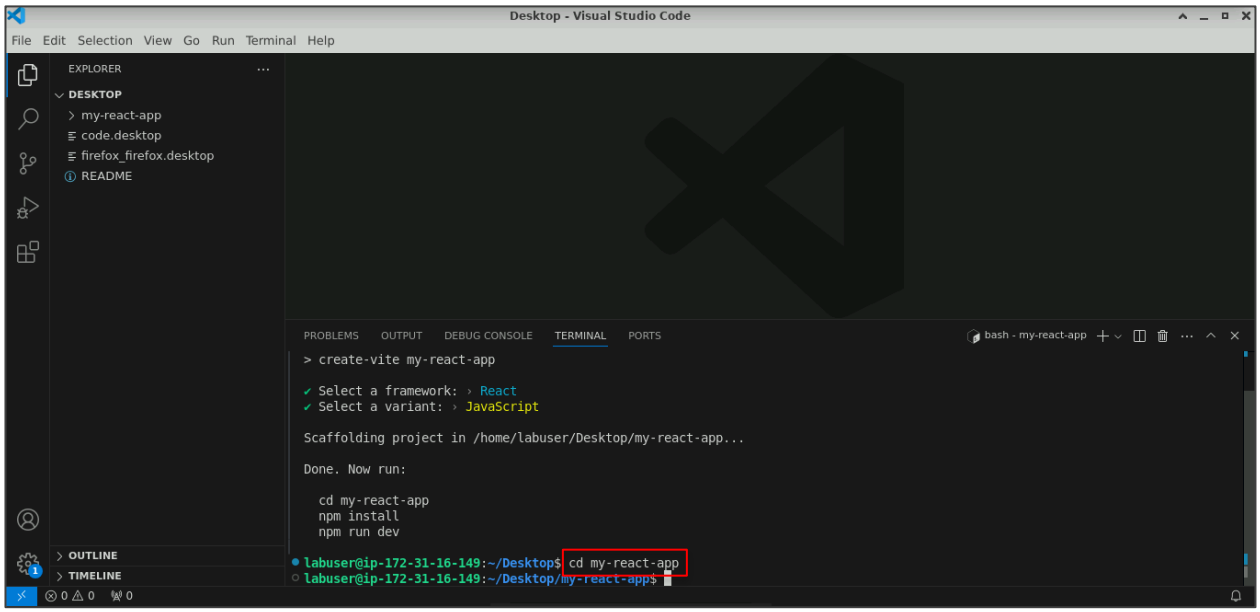

1.6 Run the following command to install dependencies:

npm i

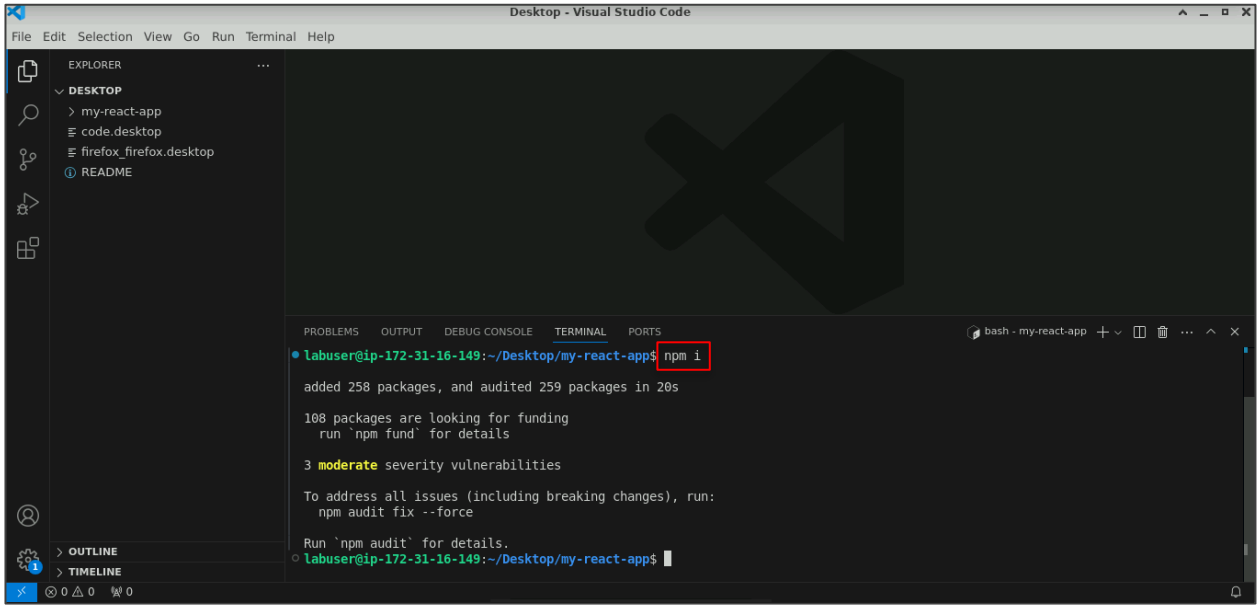

1.7 Run the following command to start the development server:

npm run dev

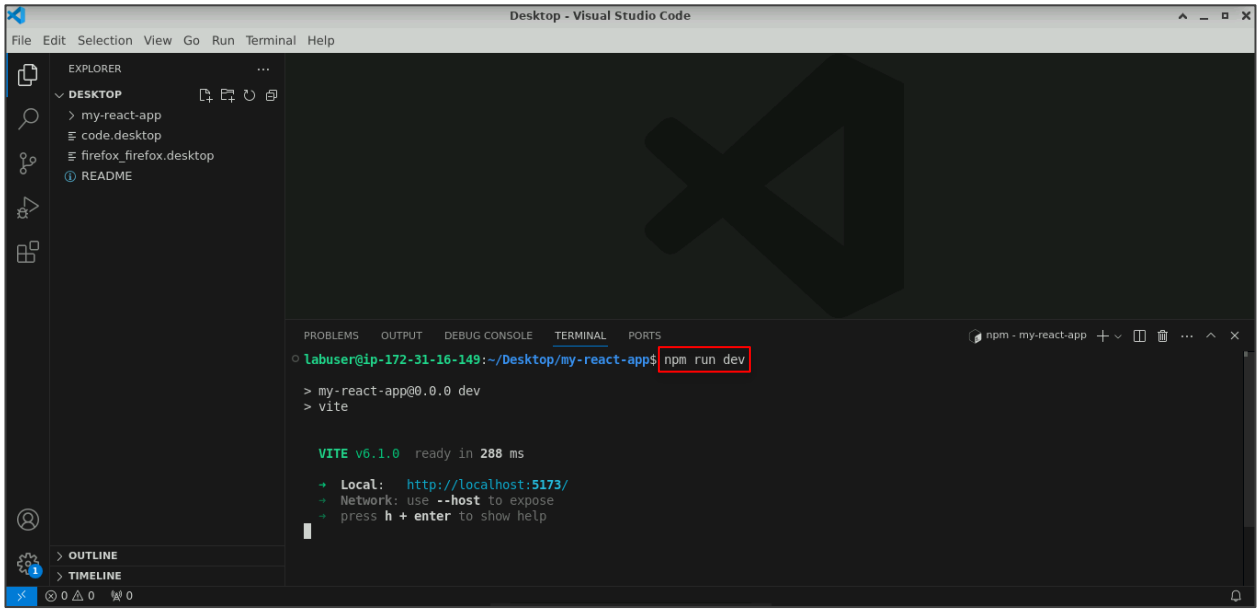

1.8 Navigate to the web browser and paste the link below:

http://localhost:5173

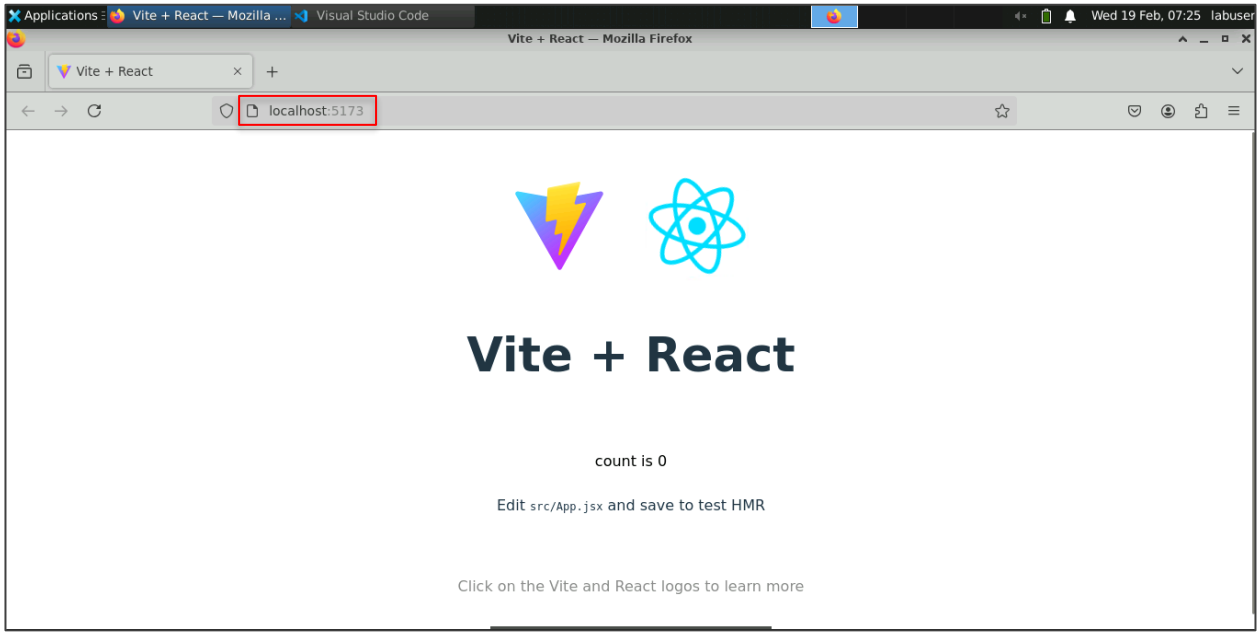

Step 2: Create a React component

2.1 Inside the **src** folder, create a new file named **MyList.jsx**

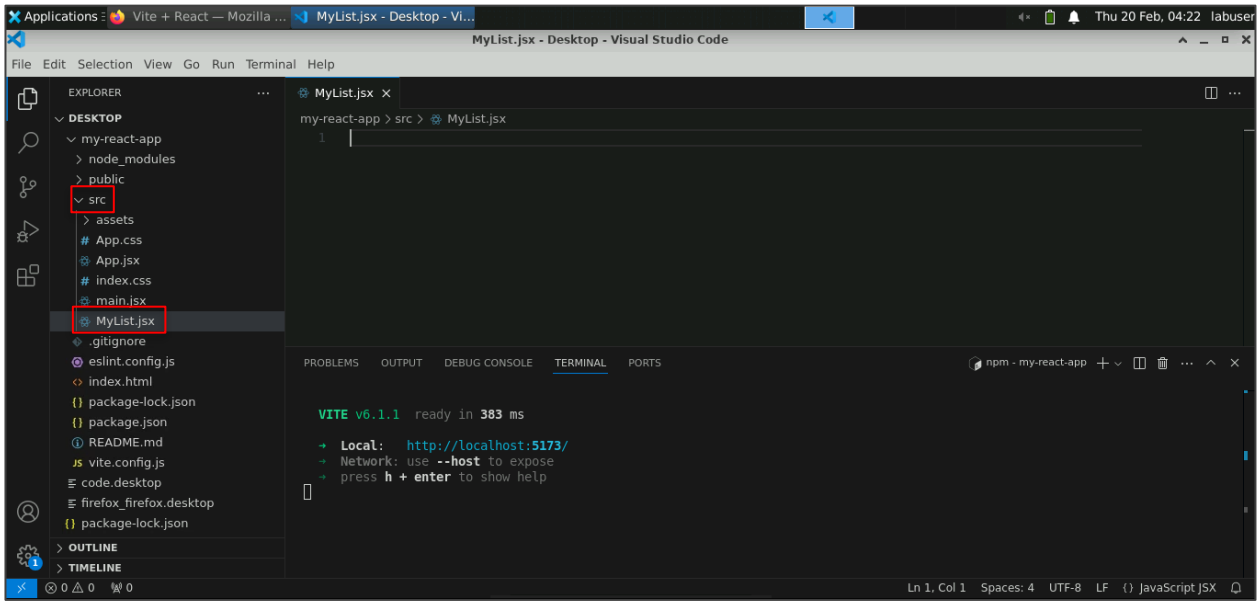

2.2 Paste the code below in **MyList.jsx**:

```
import React from 'react';

const MyList = ({ items }) => {
  const handleClick = (id, name) => {
    console.log('Clicked:', name);
  };

  return (
    <ul>
      {items.map(({ id, name }) => (
        <li key={id} onClick={() => handleClick(id, name)}>
          {name}
        </li>
      ))}
    </ul>
  );
};

export default MyList;
```

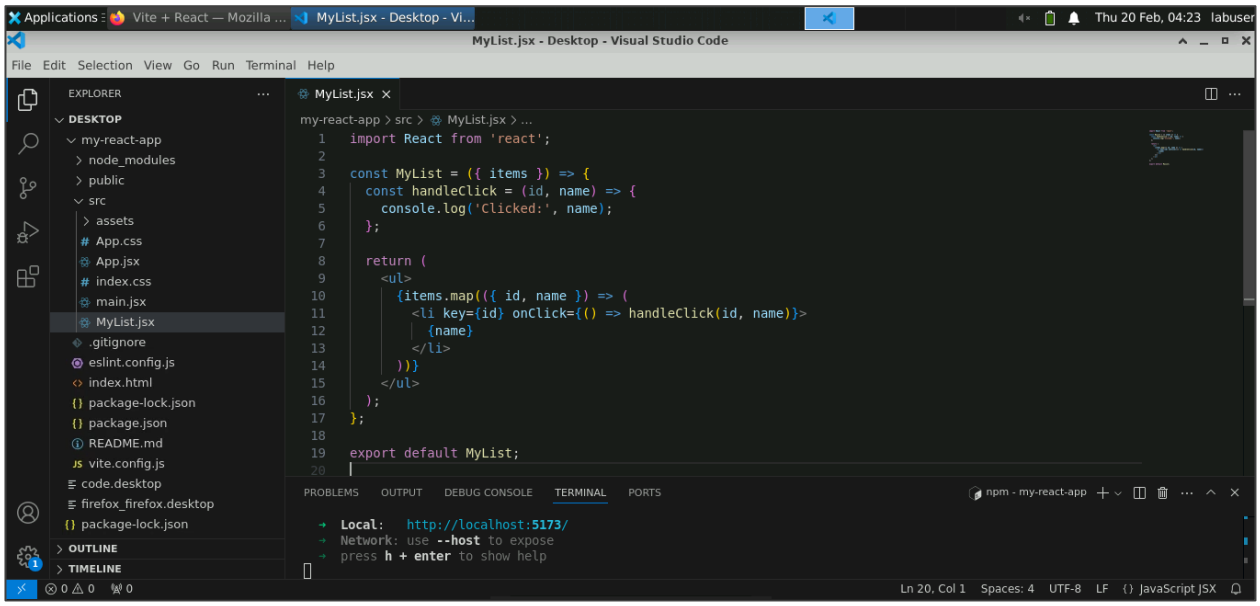

Step 3: Implement and use the component

3.1 Open the **App.jsx** file inside the **src** folder

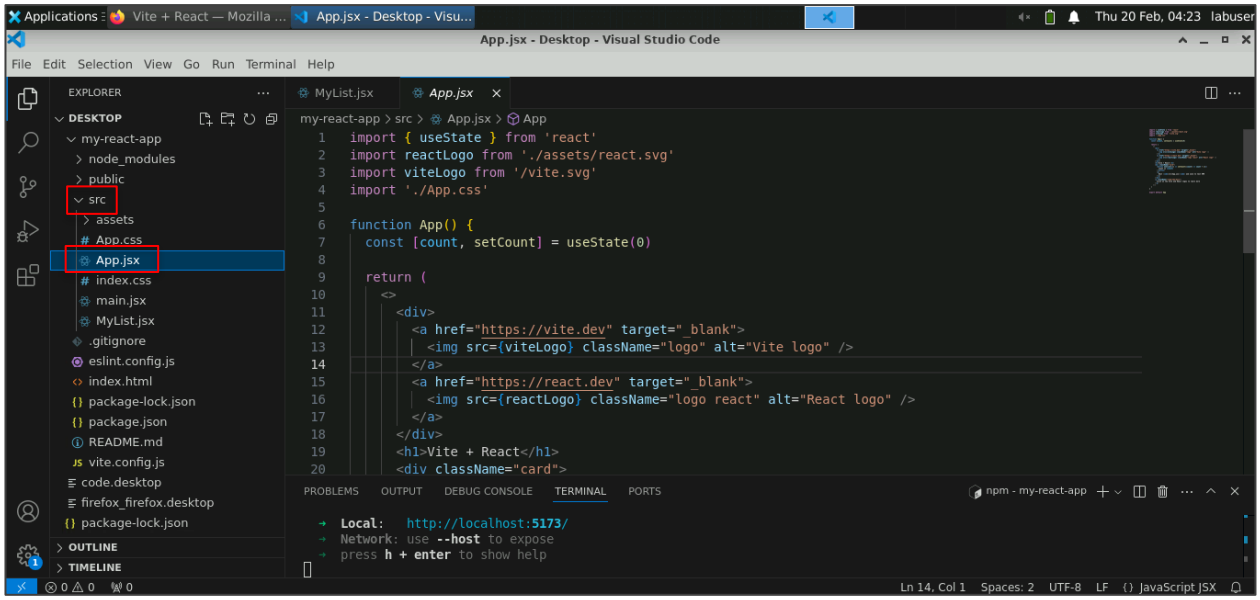

3.2 Paste the code below to include the new components in **App.jsx**:

```
import React from 'react';
import ListComponent from './ListComponent';

function App() {
  return (
    <div>
      <h1>Unordered List Example</h1>
      <ListComponent />
    </div>
  );
}

export default App;
```

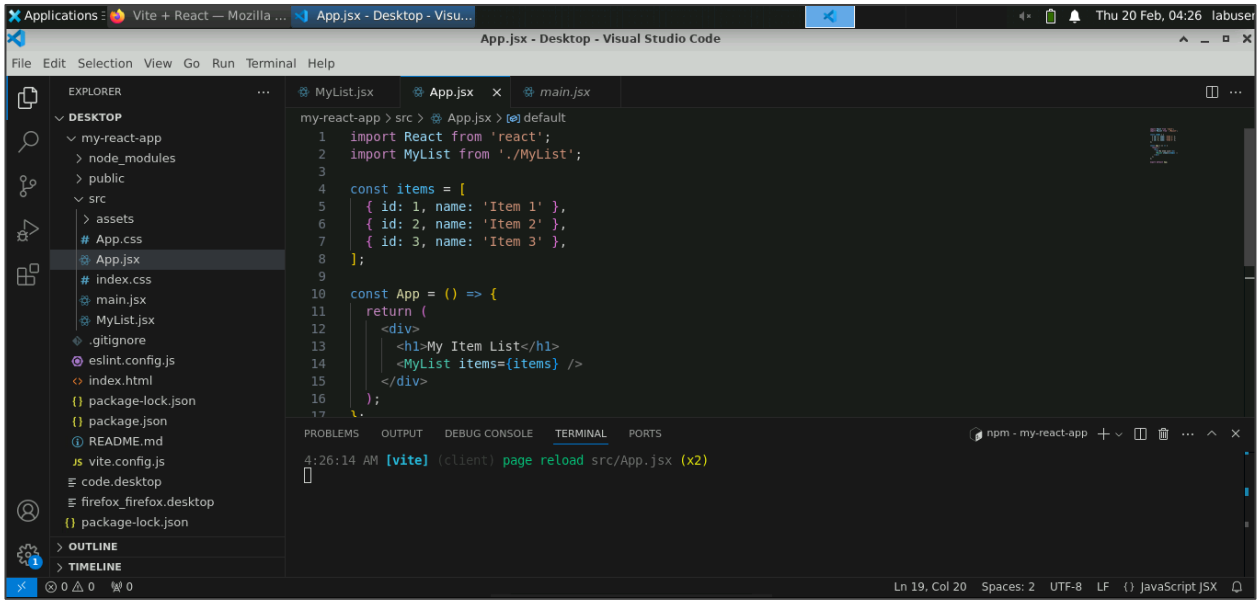

Step 4: Run and test the application

4.1 Navigate to the browser and refresh the webpage

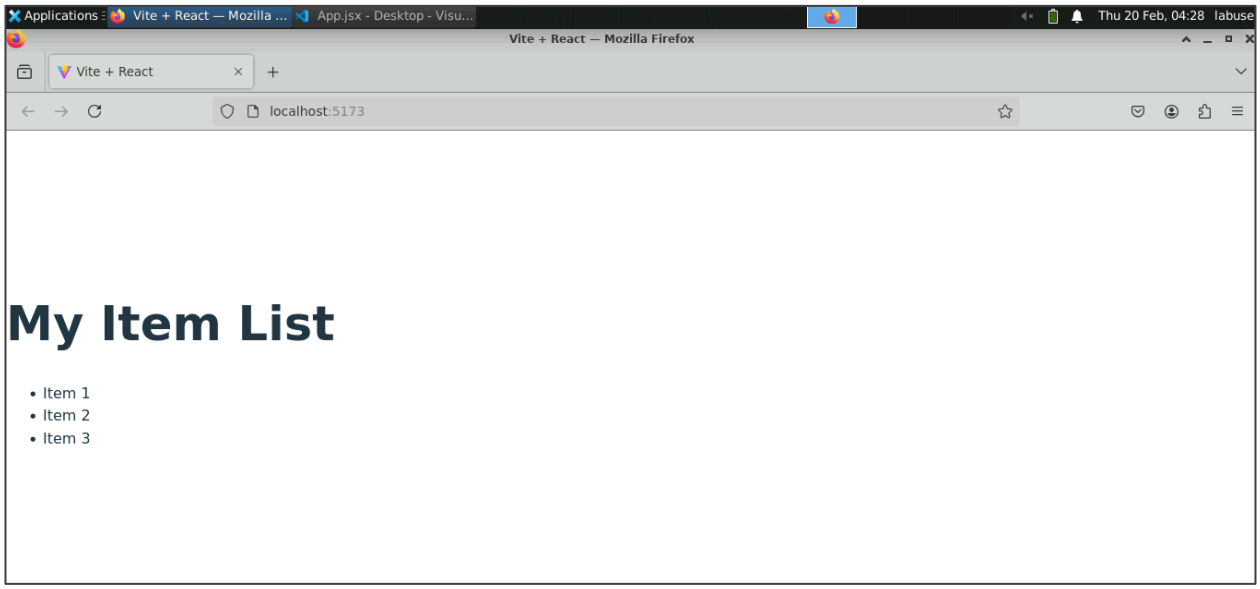

4.2 Press **ctrl + shift + I** to view the **Console** tab

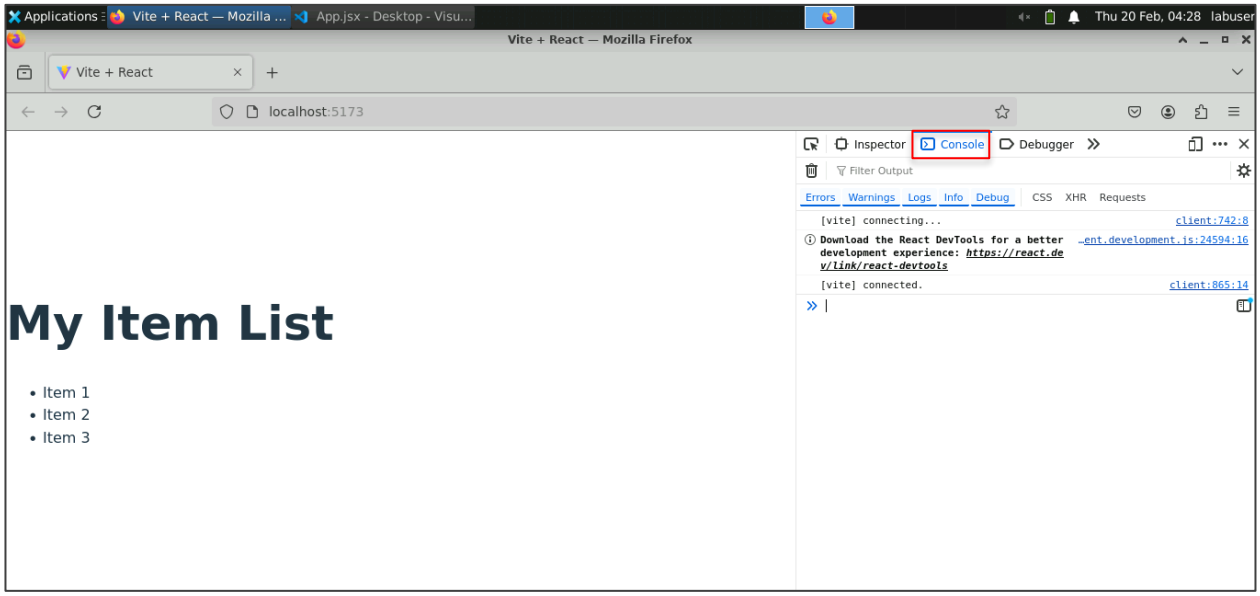

4.3 Click on **Item 1**

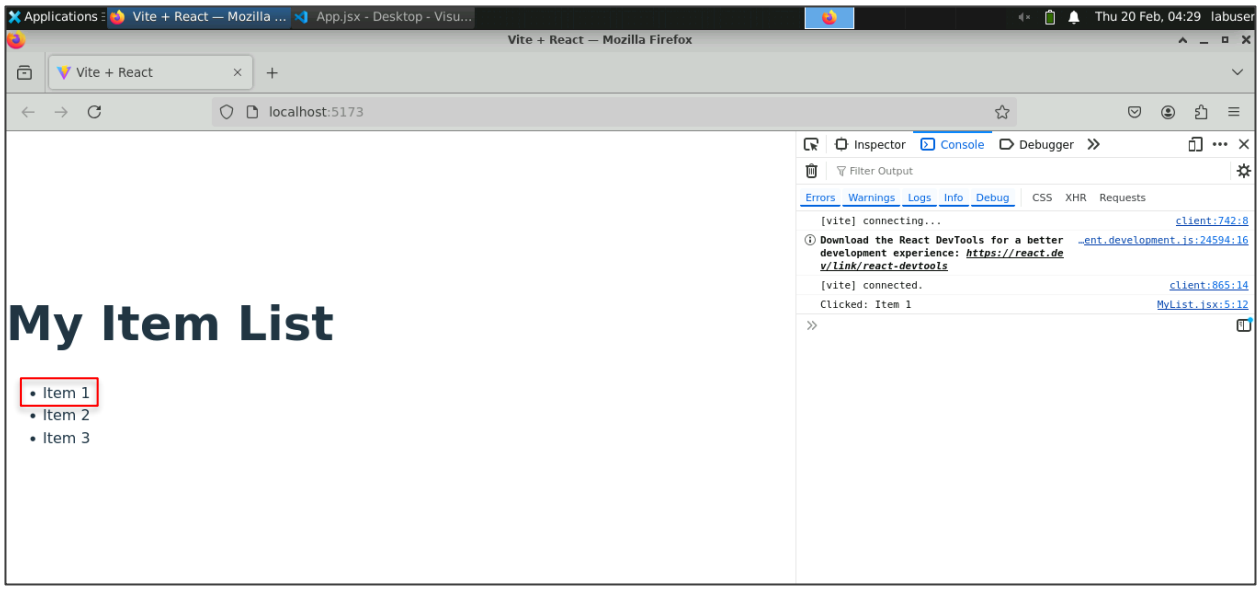

Now, the event is triggered, and the **Clicked: Item 1** is displayed in the console tab.

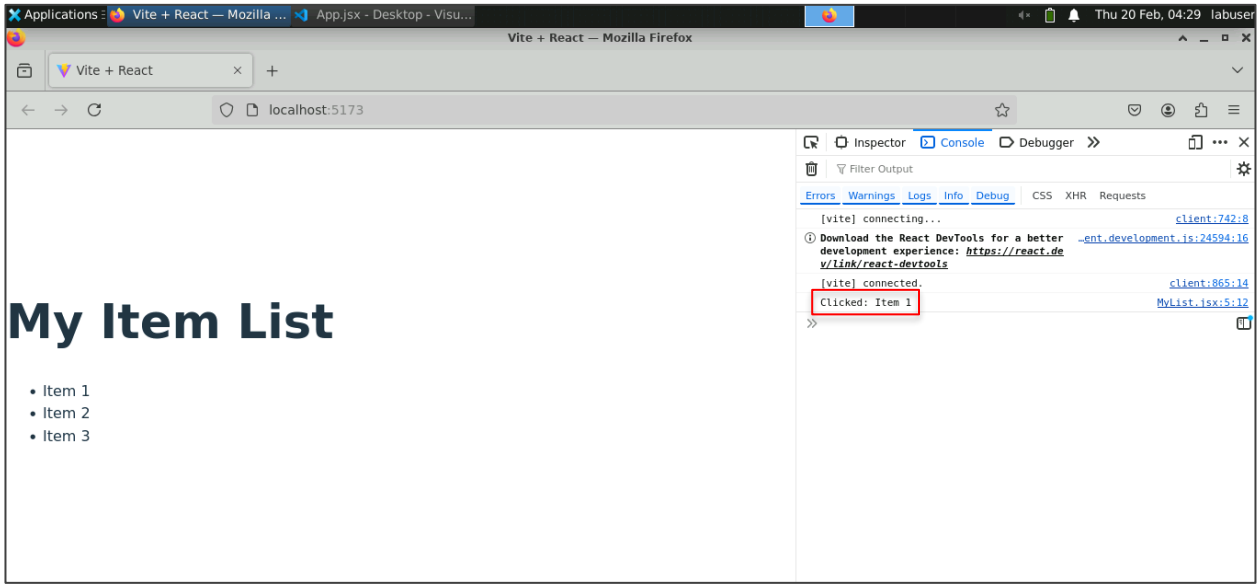

By following the above steps, you have successfully created a React application using Vite, implemented a React component with an event handler, and integrated state management. This setup allows for efficient handling of user interactions, ensuring that events are properly bound within the component's context.