Lesson 03 Demo 01

Rendering an Unordered List in React

Objective: To set up a React project using Vite and implement a React component that displays an unordered list dynamically

Tools required: Visual Studio Code and Node.js

Prerequisites: None

Steps to be followed:

1. Set up a new React project using Vite
2. Create a React component
3. Implement and use state
4. Run and test the application

Step 1: Set up a new React project using Vite

1.1 Navigate to VS Code and open the terminal

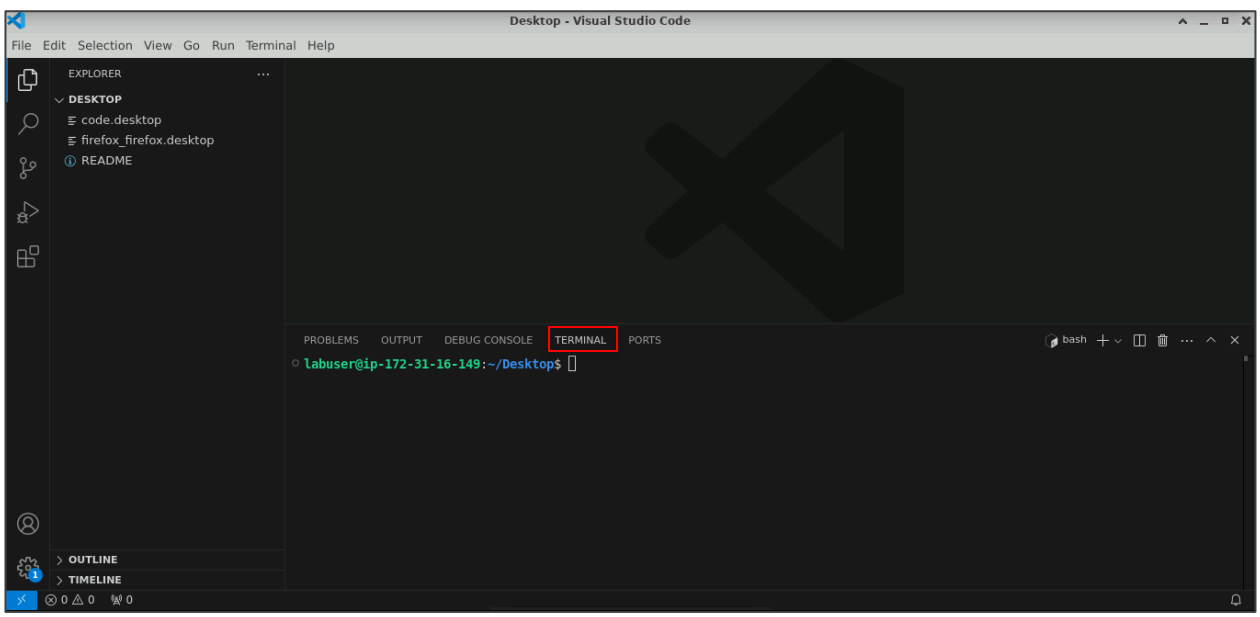

1.2 Run the following command to create a new React project using Vite:

npm create vite@latest my-react-app

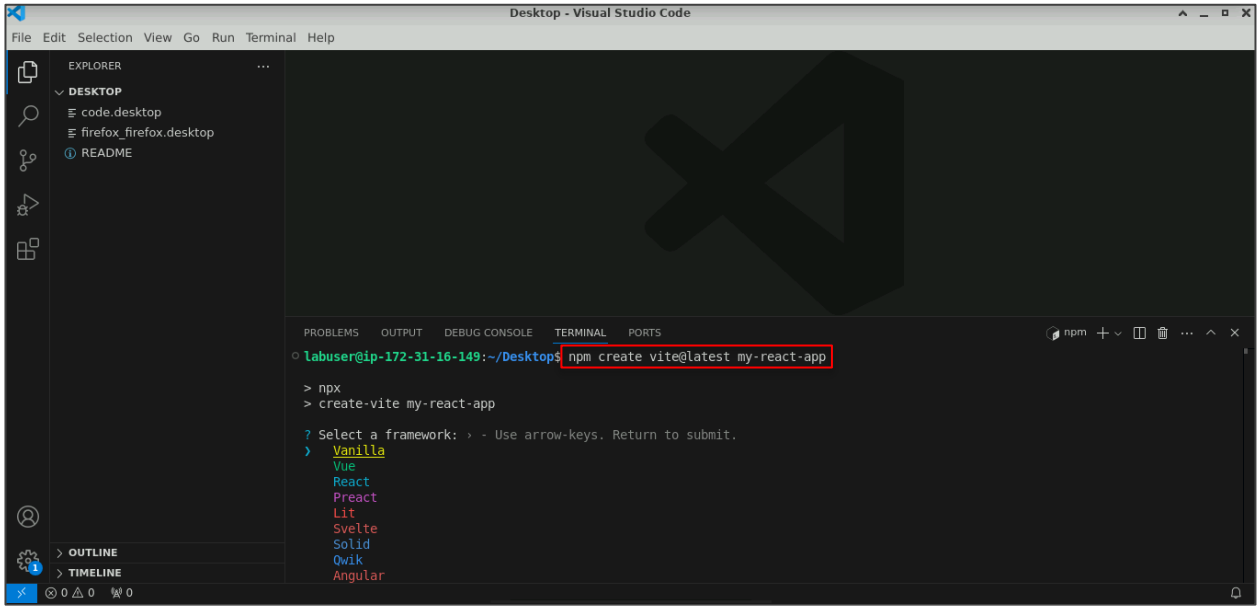

1.3 Select **React** and press enter

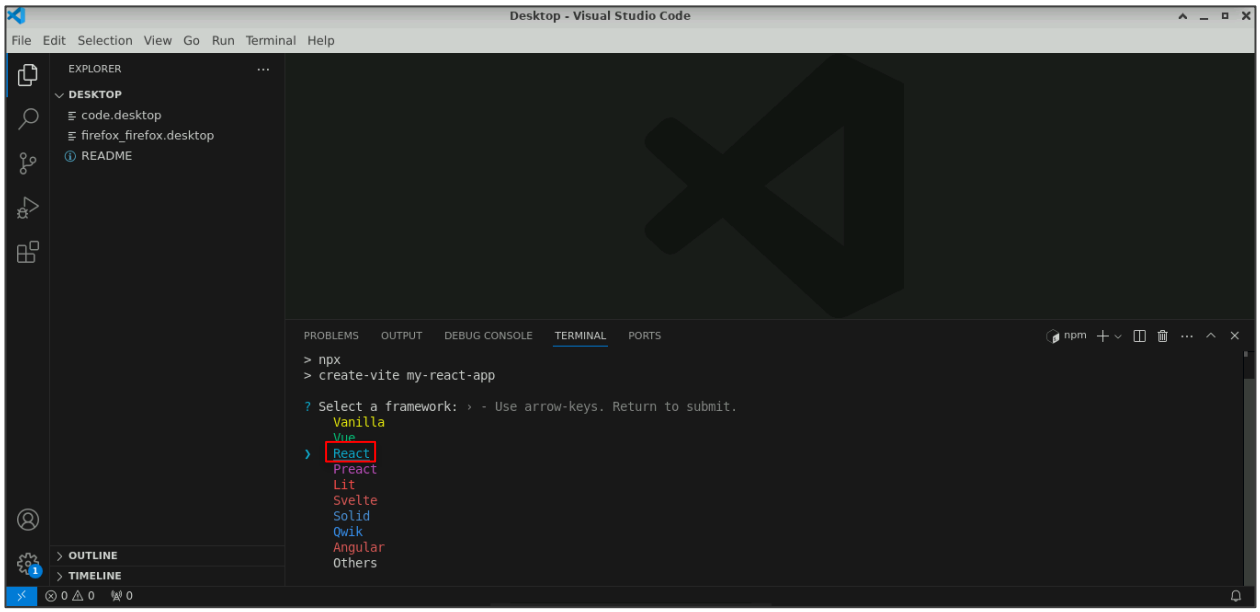

1.4 Select **JavaScript** and press enter

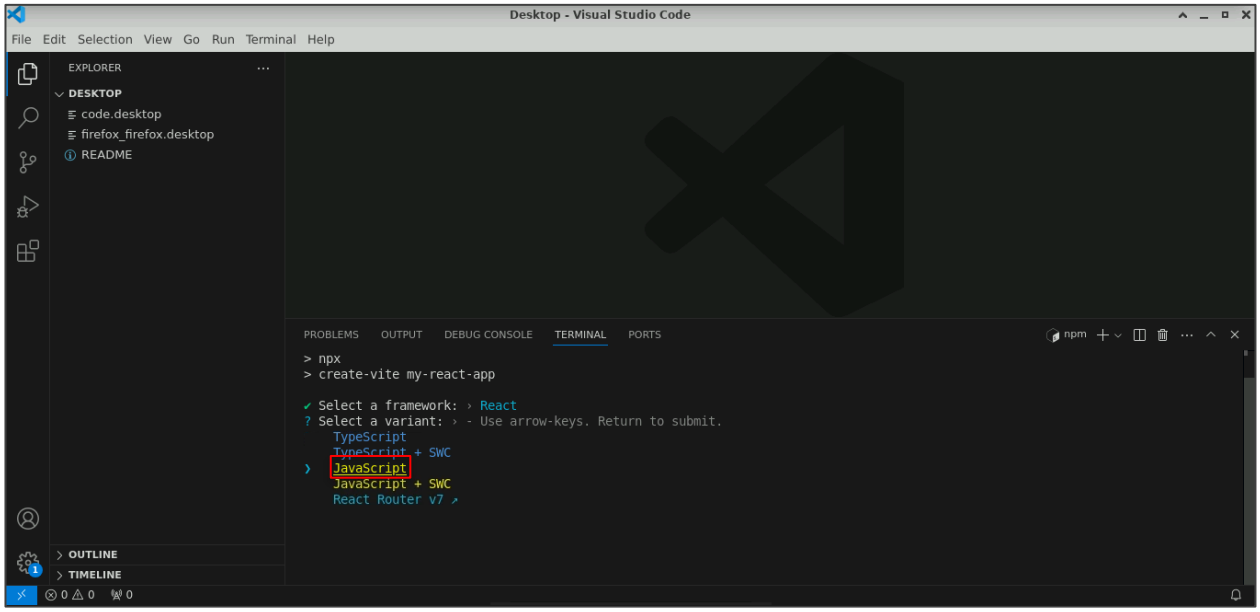

1.5 Run the following command to navigate to the project folder:

cd my-react-app

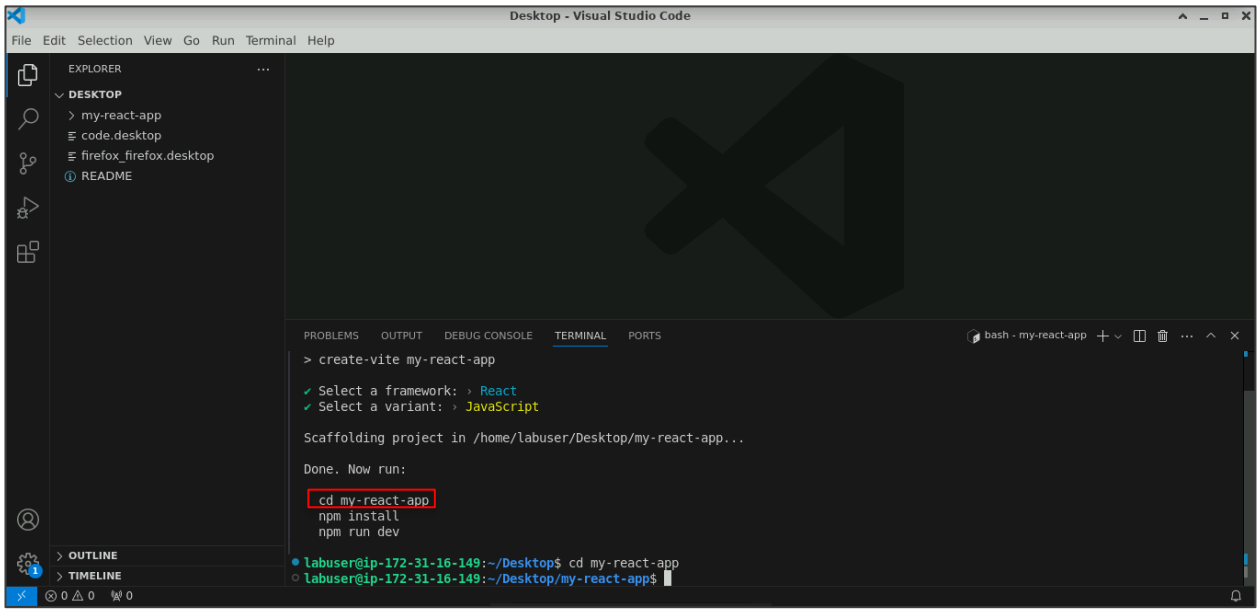

1.6 Run the following command to install dependencies:

npm i

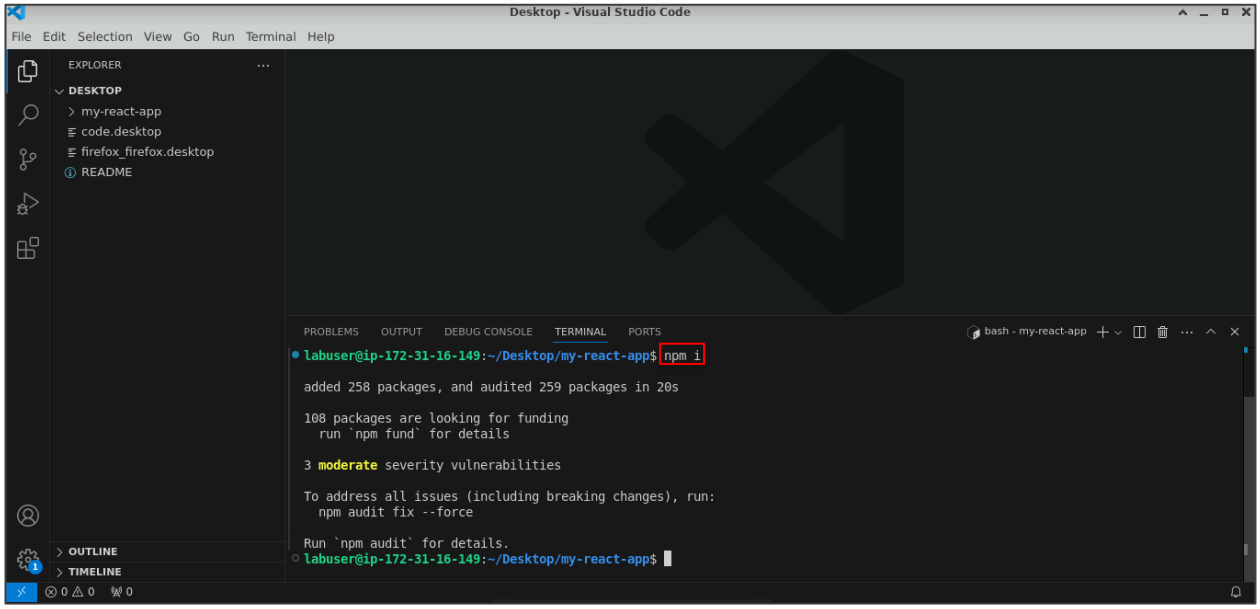

1.7 Run the following command to start the development server:

npm run dev

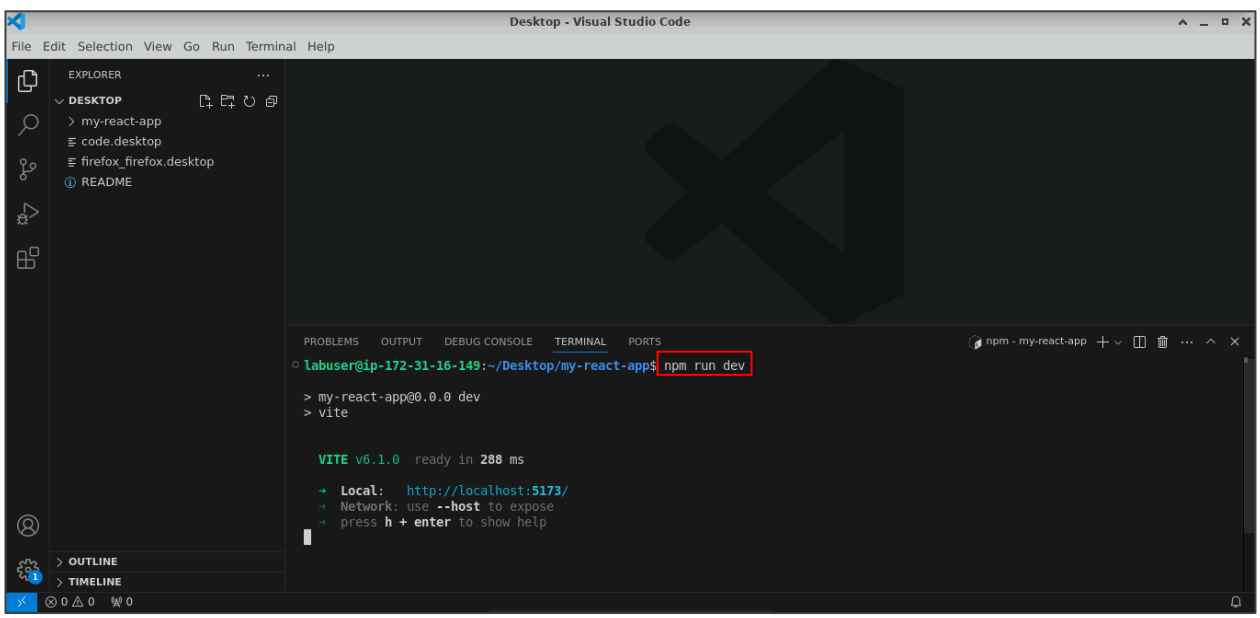

1.8 Navigate to the web browser and paste the link below:

http://localhost:5173

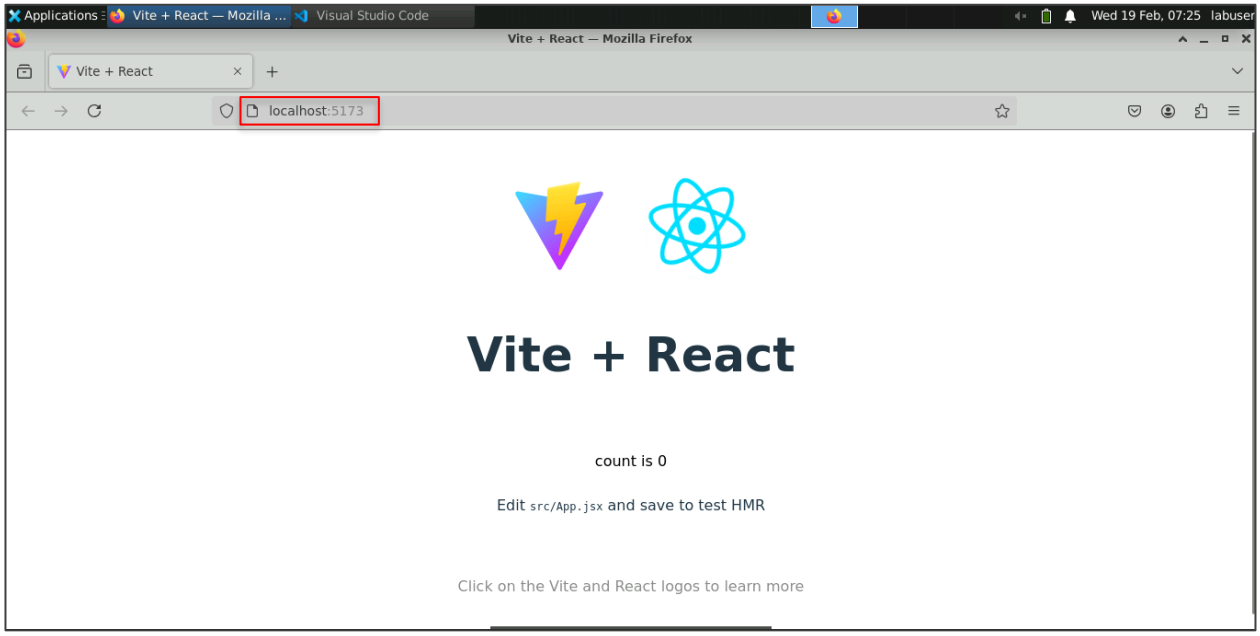

Step 2: Create a React component

2.1 Inside the **src** folder, create a new file named **ListComponent.jsx**

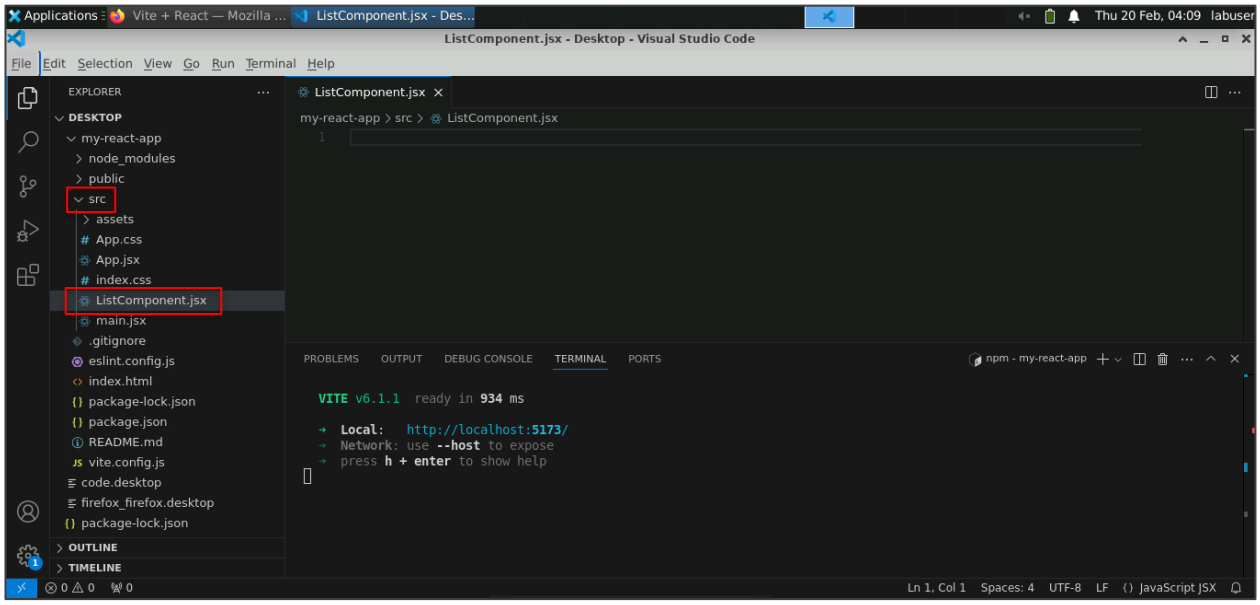

2.2 Paste the code below in **ListComponent.jsx:**

```
import React from 'react';

const ListComponent = () => {
  const items = ['Item 1', 'Item 2', 'Item 3', 'Item 4'];

  return (
    <ul>
      {items.map((item, index) => (
        <li key={index}>{item}</li>
      ))}
    </ul>
  );
};

export default ListComponent;
```

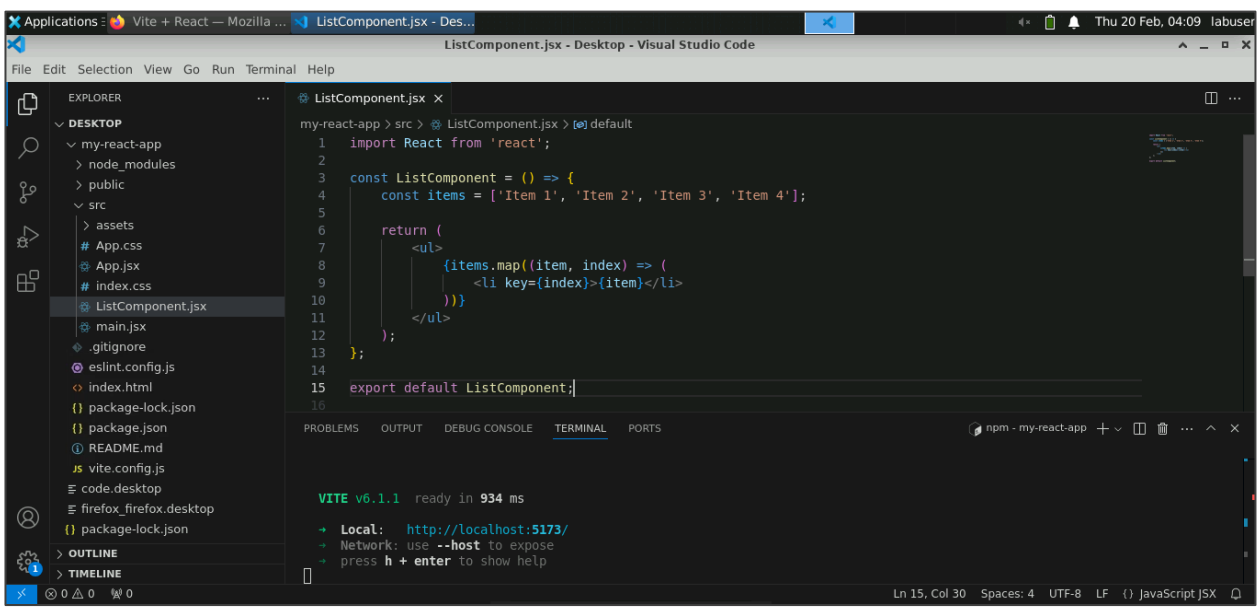

Step 3: Implement and use state

3.1 Open the **App.jsx** file inside the **src** folder

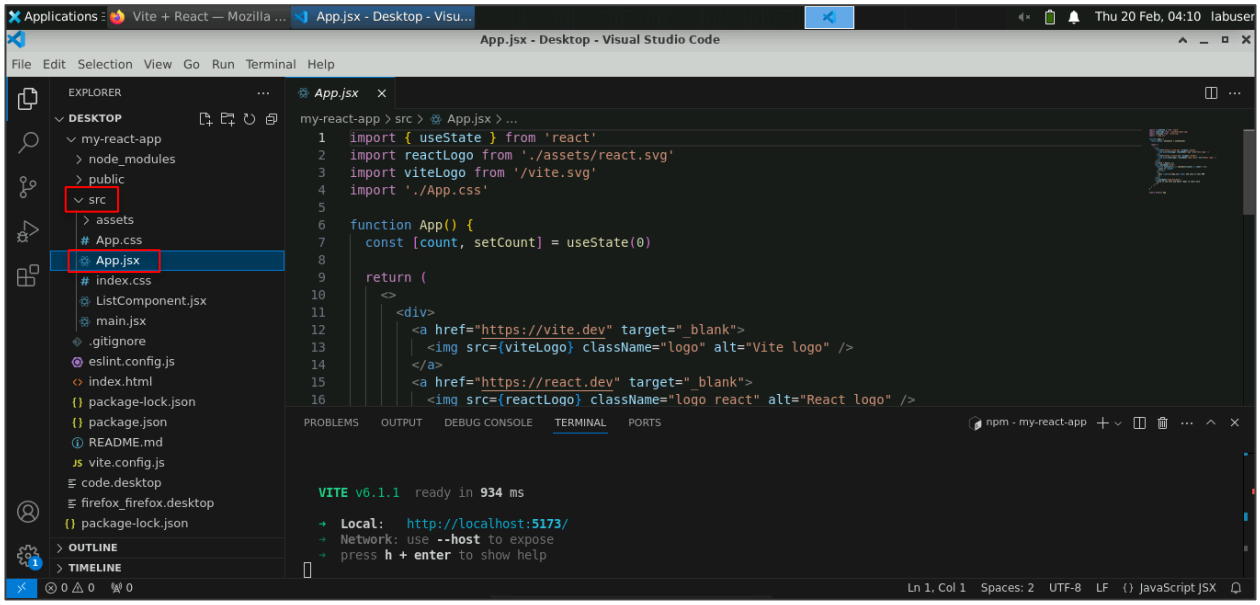

3.2 Paste the code below to include the new components in **App.jsx**:

```
import React from 'react';
import ListComponent from './ListComponent';

function App() {
  return (
    <div>
      <h1>Unordered List Example</h1>
      <ListComponent />
    </div>
  );
}

export default App;
```

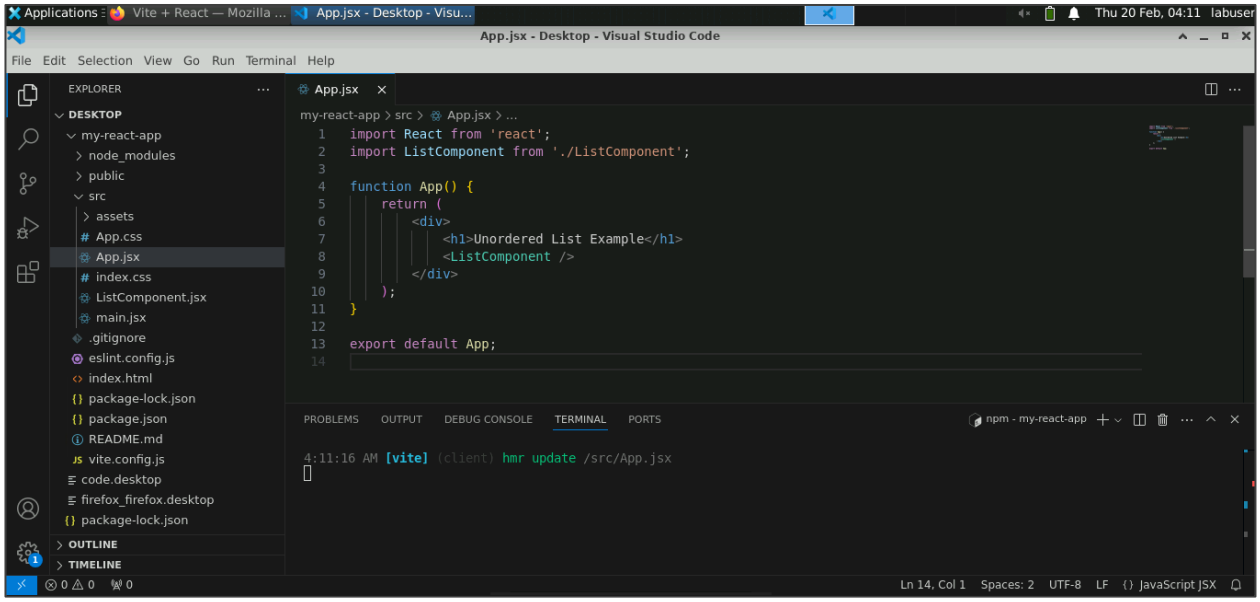

Step 4: Run and test the application

4.1 Navigate to the browser and refresh the webpage

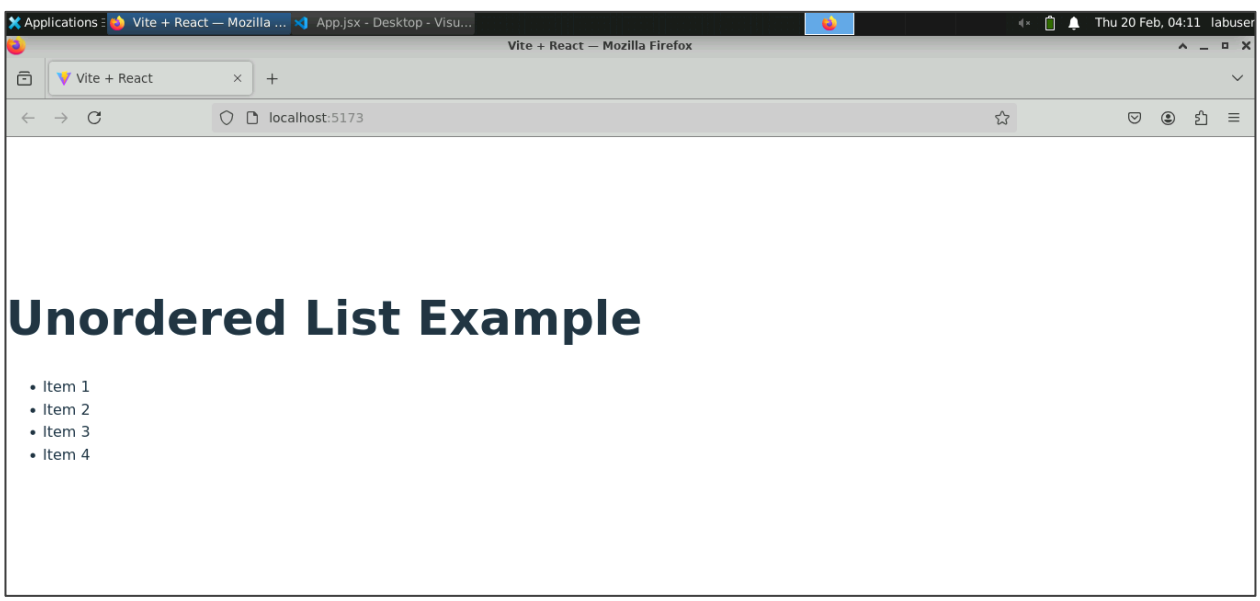

By following the above steps, you have successfully set up a React project using Vite, created a React component that dynamically renders an unordered list, implemented state management, and tested the application in a web browser.