

PG FSD End Points and Communication Aug cohort

Day 1 :06/01/2024

MVC using Servlet and JSP

Course 3

We will develop MVC application using Spring MVC or Spring boot

Web Service : Giving the service for web application when two application running using different technologies.

Java req

Amazon or e commerce application ->	XML/JSON	paypal	java
Using Servlet and JSP	.net	paytm	asp.net
	Php	Phone pay	php
	Python	Google pay	python

Credit card / debit card or net banking

Java is platform independent but language dependent programming language.

Xml : eXtensible markup language

Json : java script object notation

Spring Framework and Spring boot, Web Service and Junit testing

After develop our own rest api those rest api we calling in angular application.

We Develop web application using JEE technologies

Servlet and JSP

MVC

Model bean, service, dao, resource etc.

View : html or jsp css and Javascript


Controller : Servlet

Web container part of web server responsible to create the object of servlet and jsp. In ems model layer not up to that mark

To improve model layer EJB came in picture.

Enterprise Java bean : to develop simple ejb application we need to do more configuration. We need ejb container part of application server. EJB is complex.

For EJB Web application ie Servlet and JSP are client. Using EJB we develop distributed application.

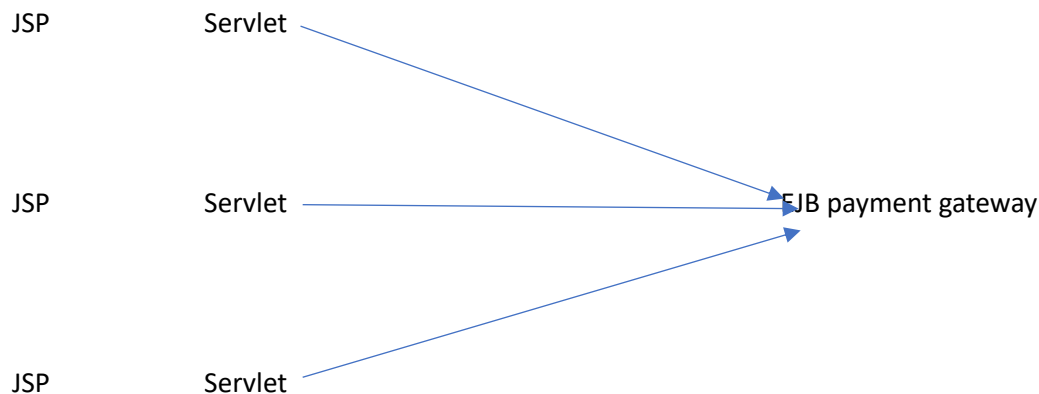

JEE

Servlet -> controller layer

JSP -> view layer

EJB -> model layer

Framework : Framework provide set of api which internally connected to each other to perform specific task. Framework internally follow standard rules. Framework provide implementation of design pattern. Design pattern is known as best practice or solution of repeating problem. If we develop any application with help of framework 70 to 80% task taken care framework. But framework is not final product it like a template or protocol.

Angular angular is framework

React with Redux react is library

Angular and React as well as Vue JS which help to develop

SPA application

Angular use MVC and React use V in MVC.

React provide virtual dom and angular doesn't provide.

Java api, python api : it may be classes or interfaces or function or modules etc.

Rest api

Java frameworks

Struts : Struts is an open source web framework provided by Apache. Struts internally follow MVC architecture design pattern. It provided lot of api to improve view layer, controller layer and model layer. But among that controller layer is very strong. **So struts is known as controller centric framework.**

JSF JSF is an open source web framework provided by Oracle. JSF internally follow MVC architecture design pattern. It provided lot of api to improve view layer, controller layer and model layer. But among that view layer is very strong. **So JSF is known as view centric framework.**

Hibernate : Hibernate is an open source framework provided by JBoss. Which help to connect the database. Hibernate is use to improve **dao layer.** Hibernate use ORM (Object Relation mapping)

Spring framework : spring is an open source light weighted layer or onion architecture framework.

Spring framework provided lot of module which help to improve all type of application or layers.

Spring framework modules.

1. Spring core
2. Spring context
3. Spring dao
4. **Spring Web or Spring MVC** : it internally follow MVC Architecture design pattern. It provided lot of api to improve view, controller and model layer. Spring MVC is known as **model centric framework.**

Spring Framework Vs EJB

5. Spring Rest
 6. Spring security
 7. Spring cloud
 8. Spring micro service
 9. Spring ORM
 10. Spring AOP
 11. Spring boot
- Etc

IOC : Inversion of Control . it is a concept. It is also known as programming design pattern.

According to IOC in place creating or maintaining any resources explicitly allow to create by container. If container create it will maintain properly. You only need to pull from container use it and leave it.

DI : Dependency Injection : DI is an implementation of IOC.

Spring framework support two type of DI

1. Constructor base
2. Setter base
3. Property base

In Spring Framework we can achieve DI using

1. XML base Configuration
2. Annotation base configuration

Spring container part of jar file which is responsible to create object for normal java bean class. that class in spring framework is known as POJO. Plain Old Java Object. That class not to extends or implements any pre defined class except Object class.

Web Container part of web server it will create the object of class only that type is type of servlet or jsp.

Struts : in Struts web container will create the object that class it class type of struts.

BeanFactory is core interface provided by spring core and context module which help to pull the object from xml.

Singleton design pattern : only one memory need to create.

By default spring container create singleton object for pojo class.

If you want to each time whenever we pull from container new memory then we need to use prototype.

Constructor base DI	Vs	setter base DI
Using constructor base		Setter base DI internally use empty
Di we need achieve fully DI.		Constructor Base DI. Using setter we override the value
We can't achieve partial DI		in setter order doesn't matter as well as we
It can be empty or parameter		can achieve partial DI.
Empty default value.		
Parameter passed value.		
Parameterized DI order matter.		

Day 7 :07/02/2024

Autowired

Spring framework by default Inject or DI for primitive value implicitly. Like 0,0.0,null, false etc.

But if class contains complex or user defined object it doesn't inject implicitly we need to inject explicitly using property ref or constructor ref attribute.

Using auto wired features we can achieve di for complex property implicitly rather explicitly using property ref or constructor ref.

byType : if we use auto wired byType then spring container search or scan the xml file if that type bean definition which is part of class present in xml file it automatically inject.

In byType autowired we need only bean definition of that type. If more than one bean

Definition present then we need to use byName

byName: byName id name and reference name must be match(part of pojo class) .

@Component : This annotation we need to use on pojo class. This annotation is equal to

```
<bean class="com.Address"></bean>
```

By default id name is address in using camel naming rules.

If class contains one word then then id name must be in lowercase. If class contains more than one word then id name must be first word lower case and second word onward first letter upper case.

Example

Address then id name is address

EmployeeInfo id name is employeeInfo

CustomerDetails id name is customerDetails

@Component

@Autowired this annotation we need to use on complex property.

@value this annotation is use to set initial value for those property.

By default @Component annotation is disable.

We need to enable using

1. Using xml file
2. Using configuration class with few more annotation.

We need to create class and on that class we need to use the annotation

As

@Configuration this annotation is equal to beans.xml file

@ComponentScan This annotation is use to enable @Compoennt annotation.

@Bean : This annotation we need to write on a method which is responsible to create the object.

ApplicationContext : it is an interface which internally extends BeanFactory interface which provided set of method which help to pull the object from a container.

By default spring container do di with singleton. Using annotation if need to prototype.

@scope annotation : this annotation is use to set the scope for bean.

SpringWithDataSourceFeatures : this example is use to improve the model layer.

Spring Core

Spring Context

Spring jdbc

Mysql connector

Spring JDBC module provided pre defined class ie DriverManagerDataSource. This class provided data connection. This class we can configure in xml or configuration.

```
create table employee(id int primary key,name varchar(10), salary float);
```

@Repository : this annotation we need to use on dao layer class. which contains database coding.

@Service : this annotation we need to use on service layer. Which contains business logic.

Day 3 :13/01/2024

Spring DAO : This module provided one of the pre defined API ie **JdbcTemplate**. JdbcTemplate internally wrap core jdbc code and provided more functionality to improve dao layer using jdbc.

Create maven project

Then in pom.xml file add properties tag to change the version of java as 11.

Then add 4 dependencies.

1. Mysql connector
2. Spring core
3. Spring context
4. Spring jdbc

Spring ORM : Object Relation Mapping

Spring ORM doesn't provide any orm tool. It help to integrate existing ORM tools like

Hibernate or JPA or iBatis etc.

Limitation of JDBC or JdbcTemplate

1. Using JDBC we can't store Java object as well as we can retrieve java objects.
In DAO layer we need to convert java object into SQL query format and vice-versa.
2. JDBC use SQL language. SQL is Database dependent language.
3. JDBC throw checked exception and exception hierarchy is database dependent.
4. JDBC doesn't support relationship ie is as and has a.

ORM : Object Relation mapping

Programming language

```
class Employee {  
    Id,name,salary  
}
```

```
Employee emp = new Employee();
```

Database

Employee -> Table (Relation)

Mapping

Employee == EMPLOYEE

Id = ID

PK

Name = NAME

Salary = SALARY

with data type and column contains PK

In JDBC not mandatory table must be map to java bean class.

In JDBC not mandatory table must be contains PK.

In ORM one record is equal to one object. so table must be contains PK.

ORM is a concept.

The implementation of ORM is JPA as well as Hibernate.

JPA is a specification as well as it provide the implementation. JPA is a technology part of EJB. Even we can say JPA is type of EJB.

Hibernate is a framework part of Jboss. Hibernate is a implementation of JPA.

Hibernate CRUD Operation

JPA CRUD Operation

Spring framework with ORM tool ie Hibernate or JPA.

Hibernate CRUD Operation

We need table ie Employee -> Id(PK), Name, Salary-> in database.

Create maven project as HibernateCrudOperation

Then using properties tag change java version and add mysql and hibernate core dependencies.

In Hibernate we use **hibernate.cfg.xml file**. (Configuration file) Which contains database details like driver name, url, username, password, dialect class(to convert java object to sql), mapping class(java bean class with few annotation) and hibernate properties.

Now we need to create the mapping class ie JavaBean class with few annotation.

In ORM java bean class is known as entity class.

@Entity class java bean class

@Id annotation on that variable which map to pk.

@Table annotation : if java bean class name and table name is different.

@column : if variable and column name is different then we can use @column annotation