

# Aggregate functions and set operators

- The learning objectives for this week are:
  - Knowing what kind of query problems **aggregate functions** solve
  - Knowing how to use the aggregate functions `COUNT` , `SUM` , `AVG` , `MIN` and `MAX`
  - Knowing what kind of query problems **set operators** solve
  - Knowing how to combine result tables with `UNION` , `EXCEPT` and `INTERSECT` set operators

# Aggregate functions

- Performing some calculation for multiple rows so that the end result is a **single value** is a common query problem
- Example of such query is calculating the count of rows, or sum of a column values in a certain table
- For example, *"what is the total number of courses?"*, or *"what is the sum of male teachers' salaries?"*
- Functions that perform such operations are referred to as **aggregate functions**

# The COUNT aggregate function

```
COUNT ( * | { [ DISTINCT ] column_expression } )
```

- The `COUNT` aggregate function returns the **total number of rows** that match the specified criteria:

```
-- what's the number of courses in the Course table?  
SELECT COUNT(*) as number_of_courses FROM Course
```

- The result table contains a single row:

number_of_courses
-------------------

7
---

# The COUNT aggregate function

- We can also filter the rows the aggregate function operates on using the `WHERE` clause:

```
-- what's the number of courses with more than 3 credits?  
SELECT COUNT(*) as number_of_courses FROM Course  
WHERE credits > 3
```

- The result table contains a single row:

number_of_courses
2

# The COUNT aggregate function

- We can also provide a column name for the `COUNT` aggregate function in which case the function returns the number of the **non-null value** of the given column:

```
-- what's the number of students with an email address?  
SELECT COUNT(email) as number_of_students_with_email  
FROM Student
```

# The COUNT aggregate function

student_number	email
o354	0354@takkula.fi
o410	0410@takkula.fi
o473	NULL

```
-- count all rows, total_number_of_students is 3
```

```
SELECT COUNT(*) as total_number_of_students
```

```
FROM Student
```

```
-- count rows with non-null email column value, number_of_students_with_email is 2
```

```
SELECT COUNT(email) as number_of_students_with_email
```

```
FROM Student
```

# The SUM aggregate function

```
SUM ( [ DISTINCT ] column_expression )
```

- The `SUM` aggregate function returns the **sum of all the values** of a column:

```
-- what's the sum of salaries of female teachers?  
SELECT SUM(salary) as sum_of_salaries FROM Teacher  
WHERE gender = 'F'
```

- The result table contains a single row:

sum_of_salaries
102273.00

# The AVG aggregate function

```
AVG ( [ DISTINCT ] column_expression )
```

- The `AVG` aggregate function returns the **average value** of a column:

```
-- what's the average grade from course with code "a730"?  
SELECT AVG(grade) as average_grade FROM CourseGrade  
WHERE course_code = 'a730'
```

- The result table contains a single row:

average_grade
3



# The AVG aggregate function

- Calculating the average includes a division operation, which can produce decimal numbers
- To avoid losing the decimal part of the average, we need to cast integer column values to a `DECIMAL` type:

```
-- multiplying an integer with 1.0 will end up with a DECIMAL type
SELECT AVG(grade * 1.0) as average_grade FROM CourseGrade
WHERE course_code = 'a730'
```

average_grade
---------------

3.333333
----------

# The AVG aggregate function

- We can limit the number of decimal places in the result by using casting the result to a `DECIMAL` type with specific precision (the total number of decimal digits stored) and scale (the number of decimal digits stored to the right of the decimal point):

```
-- use scale of 2 in the DECIMAL type to round to two decimals places
SELECT CAST(AVG(grade * 1.0) AS DECIMAL(9, 2)) as average_grade
FROM CourseGrade
WHERE course_code = 'a730'
```

average_grade
3.33

# The MIN aggregate function

```
MIN ( column_expression )
```

- The `MIN` function returns the **smallest value** of a column

```
-- what's the lowest grade from course with code "a730"?  
SELECT MIN(grade) as lowest_grade FROM CourseGrade  
WHERE course_code = 'a730'
```

- The result table contains a single row:

lowest_grade
1

# The MAX aggregate function

```
MAX ( column_expression )
```

- The `MAX` function returns the **largest value** of a column

```
-- what's the highest grade from course with code "a730"?  
SELECT MAX(grade) as highest_grade FROM CourseGrade  
WHERE course_code = 'a730'
```

- The result table contains a single row:

highest_grade
5

# Multiple aggregate functions in a single query

- We can have multiple aggregate functions in the same query:

```
-- what's the highest and lowest grade from course with code "a730"?  
SELECT MAX(grade) as highest_grade, MIN(grade) as lowest_grade FROM CourseGrade  
WHERE course_code = 'a730'
```

- The result table contains a single row with two columns:

highest_grade	lowest_grade
5	1

# Only operating on distinct values

- The `COUNT`, `SUM` and `AVG` aggregate functions support the `DISTINCT` keyword for only operating on **distinct values**:

```
-- how many different grades have been given?  
SELECT COUNT(DISTINCT grade) as number_of_different_grades FROM CourseGrade
```


# Combining aggregate function and non-aggregate function columns

- If we use an aggregate function, we **can't include non-aggregate function columns** to the

`SELECT` statement\*:

```
--  only aggregate function columns, all good here
```

```
SELECT COUNT(*) as number_of_courses FROM Course
```

```
--  combination of aggregate function and non-aggregate function columns, this won't work
```

```
SELECT course_name, COUNT(*) as number_of_courses FROM Course
```

- \* That is, unless the non-aggregate function columns are included in a `GROUP BY` clause, but we will cover that later

# Combining aggregate function and non-aggregate function columns


- If it would be possible, how would the RDMS know, which `course_name` to display in the result table?

```
-- ❌ combination of aggregate function and non-aggregate function columns, this won't work  
SELECT course_name, COUNT(*) as number_of_courses FROM Course
```

course_name	number_of_courses
?	2



# Combining results tables with set operators

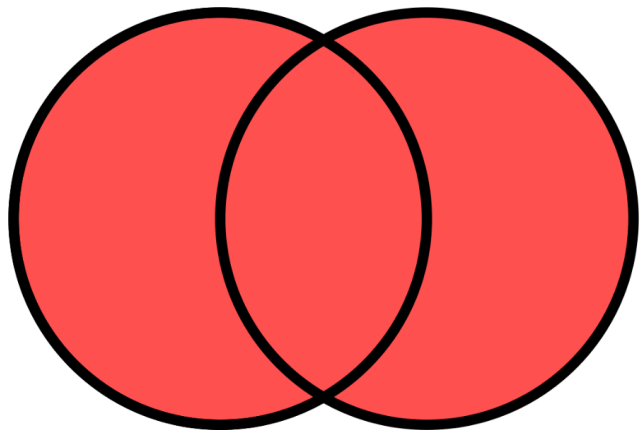

- We can use the results from **multiple result tables** using the `UNION` , `EXCEPT` , and `INTERSECT` **set operators**
- For example, the `UNION` operator returns **all** the rows from two or more result tables **without duplicate values**:

```
-- what are all the surnames among teachers and students?  
SELECT surname FROM Teacher  
UNION  
SELECT surname FROM Student
```

# The UNION operator

*"What are all the surnames among teachers and students?"*

```
SELECT surname FROM Teacher
```

surname
Huhta
Hellerus


```
SELECT surname FROM Student
```

surname
Kokki
Kuikka

```
SELECT surname FROM Teacher  
UNION  
SELECT surname FROM Student
```

surname
Huhta
Hellerus
Kokki
Kuikka

# The EXCEPT operator

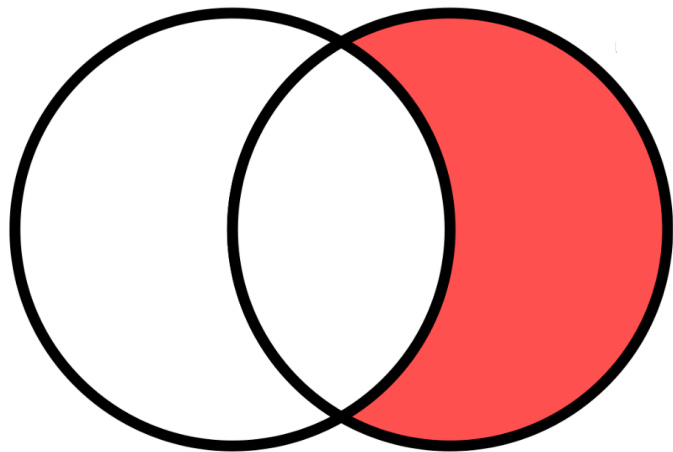

- The `EXCEPT` operator returns only the rows from the first result table that are **not included** in the second result table **without duplicate values**:

```
-- what are the campus cities that no student lives in?  
SELECT city FROM Campus  
EXCEPT  
SELECT city FROM Student
```

# The EXCEPT operator

*"What are the campus cities that no student lives in?"*

```
SELECT city FROM Campus
```

city
Helsinki
Vantaa

```
SELECT city FROM Student
```

city
Helsinki
Espoo


```
SELECT city FROM Campus
```

```
EXCEPT
```

```
SELECT city FROM Student
```

city
Vantaa

# The INTERSECT operator

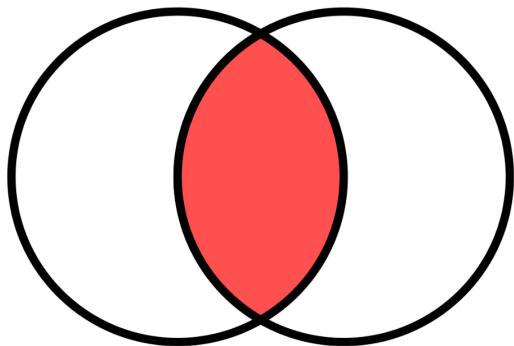

- The `INTERSECT` operator returns only the rows that **exist in both** result tables **without duplicate values**:

```
-- what are the campus cities that have students living in them?  
SELECT city FROM Campus  
INTERSECT  
SELECT city FROM Student
```

# The EXCEPT operator

*"What are the campus cities that have students living in them?"*

```
SELECT city FROM Campus
```

city
Helsinki
Vantaa

```
SELECT city FROM Student
```

city
Helsinki
Espoo


```
SELECT city FROM Campus
```

```
EXCEPT
```

```
SELECT city FROM Student
```

city
Helsinki

# The set operators

-  With set operators, the column names and data types of each `SELECT` statement **must match**:

```
-- ✗ first_name column is missing from the latter SELECT statement.  
-- This will lead into an error.  
SELECT surname, first_name FROM Teacher  
UNION  
SELECT surname FROM Student
```

# Summary

- We can perform calculations on multiple rows so that the end result is a single row using **aggregate functions**
- The **COUNT** aggregate function returns the **total number of rows**
- The **SUM** aggregate function returns the **sum of all the values** of a column
- The **AVG** aggregate function returns the **average of values** of a column
- The **MIN** aggregate function returns the **minimum value** of a column
- The **MAX** aggregate function returns the **maximum value** of a column
- The **UNION** , **EXCEPT** and **INTERSECT** **set operators** can be used to combine results of multiple result tables