

DonorsChoose

DonorsChoose.org receives hundreds of thousands of project proposals each year for classroom projects in need of funding. Right now, a large number of volunteers is needed to manually screen each submission before it's approved to be posted on the DonorsChoose.org website.

Next year, DonorsChoose.org expects to receive close to 500,000 project proposals. As a result, there are three main problems they need to solve:

- How to scale current manual processes and resources to screen 500,000 projects so that they can be posted as quickly and as efficiently as possible
- How to increase the consistency of project vetting across different volunteers to improve the experience for teachers
- How to focus volunteer time on the applications that need the most assistance

The goal of the competition is to predict whether or not a DonorsChoose.org project proposal submitted by a teacher will be approved, using the text of project descriptions as well as additional metadata about the project, teacher, and school. DonorsChoose.org can then use this information to identify projects most likely to need further review before approval.

About the DonorsChoose Data Set

The `train.csv` data set provided by DonorsChoose contains the following features:

Feature	Description
<code>project_id</code>	A unique identifier for the proposed project. Example: p036502
<code>project_title</code>	Title of the project. Examples: <ul style="list-style-type: none">• Art Will Make You Happy!• First Grade Fun
<code>project_grade_category</code>	Grade level of students for which the project is targeted. One of the following enumerated values: <ul style="list-style-type: none">• Grades PreK-2• Grades 3-5• Grades 6-8• Grades 9-12
<code>project_subject_categories</code>	One or more (comma-separated) subject categories for the project from the following enumerated list of values: <ul style="list-style-type: none">• Applied Learning• Care & Hunger• Health & Sports• History & Civics• Literacy & Language• Math & Science• Music & The Arts• Special Needs• Warmth Examples: <ul style="list-style-type: none">• Music & The Arts• Literacy & Language, Math & Science
<code>school_state</code>	State where school is located (Two-letter U.S. postal code). Example: WY
<code>project_subject_subcategories</code>	One or more (comma-separated) subject subcategories for the project. Examples: <ul style="list-style-type: none">• Literacy

Feature	Description
<code>project_resource_summary</code>	An explanation of the resources needed for the project. Example: <ul style="list-style-type: none"> My students need hands on literacy materials to manage sensory needs!
<code>project_essay_1</code>	First application essay*
<code>project_essay_2</code>	Second application essay*
<code>project_essay_3</code>	Third application essay*
<code>project_essay_4</code>	Fourth application essay*
<code>project_submitted_datetime</code>	Datetime when project application was submitted. Example: 2016-04-28 12:43:56.245
<code>teacher_id</code>	A unique identifier for the teacher of the proposed project. Example: bdf8baa8fedef6bfeec7ae4ff1c15c56
<code>teacher_prefix</code>	Teacher's title. One of the following enumerated values: <ul style="list-style-type: none"> nan Dr. Mr. Mrs. Ms. Teacher.
<code>teacher_number_of_previously_posted_projects</code>	Number of project applications previously submitted by the same teacher. Example: 2

* See the section **Notes on the Essay Data** for more details about these features.

Additionally, the `resources.csv` data set provides more data about the resources required for each project. Each line in this file represents a resource required by a project:

Feature	Description
<code>id</code>	A <code>project_id</code> value from the <code>train.csv</code> file. Example: p036502
<code>description</code>	Description of the resource. Example: Tenor Saxophone Reeds, Box of 25
<code>quantity</code>	Quantity of the resource required. Example: 3
<code>price</code>	Price of the resource required. Example: 9.95

Note: Many projects require multiple resources. The `id` value corresponds to a `project_id` in `train.csv`, so you use it as a key to retrieve all resources needed for a project:

The data set contains the following label (the value you will attempt to predict):

Label	Description
<code>project_is_approved</code>	A binary flag indicating whether DonorsChoose approved the project. A value of 0 indicates the project was not approved, and a value of 1 indicates the project was approved.

Notes on the Essay Data

Prior to May 17, 2016, the prompts for the essays were as follows:

- `__project_essay_1__` "Introduce us to your classroom"
- `__project_essay_2__` "Tell us more about your students"
- `__project_essay_3__` "Describe how your students will use the materials you're requesting"
- `__project_essay_3__` "Close by sharing why your project will make a difference"

Starting on May 17, 2016, the number of essays was reduced from 4 to 2, and the prompts for the first 2 essays were changed to the following:

- `__project_essay_1__` "Describe your students: What makes your students special? Specific details about their background, your neighborhood, and your school are all helpful."

your neighborhood, and your school are all helpful.

- __project_essay_2__: "About your project: How will these materials make a difference in your students' learning and improve their school lives?"

For all projects with project_submitted_datetime of 2016-05-17 and later, the values of project_essay_3 and project_essay_4 will be NaN.

In [2]:

```
%matplotlib inline
import warnings
warnings.filterwarnings("ignore")

import sqlite3
import pandas as pd
import numpy as np
import nltk
import string
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.feature_extraction.text import TfidfTransformer
from sklearn.feature_extraction.text import TfidfVectorizer

from sklearn.feature_extraction.text import CountVectorizer
from sklearn.metrics import confusion_matrix
from sklearn import metrics
from sklearn.metrics import roc_curve, auc
from nltk.stem.porter import PorterStemmer

import re
import string
from nltk.corpus import stopwords
from nltk.stem import PorterStemmer
from nltk.stem.wordnet import WordNetLemmatizer

from gensim.models import Word2Vec
from gensim.models import KeyedVectors
import pickle

from tqdm import tqdm
import os

from plotly import plotly
import plotly.offline as offline
import plotly.graph_objs as go
offline.init_notebook_mode()
from collections import Counter
```

```
C:\Users\Kalyan\Anaconda3\lib\site-packages\smart_open\ssh.py:34: UserWarning: paramiko missing, opening SSH/SCP/SFTP paths will be disabled. `pip install paramiko` to suppress
  warnings.warn('paramiko missing, opening SSH/SCP/SFTP paths will be disabled. `pip install paramiko` to suppress')
C:\Users\Kalyan\Anaconda3\lib\site-packages\gensim\utils.py:1197: UserWarning: detected Windows; aliasing chunkize to chunkize_serial
  warnings.warn("detected Windows; aliasing chunkize to chunkize_serial")
```

1.1 Reading Data

In [3]:

```
project_data = pd.read_csv('train_data.csv')
resource_data = pd.read_csv('resources.csv')
```

In [4]:

```
print("Number of data points in train data", project_data.shape)
print('-'*50)
print("The attributes of data :", project_data.columns.values)
```

```
Number of data points in train data (109248, 17)
```

```
-----
```

The attributes of data : ['Unnamed: 0' 'id' 'teacher_id' 'teacher_prefix' 'school_state' 'project_submitted_datetime' 'project_grade_category' 'project_subject_categories' 'project_subject_subcategories' 'project_title' 'project_essay_1' 'project_essay_2' 'project_essay_3' 'project_essay_4' 'project_resource_summary' 'teacher_number_of_previously_posted_projects' 'project_is_approved']

In [5]:

```
# how to replace elements in list python: https://stackoverflow.com/a/2582163/4084039
cols = ['Date' if x=='project_submitted_datetime' else x for x in list(project_data.columns)]

#sort dataframe based on time pandas python: https://stackoverflow.com/a/49702492/4084039
project_data['Date'] = pd.to_datetime(project_data['project_submitted_datetime'])
project_data.drop('project_submitted_datetime', axis=1, inplace=True)
project_data.sort_values(by=['Date'], inplace=True)

# how to reorder columns pandas python: https://stackoverflow.com/a/13148611/4084039
project_data = project_data[cols]

project_data.head(2)
```

Out[5]:

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	Date	project_grade_cate
55660	8393	p205479	2bf07ba08945e5d8b2a3f269b2b3cfe5	Mrs.	CA	2016-04-27 00:27:36	Grades PreK-2
76127	37728	p043609	3f60494c61921b3b43ab61bdde2904df	Ms.	UT	2016-04-27 00:31:25	Grades 3-5

In [6]:

```
print("Number of data points in train data", resource_data.shape)
print(resource_data.columns.values)
resource_data.head(2)
```

Number of data points in train data (1541272, 4)
['id' 'description' 'quantity' 'price']

Out[6]:

	id	description	quantity	price
0	p233245	LC652 - Lakeshore Double-Space Mobile Drying Rack	1	149.00
1	p069063	Bouncy Bands for Desks (Blue support pipes)	3	14.95

1.2 preprocessing of project_subject_categories

In [7]:

```
catogories = list(project_data['project_subject_categories'].values)
# remove special characters from list of strings python:
https://stackoverflow.com/a/47301924/4084039

# https://www.geeksforgeeks.org/removing-stop-words-nltk-python/
# https://stackoverflow.com/questions/23669024/how-to-strip-a-specific-word-from-a-string
# https://stackoverflow.com/questions/8270092/remove-all-whitespace-in-a-string-in-python
cat_list = []
for i in catogories:
    temp = ""
    # consider we have text like this "Math & Science Wormth Cows & Hunge"
```

```

# consider we have text like this "Math & Science, Warmth, Care & Hunger"
for j in i.split('&'): # it will split it in three parts ["Math & Science", "Warmth", "Care & Hunger"]
    if 'The' in j.split(): # this will split each of the category based on space "Math & Science" => "Math", "&", "Science"
        j = j.replace('The', '') # if we have the words "The" we are going to replace it with '' (i.e removing 'The')
        j = j.replace(' ', '') # we are replacing all the ' ' (space) with '' (empty) ex: "Math & Science" => "Math&Science"
        temp += j.strip() + " " # " abc ".strip() will return "abc", remove the trailing spaces
        temp = temp.replace('&', '_') # we are replacing the & value into
        cat_list.append(temp.strip())

project_data['clean_categories'] = cat_list
project_data.drop(['project_subject_categories'], axis=1, inplace=True)

from collections import Counter
my_counter = Counter()
for word in project_data['clean_categories'].values:
    my_counter.update(word.split())

cat_dict = dict(my_counter)
sorted_cat_dict = dict(sorted(cat_dict.items(), key=lambda kv: kv[1]))

```

1.3 preprocessing of project_subject_subcategories

In [8]:

```

sub_categories = list(project_data['project_subject_subcategories'].values)
# remove special characters from list of strings python:
https://stackoverflow.com/a/47301924/4084039

# https://www.geeksforgeeks.org/removing-stop-words-nltk-python/
# https://stackoverflow.com/questions/23669024/how-to-strip-a-specific-word-from-a-string
# https://stackoverflow.com/questions/8270092/remove-all-whitespace-in-a-string-in-python

sub_cat_list = []
for i in sub_categories:
    temp = ""
    # consider we have text like this "Math & Science, Warmth, Care & Hunger"
    for j in i.split('&'): # it will split it in three parts ["Math & Science", "Warmth", "Care & Hunger"]
        if 'The' in j.split(): # this will split each of the category based on space "Math & Science" => "Math", "&", "Science"
            j = j.replace('The', '') # if we have the words "The" we are going to replace it with '' (i.e removing 'The')
            j = j.replace(' ', '') # we are replacing all the ' ' (space) with '' (empty) ex: "Math & Science" => "Math&Science"
            temp += j.strip() + " " # " abc ".strip() will return "abc", remove the trailing spaces
            temp = temp.replace('&', '_')
        sub_cat_list.append(temp.strip())

project_data['clean_subcategories'] = sub_cat_list
project_data.drop(['project_subject_subcategories'], axis=1, inplace=True)

# count of all the words in corpus python: https://stackoverflow.com/a/22898595/4084039
my_counter = Counter()
for word in project_data['clean_subcategories'].values:
    my_counter.update(word.split())

sub_cat_dict = dict(my_counter)
sorted_sub_cat_dict = dict(sorted(sub_cat_dict.items(), key=lambda kv: kv[1]))

```

1.3 Text preprocessing

In [9]:

```

# merge two column text dataframe:
project_data["essay"] = project_data["project_essay_1"].map(str) + \
    project_data["project_essay_2"].map(str) + \
    project_data["project_essay_3"].map(str) + \
    project_data["project_essay_4"].map(str)

```

In [10]:

```
project_data.head(2)
```

Out[10]:

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	Date	project_grade_cate
55660	8393	p205479	2bf07ba08945e5d8b2a3f269b2b3cfe5	Mrs.	CA	2016-04-27 00:27:36	Grades PreK-2
76127	37728	p043609	3f60494c61921b3b43ab61bdde2904df	Ms.	UT	2016-04-27 00:31:25	Grades 3-5

In [11]:

```
# printing some random reviews
print(project_data['essay'].values[0])
print("="*50)
print(project_data['essay'].values[150])
print("="*50)
print(project_data['essay'].values[1000])
print("="*50)
print(project_data['essay'].values[20000])
print("="*50)
print(project_data['essay'].values[99999])
print("="*50)
```

I have been fortunate enough to use the Fairy Tale STEM kits in my classroom as well as the STEM journals, which my students really enjoyed. I would love to implement more of the Lakeshore STEM kits in my classroom for the next school year as they provide excellent and engaging STEM lessons. My students come from a variety of backgrounds, including language and socioeconomic status. Many of them don't have a lot of experience in science and engineering and these kits give me the materials to provide these exciting opportunities for my students. Each month I try to do several science or STEM/STEAM projects. I would use the kits and robot to help guide my science instruction in engaging and meaningful ways. I can adapt the kits to my current language arts pacing guide where we already teach some of the material in the kits like tall tales (Paul Bunyan) or Johnny Appleseed. The following units will be taught in the next school year where I will implement these kits: magnets, motion, sink vs. float, robots. I often get to these units and don't know if I am teaching the right way or using the right materials. The kits will give me additional ideas, strategies, and lessons to prepare my students in science. It is challenging to develop high quality science activities. These kits give me the materials I need to provide my students with science activities that will go along with the curriculum in my classroom. Although I have some things (like magnets) in my classroom, I don't know how to use them effectively. The kits will provide me with the right amount of materials and show me how to use them in an appropriate way.

I teach high school English to students with learning and behavioral disabilities. My students all vary in their ability level. However, the ultimate goal is to increase all students literacy levels. This includes their reading, writing, and communication levels. I teach a really dynamic group of students. However, my students face a lot of challenges. My students all live in poverty and in a dangerous neighborhood. Despite these challenges, I have students who have the desire to defeat these challenges. My students all have learning disabilities and currently all are performing below grade level. My students are visual learners and will benefit from a classroom that fulfills their preferred learning style. The materials I am requesting will allow my students to be prepared for the classroom with the necessary supplies. Too often I am challenged with students who come to school unprepared for class due to economic challenges. I want my students to be able to focus on learning and not how they will be able to get school supplies. The supplies will last all year. Students will be able to complete written assignments and maintain a classroom journal. The chart paper will be used to make learning more visual in class and to create posters to aid students

in their learning. The students have access to a classroom printer. The toner will be used to print student work that is completed on the classroom Chromebooks. I want to try and remove all barriers for the students learning and create opportunities for learning. One of the biggest barriers is the students not having the resources to get pens, paper, and folders. My students will be able to increase their literacy skills because of this project.

=====

"Life moves pretty fast. If you don't stop and look around once in awhile, you could miss it." from the movie, Ferris Bueller's Day Off. Think back...what do you remember about your grandparents? How amazing would it be to be able to flip through a book to see a day in their lives? My second graders are voracious readers! They love to read both fiction and nonfiction books. Their favorite characters include Pete the Cat, Fly Guy, Piggie and Elephant, and Mercy Watson. They also love to read about insects, space and plants. My students are hungry bookworms! My students are eager to learn and read about the world around them. My kids love to be at school and are like little sponges absorbing everything around them. Their parents work long hours and usually do not see their children. My students are usually cared for by their grandparents or a family friend. Most of my students do not have someone who speaks English at home. Thus it is difficult for my students to acquire language. Now think forward... wouldn't it mean a lot to your kids, nieces or nephews or grandchildren, to be able to see a day in your life today 30 years from now? Memories are so precious to us and being able to share these memories with future generations will be a rewarding experience. As part of our social studies curriculum, students will be learning about changes over time. Students will be studying photos to learn about how their community has changed over time. In particular, we will look at photos to study how the land, buildings, clothing, and schools have changed over time. As a culminating activity, my students will capture a slice of their history and preserve it through scrap booking. Key important events in their young lives will be documented with the date, location, and names. Students will be using photos from home and from school to create their second grade memories. Their scrap books will preserve their unique stories for future generations to enjoy. Your donation to this project will provide my second graders with an opportunity to learn about social studies in a fun and creative manner. Through their scrapbooks, children will share their story with others and have a historical document for the rest of their lives.

=====

"A person's a person, no matter how small." (Dr. Seuss) I teach the smallest students with the biggest enthusiasm for learning. My students learn in many different ways using all of our senses and multiple intelligences. I use a wide range of techniques to help all my students succeed. \r\nStudents in my class come from a variety of different backgrounds which makes for wonderful sharing of experiences and cultures, including Native Americans. \r\nOur school is a caring community of successful learners which can be seen through collaborative student project based learning in and out of the classroom. Kindergarteners in my class love to work with hands-on materials and have many different opportunities to practice a skill before it is mastered. Having the social skills to work cooperatively with friends is a crucial aspect of the kindergarten curriculum. Montana is the perfect place to learn about agriculture and nutrition. My students love to role play in our pretend kitchen in the early childhood classroom. I have had several kids ask me, "Can we try cooking with REAL food?" I will take their idea and create "Common Core Cooking Lessons" where we learn important math and writing concepts while cooking delicious healthy food for snack time. My students will have a grounded appreciation for the work that went into making the food and knowledge of where the ingredients came from as well as how it's healthy for their bodies. This project would expand our learning of nutrition and agricultural cooking recipes by having us peel our own apples to make homemade applesauce, make our own bread, and mix up healthy plants from our classroom garden in the spring. We will also create our own cookbooks to be printed and shared with families. \r\nStudents will gain math and literature skills as well as a life long enjoyment for healthy cooking. nannan

=====

My classroom consists of twenty-two amazing sixth graders from different cultures and backgrounds. They are a social bunch who enjoy working in partners and working with groups. They are hard-working and eager to head to middle school next year. My job is to get them ready to make this transition and make it as smooth as possible. In order to do this, my students need to come to school every day and feel safe and ready to learn. Because they are getting ready to head to middle school, I give them lots of choice- choice on where to sit and work, the order to complete assignments, choice of projects, etc. Part of the students feeling safe is the ability for them to come into a welcoming, encouraging environment. My room is colorful and the atmosphere is casual. I want them to take ownership of the classroom because we ALL share it together. Because my time with them is limited, I want to ensure they get the most of this time and enjoy it to the best of their abilities. Currently, we have twenty-two desks of differing sizes, yet the desks are similar to the ones the students will use in middle school. We also have a kidney table with crates for seating. I allow my students to choose their own spots while they are working independently or in groups. More often than not, most of them move out of their desks and onto the crates. Believe it or not, this has proven to be more successful than making them stay at their desks! It is because of this that I am looking toward the "Flexible Seating" option for my classroom. \r\nThe students look forward to their work time so they can move around the room. I would like to get rid of the constricting desks and move toward more "fun" seating options. I am requesting various seating so my students have more options to sit. Currently, I have a stool and a papasan chair I inherited from the previous sixth-grade teacher as well as five milk crate seats I made, but I would like to give them more options and reduce the competition for the "good seats". I am also requesting two rugs as not only more seating options but to make the classroom more welcoming and appealing. In order for my students to be able to write and complete work without desks, I am requesting a class set of clipboards. Finally, due to curriculum that requires groups to work together, I am requesting tables that we can fold up when we are not using them to leave more room for our flexible seating o

ptions.\r\nI know that with more seating options, they will be that much more excited about coming to school! Thank you for your support in making my classroom one students will remember forever!nannan

In [12]:

```
# https://stackoverflow.com/a/47091490/4084039
import re

def decontracted(phrase):
    # specific
    phrase = re.sub(r"won't", "will not", phrase)
    phrase = re.sub(r"can't", "can not", phrase)

    # general
    phrase = re.sub(r"n't", " not", phrase)
    phrase = re.sub(r"\ 're", " are", phrase)
    phrase = re.sub(r"\ 's", " is", phrase)
    phrase = re.sub(r"\ 'd", " would", phrase)
    phrase = re.sub(r"\ 'll", " will", phrase)
    phrase = re.sub(r"\ 't", " not", phrase)
    phrase = re.sub(r"\ 've", " have", phrase)
    phrase = re.sub(r"\ 'm", " am", phrase)
    return phrase
```

In [13]:

```
sent = decontracted(project_data['essay'].values[20000])
print(sent)
print("="*50)
```

\nA person is a person, no matter how small.\n" (Dr.Seuss) I teach the smallest students with the biggest enthusiasm for learning. My students learn in many different ways using all of our senses and multiple intelligences. I use a wide range of techniques to help all my students succeed. \n\nStudents in my class come from a variety of different backgrounds which makes for wonderful sharing of experiences and cultures, including Native Americans.\n\nOur school is a caring community of successful learners which can be seen through collaborative student project based learning in and out of the classroom. Kindergarteners in my class love to work with hands-on materials and have many different opportunities to practice a skill before it is mastered. Having the social skills to work cooperatively with friends is a crucial aspect of the kindergarten curriculum.Montana is the perfect place to learn about agriculture and nutrition. My students love to role play in our pretend kitchen in the early childhood classroom. I have had several kids ask me, \n"Can we try cooking with REAL food?\n" I will take their idea and create \n"Common Core Cooking Lessons\n" where we learn important math and writing concepts while cooking delicious healthy food for snack time. My students will have a grounded appreciation for the work that went into making the food and knowledge of where the ingredients came from as well as how it is healthy for their bodies. This project would expand our learning of nutrition and agricultural cooking recipes by having us peel our own apples to make homemade applesauce, make our own bread, and mix up healthy plants from our classroom garden in the spring. We will also create our own cookbooks to be printed and shared with families. \n\nStudents will gain math and literature skills as well as a life long enjoyment for healthy cooking.nannan

In [14]:

```
# \r \n \t remove from string python: http://texthandler.com/info/remove-line-breaks-python/
sent = sent.replace('\r', ' ')
sent = sent.replace('\n', ' ')
sent = sent.replace('\t', ' ')
print(sent)
```

A person is a person, no matter how small. (Dr.Seuss) I teach the smallest students with the biggest enthusiasm for learning. My students learn in many different ways using all of our senses and multiple intelligences. I use a wide range of techniques to help all my students succeed. Students in my class come from a variety of different backgrounds which makes for wonderful sharing of experiences and cultures, including Native Americans. Our school is a caring community of successful learners which can be seen through collaborative student project based learning in and out of the classroom. Kindergarteners in my class love to work with hands-on materials and have many different opportunities to practice a skill before it is mastered. Having the social skills to work cooperatively with friends is a crucial aspect of the kindergarten curriculum.Montana is the perfect place to learn about agriculture and nutrition. My students love to role play in our pretend kitchen in the early childhood classroom. I have had several kids ask me, Can we try cooki

ng with REAL food? I will take their idea and create Common Core Cooking Lessons where we learn important math and writing concepts while cooking delicious healthy food for snack time. My students will have a grounded appreciation for the work that went into making the food and knowledge of where the ingredients came from as well as how it is healthy for their bodies. This project would expand our learning of nutrition and agricultural cooking recipes by having us peel our own apples to make homemade applesauce, make our own bread, and mix up healthy plants from our classroom garden in the spring. We will also create our own cookbooks to be printed and shared with families. Students will gain math and literature skills as well as a life long enjoyment for healthy cooking.nannan

In [15]:

```
#remove spacial character: https://stackoverflow.com/a/5843547/4084039
sent = re.sub('[^A-Za-z0-9]+', ' ', sent)
print(sent)
```

A person is a person no matter how small Dr Seuss I teach the smallest students with the biggest enthusiasm for learning My students learn in many different ways using all of our senses and multiple intelligences I use a wide range of techniques to help all my students succeed Students in my class come from a variety of different backgrounds which makes for wonderful sharing of experiences and cultures including Native Americans Our school is a caring community of successful learners which can be seen through collaborative student project based learning in and out of the classroom Kindergarteners in my class love to work with hands on materials and have many different opportunities to practice a skill before it is mastered Having the social skills to work cooperatively with friends is a crucial aspect of the kindergarten curriculum Montana is the perfect place to learn about agriculture and nutrition My students love to role play in our pretend kitchen in the early childhood classroom I have had several kids ask me Can we try cooking with REAL food I will take their idea and create Common Core Cooking Lessons where we learn important math and writing concepts while cooking delicious healthy food for snack time My students will have a grounded appreciation for the work that went into making the food and knowledge of where the ingredients came from as well as how it is healthy for their bodies This project would expand our learning of nutrition and agricultural cooking recipes by having us peel our own apples to make homemade applesauce make our own bread and mix up healthy plants from our classroom garden in the spring We will also create our own cookbooks to be printed and shared with families Students will gain math and literature skills as well as a life long enjoyment for healthy cooking nannan

In [16]:

```
# https://gist.github.com/sebleier/554280
stopwords= ['i', 'me', 'my', 'myself', 'we', 'our', 'ours', 'ourselves', 'you', "you're", "you've", \
            \
            "you'll", "you'd", 'your', 'yours', 'yourself', 'yourselves', 'he', 'him', 'his', \
            'himself', \
            'she', "she's", 'her', 'hers', 'herself', 'it', "it's", 'its', 'itself', 'they', 'them', \
            'their',\
            'theirs', 'themselves', 'what', 'which', 'who', 'whom', 'this', 'that', "that'll", \
            'these', 'those', \
            'am', 'is', 'are', 'was', 'were', 'be', 'been', 'being', 'have', 'has', 'had', 'having', \
            'do', 'does', \
            'did', 'doing', 'a', 'an', 'the', 'and', 'but', 'if', 'or', 'because', 'as', 'until', ' \
while', 'of', \
            'at', 'by', 'for', 'with', 'about', 'against', 'between', 'into', 'through', 'during', \
            'before', 'after',\
            'above', 'below', 'to', 'from', 'up', 'down', 'in', 'out', 'on', 'off', 'over', 'under' \
, 'again', 'further',\
            'then', 'once', 'here', 'there', 'when', 'where', 'why', 'how', 'all', 'any', 'both', 'e \
ach', 'few', 'more',\
            'most', 'other', 'some', 'such', 'only', 'own', 'same', 'so', 'than', 'too', 'very', \
            's', 't', 'can', 'will', 'just', 'don', "don't", 'should', "should've", 'now', 'd', 'll' \
, 'm', 'o', 're', \
            've', 'y', 'ain', 'aren', "aren't", 'couldn', "couldn't", 'didn', "didn't", 'doesn', "d \
esn't", 'hadn',\
            "hadn't", 'hasn', "hasn't", 'haven', "haven't", 'isn', "isn't", 'ma', 'mightn', \
"mightn't", 'mustn',\
            "mustn't", 'needn', "needn't", 'shan', "shan't", 'shouldn', "shouldn't", 'wasn', \
"wasn't", 'weren', 'weren't', \
            'won', "won't", 'wouldn', "wouldn't"]
```

In [17]:

```
from tqdm import tqdm
preprocessed_essays = []
for sentence in tqdm(project_data['essay'].values):
```

```
100%|██████████| 109248/109248 [02:15<00:00, 805.50it/s]
```

```
# after preprocessing
preprocessed_essays[20000]
```

'person person no matter small dr seuss teach smallest students biggest enthusiasm learning students learn many different ways using senses multiple intelligences use wide range techniques help students succeed students class come variety different backgrounds makes wonderful sharing experiences cultures including native americans school caring community successful learners seen collaborative student project based learning classroom kindergarteners class love work hands materials many different opportunities practice skill mastered social skills work cooperatively friends crucial aspect kindergarten curriculum montana perfect place learn agriculture nutrition students love role play pretend kitchen early childhood classroom several kids ask try cooking real food take idea create common core cooking lessons learn important math writing concepts cooking delicious healthy food snack time students grounded appreciation work went making food knowledge ingredients came well healthy bodies project would expand learning nutrition agricultural cooking recipes us peel apples make homemade applesauce make bread mix healthy plants classroom garden spring also create cookbooks printed shared families students gain math literature skills well life long enjoyment healthy cooking nannan'

1.4 Preprocessing of `project_title`

```
print(project_data['project title'].values[0])
```

Engineering STEAM into the Primary Classroom

```
sent = decontracted(project_data['project_title'].values[20000])
print(sent)
print("="*50)
```

Health Nutritional Cooking in Kindergarten

```
sent = sent.replace('\\r', ' ')
sent = sent.replace('\\n', ' ')
sent = sent.replace('\\n', ' ')
print(sent)
```

Health Nutritional Cooking in Kindergarten

```
sent = re.sub('[^A-Za-z0-9]+', ' ', sent)
print(sent)
```

Health Nutritional Cooking in Kindergarten

In [23]:

```
from tqdm import tqdm
preprocessed_titles = []
for sentence in tqdm(project_data['project_title'].values):
    sent = decontracted(sentence)
    sent = sent.replace('\\r', ' ')
    sent = sent.replace('\\n', ' ')
    sent = sent.replace('\\n', ' ')
    sent = re.sub('[^A-Za-z0-9]+', ' ', sent)
    sent = ' '.join(e for e in sent.split() if e.lower() not in stopwords)
    preprocessed_titles.append(sent.lower().strip())
```

100%|██| 109248/109248 [00:06<00:00, 17676.21it/s]

In [24]:

```
preprocessed_essays[20000]
```

Out[24]:

'person person no matter small dr seuss teach smallest students biggest enthusiasm learning students learn many different ways using senses multiple intelligences use wide range techniques help students succeed students class come variety different backgrounds makes wonderful sharing experiences cultures including native americans school caring community successful learners seen collaborative student project based learning classroom kindergarteners class love work hands materials many different opportunities practice skill mastered social skills work cooperatively friends crucial aspect kindergarten curriculum montana perfect place learn agriculture nutrition students love role play pretend kitchen early childhood classroom several kids ask try cooking real food take idea create common core cooking lessons learn important math writing concepts cooking delicious healthy food snack time students grounded appreciation work went making food knowledge ingredients came well healthy bodies project would expand learning nutrition agricultural cooking recipes use peel apples make homemade applesauce make bread mix healthy plants classroom garden spring also create cookbooks printed shared families students gain math literature skills well life long enjoyment healthy cooking nannan'

1.5 Preparing data for models

In [25]:

```
project_data.columns
```

Out[25]:

```
Index(['Unnamed: 0', 'id', 'teacher_id', 'teacher_prefix', 'school_state',
      'Date', 'project_grade_category', 'project_title', 'project_essay_1',
      'project_essay_2', 'project_essay_3', 'project_essay_4',
      'project_resource_summary',
      'teacher_number_of_previously_posted_projects', 'project_is_approved',
      'clean_categories', 'clean_subcategories', 'essay'],
      dtype='object')
```

we are going to consider

- school_state : categorical data
- clean_categories : categorical data
- clean_subcategories : categorical data
- project_grade_category : categorical data
- teacher_prefix : categorical data
- project_title : text data
- text : text data
- project_resource_summary: text data (optional)
- quantity : numerical (optional)
- teacher_number_of_previously_posted_projects : numerical
- price : numerical

1.5.3 Vectorizing Numerical features

In [26]:

```
price_data = resource_data.groupby('id').agg({'price':'sum', 'quantity':'sum'}).reset_index()
project_data = pd.merge(project_data, price_data, on='id', how='left')
```

In [27]:

```
catogories_grade = list(project_data['project_grade_category'].values)
# remove special characters from list of strings python:
https://stackoverflow.com/a/47301924/4084039
# https://www.geeksforgeeks.org/removing-stop-words-nltk-python/
# https://stackoverflow.com/questions/23669024/how-to-strip-a-specific-word-from-a-string
# https://stackoverflow.com/questions/8270092/remove-all-whitespace-in-a-string-in-python
cat_list_grade = []
for i in catogories_grade:
    temp = ""
    for j in i:
        j = j.replace('-', '_')
        j = j.replace(' ', '_')
        temp+=j.strip(' ')
        temp = temp.replace('&', '_')
    cat_list_grade.append(temp.strip())
print(cat_list_grade[0:5])
project_data['clean_grades'] = cat_list_grade
project_data.drop(['project_grade_category'], axis=1, inplace=True)
```

```
['Grades_PreK_2', 'Grades_3_5', 'Grades_PreK_2', 'Grades_PreK_2', 'Grades_3_5']
```

In [28]:

```
project_data['teacher_prefix'].fillna('NoValue',inplace=True)
```

In [29]:

```
project_data.head(2)
project_data.shape
```

Out[29]:

```
(109248, 20)
```

In [30]:

```
project_data["preprocessed_essays"]=preprocessed_essays
project_data["preprocessed_titles"]=preprocessed_titles
```

In [31]:

```
project_data.head(2)
project_data.shape
```

Out[31]:

```
(109248, 22)
```

Assignment 3: Apply KNN

1. [Task-1] Apply KNN(brute force version) on these feature sets

- **Set 1:** categorical, numerical features + project_title(BOW) + preprocessed_essay (BOW)
- **Set 2:** categorical, numerical features + project_title(TFIDF)+ preprocessed_essay (TFIDF)
- **Set 3:** categorical, numerical features + project_title(AVG W2V)+ preprocessed_essay (AVG W2V)
- **Set 4:** categorical, numerical features + project_title(TFIDF W2V)+ preprocessed_essay (TFIDF W2V)

2. Hyper parameter tuning to find best K

- Find the best hyper parameter which results in the maximum [AUC](#) value
- Find the best hyper parameter using k-fold cross validation (or) simple cross validation data
- Use gridsearch-cv or randomsearch-cv or write your own for loops to do this task

3. Representation of results

- You need to plot the performance of model both on train data and cross validation data for each hyper parameter, as shown in the figure
- Once you find the best hyper parameter, you need to train your model-M using the best hyper-param. Now, find the AUC on test data and plot the ROC curve on both train and test using model-M.
- Along with plotting ROC curve, you need to print the [confusion matrix](#) with predicted and original labels of test data points

4. [Task-2]

- Select top 2000 features from feature **Set 2** using '[SelectKBest](#)' and then apply KNN on top of these features

```
• from sklearn.datasets import load_digits
  from sklearn.feature_selection import SelectKBest, chi2
  X, y = load_digits(return_X_y=True)
  X.shape
  X_new = SelectKBest(chi2, k=20).fit_transform(X, y)
  X_new.shape
  =====
  output:
  (1797, 64)
  (1797, 20)
```

- Repeat the steps 2 and 3 on the data matrix after feature selection

5. Conclusion

- You need to summarize the results at the end of the notebook, summarize it in the table format. To print out a table please refer to this [prettytable library link](#)

Note: Data Leakage

1. There will be an issue of data-leakage if you vectorize the entire data and then split it into train/cv/test.
2. To avoid the issue of data-leakag, make sure to split your data first and then vectorize it.
3. While vectorizing your data, apply the method fit_transform() on you train data, and apply the method transform() on cv/test data.
4. For more details please go through this [link](#).

2. K Nearest Neighbor

2.1 Splitting data into Train and cross validation(or test): Stratified Sampling

In [32]:

```
cols = list(project_data.columns.values) #Make a list of all of the columns in the df
cols.pop(cols.index('project_is_approved')) #Remove project_is_approved from list
project_data_KNN = project_data[cols+['project_is_approved']]
project_data_KNN.head(2)
```

Out[32]:

Unnamed: 0	id	teacher_id	teacher_prefix	school_state	Date	project_title	project_es

	Unnamed: 0	id	teacher_id	teacher_prefix	school_state	Date	Engineering project title	project es
0	8393	p205479	2bf07ba08945e5d8b2a3f269b2b3cfe5	Mrs.	CA	2016-04-27 00:27:36	STEAM into the Primary Classroom	I have been fortunate er to use the F ...
1	37728	p043609	3f60494c61921b3b43ab61bdde2904df	Ms.	UT	2016-04-27 00:31:25	Sensory Tools for Focus	Imagine bei 9 years old. You're in yc th...

2 rows × 22 columns



In [33]:

```
project_data_KNN=project_data_KNN[0:50000]
X=np.array(project_data_KNN.iloc[0:50000,0:21])
Y=np.array(project_data_KNN['project_is_approved'])
```

In [34]:

```
project_data_KNN.teacher_prefix.unique()
```

Out[34]:

```
array(['Mrs.', 'Ms.', 'Mr.', 'Teacher', 'NoValue', 'Dr.'], dtype=object)
```

In [35]:

```
print(X.shape)
print(Y.shape)
```

```
(50000, 21)
(50000,)
```

In [36]:

```
from sklearn.model_selection import train_test_split

X_train, X_test, y_train, y_test = train_test_split(X, Y, test_size=0.33)
X_train, X_cv, y_train, y_cv = train_test_split(X_train, y_train, test_size=0.33)
print(X_train.shape, y_train.shape)
print(X_cv.shape, y_cv.shape)
print(X_test.shape, y_test.shape)
```

```
(22445, 21) (22445,)
(11055, 21) (11055,)
(16500, 21) (16500,)
```

In [37]:

```
np.unique(X_train[:,3])
```

Out[37]:

```
array(['Dr.', 'Mr.', 'Mrs.', 'Ms.', 'NoValue', 'Teacher'], dtype=object)
```

2.2 Make Data Model Ready: encoding numerical, categorical features

In [38]:

```
project_data_KNN.columns
```

Out [38]:

```
Index(['Unnamed: 0', 'id', 'teacher_id', 'teacher_prefix', 'school_state',
      'Date', 'project_title', 'project_essay_1', 'project_essay_2',
      'project_essay_3', 'project_essay_4', 'project_resource_summary',
      'teacher_number_of_previously_posted_projects', 'clean_categories',
      'clean_subcategories', 'essay', 'price', 'quantity', 'clean_grades',
      'preprocessed_essays', 'preprocessed_titles', 'project_is_approved'],
      dtype='object')
```

Vectorizing Clean Categories

In [39]:

```
vectorizer = CountVectorizer(lowercase=False)
vectorizer.fit(X_train[:,13])
X_train_clean_categories = vectorizer.transform(X_train[:,13])
X_cv_clean_categories = vectorizer.transform(X_cv[:,13])
X_test_clean_categories = vectorizer.transform(X_test[:,13])

print("After vectorizations")
print(X_train_clean_categories.shape, y_train.shape)
print(X_cv_clean_categories.shape, y_cv.shape)
print(X_test_clean_categories.shape, y_test.shape)
print(vectorizer.get_feature_names())
```

```
After vectorizations
(22445, 9) (22445,)
(11055, 9) (11055,)
(16500, 9) (16500,)
['AppliedLearning', 'Care_Hunger', 'Health_Sports', 'History_Civics', 'Literacy_Language',
'Math_Science', 'Music_Arts', 'SpecialNeeds', 'Warmth']
```

Vectorizing Clean Sub Categories

In [40]:

```
vectorizer = CountVectorizer(lowercase=False)
vectorizer.fit(X_train[:,14])
X_train_clean_subcategories = vectorizer.transform(X_train[:,14])
X_cv_clean_subcategories = vectorizer.transform(X_cv[:,14])
X_test_clean_subcategories = vectorizer.transform(X_test[:,14])

print("After vectorizations")
print(X_train_clean_subcategories.shape, y_train.shape)
print(X_cv_clean_subcategories.shape, y_cv.shape)
print(X_test_clean_subcategories.shape, y_test.shape)
print(vectorizer.get_feature_names())
```

```
After vectorizations
(22445, 30) (22445,)
(11055, 30) (11055,)
(16500, 30) (16500,)
['AppliedSciences', 'Care_Hunger', 'CharacterEducation', 'Civics_Government',
'College_CareerPrep', 'CommunityService', 'ESL', 'EarlyDevelopment', 'Economics',
'EnvironmentalScience', 'Extracurricular', 'FinancialLiteracy', 'ForeignLanguages', 'Gym_Fitness',
'Health_LifeScience', 'Health_Wellness', 'History_Geography', 'Literacy', 'Literature_Writing', 'M
athematics', 'Music', 'NutritionEducation', 'Other', 'ParentInvolvement', 'PerformingArts', 'Socia
lSciences', 'SpecialNeeds', 'TeamSports', 'VisualArts', 'Warmth']
```

Vectorizing School State

In [41]:

```
vectorizer = CountVectorizer(lowercase=False)
vectorizer.fit(X_train[:,4])
X_train_school_state = vectorizer.transform(X_train[:,4])
X_cv_school_state = vectorizer.transform(X_cv[:,4])
X_test_school_state = vectorizer.transform(X_test[:,4])
```

```

print("After vectorizations")
print(X_train_school_state.shape, y_train.shape)
print(X_cv_school_state.shape, y_cv.shape)
print(X_test_school_state.shape, y_test.shape)
print(vectorizer.get_feature_names())

```

```

After vectorizations
(22445, 51) (22445,)
(11055, 51) (11055,)
(16500, 51) (16500,)
['AK', 'AL', 'AR', 'AZ', 'CA', 'CO', 'CT', 'DC', 'DE', 'FL', 'GA', 'HI', 'IA', 'ID', 'IL', 'IN', 'KS', 'KY', 'LA', 'MA', 'MD', 'ME', 'MI', 'MN', 'MO', 'MS', 'MT', 'NC', 'ND', 'NE', 'NH', 'NJ', 'NM', 'NV', 'NY', 'OH', 'OK', 'OR', 'PA', 'RI', 'SC', 'SD', 'TN', 'TX', 'UT', 'VA', 'VT', 'WA', 'WI', 'WV', 'WY']

```

Vectorizing Teacher Prefix

In [42]:

```

vectorizer = CountVectorizer(lowercase=False)
vectorizer.fit(X_train[:,3])
X_train_teacher_prefix = vectorizer.transform(X_train[:,3])
X_cv_teacher_prefix = vectorizer.transform(X_cv[:,3])
X_test_teacher_prefix = vectorizer.transform(X_test[:,3])
print("After vectorizations")
print(X_train_teacher_prefix.shape, y_train.shape)
print(X_cv_teacher_prefix.shape, y_cv.shape)
print(X_test_teacher_prefix.shape, y_test.shape)
print(vectorizer.get_feature_names())

```

```

After vectorizations
(22445, 6) (22445,)
(11055, 6) (11055,)
(16500, 6) (16500,)
['Dr', 'Mr', 'Mrs', 'Ms', 'NoValue', 'Teacher']

```

Vectorizing Project Grade Category

In [43]:

```

vectorizer = CountVectorizer(lowercase=False)
vectorizer.fit(X_train[:,18])
X_train_grades = vectorizer.transform(X_train[:,18])
X_cv_grades = vectorizer.transform(X_cv[:,18])
X_test_grades = vectorizer.transform(X_test[:,18])
print("After vectorizations")
print(X_train_grades.shape, y_train.shape)
print(X_cv_grades.shape, y_cv.shape)
print(X_test_grades.shape, y_test.shape)
print(vectorizer.get_feature_names())

```

```

After vectorizations
(22445, 4) (22445,)
(11055, 4) (11055,)
(16500, 4) (16500,)
['Grades_3_5', 'Grades_6_8', 'Grades_9_12', 'Grades_PreK_2']

```

Standardizing Prices

In [44]:

```

from sklearn.preprocessing import StandardScaler

price_scaler = StandardScaler()
price_scaler.fit(X_train[:,16].reshape(-1,1))
print(f"Mean : {price_scaler.mean_[0]}, Standard deviation : {np.sqrt(price_scaler.var_[0])}")

```



```
X_train_price_standardized = price_scalar.transform(X_train[:,16].reshape(-1,1))
X_cv_price_standardized = price_scalar.transform(X_cv[:,16].reshape(-1,1))
X_test_price_standardized = price_scalar.transform(X_test[:,16].reshape(-1,1))

print("After vectorizations")
print(X_train_price_standardized.shape, y_train.shape)
print(X_cv_price_standardized.shape, y_cv.shape)
print(X_test_price_standardized.shape, y_test.shape)
```

C:\Users\Kalyan\Anaconda3\lib\site-packages\sklearn\utils\validation.py:475:
DataConversionWarning:

Data with input dtype object was converted to float64 by StandardScaler.

Mean : 313.09934729338386, Standard deviation : 371.01813383972507

C:\Users\Kalyan\Anaconda3\lib\site-packages\sklearn\utils\validation.py:475:
DataConversionWarning:

Data with input dtype object was converted to float64 by StandardScaler.

C:\Users\Kalyan\Anaconda3\lib\site-packages\sklearn\utils\validation.py:475:
DataConversionWarning:

Data with input dtype object was converted to float64 by StandardScaler.

C:\Users\Kalyan\Anaconda3\lib\site-packages\sklearn\utils\validation.py:475:
DataConversionWarning:

Data with input dtype object was converted to float64 by StandardScaler.

After vectorizations
(22445, 1) (22445,)
(11055, 1) (11055,)
(16500, 1) (16500,)

2.3 Make Data Model Ready: encoding eassay, and project_title

BOW

In [45]:

```
from sklearn.feature_extraction.text import CountVectorizer
vectorizer = CountVectorizer(min_df=10)
vectorizer.fit(X_train[:,19])
X_train_preprocessed_essays_bow = vectorizer.transform(X_train[:,19])
X_cv_preprocessed_essays_bow = vectorizer.transform(X_cv[:,19])
X_test_preprocessed_essays_bow = vectorizer.transform(X_test[:,19])
print("After vectorizations")
print(X_train_preprocessed_essays_bow.shape, y_train.shape)
print(X_cv_preprocessed_essays_bow.shape, y_cv.shape)
print(X_test_preprocessed_essays_bow.shape, y_test.shape)
```

After vectorizations
(22445, 8717) (22445,)
(11055, 8717) (11055,)
(16500, 8717) (16500,)

In [46]:

```
from sklearn.feature_extraction.text import CountVectorizer
vectorizer = CountVectorizer(min_df=10)
vectorizer.fit(X_train[:,20])
X_train_preprocessed_titles_bow = vectorizer.transform(X_train[:,20])
X_cv_preprocessed_titles_bow = vectorizer.transform(X_cv[:,20])
X_test_preprocessed_titles_bow = vectorizer.transform(X_test[:,20])
print("After vectorizations")
print(X_train_preprocessed_titles_bow.shape, y_train.shape)
```

```
print(X_train_preprocessed_titles_bow.shape, y_train.shape)
print(X_cv_preprocessed_titles_bow.shape, y_cv.shape)
print(X_test_preprocessed_titles_bow.shape, y_test.shape)
```

After vectorizations
 (22445, 1113) (22445,)
 (11055, 1113) (11055,)
 (16500, 1113) (16500,)

TFIDF

In [47]:

```
from sklearn.feature_extraction.text import TfidfVectorizer
vectorizer = TfidfVectorizer(min_df=10)
vectorizer.fit(X_train[:,19])
X_train_preprocessed_essays_tfidf = vectorizer.transform(X_train[:,19])
X_cv_preprocessed_essays_tfidf = vectorizer.transform(X_cv[:,19])
X_test_preprocessed_essays_tfidf = vectorizer.transform(X_test[:,19])
print("After vectorizations")
print(X_train_preprocessed_essays_tfidf.shape, y_train.shape)
print(X_cv_preprocessed_essays_tfidf.shape, y_cv.shape)
print(X_test_preprocessed_essays_tfidf.shape, y_test.shape)
```

After vectorizations
 (22445, 8717) (22445,)
 (11055, 8717) (11055,)
 (16500, 8717) (16500,)

In [48]:

```
from sklearn.feature_extraction.text import TfidfVectorizer
vectorizer = CountVectorizer(min_df=10)
vectorizer.fit(X_train[:,20])
X_train_preprocessed_titles_tfidf = vectorizer.transform(X_train[:,20])
X_cv_preprocessed_titles_tfidf = vectorizer.transform(X_cv[:,20])
X_test_preprocessed_titles_tfidf = vectorizer.transform(X_test[:,20])
print("After vectorizations")
print(X_train_preprocessed_titles_tfidf.shape, y_train.shape)
print(X_cv_preprocessed_titles_tfidf.shape, y_cv.shape)
print(X_test_preprocessed_titles_tfidf.shape, y_test.shape)
```

After vectorizations
 (22445, 1113) (22445,)
 (11055, 1113) (11055,)
 (16500, 1113) (16500,)

Avg W2V

In [49]:

```
with open('glove_vectors', 'rb') as f:
    model = pickle.load(f)
    glove_words = set(model.keys())
```

In [50]:

```
X_train_preprocessed_essays_avg_w2v_vectors = []; # the avg-w2v for each sentence/review is stored
in this list
for sentence in tqdm(X_train[:,19]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    X_train_preprocessed_essays_avg_w2v_vectors.append(vector)
```

```
print(len(X_train_preprocessed_essays_avg_w2v_vectors))
print(len(X_train_preprocessed_essays_avg_w2v_vectors[0]))

X_cv_preprocessed_essays_avg_w2v_vectors = []; # the avg-w2v for each sentence/review is stored in
this list
for sentence in tqdm(X_cv[:,19]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    X_cv_preprocessed_essays_avg_w2v_vectors.append(vector)

print(len(X_cv_preprocessed_essays_avg_w2v_vectors))
print(len(X_cv_preprocessed_essays_avg_w2v_vectors[0]))

X_test_preprocessed_essays_avg_w2v_vectors = []; # the avg-w2v for each sentence/review is stored
in this list
for sentence in tqdm(X_test[:,19]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    X_test_preprocessed_essays_avg_w2v_vectors.append(vector)

print(len(X_test_preprocessed_essays_avg_w2v_vectors))
print(len(X_test_preprocessed_essays_avg_w2v_vectors[0]))
```

```
100%|██████████| 22445/22445 [00:13<00:00, 1676.47it/s]
```

22445
300

[illegible]

11055
300

[illegible]

16500
300

In [51]:

```
X_train_preprocessed_titles_avg_w2v_vectors = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(X_train[:,20]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    X_train_preprocessed_titles_avg_w2v_vectors.append(vector)

print(len(X_train_preprocessed_titles_avg_w2v_vectors))
print(len(X_train_preprocessed_titles_avg_w2v_vectors[0]))

X_cv_preprocessed_titles_avg_w2v_vectors = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(X_cv[:,20]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
```

```

cnt_words = 0; # num of words with a valid vector in the sentence/review
for word in sentence.split(): # for each word in a review/sentence
    if word in glove_words:
        vector += model[word]
        cnt_words += 1
if cnt_words != 0:
    vector /= cnt_words
X_cv_preprocessed_titles_avg_w2v_vectors.append(vector)

print(len(X_cv_preprocessed_titles_avg_w2v_vectors))
print(len(X_cv_preprocessed_titles_avg_w2v_vectors[0]))

X_test_preprocessed_titles_avg_w2v_vectors = []; # the avg-w2v for each sentence/review is stored
in this list
for sentence in tqdm(X_test[:,20]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    cnt_words = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if word in glove_words:
            vector += model[word]
            cnt_words += 1
    if cnt_words != 0:
        vector /= cnt_words
    X_test_preprocessed_titles_avg_w2v_vectors.append(vector)

print(len(X_test_preprocessed_titles_avg_w2v_vectors))
print(len(X_test_preprocessed_titles_avg_w2v_vectors[0]))

```

100%|██| 22445/22445 [00:00<00:00, 32152.31it/s]

22445
300

100%|██| 11055/11055 [00:00<00:00, 31382.29it/s]

11055
300

100%|██| 16500/16500 [00:00<00:00, 32521.23it/s]

16500
300

TFIDF W2V For Essay

In [52]:

```

tfidf_model = TfidfVectorizer()
tfidf_model.fit(X_train[:,19])
# we are converting a dictionary with word as a key, and the idf as a value
dictionary = dict(zip(tfidf_model.get_feature_names(), list(tfidf_model.idf_)))
tfidf_words = set(tfidf_model.get_feature_names())

```

In [53]:

```

# average Word2Vec
# compute average word2vec for each review.
X_train_preprocessed_essays_tfidf_w2v_vectors = []; # the avg-w2v for each sentence/review is stor
ed in this list
for sentence in tqdm(X_train[:,19]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
# here we are multiplying idf value(dictionary[word]) and the tf
value((sentence.count(word)/len(sentence.split())))
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v

```

```

        tr_idf_weight += tr_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    X_train_preprocessed_essays_tfidf_w2v_vectors.append(vector)

print(len(X_train_preprocessed_essays_tfidf_w2v_vectors))
print(len(X_train_preprocessed_essays_tfidf_w2v_vectors[0]))

# average Word2Vec
# compute average word2vec for each review.
X_cv_preprocessed_essays_tfidf_w2v_vectors = []; # the avg-w2v for each sentence/review is stored
in this list
for sentence in tqdm(X_cv[:,19]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
# here we are multiplying idf value(dictionary[word]) and the tf
value((sentence.count(word)/len(sentence.split()))))
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    X_cv_preprocessed_essays_tfidf_w2v_vectors.append(vector)

print(len(X_cv_preprocessed_essays_tfidf_w2v_vectors))
print(len(X_cv_preprocessed_essays_tfidf_w2v_vectors[0]))

# average Word2Vec
# compute average word2vec for each review.
X_test_preprocessed_essays_tfidf_w2v_vectors = []; # the avg-w2v for each sentence/review is
stored in this list
for sentence in tqdm(X_test[:,19]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
# here we are multiplying idf value(dictionary[word]) and the tf
value((sentence.count(word)/len(sentence.split()))))
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    X_test_preprocessed_essays_tfidf_w2v_vectors.append(vector)

print(len(X_test_preprocessed_essays_tfidf_w2v_vectors))
print(len(X_test_preprocessed_essays_tfidf_w2v_vectors[0]))

```

100%|██| 22445/22445 [01:32<00:00, 242.72it/s]

22445
300

100%|██| 11055/11055 [00:46<00:00, 239.73it/s]

11055
300

100%|██| 16500/16500 [01:08<00:00, 240.94it/s]

16500
300

TFIDF W2V For Titles

To [54].

In [54]:

```
tfidf_model = TfidfVectorizer()
tfidf_model.fit(X_train[:,20])
# we are converting a dictionary with word as a key, and the idf as a value
dictionary = dict(zip(tfidf_model.get_feature_names(), list(tfidf_model.idf_)))
tfidf_words = set(tfidf_model.get_feature_names())
```

In [55]:

```
# average Word2Vec
# compute average word2vec for each review.
X_train_preprocessed_titles_tfidf_w2v_vectors = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(X_train[:,20]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
# here we are multiplying idf value(dictionary[word]) and the tf
value((sentence.count(word)/len(sentence.split())))
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    X_train_preprocessed_titles_tfidf_w2v_vectors.append(vector)

print(len(X_train_preprocessed_titles_tfidf_w2v_vectors))
print(len(X_train_preprocessed_titles_tfidf_w2v_vectors[0]))

# average Word2Vec
# compute average word2vec for each review.
X_cv_preprocessed_titles_tfidf_w2v_vectors = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(X_cv[:,20]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
# here we are multiplying idf value(dictionary[word]) and the tf
value((sentence.count(word)/len(sentence.split())))
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    X_cv_preprocessed_titles_tfidf_w2v_vectors.append(vector)

print(len(X_cv_preprocessed_titles_tfidf_w2v_vectors))
print(len(X_cv_preprocessed_titles_tfidf_w2v_vectors[0]))

# average Word2Vec
# compute average word2vec for each review.
X_test_preprocessed_titles_tfidf_w2v_vectors = []; # the avg-w2v for each sentence/review is stored in this list
for sentence in tqdm(X_test[:,20]): # for each review/sentence
    vector = np.zeros(300) # as word vectors are of zero length
    tf_idf_weight = 0; # num of words with a valid vector in the sentence/review
    for word in sentence.split(): # for each word in a review/sentence
        if (word in glove_words) and (word in tfidf_words):
            vec = model[word] # getting the vector for each word
# here we are multiplying idf value(dictionary[word]) and the tf
value((sentence.count(word)/len(sentence.split())))
            tf_idf = dictionary[word]*(sentence.count(word)/len(sentence.split())) # getting the tf
idf value for each word
            vector += (vec * tf_idf) # calculating tfidf weighted w2v
            tf_idf_weight += tf_idf
    if tf_idf_weight != 0:
        vector /= tf_idf_weight
    X_test_preprocessed_titles_tfidf_w2v_vectors.append(vector)

print(len(X_test_preprocessed_titles_tfidf_w2v_vectors))
```

```
print(len(X_test_preprocessed_titles_tfidf_w2v_vectors[0]))
```

100%|██| 22445/22445 [00:01<00:00, 16504.07it/s]

22445
300

100%|██| 11055/11055 [00:00<00:00, 16439.19it/s]

11055
300

100%|██| 16500/16500 [00:00<00:00, 17033.32it/s]

16500
300

SET 1-- BOW

In [56]:

```
from scipy.sparse import hstack
X1_train = hstack((X_train_clean_categories,
X_train_clean_subcategories,X_train_school_state,X_train_teacher_prefix,X_train_grades,X_train_price_standardized,X_train_preprocessed_essays_bow,X_train_preprocessed_titles_bow))
X1_train.shape
```

Out[56]:

(22445, 9931)

In [57]:

```
X1_cv = hstack((X_cv_clean_categories,
X_cv_clean_subcategories,X_cv_school_state,X_cv_teacher_prefix,X_cv_grades,X_cv_price_standardized
,X_cv_preprocessed_essays_bow,X_cv_preprocessed_titles_bow))
X1_cv.shape
```

Out[57]:

(11055, 9931)

In [58]:

```
X1_test = hstack((X_test_clean_categories,
X_test_clean_subcategories,X_test_school_state,X_test_teacher_prefix,X_test_grades,X_test_price_standardized,X_test_preprocessed_essays_bow,X_test_preprocessed_titles_bow))
X1_test.shape
```

Out[58]:

(16500, 9931)

SET 2--TFIDF

In [59]:

```
from scipy.sparse import hstack
X2_train = hstack((X_train_clean_categories,
X_train_clean_subcategories,X_train_school_state,X_train_teacher_prefix,X_train_grades,X_train_price_standardized,X_train_preprocessed_essays_tfidf,X_train_preprocessed_titles_tfidf))
X2_train.shape
```

Out[59]:

(22445, 9931)

In [60]:

```
X2_cv = hstack((X_cv_clean_categories,  
X_cv_clean_subcategories,X_cv_school_state,X_cv_teacher_prefix,X_cv_grades,X_cv_price_standardized  
,X_cv_preprocessed_essays_tfidf,X_cv_preprocessed_titles_tfidf))  
X2_cv.shape
```

Out[60]:

```
(11055, 9931)
```

In [61]:

```
X2_test = hstack((X_test_clean_categories,  
X_test_clean_subcategories,X_test_school_state,X_test_teacher_prefix,X_test_grades,X_test_price_sta  
ndardized,X_test_preprocessed_essays_tfidf,X_test_preprocessed_titles_tfidf))  
X2_test.shape
```

Out[61]:

```
(16500, 9931)
```

SET 3--AVGW2V

In [62]:

```
from scipy.sparse import hstack  
X3_train = hstack((X_train_clean_categories,  
X_train_clean_subcategories,X_train_school_state,X_train_teacher_prefix,X_train_grades,X_train_pric  
e_standardized,X_train_preprocessed_essays_avg_w2v_vectors,X_train_preprocessed_titles_avg_w2v_vect  
rs))  
X3_train.shape
```

Out[62]:

```
(22445, 701)
```

In [63]:

```
X3_cv = hstack((X_cv_clean_categories,  
X_cv_clean_subcategories,X_cv_school_state,X_cv_teacher_prefix,X_cv_grades,X_cv_price_standardized  
,X_cv_preprocessed_essays_avg_w2v_vectors,X_cv_preprocessed_titles_avg_w2v_vectors))  
X3_cv.shape
```

Out[63]:

```
(11055, 701)
```

In [64]:

```
X3_test = hstack((X_test_clean_categories,  
X_test_clean_subcategories,X_test_school_state,X_test_teacher_prefix,X_test_grades,X_test_price_sta  
ndardized,X_test_preprocessed_essays_avg_w2v_vectors,X_test_preprocessed_titles_avg_w2v_vectors))  
X3_test.shape
```

Out[64]:

```
(16500, 701)
```

SET 4--TFIDFW2V

In [65]:

```
from scipy.sparse import hstack  
X4_train = hstack((X_train_clean_categories,  
X_train_clean_subcategories,X_train_school_state,X_train_teacher_prefix,X_train_grades,X_train_pric
```



```
e_standardized,X_train_preprocessed_essays_tfidf_w2v_vectors,X_train_preprocessed_titles_tfidf_w2v_vectors))
X4_train.shape
```

Out [65]:

(22445, 701)

In [66]:

```
X4_cv = hstack((X_cv_clean_categories,
X_cv_clean_subcategories,X_cv_school_state,X_cv_teacher_prefix,X_cv_grades,X_cv_price_standardized
,X_cv_preprocessed_essays_tfidf_w2v_vectors,X_cv_preprocessed_titles_tfidf_w2v_vectors))
X4_cv.shape
```

Out [66]:

(11055, 701)

In [67]:

```
X4_test = hstack((X_test_clean_categories,
X_test_clean_subcategories,X_test_school_state,X_test_teacher_prefix,X_test_grades,X_test_price_standardized,X_test_preprocessed_essays_tfidf_w2v_vectors,X_test_preprocessed_titles_tfidf_w2v_vectors))
X4_test.shape
```

Out [67]:

(16500, 701)

2.4 Appling KNN on different kind of featurization as mentioned in the instructions

Apply KNN on different kind of featurization as mentioned in the instructions

For Every model that you work on make sure you do the step 2 and step 3 of instructions

2.4.1 Applying KNN brute force on BOW, SET 1

In [68]:

```
def batch_predict_proba(clf, data):

    y_data_pred = []
    tr_loop = data.shape[0]-data.shape[0]%1000

    for i in range(0, tr_loop, 1000):
        y_data_pred.extend(clf.predict_proba(data[i:i+1000])[:,1])
    y_data_pred.extend(clf.predict_proba(data[tr_loop:])[:,1])
    return y_data_pred
```

In [69]:

```
def batch_predict(clf, data):
    y_data_pred = []
    tr_loop = data.shape[0]-data.shape[0]%1000
    for i in range(0, tr_loop, 1000):
        y_data_pred.extend(clf.predict(data[i:i+1000]))
    y_data_pred.extend(clf.predict(data[tr_loop:]))
    return y_data_pred
```

In [78]:

```
def find_best_threshold(threshold, fpr, tpr):
    t = threshold[np.argmax(tpr*(1-fpr))]
    print("the maximum value of tpr*(1-fpr)", max(tpr*(1-fpr)), "for threshold", np.round(t,3))
    return t
```

```
def predict_with_best_t(proba, threshold):
    predictions = []
    for i in proba:
        if i >= threshold:
            predictions.append(1)
        else:
            predictions.append(0)
    return predictions
```

Simple for Loop

In [79]:


```
from sklearn.neighbors import KNeighborsClassifier
from sklearn.metrics import roc_auc_score
import matplotlib.pyplot as plt

train_auc = []
cv_auc = []
K = [1, 5, 10, 15, 21, 31, 41, 51]
for i in K:
    neigh = KNeighborsClassifier(n_neighbors=i)
    neigh.fit(X1_train, y_train)

    X1_train_csr=X1_train.tocsr()
    X1_cv_csr=X1_cv.tocsr()
    y_train_pred = batch_predict_proba(neigh, X1_train_csr)
    y_cv_pred = batch_predict_proba(neigh, X1_cv_csr)

    train_auc.append(roc_auc_score(y_train,y_train_pred))
    cv_auc.append(roc_auc_score(y_cv, y_cv_pred))

plt.plot(K, train_auc, label='Train AUC')
plt.plot(K, cv_auc, label='CV AUC')
plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS")
plt.show()
```

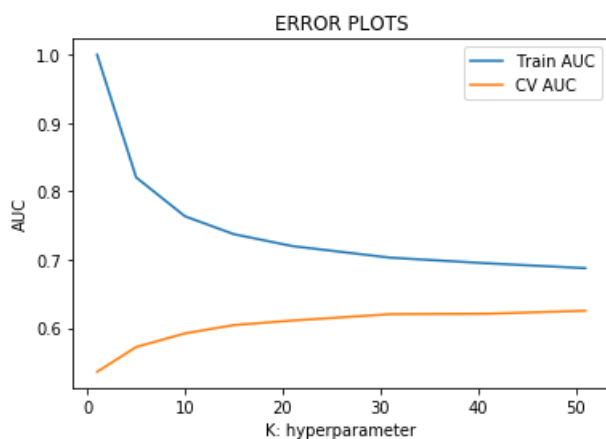

In [80]:

```
# https://scikit-learn.org/stable/modules/generated/sklearn.metrics.roc_curve.html#sklearn.metrics.roc_curve
from sklearn.metrics import roc_curve, auc

neigh = KNeighborsClassifier(n_neighbors=41)
neigh.fit(X1_train, y_train)
X1_test_csr=X1_test.tocsr()

y_train_pred = batch_predict(neigh, X1_train_csr)
y_test_pred = batch_predict(neigh, X1_test_csr)
```

```


train_fpr, train_tpr, tr_thresholds = roc_curve(y_train, batch_predict_proba(neigh, X1_train_csr))
test_fpr, test_tpr, te_thresholds = roc_curve(y_test, batch_predict_proba(neigh, X1_test_csr))

plt.plot(train_fpr, train_tpr, label="train AUC =" + str(auc(train_fpr, train_tpr)))
plt.plot(test_fpr, test_tpr, label="test AUC =" + str(auc(test_fpr, test_tpr)))
plt.legend()
plt.xlabel("False Positive Rate")
plt.ylabel("True Positive Rate")
plt.title("ROC Curve")
plt.show()

print("="*100)

from sklearn.metrics import confusion_matrix
best_t = find_best_threshold(tr_thresholds, train_fpr, train_tpr)
print("Train confusion matrix")
print(confusion_matrix(y_train, predict_with_best_t(y_train_pred, best_t)))
print("Test confusion matrix")
print(confusion_matrix(y_test, predict_with_best_t(y_test_pred, best_t)))

```

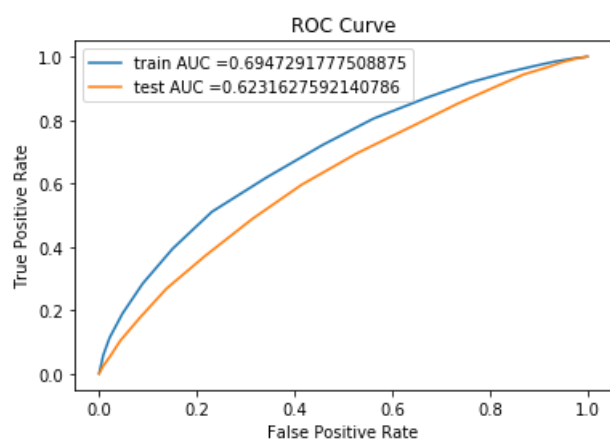

=====

the maximum value of $tpr \cdot (1 - fpr)$ 0.4069294681725383 for threshold 0.78

Train confusion matrix

```
[[ 21 3556]
 [ 21 18847]]
```

Test confusion matrix

```
[[ 8 2651]
 [ 8 13833]]
```

In [81]:


```

import seaborn as sns
df_cm = pd.DataFrame(confusion_matrix(y_train, predict_with_best_t(y_train_pred, best_t)))
df_cm.columns = ['Predicted NO', 'Predicted YES']
df_cm = df_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)
sns.heatmap(df_cm, annot=True, annot_kws={"size": 16}, fmt='g')

```

Out[81]:

<matplotlib.axes._subplots.AxesSubplot at 0x5ea395e7b8>

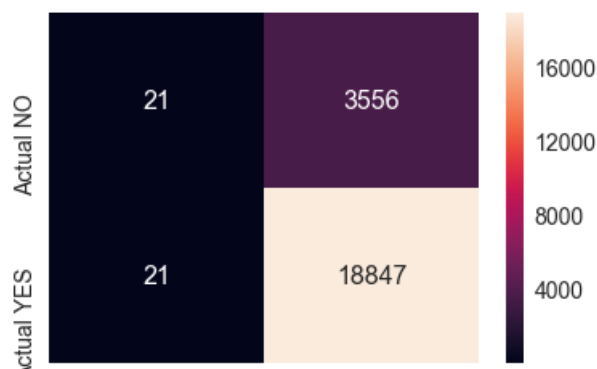


Predicted NO Predicted YES

In [82]:

```
df_cm = pd.DataFrame(confusion_matrix(y_test, predict_with_best_t(y_test_pred, best_t)))
df_cm.columns = ['Predicted NO', 'Predicted YES']
df_cm = df_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)
sns.heatmap(df_cm, annot=True, annot_kws={"size": 16}, fmt='g')
```

Out[82]:

<matplotlib.axes._subplots.AxesSubplot at 0x5ea3669470>

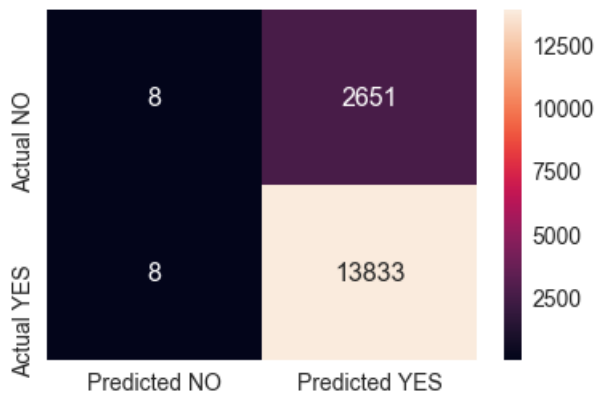

2.4.2 Applying KNN brute force on TFIDF, SET 2

In [83]:

```
from sklearn.neighbors import KNeighborsClassifier
from sklearn.metrics import roc_auc_score
import matplotlib.pyplot as plt

train_auc = []
cv_auc = []
K = [1, 5, 10, 15, 21, 31, 41, 51]
for i in K:
    neigh = KNeighborsClassifier(n_neighbors=i)
    neigh.fit(X2_train, y_train)


    X2_train_csr=X2_train.tocsr()
    X2_cv_csr=X2_cv.tocsr()
    y_train_pred = batch_predict_proba(neigh, X2_train_csr)
    y_cv_pred = batch_predict_proba(neigh, X2_cv_csr)

    train_auc.append(roc_auc_score(y_train,y_train_pred))
    cv_auc.append(roc_auc_score(y_cv, y_cv_pred))

plt.plot(K, train_auc, label='Train AUC')
plt.plot(K, cv_auc, label='CV AUC')
plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS")
plt.show()
```

ERROR PLOTS



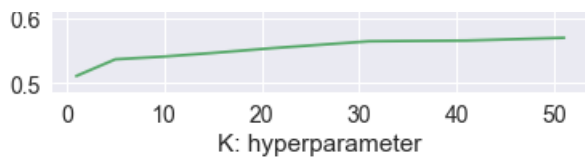

In [84]:

```
from sklearn.metrics import roc_curve, auc

neigh = KNeighborsClassifier(n_neighbors=41)
neigh.fit(X2_train, y_train)
X2_test_csr=X2_test.tocsr()


y_train_pred = batch_predict(neigh, X2_train_csr)
y_test_pred = batch_predict(neigh, X2_test_csr)

train_fpr, train_tpr, tr_thresholds = roc_curve(y_train, batch_predict_proba(neigh, X2_train_csr))
test_fpr, test_tpr, te_thresholds = roc_curve(y_test, batch_predict_proba(neigh, X2_test_csr))

plt.plot(train_fpr, train_tpr, label="train AUC =" +str(auc(train_fpr, train_tpr)))
plt.plot(test_fpr, test_tpr, label="test AUC =" +str(auc(test_fpr, test_tpr)))
plt.legend()
plt.xlabel("False Positive Rate")
plt.ylabel("True Positive Rate")
plt.title("ROC Curve")
plt.show()

print("="*100)

from sklearn.metrics import confusion_matrix
best_t = find_best_threshold(tr_thresholds, train_fpr, train_tpr)
print("Train confusion matrix")
print(confusion_matrix(y_train, predict_with_best_t(y_train_pred, best_t)))
print("Test confusion matrix")
print(confusion_matrix(y_test, predict_with_best_t(y_test_pred, best_t)))
```

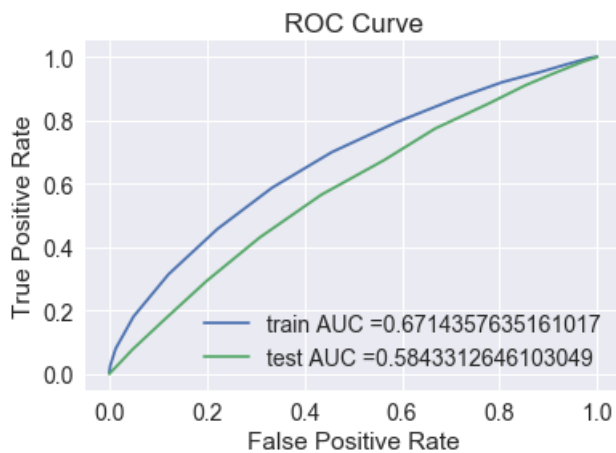

=====

the maximum value of $tpr \cdot (1 - fpr)$ 0.3914176437227715 for threshold 0.854

Train confusion matrix

```
[[ 1 3576]
 [ 0 18868]]
```

Test confusion matrix

```
[[ 0 2659]
 [ 1 13840]]
```


In [85]:

```
import seaborn as sns
df_cm = pd.DataFrame(confusion_matrix(y_train, predict_with_best_t(y_train_pred, best_t)))
df_cm.columns = ['Predicted NO', 'Predicted YES']
df_cm = df_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)
```

```
sns.heatmap(df_cm, annot=True,annot_kws={"size": 16}, fmt='g')
```

Out[85]:

<matplotlib.axes._subplots.AxesSubplot at 0x5e8630d550>

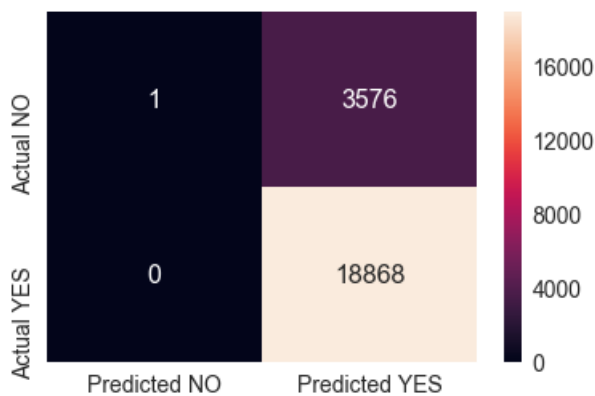


In [86]:

```
df_cm = pd.DataFrame(confusion_matrix(y_test, predict_with_best_t(y_test_pred, best_t)))  
df_cm.columns = ['Predicted NO', 'Predicted YES']  
df_cm = df_cm.rename({0: 'Actual NO', 1: 'Actual YES'})  
sns.set(font_scale=1.4)  
sns.heatmap(df_cm, annot=True,annot_kws={"size": 16}, fmt='g')
```

Out[86]:

<matplotlib.axes._subplots.AxesSubplot at 0x5ea386d780>

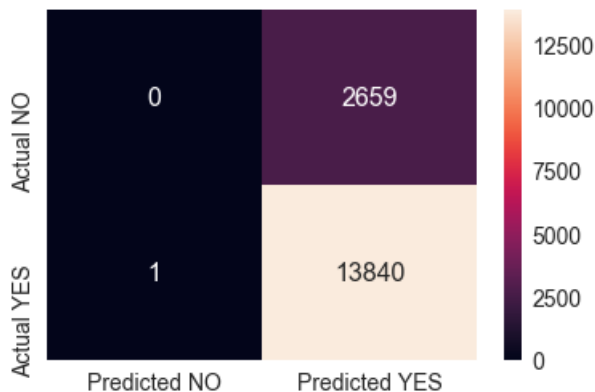

2.4.3 Applying KNN brute force on AVG W2V, SET 3

In [87]:

```
from sklearn.neighbors import KNeighborsClassifier  
from sklearn.metrics import roc_auc_score  
import matplotlib.pyplot as plt  
  
train_auc = []  
cv_auc = []  
K = [1, 5, 10, 15, 21, 31, 41, 51]  
for i in K:  
    neigh = KNeighborsClassifier(n_neighbors=i)  
    neigh.fit(X3_train, y_train)  
  
    X3_train_csr=X3_train.tocsr()  
    X3_cv_csr=X3_cv.tocsr()  
    y_train_pred = batch_predict_proba(neigh, X3_train_csr)  
    y_cv_pred = batch_predict_proba(neigh, X3_cv_csr)  
  
    train_auc.append(roc_auc_score(y_train,y_train_pred))  
    cv_auc.append(roc_auc_score(y_cv, y_cv_pred))
```

```
plt.plot(K, train_auc, label='Train AUC')
plt.plot(K, cv_auc, label='CV AUC')
plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS")
plt.show()
```



In [88]:

```
from sklearn.metrics import roc_curve, auc

neigh = KNeighborsClassifier(n_neighbors=41)
neigh.fit(X3_train, y_train)
X3_test_csr=X3_test.tocsr()


y_train_pred = batch_predict(neigh, X3_train_csr)
y_test_pred = batch_predict(neigh, X3_test_csr)

train_fpr, train_tpr, tr_thresholds = roc_curve(y_train, batch_predict_proba(neigh, X3_train_csr))
test_fpr, test_tpr, te_thresholds = roc_curve(y_test, batch_predict_proba(neigh, X3_test_csr))

plt.plot(train_fpr, train_tpr, label="train AUC =" +str(auc(train_fpr, train_tpr)))
plt.plot(test_fpr, test_tpr, label="test AUC =" +str(auc(test_fpr, test_tpr)))
plt.legend()
plt.xlabel("False Positive Rate")
plt.ylabel("True Positive Rate")
plt.title("ROC Curve")
plt.show()

print("="*100)

from sklearn.metrics import confusion_matrix
best_t = find_best_threshold(tr_thresholds, train_fpr, train_tpr)
print("Train confusion matrix")
print(confusion_matrix(y_train, predict_with_best_t(y_train_pred, best_t)))
print("Test confusion matrix")
print(confusion_matrix(y_test, predict_with_best_t(y_test_pred, best_t)))
```

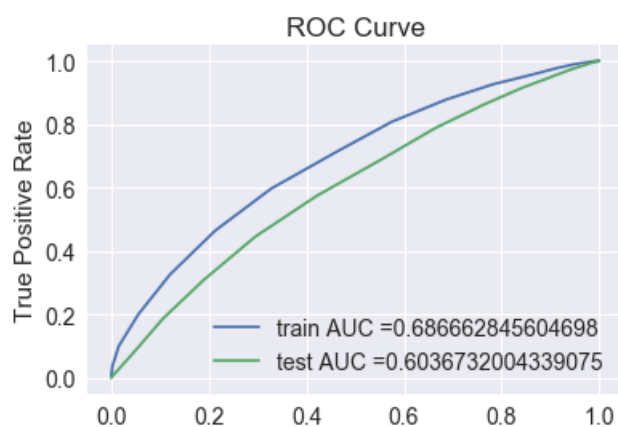

False Positive Rate

the maximum value of $tpr \cdot (1 - fpr)$ 0.40151788903607594 for threshold 0.854

Train confusion matrix

```
[[ 0 3577]
 [ 0 18868]]
```

Test confusion matrix


```
[[ 0 2659]
 [ 0 13841]]
```

In [89]:

```
import seaborn as sns
df_cm = pd.DataFrame(confusion_matrix(y_train, predict_with_best_t(y_train_pred, best_t)))
df_cm.columns = ['Predicted NO', 'Predicted YES']
df_cm = df_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)
sns.heatmap(df_cm, annot=True, annot_kws={"size": 16}, fmt='g')
```

Out[89]:

<matplotlib.axes._subplots.AxesSubplot at 0x5ea38f6d30>

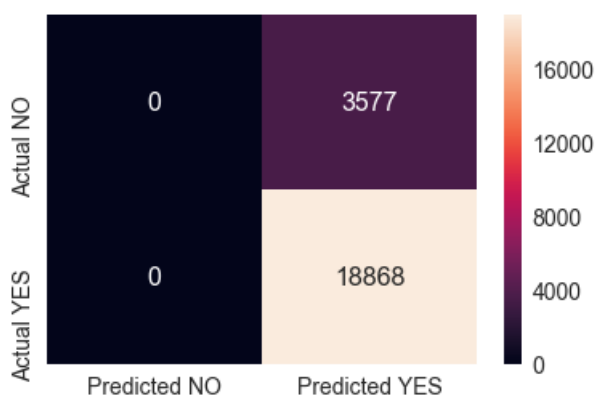


In [90]:

```
df_cm = pd.DataFrame(confusion_matrix(y_test, predict_with_best_t(y_test_pred, best_t)))
df_cm.columns = ['Predicted NO', 'Predicted YES']
df_cm = df_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)
sns.heatmap(df_cm, annot=True, annot_kws={"size": 16}, fmt='g')
```

Out[90]:

<matplotlib.axes._subplots.AxesSubplot at 0x5e862a3e48>

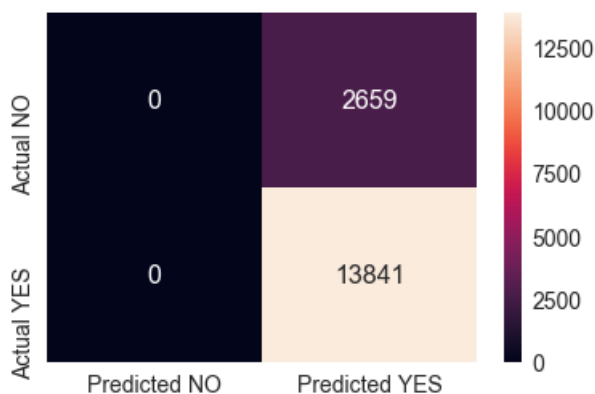

2.4.4 Applying KNN brute force on TFIDF W2V, SET 4

In [91]:


```
from sklearn.neighbors import KNeighborsClassifier
from sklearn.metrics import roc_auc_score
import matplotlib.pyplot as plt

train_auc = []
cv_auc = []
K = [1, 5, 10, 15, 21, 31, 41, 51]
for i in K:
    neigh = KNeighborsClassifier(n_neighbors=i)
    neigh.fit(X4_train, y_train)

    X4_train_csr=X4_train.tocsr()
    X4_cv_csr=X4_cv.tocsr()
    y_train_pred = batch_predict_proba(neigh, X4_train_csr)
    y_cv_pred = batch_predict_proba(neigh, X4_cv_csr)

    train_auc.append(roc_auc_score(y_train,y_train_pred))
    cv_auc.append(roc_auc_score(y_cv, y_cv_pred))

plt.plot(K, train_auc, label='Train AUC')
plt.plot(K, cv_auc, label='CV AUC')
plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS")
plt.show()
```

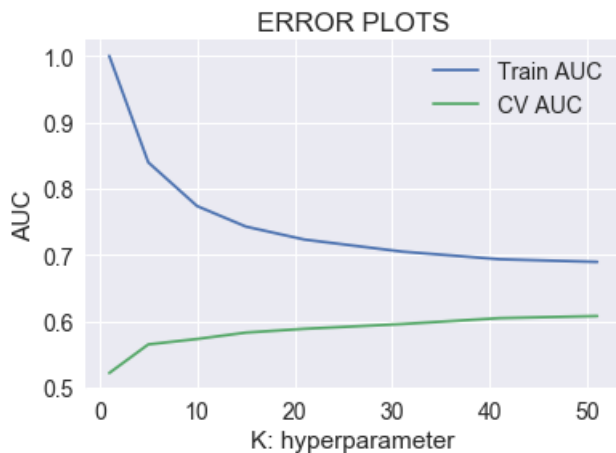

In [92]:

```
from sklearn.metrics import roc_curve, auc

neigh = KNeighborsClassifier(n_neighbors=41)
neigh.fit(X4_train, y_train)

X4_train_csr=X4_train.tocsr()
X4_test_csr=X4_test.tocsr()

y_train_pred = batch_predict(neigh, X4_train_csr)
y_test_pred = batch_predict(neigh, X4_test_csr)

train_fpr, train_tpr, tr_thresholds = roc_curve(y_train, batch_predict_proba(neigh, X4_train_csr))
test_fpr, test_tpr, te_thresholds = roc_curve(y_test, batch_predict_proba(neigh, X4_test_csr))

plt.plot(train_fpr, train_tpr, label="train AUC =" +str(auc(train_fpr, train_tpr)))
plt.plot(test_fpr, test_tpr, label="test AUC =" +str(auc(test_fpr, test_tpr)))
plt.legend()
plt.xlabel("False Positive Rate")
plt.ylabel("True Positive Rate")
plt.title("ROC Curve")
plt.show()


print("="*100)

from sklearn.metrics import confusion matrix
```

```

from sklearn.metrics import confusion_matrix
best_t = find_best_threshold(tr_thresholds, train_fpr, train_tpr)
print("Train confusion matrix")
print(confusion_matrix(y_train, predict_with_best_t(y_train_pred, best_t)))
print("Test confusion matrix")
print(confusion_matrix(y_test, predict_with_best_t(y_test_pred, best_t)))

```

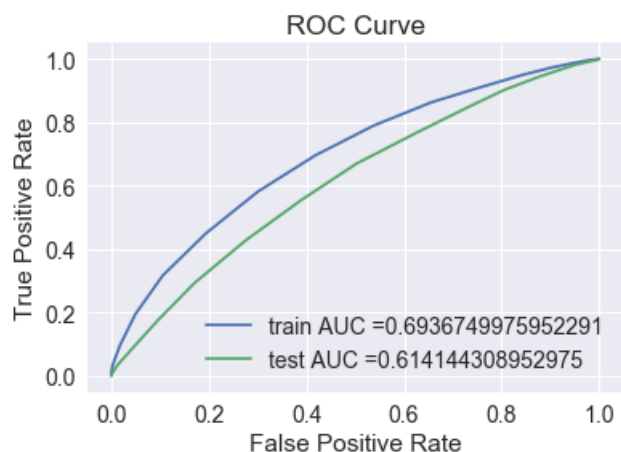

the maximum value of $tpr \cdot (1 - fpr)$ 0.4067419167840801 for threshold 0.854

Train confusion matrix

```

[[ 0 3577]
 [ 0 18868]]

```

Test confusion matrix

```

[[ 0 2659]
 [ 1 13840]]

```

In [93]:


```

import seaborn as sns
df_cm = pd.DataFrame(confusion_matrix(y_train, predict_with_best_t(y_train_pred, best_t)))
df_cm.columns = ['Predicted NO', 'Predicted YES']
df_cm = df_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)
sns.heatmap(df_cm, annot=True, annot_kws={"size": 16}, fmt='g')

```

Out[93]:

<matplotlib.axes._subplots.AxesSubplot at 0x5ea36f6fd0>

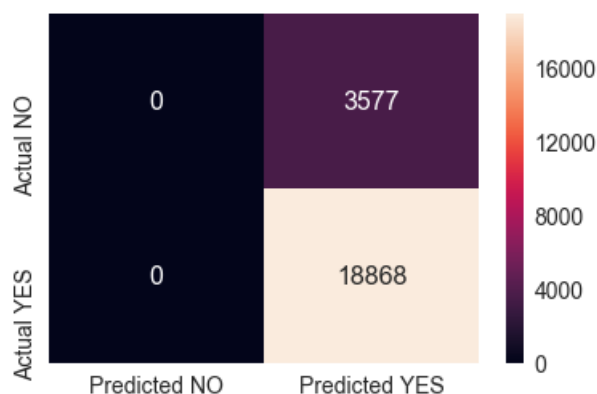

In [94]:


```

df_cm = pd.DataFrame(confusion_matrix(y_test, predict_with_best_t(y_test_pred, best_t)))
df_cm.columns = ['Predicted NO', 'Predicted YES']
df_cm = df_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)
sns.heatmap(df_cm, annot=True, annot_kws={"size": 16}, fmt='g')

```

Out[94]:

<matplotlib.axes._subplots.AxesSubplot at 0x5ea3badf60>

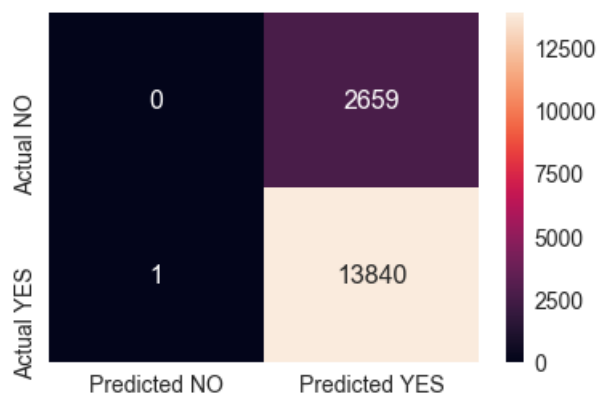

2.5 Feature selection with `SelectKBest`

In [95]:

```
from sklearn.datasets import load_digits
from sklearn.feature_selection import SelectKBest, f_classif

model=SelectKBest(f_classif, k=2000)
model.fit(X2_train, y_train)
X2_train_new = model.transform(X2_train)
X2_cv_new = model.transform(X2_cv)
X2_test_new = model.transform(X2_test)

print(X2_train_new.shape)
print(X2_cv_new.shape)
print(X2_test_new.shape)
```

```
(22445, 2000)
(11055, 2000)
(16500, 2000)
```

In [96]:

```
from sklearn.neighbors import KNeighborsClassifier
from sklearn.metrics import roc_auc_score
import matplotlib.pyplot as plt


train_auc = []
cv_auc = []
K = [1, 5, 10, 15, 21, 31, 41, 51]
for i in K:
    neigh = KNeighborsClassifier(n_neighbors=i)
    neigh.fit(X2_train_new, y_train)

    X2_train_new_csr=X2_train_new.tocsr()
    X2_cv_new_csr=X2_cv_new.tocsr()
    y_train_pred = batch_predict_proba(neigh, X2_train_new_csr)
    y_cv_pred = batch_predict_proba(neigh, X2_cv_new_csr)

    train_auc.append(roc_auc_score(y_train,y_train_pred))
    cv_auc.append(roc_auc_score(y_cv, y_cv_pred))

plt.plot(K, train_auc, label='Train AUC')
plt.plot(K, cv_auc, label='CV AUC')
plt.legend()
plt.xlabel("K: hyperparameter")
plt.ylabel("AUC")
plt.title("ERROR PLOTS")
plt.show()
```



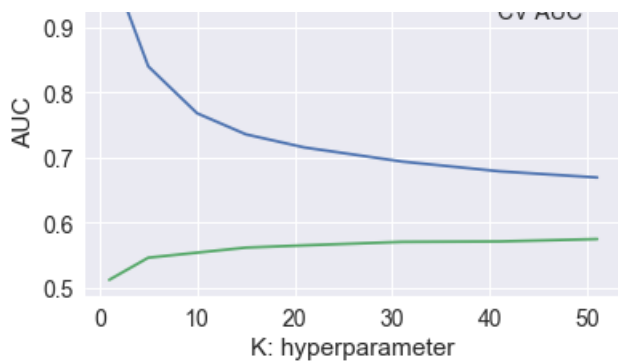

In [98]:

```
from sklearn.metrics import roc_curve, auc

neigh = KNeighborsClassifier(n_neighbors=41)
neigh.fit(X2_train_new, y_train)

X2_train_new_csr=X2_train_new.tocsr()
X2_test_new_csr=X2_test_new.tocsr()


y_train_pred = batch_predict(neigh, X2_train_new_csr)
y_test_pred = batch_predict(neigh, X2_test_new_csr)

train_fpr, train_tpr, tr_thresholds = roc_curve(y_train, batch_predict_proba(neigh,
X2_train_new_csr))
test_fpr, test_tpr, te_thresholds = roc_curve(y_test, batch_predict_proba(neigh, X2_test_new_csr))

plt.plot(train_fpr, train_tpr, label="train AUC =" +str(auc(train_fpr, train_tpr)))
plt.plot(test_fpr, test_tpr, label="test AUC =" +str(auc(test_fpr, test_tpr)))
plt.legend()
plt.xlabel("False Positive Rate")
plt.ylabel("True Positive Rate")
plt.title("ROC Curve")
plt.show()

print("="*100)

from sklearn.metrics import confusion_matrix
best_t = find_best_threshold(tr_thresholds, train_fpr, train_tpr)
print("Train confusion matrix")
print(confusion_matrix(y_train, predict_with_best_t(y_train_pred, best_t)))
print("Test confusion matrix")
print(confusion_matrix(y_test, predict_with_best_t(y_test_pred, best_t)))
```

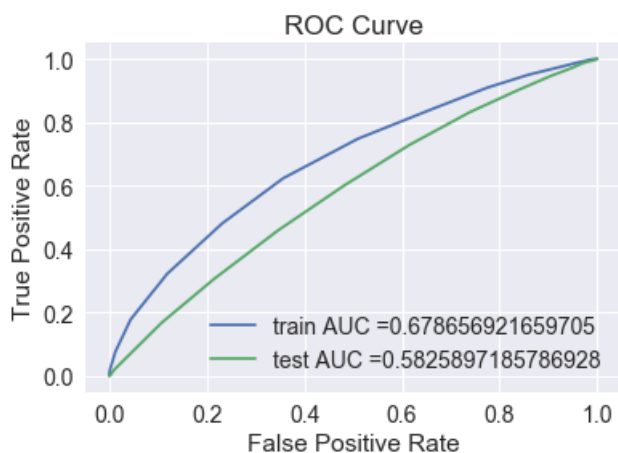

=====

the maximum value of $tpr \cdot (1 - fpr)$ 0.4013527703227739 for threshold 0.854

Train confusion matrix

```
[[ 0 3577]
 [ 0 18868]]
```

Test confusion matrix

```
[[ 0 2659]
```


```
[ 0 13841]]
```

In [99]:

```
import seaborn as sns
df_cm = pd.DataFrame(confusion_matrix(y_train, predict_with_best_t(y_train_pred, best_t)))
df_cm.columns = ['Predicted NO', 'Predicted YES']
df_cm = df_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)
sns.heatmap(df_cm, annot=True, annot_kws={"size": 16}, fmt='g')
```

Out[99]:

<matplotlib.axes._subplots.AxesSubplot at 0x5ea3817940>

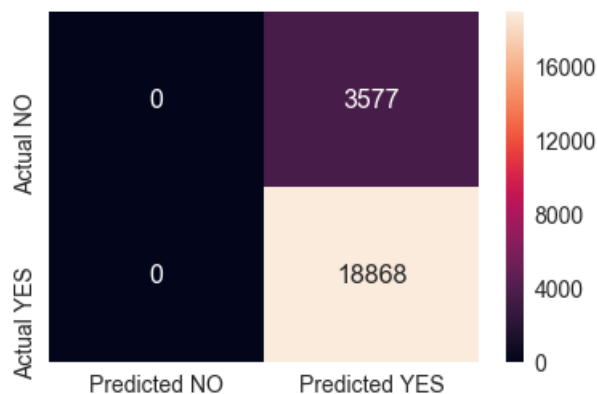


In [100]:

```
df_cm = pd.DataFrame(confusion_matrix(y_test, predict_with_best_t(y_test_pred, best_t)))
df_cm.columns = ['Predicted NO', 'Predicted YES']
df_cm = df_cm.rename({0: 'Actual NO', 1: 'Actual YES'})
sns.set(font_scale=1.4)
sns.heatmap(df_cm, annot=True, annot_kws={"size": 16}, fmt='g')
```

Out[100]:

<matplotlib.axes._subplots.AxesSubplot at 0x5ea36fa978>

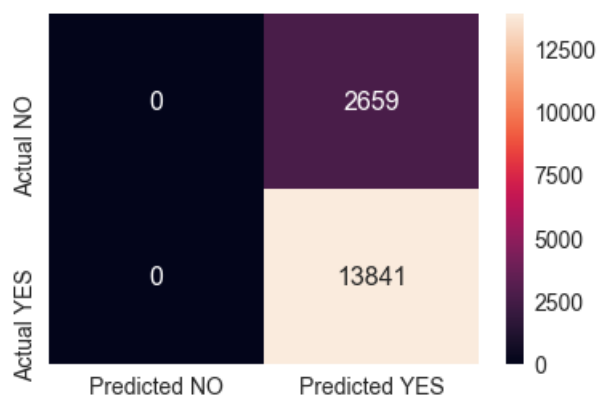

3. Conclusions

In [102]:

```
from prettytable import PrettyTable

x = PrettyTable()

x.field_names = ["Vectorizer", "Model", "HyperParameter", "AUC"]

x.add_row(["BOW", "Brute Force", 41, 0.69 ])
x.add_row(["TFIDF", "Brute Force", 41, 0.67 ])
```

```
x.add_row(["AVG W2V", "Brute Force", 41,0.68 ])
x.add_row(["TFIDF W2V", "Brute Force", 41,0.69 ])

print(x)
```

Vectorizer	Model	HyperParameter	AUC
BOW	Brute Force	41	0.69
TFIDF	Brute Force	41	0.67
AVG W2V	Brute Force	41	0.68
TFIDF W2V	Brute Force	41	0.69