



Terminal

R1 x R2 x R3 x Win-1 x Win-2 x

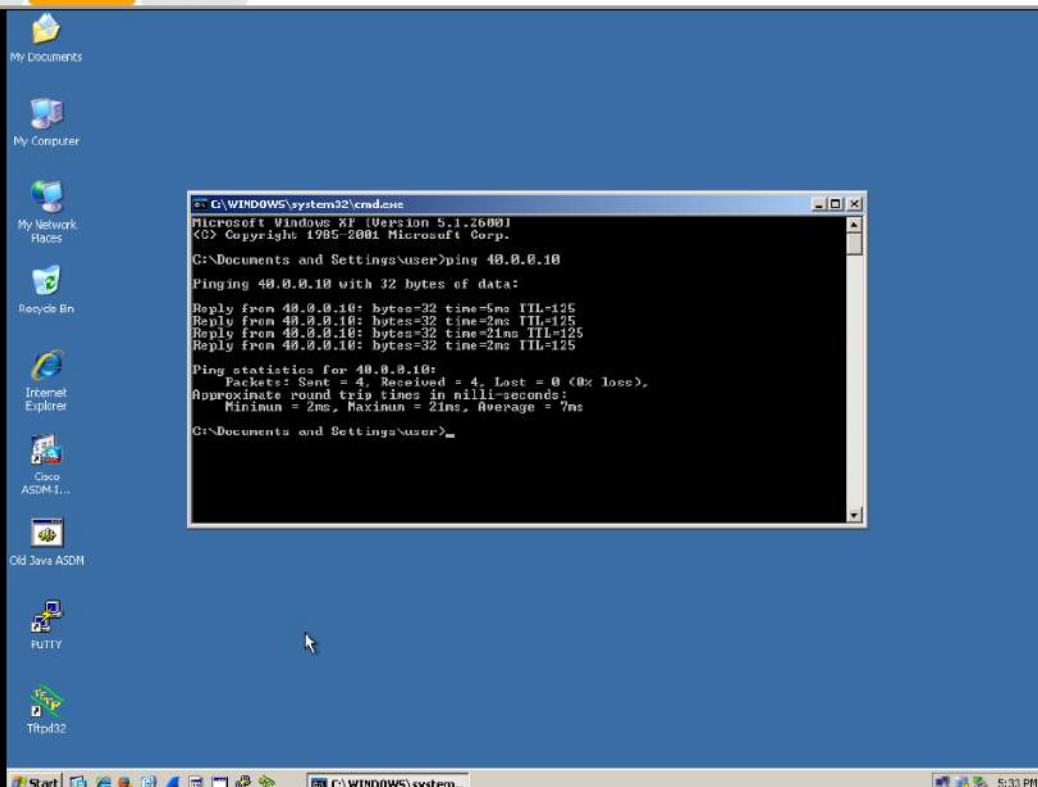

Terminal

R1 x R2 x R3 x Win-1 x Win-2 x

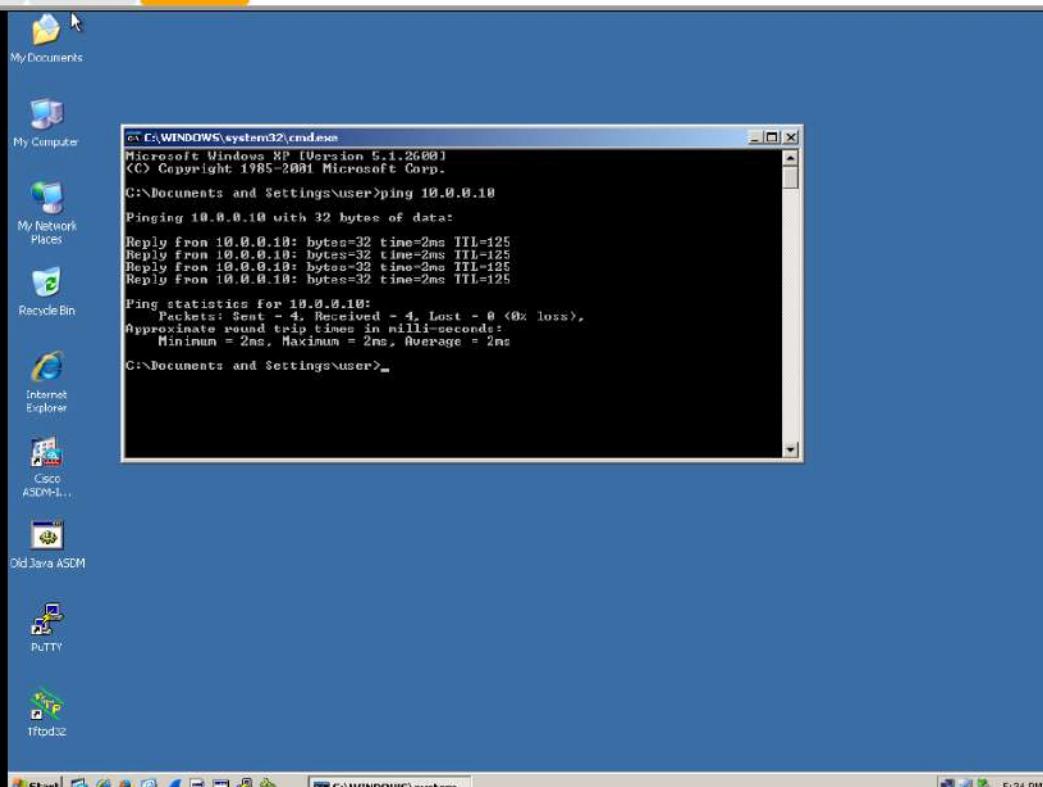

```
Terminal
Win-1 * Win-2 * R1 * R2 * R3 *
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

  10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
  20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
S       30.0.0.0/8 [1/0] via 20.0.0.2
S       40.0.0.0/8 [1/0] via 20.0.0.2
R1#
```

Terminal

Win-1 x Win-2 x R1 x R2 x R3 x

R2#show ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 20.0.0.1
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/0
L 20.0.0.2/32 is directly connected, Ethernet0/0
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 30.0.0.0/8 is directly connected, Ethernet0/1
L 30.0.0.1/32 is directly connected, Ethernet0/1
S 40.0.0.0/8 [1/0] via 30.0.0.2

R2#

```
Terminal
Win-1 x Win-2 x R1 x R2 x R3 x
R3#SHOW IP ROUTE
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, Ethernet0/1
L     30.0.0.2/32 is directly connected, Ethernet0/1
     40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     40.0.0.0/8 is directly connected, Ethernet0/0
L     40.0.0.1/32 is directly connected, Ethernet0/0
R3#
```