



Automated labeling turns wearable sensor windows into behavioral representations

A. Sensor windows occupy separable feature regions

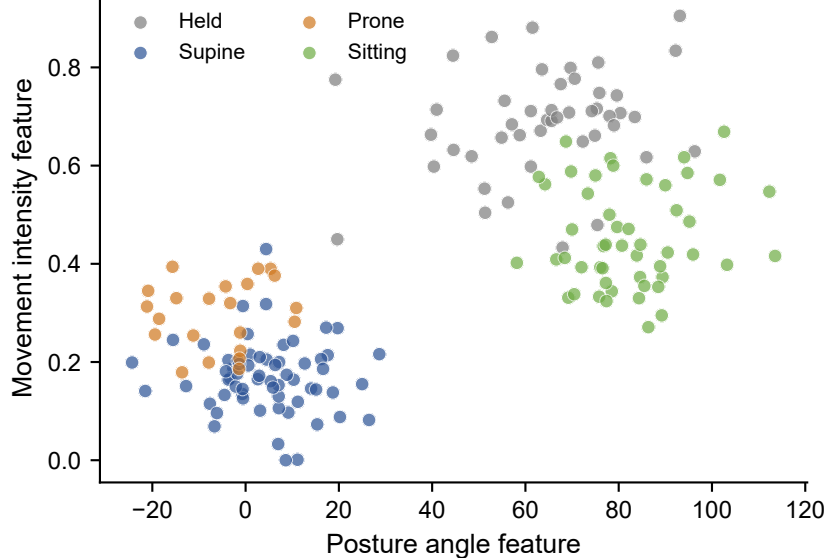

B. Held-out labeling accuracy = 0.92

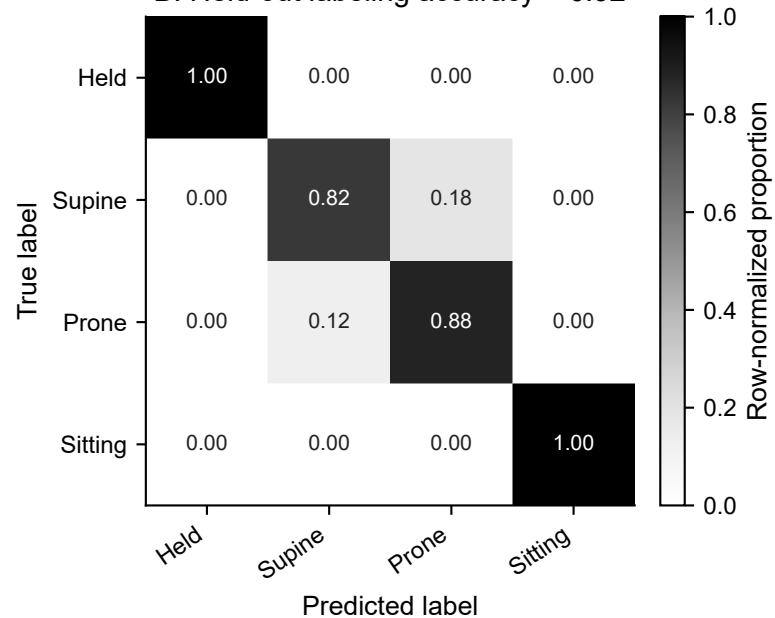

C. Classifier converts dense windows into a behavioral timeline

