



Random forest labeling turns wearable sensor windows into behavioral representations

A. Sensor windows occupy separable feature regions

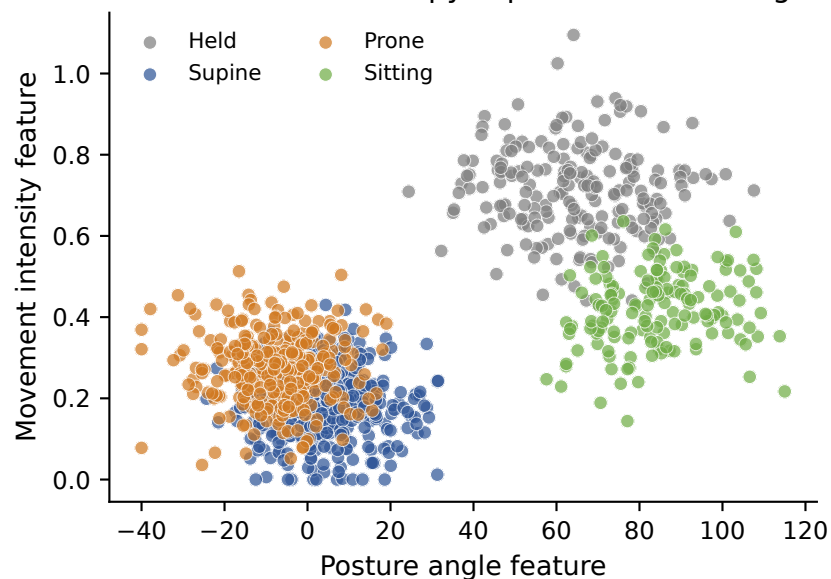

B. Random forest held-out accuracy = 0.94

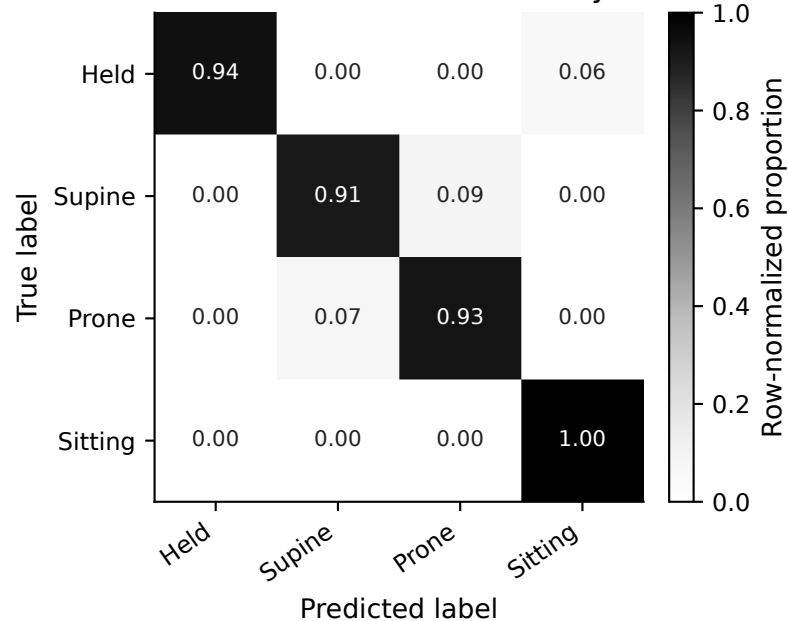

C. Classifier converts dense windows into a behavioral timeline

