

RAJALAKSHMI ENGINEERING COLLEGE

RAJALAKSHMI NAGAR, THANDALAM – 602 105



**RAJALAKSHMI
ENGINEERING COLLEGE**

An AUTONOMOUS Institution
Affiliated to ANNA UNIVERSITY, Chennai

CS23332 DATABASE MANAGEMENT SYSTEMS LAB

Laboratory Record Note Book

Name	Kamalesh P
Register No.	230701137
Year / Branch / Section	2nd year B.E. CSE C
Semester	II
Academic Year	2024-2025

CS23332 DATABASE MANAGEMENT SYSTEMS

NAME	Kamalesh P
ROLL NO	230701137
DEPT	CSE
SEC	C

INDEX

S. NO.	EXPT. DATE	NAME OF THE EXPERIMENT
1	31/7/24	Creation of Base Table and DML Operations
2	3/8/24	Data Manipulations
3	17/8/24	Writing basic SQL Select Statements
4	19/8/24	Working with Constrains
5	22/8/24	Creating Views
6	2/9/24	Restricting and Sorting Data
7	5/9/24	Using Set Operators
8	12/9/24	Working with Multiple Tables
9	21/9/24	Sub Queries
10	30/9/24	Aggregating Data using Group Functions
11	26/10/24	PL SQL Programs
12	26/10/24	Working with Cursor, Procedures and Functions
13	26/10/24	Working with Trigger
14	8/11/24	Mongo DB
15	12/11/24	Other Database Objects
16	12/11/24	Controlling User Access

SQL Statements

1. Data Retrieval(DR)
2. Data Manipulation Language(DML)
3. Data Definition Language(DDL)
4. Data Control Language(DCL)
5. Transaction Control Language(TCL)

TYPE	STATEMENT	DESCRIPTION
DR	SELECT	Retrieves the data from the database
DML	1.INSERT 2.UPDATE 3.DELETE 4.MERGE	Enter new rows, changes existing rows, removes unwanted rows from tables in the database respectively.
DDL	1.CREATE 2.ALTER 3.DROP 4.RENAME 5.TRUNCATE	Sets up, changes and removes data structures from tables.
TCL	1.COMMIT 2.ROLLBACK 3.SAVEPOINT	Manages the changes made by DML statements. Changes to the data can be grouped together into logical transactions.
DCL	1.GRANT 2.REVOKE	Gives or removes access rights to both the oracle database and the structures within it.

DATA TYPES

1. Character Data types:

- Char – fixed length character string that can varies between 1-2000 bytes
- Varchar / Varchar2 – variable length character string, size ranges from 1-4000 bytes.it saves the disk space(only length of the entered value will be assigned as the size of column)
- Long - variable length character string, maximum size is 2 GB

2. Number Data types : Can store +ve, -ve, zero, fixed point, floating point with 38 precision.

- Number – {p=38,s=0}
- Number(p) - fixed point
- Number(p,s) –floating point (p=1 to 38,s= -84 to 127)

3. **Date Time Data type:** used to store date and time in the table.
 - DB uses its own format of storing in fixed length of 7 bytes for century, date, month, year, hour, minutes, and seconds.
 - Default data type is —dd-mon-yy||
 - New Date time data types have been introduced. They are
 - TIMESTAMP-Date with fractional seconds
 - INTERVAL YEAR TO MONTH-stored as an interval of years and months
 - INTERVAL DAY TO SECOND-stored as o interval of days to hour's minutes and seconds
4. **Raw Data type:** used to store byte oriented data like binary data and byte string.
5. **Other :**
 - CLOB – stores character object with single byte character.
 - BLOB – stores large binary objects such as graphics, video, sounds.
 - BFILE – stores file pointers to the LOB's.

Creating and Managing Tables

OBJECTIVE

After the completion of this exercise, students should be able to do the following:

- ☐ Create tables
- ☐ Describing the data types that can be used when specifying column definition
- ☐ Alter table definitions
- ☐ Drop, rename, and truncate tables

NAMING RULES

Table names and column names:

- Must begin with a letter
- Must be 1-30 characters long
- Must contain only A-Z, a-z, 0-9, _, \$, and #
- Must not duplicate the name of another object owned by the same user
- Must not be an oracle server reserve words
- 2 different tables should not have same name.
- Should specify a unique column name.
- Should specify proper data type along with width
- Can include —not null|| condition when needed. By default it is _null'.

OBJECTIVE

After, the completion of this exercise the students will be able to do the following

- Describe each DML statement
- Insert rows into tables
- Update rows into table
- Delete rows from table
- Control Transactions

A DML statement is executed when you:

- Add new rows to a table
- Modify existing rows
- Removing existing rows

A transaction consists of a collection of DML statements that form a logical unit of work.

The ALTER TABLE Statement

The ALTER statement is used to

- Add a new column
- Modify an existing column
- Define a default value to the new column
- Drop a column
- To include or drop integrity constraint.

DROPPING A TABLE

- All data and structure in the table is deleted.
- Any pending transactions are committed.
- All indexes are dropped.
- Cannot roll back the drop table statement

To Add a New Row

INSERT Statement

Syntax

INSERT INTO table_name VALUES (column1 values, column2 values, ..., columnn values);

Example:

INSERT INTO department (70, 'Public relations', 100, 1700);

Inserting rows with null values

Implicit Method: (Omit the column)

INSERT INTO department VALUES (30, 'purchasing');

Explicit Method: (Specify NULL keyword)

```
INSERT INTO department VALUES (100,'finance', NULL, NULL);
```

Inserting Special Values

Example:

Using SYSDATE

```
INSERT INTO employees VALUES (113,'louis', _popp', _lpopp', '5151244567',SYSDATE,
_ac_account', 6900, NULL, 205, 100);
```

Inserting Specific Date Values

Example:

```
INSERT INTO employees VALUES ( 114,'den', _raphealy', _drapheal', _5151274561',
TO_DATE('feb 3,1999','mon, dd ,yyyy'), _ac_account', 11000,100,30);
```

To Insert Multiple Rows

& is the placeholder for the variable value

Example:

```
INSERT INTO department VALUES (&dept_id, &dept_name, &location);
```

Copying Rows from another table

□ Using Subquery

Example:

```
INSERT INTO sales_reps(id, name, salary, commission_pct)
SELECT employee_id, Last_name, salary, commission_pct
FROM employees
WHERE job_id LIKE '%REP';
```

CHANGING DATA IN A TABLE

UPDATE Statement

Syntax1: (to update specific rows)

```
UPDATE table_name SET column=value WHERE condition;
```

Syntax 2: (To updae all rows)

```
UPDATE table_name SET column=value;
```

Updating columns with a subquery

```
UPDATE employees  
SET job_id= (SELECT job_id  
FROM employees  
WHERE  
employee_id=205)  
WHERE employee_id=114;
```

REMOVING A ROW FROM A TABLE

DELETE STATEMENT

Syntax

```
DELETE FROM table_name WHERE conditions;
```

Example:

```
DELETE FROM department WHERE dept_name='finance';
```


Ex.No.: 1	CREATION OF BASE TABLE AND DML OPERATIONS
Date: 31/7/24	

AIM:

ALGORITHM:

STEP-1: Start.

STEP-2: Create a base Table

Syntax:

CREATE TABLE <table name> (column1 type, column2 type, ...);

STEP-3: Describe the Table structure

Syntax:

DESC <table name>

STEP-4: Add a new row to a Table using INSERT statement.

Syntax:

- INSERT INTO <table name> VALUES (value1, value2..);
- INSERT INTO <table name> (column1, column2..) VALUES (value1, value2..);
- INSERT INTO <table name>VALUES (&column1,'&column');

STEP-5: Modify the existing rows in the base Table with UPDATE statement.

Syntax:

UPDATE <table name> SET column1=value, column2 = 'value'
WHERE (condition);

STEP-6: Remove the existing rows from the Table using DELETE statement.

Syntax:

DELETE FROM <table name> WHERE <condition>;

STEP-7: Perform a Query using SELECT statement.

Syntax:

SELECT [DISTINCT] {*,<column1,..>} FROM <table name>
WHERE <condition>;

STEP-8: The truncate command deletes all rows from the table. Only the structure of the table remains.

Syntax:
TRUNCATE TABLE <table name>;

STEP-9: Alter the existing table using ALTER statement.

Syntax:

Add Column:

ALTER TABLE <table name> ADD (column data type
[DEFAULT expr][,column data type]);

Modify Column:

ALTER TABLE <table name> MODIFY (column data type
[DEFAULT expr], [,column data type]);

Drop Column:

ALTER TABLE <table name> DROP COLUMN <column name>;

STEP-10: To drop the entire table using DROP statement.

Syntax:
DROP TABLE <table name>;

STEP-11: Exit.

1. Create MY_EMPLOYEE table with the following structure

NAME	NULL?	TYPE
ID	Not null	Number(4)
Last_name		Varchar(25)
First_name		Varchar(25)
Userid		Varchar(25)
Salary		Number(9,2)

2. Add the first and second rows data to MY_EMPLOYEE table from the following sample data.

ID	Last_name	First_name	Userid	salary
1	Patel	Ralph	rpatel	895
2	Dancs	Betty	bdancs	860
3	Biri	Ben	bbiri	1100
4	Newman	Chad	Cnewman	750
5	Ropebur	Audrey	aropebur	1550

3. Display the table with values.
4. Populate the next two rows of data from the sample data. Concatenate the first letter of the first_name with the first seven characters of the last_name to produce Userid.
5. Delete Betty dancs from MY_EMPLOYEE table.

6. Empty the fourth row of the emp table.
7. Make the data additions permanent.
8. Change the last name of employee 3 to Drexler.
9. Change the salary to 1000 for all the employees with a salary less than 900.

Evaluation Procedure	Marks awarded
Query(5)	
Execution (5)	
Viva(5)	
Total (15)	
Faculty Signature	

Ex. No.: 1

CREATION OF BASE TABLE AND DML OPERATIONS

1.

```
CREATE TABLE MY_EMPLOYEE (  
    ID NUMBER(4) NOT NULL,  
    Last_name VARCHAR2(25),  
    First_name VARCHAR2(25),  
    Userid VARCHAR2(25),  
    Salary NUMBER(9,2),  
    CONSTRAINT pk_employee PRIMARY KEY (ID)  
);
```

2.

```
INSERT INTO MY_EMPLOYEE (ID, Last_name, First_name, Userid, Salary)  
VALUES (1, 'Patel', 'Ralph', 'rpatel', 895);  
INSERT INTO MY_EMPLOYEE (ID, Last_name, First_name, Userid, Salary)  
VALUES (2, 'Dancs', 'Betty', 'bdancs', 860);
```

3.

```
SELECT * FROM MY_EMPLOYEE;
```

4.

```
INSERT INTO MY_EMPLOYEE (ID, Last_name, First_name, Userid, Salary)  
VALUES (3, 'Biri', 'Ben', NULL, 1100);  
INSERT INTO MY_EMPLOYEE (ID, Last_name, First_name, Userid, Salary)  
VALUES (4, 'Newman', 'Chad', NULL, 750);  
  
UPDATE MY_EMPLOYEE  
SET Userid = LOWER(CONCAT(SUBSTR(First_name, 1, 1), SUBSTR(Last_name, 1, 7)))  
WHERE ID = 3 OR ID = 4;
```

5.

```
DELETE FROM MY_EMPLOYEE  
WHERE First_name = 'Betty' AND Last_name = 'Dancs';
```

6.

```
UPDATE MY_EMPLOYEE  
SET Last_name = NULL, First_name = NULL, Userid = NULL, Salary = NULL  
WHERE ID = 4;
```

7.

```
COMMIT;
```

8.

```
UPDATE MY_EMPLOYEE  
SET Last_name = 'Drexler'  
WHERE ID = 3;
```

9.

```
UPDATE MY_EMPLOYEE  
SET Salary = 1000  
WHERE Salary < 900;
```

Ex.No.: 2	DATA MANIPULATIONS
Date: 3/8/24	

Create the following tables with the given structure.

EMPLOYEES TABLE

NAME	NULL?	TYPE
Employee_id	Not null	Number(6)
First_Name		Varchar(20)
Last_Name	Not null	Varchar(25)
Email	Not null	Varchar(25)
Phone_Number		Varchar(20)
Hire_date	Not null	Date
Job_id	Not null	Varchar(10)
Salary		Number(8,2)
Commission_pct		Number(2,2)
Manager_id		Number(6)
Department_id		Number(4)

(a) Find out the employee id, names, salaries of all the employees

(b) List out the employees who works under manager 100

(c) Find the names of the employees who have a salary greater than or equal to 4800

(d) List out the employees whose last name is 'AUSTIN'

(e) Find the names of the employees who work in departments 60, 70 and 80

(f) Display the unique Manager_Id.

Create an Emp table with the following fields: (EmpNo, EmpName, Job, Basic, DA, HRA, PF, GrossPay, NetPay) (Calculate DA as 30% of Basic and HRA as 40% of Basic)

(a) Insert Five Records and calculate GrossPay and NetPay.

(b) Display the employees whose Basic is lowest in each department.

(c) If Net Pay is less than

DEPARTMENT TABLE

NAME	NULL?	TYPE
Dept_id	Not null	Number(6)
Dept_name	Not null	Varchar(20)
Manager_id		Number(6)
Location_id		Number(4)

JOB_GRADE TABLE

NAME	NULL?	TYPE
Grade_level		Varchar(2)
Lowest_sal		Number
Highest_sal		Number

LOCATION TABLE

NAME	NULL?	TYPE
Location_id	Not null	Number(4)
St_addr		Varchar(40)
Postal_code		Varchar(12)
City	Not null	Varchar(30)
State_province		Varchar(25)
Country_id		Char(2)

1. Create the DEPT table based on the DEPARTMENT following the table instance chart below. Confirm that the table is created.

Column name	ID	NAME
Key Type		
Nulls/Unique		
FK table		
FK column		
Data Type	Number	Varchar2
Length	7	25

2. Create the EMP table based on the following instance chart. Confirm that the table is created.

Column name	ID	LAST_NAME	FIRST_NAME	DEPT_ID
Key Type				
Nulls/Unique				
FK table				
FK column				
Data Type	Number	Varchar2	Varchar2	Number
Length	7	25	25	7

- 3 Modify the EMP table to allow for longer employee last names. Confirm the modification.(Hint: Increase the size to 50)
- 4 Create the EMPLOYEES2 table based on the structure of EMPLOYEES table. Include Only the Employee_id, First_name, Last_name, Salary and Dept_id coloumns. Name the columns Id, First_name, Last_name, salary and Dept_id respectively.
- 5 Drop the EMP table.
- 6 Rename the EMPLOYEES2 table as EMP.

- 7 Add a comment on DEPT and EMP tables. Confirm the modification by describing the table.
- 8 Drop the First_name column from the EMP table and confirm it.

Evaluation Procedure	Marks awarded
Query(5)	
Execution (5)	
Viva(5)	
Total (15)	
Faculty Signature	

Ex. No.: 2

DATA MANIPULATIONS

A.

Initial:

```
CREATE TABLE EMPLOYEES (  
    Employee_id NUMBER(6) NOT NULL,  
    First_Name VARCHAR2(20),  
    Last_Name VARCHAR2(25) NOT NULL,  
    Email VARCHAR2(25) NOT NULL,  
    Phone_Number VARCHAR2(20),  
    Hire_date DATE NOT NULL,  
    Job_id VARCHAR2(10) NOT NULL,  
    Salary NUMBER(8,2),  
    Commission_pct NUMBER(2,2),  
    Manager_id NUMBER(6),  
    Department_id NUMBER(4),  
    CONSTRAINT pk_employee_id PRIMARY KEY (Employee_id)  
);  
  
INSERT INTO EMPLOYEES  
VALUES (101, 'John', 'Doe', 'jdoe@example.com', '1234567890', TO_DATE('2022-06-15',  
'YYYY-MM-DD'), 'IT_PROG', 5000, NULL, 100, 60);  
  
INSERT INTO EMPLOYEES  
VALUES (102, 'Jane', 'Austin', 'jaustin@example.com', '0987654321',  
TO_DATE('2022-08-20', 'YYYY-MM-DD'), 'HR_MAN', 4800, NULL, 101, 70);  
  
INSERT INTO EMPLOYEES  
VALUES (103, 'Mark', 'Smith', 'msmith@example.com', '1230984567',  
TO_DATE('2023-01-10', 'YYYY-MM-DD'), 'SA_REP', 4600, 0.10, 100, 80);
```

```
INSERT INTO EMPLOYEES
VALUES (104, 'Chad', 'Newman', 'cnewman@example.com', '7896541230',
TO_DATE('2021-11-03', 'YYYY-MM-DD'), 'FI_MGR', 6000, NULL, 102, 60);
```

```
INSERT INTO EMPLOYEES
VALUES (105, 'Betty', 'Austin', 'baustin@example.com', '9874563210',
TO_DATE('2020-12-25', 'YYYY-MM-DD'), 'HR_CLERK', 3900, NULL, 101, 70);
```

1.

```
SELECT Employee_id, First_Name, Last_Name, Salary
FROM EMPLOYEES;
```

2.

```
SELECT Employee_id, First_Name, Last_Name
FROM EMPLOYEES
WHERE Manager_id = 100;
```

3.

```
SELECT First_Name, Last_Name
FROM EMPLOYEES
WHERE Salary >= 4800;
```

4.

```
SELECT First_Name, Last_Name
FROM EMPLOYEES
WHERE Last_Name = 'AUSTIN';
```

5.

```
SELECT First_Name, Last_Name
FROM EMPLOYEES
WHERE Department_id IN (60, 70, 80);
```

6.

```
SELECT DISTINCT Manager_id  
FROM EMPLOYEES;
```

B.

Initial:

```
CREATE TABLE EMP (  
    EmpNo NUMBER(6),  
    EmpName VARCHAR2(25),  
    Job VARCHAR2(20),  
    Basic NUMBER(8,2),  
    DA NUMBER(8,2),  
    HRA NUMBER(8,2),  
    PF NUMBER(8,2),  
    GrossPay NUMBER(8,2),  
    NetPay NUMBER(8,2),  
    Department_id NUMBER(4)  
);
```

1.

```
INSERT INTO EMP (EmpNo, EmpName, Job, Basic, Department_id)  
VALUES (1, 'John Doe', 'Manager', 5000, 60);  
INSERT INTO EMP (EmpNo, EmpName, Job, Basic, Department_id)  
VALUES (2, 'Jane Austin', 'Clerk', 4000, 70);  
INSERT INTO EMP (EmpNo, EmpName, Job, Basic, Department_id)  
VALUES (3, 'Mark Smith', 'Sales', 3500, 80);  
INSERT INTO EMP (EmpNo, EmpName, Job, Basic, Department_id)  
VALUES (4, 'Chad Newman', 'Manager', 6000, 60);  
INSERT INTO EMP (EmpNo, EmpName, Job, Basic, Department_id)  
VALUES (5, 'Betty Austin', 'HR', 3900, 70);
```

```
UPDATE EMP
```

```
SET
```

```
    DA = 0.30 * Basic,
```

```
    HRA = 0.40 * Basic,
```

```
    PF = 0.12 * Basic;
```

```
UPDATE EMP
```

```
SET
```

```
    GrossPay = Basic + DA + HRA;
```

```
UPDATE EMP
```

```
SET
```

```
    NetPay = GrossPay - PF;
```

2.

```
SELECT *
```

```
FROM EMP e
```

```
WHERE Basic = (
```

```
    SELECT MIN(Basic)
```

```
    FROM EMP
```

```
    WHERE Department_id = e.Department_id
```

```
);
```

3.

```
SELECT EmpName, NetPay
```

```
FROM EMP
```

```
WHERE NetPay < 7500;
```

C.

1.

```
CREATE TABLE DEPT (  
    ID NUMBER(7),  
    NAME VARCHAR2(25),  
    CONSTRAINT pk_dept PRIMARY KEY (ID)  
);
```

2.

```
CREATE TABLE EMP (  
    ID NUMBER(7),  
    LAST_NAME VARCHAR2(25),  
    FIRST_NAME VARCHAR2(25),  
    DEPT_ID NUMBER(7),  
    CONSTRAINT pk_emp PRIMARY KEY (ID)  
);
```

3.

```
ALTER TABLE EMP  
MODIFY LAST_NAME VARCHAR2(50);
```

4.

```
CREATE TABLE EMPLOYEES2 AS  
SELECT Employee_id AS Id, First_Name, Last_Name, Salary, Department_id AS Dept_id  
FROM EMPLOYEES;
```

5.

```
DROP TABLE EMP;
```

6.

```
ALTER TABLE EMPLOYEES2  
RENAME TO EMP;
```


7.

```
COMMENT ON TABLE DEPT IS 'Department Table';
```

```
COMMENT ON TABLE EMP IS 'Employees Table';
```

```
DESC DEPT;
```

```
DESC EMP;
```

8.

```
ALTER TABLE EMP
```

```
DROP COLUMN First_Name;
```

```
DESC EMP;
```

Ex.No.: 3		WRITING BASIC SQL SELECT STATEMENTS
Date:	17/8/24	

OBJECTIVES

After the completion of this exercise, the students will be able to do the following:

- List the capabilities of SQL SELECT Statement
- Execute a basic SELECT statement

Capabilities of SQL SELECT statement

A SELECT statement retrieves information from the database. Using a select statement, we can perform

- ✓ Projection: To choose the columns in a table
- ✓ Selection: To choose the rows in a table
- ✓ Joining: To bring together the data that is stored in different tables

Basic SELECT Statement

Syntax

```
SELECT *|DISTINCT Column_ name| alias
FROM table_name;
```

NOTE:

DISTINCT—Suppress the duplicates.

Alias—gives selected columns different

headings. **Example: 1**

```
SELECT * FROM departments;
```

Example: 2

```
SELECT location_id, department_id FROM departments;
```

Writing SQL Statements

- SQL statements are not case sensitive
- SQL statements can be on one or more lines.

- Keywords cannot be abbreviated or split across lines
- Clauses are usually placed on separate lines
- Indents are used to enhance readability

Using Arithmetic Expressions

Basic Arithmetic operators like *, /, +, - can be used

Example:1

```
SELECT last_name, salary, salary+300 FROM employees;
```

Example:2

```
SELECT last_name, salary, 12*salary+100 FROM employees;
```

The statement is not same as

```
SELECT last_name, salary, 12*(salary+100) FROM employees;
```

Example:3

```
SELECT last_name, job_id, salary, commission_pct FROM employees;
```

Example:4

```
SELECT last_name, job_id, salary, 12*salary*commission_pct FROM employees;
```

Using Column Alias

- To rename a column heading with or without AS keyword.

Example:1

```
SELECT last_name AS Name
FROM employees;
```

Example: 2

```
SELECT last_name —Name|| salary*12 —Annual
Salary — FROM employees;
```

Concatenation Operator

- Concatenates columns or character strings to other columns
- Represented by two vertical bars (||)
- Creates a resultant column that is a character expression

Example:

```
SELECT last_name||job_id AS —EMPLOYEES JOB|| FROM employees;
```

Using Literal Character String

- A literal is a character, a number, or a date included in the SELECT list.
- Date and character literal values must be enclosed within single quotation marks.

Example:

```
SELECT last_name||'is a'||job_id AS —EMPLOYEES JOB|| FROM employees;
```

Eliminating Duplicate Rows

- Using DISTINCT keyword.

Example:

```
SELECT DISTINCT department_id FROM employees;
```

Displaying Table Structure

- Using DESC keyword.

Syntax

```
DESC table_name;
```

Example:

```
DESC employees;
```

Find the Solution for the following:

True OR False

1. The following statement executes successfully.

Identify the Errors

```
SELECT employee_id,  
last_name sal*12 ANNUAL  
SALARY  
FROM employees;
```

Queries

2. Show the structure of departments the table. Select all the data from it.

3. Create a query to display the last name, job code, hire date, and employee number for each employee, with employee number appearing first.
4. Provide an alias STARTDATE for the hire date.
5. Create a query to display unique job codes from the employee table.
6. Display the last name concatenated with the job ID , separated by a comma and space, and name the column EMPLOYEE and TITLE.
7. Create a query to display all the data from the employees table. Separate each column by a comma. Name the column THE_OUTPUT.

Evaluation Procedure	Marks awarded
Query(5)	
Execution (5)	
Viva(5)	
Total (15)	
Faculty Signature	

Ex. No.: 3

WRITING BASIC SQL SELECT STATEMENTS

Initial:

```
CREATE TABLE departments (  
    dept_id NUMBER(4) PRIMARY KEY,  
    dept_name VARCHAR2(30),  
    manager_id NUMBER(6),  
    location_id NUMBER(4)  
);
```

```
INSERT INTO departments (dept_id, dept_name, manager_id, location_id)  
VALUES (10, 'HR', 101, 1001);  
INSERT INTO departments (dept_id, dept_name, manager_id, location_id)  
VALUES (20, 'Sales', 102, 1002);  
INSERT INTO departments (dept_id, dept_name, manager_id, location_id)  
VALUES (30, 'IT', 103, 1003);
```

```
CREATE TABLE EMPLOYEES (  
    Employee_id NUMBER(6) NOT NULL,  
    First_Name VARCHAR2(20),  
    Last_Name VARCHAR2(25) NOT NULL,  
    Email VARCHAR2(25) NOT NULL,  
    Phone_Number VARCHAR2(20),  
    Hire_date DATE NOT NULL,  
    Job_id VARCHAR2(10) NOT NULL,  
    Salary NUMBER(8,2),  
    Commission_pct NUMBER(2,2),  
    Manager_id NUMBER(6),  
    Department_id NUMBER(4),  
    CONSTRAINT pk_employee_id PRIMARY KEY (Employee_id)  
);
```

```
INSERT INTO EMPLOYEES
VALUES (101, 'John', 'Doe', 'jdoe@example.com', '1234567890', TO_DATE('2022-06-15',
'YYYY-MM-DD'), 'IT_PROG', 5000, NULL, 100, 60);
```

```
INSERT INTO EMPLOYEES
VALUES (102, 'Jane', 'Austin', 'jaustin@example.com', '0987654321',
TO_DATE('2022-08-20', 'YYYY-MM-DD'), 'HR_MAN', 4800, NULL, 101, 70);
```

```
INSERT INTO EMPLOYEES
VALUES (103, 'Mark', 'Smith', 'msmith@example.com', '1230984567',
TO_DATE('2023-01-10', 'YYYY-MM-DD'), 'SA_REP', 4600, 0.10, 100, 80);
```

```
INSERT INTO EMPLOYEES
VALUES (104, 'Chad', 'Newman', 'cnewman@example.com', '7896541230',
TO_DATE('2021-11-03', 'YYYY-MM-DD'), 'FI_MGR', 6000, NULL, 102, 60);
```

```
INSERT INTO EMPLOYEES
VALUES (105, 'Betty', 'Austin', 'baustin@example.com', '9874563210',
TO_DATE('2020-12-25', 'YYYY-MM-DD'), 'HR_CLERK', 3900, NULL, 101, 70);
```

1.

```
SELECT Employee_id, Last_Name, Salary * 12 AS "ANNUAL SALARY"
FROM EMPLOYEES;
```

2.

```
DESC departments;
SELECT * FROM departments;
```

3.

```
SELECT employee_id, last_name, job_id, hire_date
FROM employees;
```

4.

```
SELECT employee_id, last_name, job_id, hire_date AS "STARTDATE"  
FROM employees;
```

5.

```
SELECT DISTINCT job_id  
FROM employees;
```

6.

```
SELECT last_name || ', ' || job_id AS "EMPLOYEE and TITLE"  
FROM employees;
```

7.

```
SELECT employee_id || ', ' || first_name || ', ' || last_name || ', ' || email || ', ' ||  
phone_number || ', ' || hire_date || ', ' || job_id || ', ' || salary || ', ' || commission_pct || ', ' ||  
manager_id || ', ' || department_id AS "THE_OUTPUT"  
FROM employees;
```


Ex.No.: 4		WORKING WITH CONSTRAINTS
Date:	19/8/24	

OBJECTIVE

After the completion of this exercise the students should be able to do the following

- Describe the constraints
- Create and maintain the constraints

What are Integrity constraints?

- Constraints enforce rules at the table level.
- Constraints prevent the deletion of a table if there are dependencies

The following types of integrity constraints are valid

a) Domain Integrity

- ✓ NOT NULL
- ✓ CHECK

b) Entity Integrity

- ✓ UNIQUE
- ✓ PRIMARY KEY

c) Referential Integrity

- ✓ FOREIGN KEY

Constraints can be created in either of two ways

1. At the same time as the table is created
2. After the table has been created.

Defining Constraints

Create table tablename (column_name1 data_type constraints, column_name2 data_type constraints ...);

Example:

Create table employees (employee_id number(6), first_name varchar2(20), ..job_id varchar2(10), CONSTRAINT emp_emp_id_pk PRIMARY KEY (employee_id));

Domain Integrity

This constraint sets a range and any violations that takes place will prevent the user from performing the manipulation that caused the breach. It includes:

NOT NULL Constraint

While creating tables, by default the rows can have null value. the enforcement of not null constraint in a table ensure that the table contains values.

Principle of null values:

- o Setting null value is appropriate when the actual value is unknown, or when a value would not be meaningful.
- o A null value is not equivalent to a value of zero.
- o A null value will always evaluate to null in any expression.
- o When a column name is defined as not null, that column becomes a mandatory i.e., the user has to enter data into it.
- o Not null Integrity constraint cannot be defined using the alter table command when the table contain rows.

Example

```
CREATE TABLE employees (employee_id number (6), last_name varchar2(25) NOT NULL, salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn NOT NULL '....');
```

CHECK

Check constraint can be defined to allow only a particular range of values. when the manipulation violates this constraint, the record will be rejected. Check condition cannot contain sub queries.

```
CREATE TABLE employees (employee_id number (6), last_name varchar2 (25) NOT NULL, salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn NOT NULL '...', CONSTRAINT emp_salary_mi CHECK(salary > 0));
```

Entity Integrity

Maintains uniqueness in a record. An entity represents a table and each row of a table represents an instance of that entity. To identify each row in a table uniquely we need to use this constraint. There are 2 entity constraints:

a) Unique key constraint

It is used to ensure that information in the column for each record is unique, as with telephone or driver's license numbers. It prevents the duplication of value with rows of a specified column in a set of column. A column defined with the constraint can allow null value.

If unique key constraint is defined in more than one column i.e., combination of column cannot be specified. Maximum combination of columns that a composite unique key can contain is 16.

Example:

```
CREATE TABLE employees (employee_id number(6), last_name varchar2(25) NOT NULL, email varchar2(25), salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn NOT NULL, CONSTRAINT emp_email_uk UNIQUE(email));
```

PRIMARY KEY CONSTRAINT

A primary key avoids duplication of rows and does not allow null values. Can be defined on one or more columns in a table and is used to uniquely identify each row in a table. These values should never be changed and should never be null.

A table should have only one primary key. If a primary key constraint is assigned to more than one column or combination of column is said to be composite primary key, which can contain 16 columns.

Example:

```
CREATE TABLE employees (employee_id number(6) , last_name varchar2(25) NOT NULL, email varchar2(25), salary number(8,2), commission_pct number(2,2), hire_date date constraint emp_hire_date_nn NOT NULL, CONSTRAINT emp_id_pk PRIMARY KEY (employee_id), CONSTRAINT emp_email_uk UNIQUE(email));
```

c) Referential Integrity

It enforces relationship between tables. To establish parent-child relationship between 2 tables having a common column definition, we make use of this constraint. To implement this, we should define the column in the parent table as primary key and same column in the child table as foreign key referring to the corresponding parent entry.

Foreign key

A column or combination of column included in the definition of referential integrity, which would refer to a referenced key.

Referenced key

It is a unique or primary key upon which is defined on a column belonging to the parent table.
Keywords:

FOREIGN KEY: Defines the column in the child table at the table level constraint.

REFERENCES: Identifies the table and column in the parent table.

ON DELETE CASCADE: Deletes the dependent rows in the child table when a row in the parent table is deleted.

ON DELETE SET NULL: converts dependent foreign key values to null when the parent value is removed.

```
CREATE TABLE employees (employee_id number(6), last_name varchar2(25) NOT
NULL,email varchar2(25), salary number(8,2), commission_pct number(2,2), hire_date date
constraint emp_hire_date_nn NOT NULL, Constraint emp_id pk PRIMARY KEY
(employee_id), CONSTRAINT emp_email_uk UNIQUE(email), CONSTRAINT emp_dept_fk
FOREIGN KEY (department_id) references departments(dept_id));
```

ADDING A CONSTRAINT

Use the ALTER to

- Add or Drop a constraint, but not modify the structure
- Enable or Disable the constraints
- Add a not null constraint by using the Modify clause

Syntax

```
ALTER TABLE table name ADD CONSTRAINT Cons_name type(column name);
```

Example:

```
ALTER TABLE employees ADD CONSTRAINT emp_manager_fk FOREIGN KEY
(manager_id) REFERENCES employees (employee_id);
```

DROPPING A CONSTRAINT

Example:

```
ALTER TABLE employees DROP CONSTRAINT emp_manager_fk;
```

CASCADE IN DROP

- The CASCADE option of the DROP clause causes any dependent constraints also to be dropped.

Syntax

```
ALTER TABLE departments DROP PRIMARY KEY|UNIQUE (column)| CONSTRAINT
constraint_name CASCADE;
```

DISABLING CONSTRAINTS

- Execute the DISABLE clause of the ALTER TABLE statement to deactivate an integrity constraint
- Apply the CASCADE option to disable dependent integrity constraints.

Example

```
ALTER TABLE employees DISABLE CONSTRAINT emp_emp_id_pk CASCADE;
```

ENABLING CONSTRAINTS

- Activate an integrity constraint currently disabled in the table definition by using the ENABLE clause.

Example

```
ALTER TABLE employees ENABLE CONSTRAINT emp_emp_id_pk CASCADE;
```

CASCADING CONSTRAINTS

The CASCADE CONSTRAINTS clause is used along with the DROP column clause. It drops all referential integrity constraints that refer to the primary and unique keys defined on the dropped Columns.

This clause also drops all multicolumn constraints defined on the dropped column.

Example:

Assume table TEST1 with the following structure

```
CREATE TABLE test1 ( pk number PRIMARY KEY, fk number, col1 number,col2 number,  
CONSTRAINT fk_constraint FOREIGN KEY(fk) references test1, CONSTRAINT ck1 CHECK  
(pk>0 and col1>0), CONSTRAINT ck2 CHECK (col2>0));
```

An error is returned for the following statements

```
ALTER TABLE test1 DROP (pk);
```

```
ALTER TABLE test1 DROP (col1);
```

The above statement can be written with CASCADE CONSTRAINT

```
ALTER TABLE test 1 DROP(pk) CASCADE CONSTRAINTS;
```

(OR)

ALTER TABLE test 1 DROP(pk, fk, col1) CASCADE CONSTRAINTS;

VIEWING CONSTRAINTS

Query the USER_CONSTRAINTS table to view all the constraints definition and names.

Example:

```
SELECT constraint_name, constraint_type, search_condition FROM user_constraints  
WHERE table_name='employees';
```

Viewing the columns associated with constraints

```
SELECT constraint_name, constraint_type, FROM user_cons_columns  
WHERE table_name='employees';
```

Find the Solution for the following:

1. Add a table-level PRIMARY KEY constraint to the EMP table on the ID column. The constraint should be named at creation. Name the constraint my_emp_id_pk.
2. Create a PRIMAY KEY constraint to the DEPT table using the ID colum. The constraint should be named at creation. Name the constraint my_dept_id_pk.
3. Add a column DEPT_ID to the EMP table. Add a foreign key reference on the EMP table that ensures that the employee is not assigned to nonexistent deparment. Name the constraint my_emp_dept_id_fk.

4. Modify the EMP table. Add a COMMISSION column of NUMBER data type, precision 2, scale 2. Add a constraint to the commission column that ensures that a commission value is greater than zero.

Evaluation Procedure	Marks awarded
Query(5)	
Execution (5)	
Viva(5)	
Total (15)	
Faculty Signature	

Ex. No.: 4

WORKING WITH CONSTRAINTS

Initial:

```
CREATE TABLE departments (  
    dept_id NUMBER(4),  
    dept_name VARCHAR2(30),  
    manager_id NUMBER(6),  
    location_id NUMBER(4)  
);
```

```
INSERT INTO departments (dept_id, dept_name, manager_id, location_id)  
VALUES (10, 'HR', 101, 1001);
```

```
INSERT INTO departments (dept_id, dept_name, manager_id, location_id)  
VALUES (20, 'Sales', 102, 1002);
```

```
INSERT INTO departments (dept_id, dept_name, manager_id, location_id)  
VALUES (30, 'IT', 103, 1003);
```

```
CREATE TABLE EMP (  
    Employee_id NUMBER(6) NOT NULL,  
    First_Name VARCHAR2(20),  
    Last_Name VARCHAR2(25) NOT NULL,  
    Email VARCHAR2(25) NOT NULL,  
    Phone_Number VARCHAR2(20),  
    Hire_date DATE NOT NULL,  
    Job_id VARCHAR2(10) NOT NULL,  
    Salary NUMBER(8,2),  
    Commission_pct NUMBER(2,2),  
    Manager_id NUMBER(6),  
    Department_id NUMBER(4)  
);
```



```
INSERT INTO EMP
VALUES (101, 'John', 'Doe', 'jdoe@example.com', '1234567890', TO_DATE('2022-06-15',
'YYYY-MM-DD'), 'IT_PROG', 5000, NULL, 100, 60);
```

```
INSERT INTO EMP
VALUES (102, 'Jane', 'Austin', 'jaustin@example.com', '0987654321',
TO_DATE('2022-08-20', 'YYYY-MM-DD'), 'HR_MAN', 4800, NULL, 101, 70);
```

```
INSERT INTO EMP
VALUES (103, 'Mark', 'Smith', 'msmith@example.com', '1230984567',
TO_DATE('2023-01-10', 'YYYY-MM-DD'), 'SA_REP', 4600, 0.10, 100, 80);
```

```
INSERT INTO EMP
VALUES (104, 'Chad', 'Newman', 'cnewman@example.com', '7896541230',
TO_DATE('2021-11-03', 'YYYY-MM-DD'), 'FI_MGR', 6000, NULL, 102, 60);
```

```
INSERT INTO EMP
VALUES (105, 'Betty', 'Austin', 'baustin@example.com', '9874563210',
TO_DATE('2020-12-25', 'YYYY-MM-DD'), 'HR_CLERK', 3900, NULL, 101, 70);
```

1.

```
ALTER TABLE EMP
ADD CONSTRAINT my_emp_id_pk PRIMARY KEY (Employee_id);
```

2.

```
ALTER TABLE DEPARTMENTS
ADD CONSTRAINT my_dept_id_pk PRIMARY KEY (dept_id);
```

3.

```
ALTER TABLE EMP ADD DEPT_ID NUMBER(4);
```

```
ALTER TABLE EMP
ADD CONSTRAINT my_emp_dept_id_fk FOREIGN KEY (DEPT_ID)
REFERENCES DEPARTMENTS(dept_id);
```

4.

```
ALTER TABLE EMP
```

```
ADD COMMISSION NUMBER(2,2);
```

```
ALTER TABLE EMP
```

```
ADD CONSTRAINT chk_commission_gt_zero CHECK (COMMISSION > 0);
```

Ex.No.: 5	CREATING VIEWS
Date: 22/8/24	

After the completion of this exercise, students will be able to do the following:

- Describe a view
- Create, alter the definition of, and drop a view
- Retrieve data through a view
- Insert, update, and delete data through a view
- Create and use an inline view

View

A view is a logical table based on a table or another view. A view contains no data but is like a window through which data from tables can be viewed or changed. The tables on which a view is based are called base tables.

Advantages of Views

- To restrict data access
- To make complex queries easy
- To provide data independence
- To present different views of the same data

Classification of views

1. Simple view
2. Complex view

Feature	Simple	Complex
No. of tables	One	One or more
Contains functions	No	Yes
Contains groups of data	No	Yes
DML operations thr' view	Yes	Not always

Creating a view

Syntax

CREATE OR REPLACE FORCE/NOFORCE VIEW view_name AS Subquery WITH CHECK OPTION CONSTRAINT constraint WITH READ ONLY CONSTRAINT constraint;

FORCE - Creates the view regardless of whether or not the base tables exist.

NOFORCE - Creates the view only if the base table exist.

WITH CHECK OPTION CONSTRAINT-specifies that only rows accessible to the view can be inserted or updated.

WITH READ ONLY CONSTRAINT-ensures that no DML operations can be performed on the view.

Example: 1 (Without using Column aliases)

Create a view EMPVU80 that contains details of employees in department80.

Example 2:

```
CREATE VIEW empvu80 AS SELECT employee_id, last_name, salary FROM employees
WHERE department_id=80;
```

Example:1 (Using column aliases)

```
CREATE VIEW salvu50
AS SELECT employee_id,id_number, last_name NAME, salary *12 ANN_SALARY
FROM employees
WHERE department_id=50;
```

Retrieving data from a view

Example:

```
SELECT * from salvu50;
```

Modifying a view

A view can be altered without dropping, re-creating.

Example: (Simple view)

Modify the EMPVU80 view by using CREATE OR REPLACE.

```
CREATE OR REPLACE VIEW empvu80 (id_number, name, sal, department_id)
AS SELECT employee_id,first_name, last_name, salary, department_id
FROM employees
WHERE department_id=80;
```

Example: (complex view)

```
CREATE VIEW dept_sum_vu (name, minsal, maxsal,avgsal)
AS   SELECT d.department_name, MIN(e.salary), MAX(e.salary), AVG(e.salary)
FROM employees e, department d
WHERE e.deparment_id=d.deparment_id
GROUP BY d.department_name;
```

Rules for performing DML operations on view

- Can perform operations on simple views
- Cannot remove a row if the view contains the following:
 - Group functions
 - Group By clause
 - Distinct keyword
- Cannot modify data in a view if it contains
 - Group functions
 - Group By clause
 - Distinct keyword
 - Columns contain by expressions
- Cannot add data thr' a view if it contains
 - Group functions
 - Group By clause
 - Distinct keyword
 - Columns contain by expressions
 - NOT NULL columns in the base table that are not selected by the view

Example: (Using the WITH CHECK OPTION clause)

```
CREATE OR REPLACE VIEW empvu20
AS   SELECT *
FROM employees
WHERE department_id=20
WITH CHECK OPTION CONSTRAINT empvu20_ck;
```

Note: Any attempt to change the department number for any row in the view fails because it violates the WITH CHECK OPTION constraint.

Example – (Execute this and note the error)

```
UPDATE empvu20 SET department_id=10 WHERE employee_id=201;
```

Denying DML operations

Use of WITH READ ONLY option.

Any attempt to perform a DML on any row in the view results in an oracle server error.

Try this code:

```
CREATE OR REPLACE VIEW empvu10(employee_number, employee_name, job_title)
AS SELECT employee_id, last_name, job_id
FROM employees
WHERE department_id=10
WITH READ ONLY;
```

Find the Solution for the following:

1. Create a view called EMPLOYEE_VU based on the employee numbers, employee names and department numbers from the EMPLOYEES table. Change the heading for the employee name to EMPLOYEE.
2. Display the contents of the EMPLOYEES_VU view.
3. Select the view name and text from the USER_VIEWS data dictionary views.
4. Using your EMPLOYEES_VU view, enter a query to display all employees names and department.

5. Create a view named DEPT50 that contains the employee number, employee last names and department numbers for all employees in department 50. Label the view columns EMPNO, EMPLOYEE and DEPTNO. Do not allow an employee to be reassigned to another department through the view.
6. Display the structure and contents of the DEPT50 view.
7. Attempt to reassign Matos to department 80.
8. Create a view called SALARY_VU based on the employee last names, department names, salaries, and salary grades for all employees. Use the Employees, DEPARTMENTS and JOB_GRADE tables. Label the column Employee, Department, salary, and Grade respectively.

Evaluation Procedure	Marks awarded
Query(5)	
Execution (5)	
Viva(5)	
Total (15)	
Faculty Signature	

Ex. No.: 5

CREATING VIEWS

Initial:

```
CREATE TABLE JOB_GRADE (  
    Grade_level VARCHAR2(2),  
    Lowest_sal NUMBER,  
    Highest_sal NUMBER  
);
```

```
INSERT INTO JOB_GRADE (Grade_level, Lowest_sal, Highest_sal)  
VALUES ('A', 3000, 4999);  
INSERT INTO JOB_GRADE (Grade_level, Lowest_sal, Highest_sal)  
VALUES ('B', 5000, 6999);  
INSERT INTO JOB_GRADE (Grade_level, Lowest_sal, Highest_sal)  
VALUES ('C', 7000, 9999);
```

```
CREATE TABLE DEPARTMENTS (  
    dept_id NUMBER(4) PRIMARY KEY,  
    dept_name VARCHAR2(30),  
    manager_id NUMBER(6),  
    location_id NUMBER(4)  
);
```

```
INSERT INTO DEPARTMENTS (dept_id, dept_name, manager_id, location_id)  
VALUES (80, 'HR', 101, 1001);  
INSERT INTO DEPARTMENTS (dept_id, dept_name, manager_id, location_id)  
VALUES (20, 'Sales', 102, 1002);  
INSERT INTO DEPARTMENTS (dept_id, dept_name, manager_id, location_id)  
VALUES (30, 'IT', 103, 1003);  
INSERT INTO DEPARTMENTS (dept_id, dept_name, manager_id, location_id)  
VALUES (50, 'Support', 104, 1004);
```



```
CREATE TABLE EMPLOYEES (  
    Employee_id NUMBER(6) NOT NULL,  
    First_Name VARCHAR2(20),  
    Last_Name VARCHAR2(25) NOT NULL,  
    Email VARCHAR2(25) NOT NULL,  
    Phone_Number VARCHAR2(20),  
    Hire_date DATE NOT NULL,  
    Job_id VARCHAR2(10) NOT NULL,  
    Salary NUMBER(8,2),  
    Commission NUMBER(2,2),  
    Manager_id NUMBER(6),  
    Dept_ID NUMBER(4),  
    CONSTRAINT pk_employee_id PRIMARY KEY (Employee_id),  
    CONSTRAINT fk_department FOREIGN KEY (Dept_ID) REFERENCES  
DEPARTMENTS(dept_id)  
);
```

```
INSERT INTO EMPLOYEES (Employee_id, First_Name, Last_Name, Email, Phone_Number,  
Hire_date, Job_id, Salary, Commission, Manager_id, Dept_ID)  
VALUES (101, 'John', 'Doe', 'jdoe@example.com', '1234567890', TO_DATE('2022-06-15',  
'YYYY-MM-DD'), 'IT_PROG', 5000, 0.05, 100, 80);
```

```
INSERT INTO EMPLOYEES (Employee_id, First_Name, Last_Name, Email, Phone_Number,  
Hire_date, Job_id, Salary, Commission, Manager_id, Dept_ID)  
VALUES (102, 'Jane', 'Austin', 'jaustin@example.com', '0987654321',  
TO_DATE('2022-08-20', 'YYYY-MM-DD'), 'HR_MAN', 4800, NULL, 101, 50);
```

```
INSERT INTO EMPLOYEES (Employee_id, First_Name, Last_Name, Email, Phone_Number,  
Hire_date, Job_id, Salary, Commission, Manager_id, Dept_ID)  
VALUES (103, 'Mark', 'Smith', 'msmith@example.com', '1230984567',  
TO_DATE('2023-01-10', 'YYYY-MM-DD'), 'SA_REP', 4600, 0.10, 100, 30);
```

```
INSERT INTO EMPLOYEES (Employee_id, First_Name, Last_Name, Email, Phone_Number,  
Hire_date, Job_id, Salary, Commission, Manager_id, Dept_ID)  
VALUES (104, 'Chad', 'Matos', 'cnewman@example.com', '7896541230',  
TO_DATE('2021-11-03', 'YYYY-MM-DD'), 'FI_MGR', 6000, NULL, 102, 50);
```

```
INSERT INTO EMPLOYEES (Employee_id, First_Name, Last_Name, Email, Phone_Number,  
Hire_date, Job_id, Salary, Commission, Manager_id, Dept_ID)  
VALUES (105, 'Betty', 'Austin', 'baustin@example.com', '9874563210',  
TO_DATE('2020-12-25', 'YYYY-MM-DD'), 'HR_CLERK', 3900, NULL, 101, 20);
```

1.

```
CREATE VIEW EMPLOYEE_VU AS  
SELECT Employee_id,  
       First_Name || ' ' || Last_Name AS EMPLOYEE,  
       Dept_ID  
FROM EMPLOYEES;
```

2.

```
SELECT * FROM EMPLOYEE_VU;
```

3.

```
SELECT VIEW_NAME, TEXT  
FROM USER_VIEWS  
WHERE VIEW_NAME = 'EMPLOYEE_VU';
```

4.

```
SELECT EMPLOYEE, Dept_ID  
FROM EMPLOYEE_VU;
```

5.

```
CREATE VIEW DEPT50 AS  
SELECT Employee_id AS EMPNO,  
       Last_Name AS EMPLOYEE,  
       Dept_ID AS DEPTNO  
FROM EMPLOYEES  
WHERE Dept_ID = 50;
```

6.

```
DESC DEPT50;  
SELECT * FROM DEPT50;
```

7.

```
UPDATE EMPLOYEES  
SET Dept_ID = 80  
WHERE Last_Name = 'Matos';
```

8.

```
CREATE VIEW SALARY_VU AS  
SELECT E.Last_Name AS Employee,  
       D.dept_name AS Department,  
       E.Salary AS Salary,  
       J.Grade_level AS Grade  
FROM EMPLOYEES E  
JOIN DEPARTMENTS D ON E.Dept_ID = D.dept_id  
JOIN JOB_GRADE J ON E.Salary BETWEEN J.Lowest_sal AND J.Highest_sal;
```

Ex.No.: 6		RESTRICTING AND SORTING DATA
Date:	2/9/24	

After the completion of this exercise, the students will be able to do the following:

- Limit the rows retrieved by the queries
- Sort the rows retrieved by the queries
-

Limiting the Rows selected

- Using WHERE clause
- Alias cannot be used in WHERE clause

Syntax

SELECT-----
FROM-----
WHERE condition;

Example:

```
SELECT employee_id,last_name, job_id, department_id FROM employees WHERE
department_id=90;
```

Character strings and Dates

Character strings and date values are enclosed in single quotation marks.

Character values are case sensitive and date values are format sensitive.

Example:

```
SELECT employee_id,last_name, job_id, department_id FROM employees
WHERE last_name='WHALEN';
```

Comparison Conditions

All relational operators can be used. (=, >, >=, <, <=, <>, !=)

Example:

```
SELECT last_name, salary
```

```
FROM employees
WHERE salary<=3000;
```

Other comparison conditions

Operator	Meaning
BETWEEN ...AND...	Between two values
IN	Match any of a list of values
LIKE	Match a character pattern
IS NULL	Is a null values

Example:1

```
SELECT last_name, salary
FROM employees
WHERE salary BETWEEN 2500 AND 3500;
```

Example:2

```
SELECT employee_id, last_name, salary , manager_id
FROM employees
WHERE manager_id IN (101, 100,201);
```

Example:3

- Use the LIKE condition to perform wildcard searches of valid string values.
- Two symbols can be used to construct the search string
- % denotes zero or more characters
- _ denotes one character

```
SELECT first_name, salary
FROM employees
WHERE first_name LIKE _%s';
```

Example:4

```
SELECT last_name, salary
FROM employees
WHERE last_name LIKE __o%';
```

Example:5

ESCAPE option-To have an exact match for the actual % and _ characters
To search for the string that contain _SA_

```
SELECT employee_id, first_name, salary, job_id
FROM employees
WHERE job_id LIKE _%sa\_%'ESCAPE'\';
```

Test for NULL

- Using IS NULL operator

Example:

```
SELECT employee_id, last_name, salary , manager_id
FROM employees
WHERE manager_id IS NULL;
```

Logical Conditions

All logical operators can be used.(AND,OR,NOT)

Example:1

```
SELECT employee_id, last_name, salary , job_id
FROM employees
WHERE salary >= 10000
AND job_id LIKE _%MAN%';
```

Example:2

```
SELECT employee_id, last_name, salary , job_id
FROM employees
WHERE salary >= 10000
OR job_id LIKE _%MAN%';
```

Example:3

```
SELECT employee_id, last_name, salary , job_id
FROM employees
WHERE job_id NOT IN (_it_prog', st_clerk', sa_rep');
```

Rules of Precedence

Order Evaluated	Operator
1	Arithmetic

2	Concatenation
3	Comparison
4	IS [NOT] NULL, LIKE, [NOT] IN
5	[NOT] BETWEEN
6	Logical NOT
7	Logical AND
8	Logical OR

Example:1

```
SELECT employee_id, last_name, salary , job_id
FROM employees
WHERE job_id ='sa_rep'
OR job_id='ad_pres'
AND salary>15000;
```

Example:2

```
SELECT employee_id, last_name, salary , job_id
FROM employees
WHERE (job_id ='sa_rep'
OR job_id='ad_pres')
AND salary>15000;
```

Sorting the rows

Using ORDER BY Clause

ASC-Ascending Order,Default

DESC-Descending order

Example:1

```
SELECT last_name, salary , job_id,department_id,hire_date
FROM employees
ORDER BY hire_date;
```

Example:2

```
SELECT last_name, salary , job_id,department_id,hire_date
FROM employees
```

```
ORDER BY hire_date DESC;
```

Example:3

Sorting by column alias


```
SELECT last_name, salary*12 annsal , job_id,department_id,hire_date
FROM employees
ORDER BY annsal;
```

Example:4

Sorting by Multiple columns

```
SELECT last_name, salary , job_id,department_id,hire_date
FROM employees
ORDER BY department_id, salary DESC;
```

Find the Solution for the following:

1. Create a query to display the last name and salary of employees earning more than 12000.

2. Create a query to display the employee last name and department number for employee number 176.

3. Create a query to display the last name and salary of employees whose salary is not in the range of 5000 and 12000. (hints: not between)

4. Display the employee last name, job ID, and start date of employees hired between February 20,1998 and May 1,1998.order the query in ascending order by start date.(hints: between)

5. Display the last name and department number of all employees in departments 20 and 50 in alphabetical order by name.(hints: in, orderby)

6. Display the last name and salary of all employees who earn between 5000 and 12000 and are in departments 20 and 50 in alphabetical order by name. Label the columns EMPLOYEE, MONTHLY SALARY respectively.(hints: between, in)

7. Display the last name and hire date of every employee who was hired in 1994.(hints: like)

8. Display the last name and job title of all employees who do not have a manager.(hints: is null)

9. Display the last name, salary, and commission for all employees who earn commissions. Sort data in descending order of salary and commissions.(hints: is not nul,orderby)

10. Display the last name of all employees where the third letter of the name is *a*.(hints:like)

11. Display the last name of all employees who have an *a* and an *e* in their last name.(hints: like)

12. Display the last name and job and salary for all employees whose job is sales representative or stock clerk and whose salary is not equal to 2500 ,3500 or 7000.(hints:in,not in)

Evaluation Procedure	Marks awarded
Query(5)	
Execution (5)	
Viva(5)	
Total (15)	
Faculty Signature	

Ex. No.: 6

RESTRICTING AND SORTING DATA

Initial:

```
CREATE TABLE EMPLOYEES (  
    Employee_id NUMBER(6) NOT NULL,  
    Last_Name VARCHAR2(25) NOT NULL,  
    First_Name VARCHAR2(20),  
    Email VARCHAR2(25) NOT NULL,  
    Phone_Number VARCHAR2(20),  
    Hire_date DATE NOT NULL,  
    Job_id VARCHAR2(10) NOT NULL,  
    Salary NUMBER(8,2),  
    Commission_pct NUMBER(2,2),  
    Manager_id NUMBER(6),  
    Department_id NUMBER(4),  
    CONSTRAINT pk_employee_id PRIMARY KEY (Employee_id)  
);
```

```
INSERT INTO EMPLOYEES  
VALUES (176, 'Smith', 'John', 'jsmith@example.com', '555-1234', TO_DATE('1994-07-15',  
'YYYY-MM-DD'), 'SA_REP', 13000, 0.10, NULL, 30);
```

```
INSERT INTO EMPLOYEES  
VALUES (177, 'Doe', 'Jane', 'jdoe@example.com', '555-5678', TO_DATE('1998-03-25',  
'YYYY-MM-DD'), 'IT_PROG', 11000, NULL, 176, 20);
```

```
INSERT INTO EMPLOYEES  
VALUES (178, 'Johnson', 'Emily', 'ejohnson@example.com', '555-8765',  
TO_DATE('1995-11-30', 'YYYY-MM-DD'), 'ST_CLERK', 2500, NULL, 176, 50);
```

```
INSERT INTO EMPLOYEES  
VALUES (179, 'Miller', 'Tom', 'tmiller@example.com', '555-4321', TO_DATE('1996-09-10',  
'YYYY-MM-DD'), 'SA_REP', 8000, 0.15, 176, 20);
```

```
INSERT INTO EMPLOYEES
VALUES (180, 'Matos', 'Daniel', 'dmatos@example.com', '555-7890',
TO_DATE('1994-05-23', 'YYYY-MM-DD'), 'HR_CLERK', 3000, NULL, NULL, 50);
```

```
INSERT INTO EMPLOYEES
VALUES (196, 'Sharukesh', 'John', 'jsharuk@example.com', '555-1274',
TO_DATE('1999-07-15', 'YYYY-MM-DD'), 'SA_REP', 16000, 0.10, NULL, 60);
```

1.

```
SELECT Last_Name, Salary
FROM EMPLOYEES
WHERE Salary > 12000;
```

2.

```
SELECT Last_Name, Department_id
FROM EMPLOYEES
WHERE Employee_id = 176;
```

3.

```
SELECT Last_Name, Salary
FROM EMPLOYEES
WHERE Salary NOT BETWEEN 5000 AND 12000;
```

4.

```
SELECT Last_Name, Job_id, Hire_date
FROM EMPLOYEES
WHERE Hire_date BETWEEN TO_DATE('1998-02-20', 'YYYY-MM-DD') AND
TO_DATE('1998-05-01', 'YYYY-MM-DD')
ORDER BY Hire_date;
```

5.

```
SELECT Last_Name, Department_id
FROM EMPLOYEES
WHERE Department_id IN (20, 50)
ORDER BY Last_Name;
```

6.

```
SELECT Last_Name AS EMPLOYEE, Salary AS "MONTHLY SALARY"
FROM EMPLOYEES
WHERE Salary BETWEEN 5000 AND 12000
AND Department_id IN (20, 50)
ORDER BY Last_Name;
```

7.

```
SELECT Last_Name, Hire_date
FROM EMPLOYEES
WHERE TO_CHAR(Hire_date, 'YYYY') = '1994';
```

8.

```
SELECT Last_Name, Job_id
FROM EMPLOYEES
WHERE Manager_id IS NULL;
```

9.

```
SELECT Last_Name, Salary, Commission_pct
FROM EMPLOYEES
WHERE Commission_pct IS NOT NULL
ORDER BY Salary DESC, Commission_pct DESC;
```

10.

```
SELECT Last_Name
FROM EMPLOYEES
WHERE Last_Name LIKE '__a%';
```

11.

```
SELECT Last_Name  
FROM EMPLOYEES  
WHERE Last_Name LIKE '%a%' AND Last_Name LIKE '%e%';
```

12.

```
SELECT Last_Name, Job_id, Salary  
FROM EMPLOYEES  
WHERE Job_id IN ('SA_REP', 'ST_CLERK')  
AND Salary NOT IN (2500, 3500, 7000);
```

Ex.No.: 7	USING SET OPERATORS
Date: 5/9/24	

Objectives

After the completion this exercise, the students should be able to do the following:

- Describe set operators
- Use a set operator to combine multiple queries into a single query
- Control the order of rows returned

The set operators combine the results of two or more component queries into one result.

Queries containing set operators are called *compound queries*.

Operator	Returns
UNION	All distinct rows selected by either query
UNION ALL	All rows selected by either query, including all duplicates
INTERSECT	All distinct rows selected by both queries
MINUS	All distinct rows that are selected by the first SELECT statement and not selected in the second SELECT statement

The tables used in this lesson are:

- EMPLOYEES: Provides details regarding all current employees
- JOB_HISTORY: Records the details of the start date and end date of the former job, and the job identification number and department when an employee switches jobs

UNION Operator

Guidelines

- The number of columns and the data types of the columns being selected must be identical in all the SELECT statements used in the query. The names of the columns need not be identical.
- UNION operates over all of the columns being selected.
- NULL values are not ignored during duplicate checking.
- The IN operator has a higher precedence than the UNION operator.

- By default, the output is sorted in ascending order of the first column of the SELECT clause.

Example:

Display the current and previous job details of all employees. Display each employee only once.

```
SELECT employee_id, job_id FROM employees UNION SELECT employee_id, job_id  
FROM job_history;
```

Example:

```
SELECT employee_id, job_id, department_id  
FROM employees  
UNION  
SELECT employee_id, job_id, department_id  
FROM job_history;
```

UNION ALL Operator

Guidelines

The guidelines for UNION and UNION ALL are the same, with the following two exceptions that pertain to UNION ALL:

- Unlike UNION, duplicate rows are not eliminated and the output is not sorted by default.
- The DISTINCT keyword cannot be used.

Example:

Display the current and previous departments of all employees.

```
SELECT employee_id, job_id, department_id  
FROM employees  
UNION ALL  
SELECT employee_id, job_id, department_id  
FROM job_history  
ORDER BY employee_id;
```

INTERSECT Operator

Guidelines

- The number of columns and the data types of the columns being selected by the SELECT statements in the queries must be identical in all the SELECT statements used in the query. The names of the columns need not be identical.
- Reversing the order of the intersected tables does not alter the result.
- INTERSECT does not ignore NULL values.

Example:

Display the employee IDs and job IDs of those employees who currently have a job title that is the same as their job title when they were initially hired (that is, they changed jobs but have now gone back to doing their original job).

```
SELECT employee_id, job_id FROM employees
INTERSECT
SELECT employee_id, job_id
FROM job_history;
```

Example

```
SELECT employee_id, job_id, department_id
FROM employees
INTERSECT
SELECT employee_id, job_id, department_id
FROM job_history;
```

MINUS Operator **Guidelines**

- The number of columns and the data types of the columns being selected by the SELECT statements in the queries must be identical in all the SELECT statements used in the query. The names of the columns need not be identical.
- All of the columns in the WHERE clause must be in the SELECT clause for the MINUS operator to work.

Example:

Display the employee IDs of those employees who have not changed their jobs even once.

```
SELECT employee_id, job_id

FROM employees
MINUS
SELECT employee_id, job_id
FROM job_history;
```

Find the Solution for the following:

1. The HR department needs a list of department IDs for departments that do not contain the job ID ST_CLERK. Use set operators to create this report.
2. The HR department needs a list of countries that have no departments located in them. Display the country ID and the name of the countries. Use set operators to create this report.

3. Produce a list of jobs for departments 10, 50, and 20, in that order. Display job ID and department ID using set operators.

4. Create a report that lists the employee IDs and job IDs of those employees who currently have a job title that is the same as their job title when they were initially hired by the company (that is, they changed jobs but have now gone back to doing their original job).

5. The HR department needs a report with the following specifications:

- Last name and department ID of all the employees from the EMPLOYEES table, regardless of whether or not they belong to a department.
- Department ID and department name of all the departments from the DEPARTMENTS table, regardless of whether or not they have employees working in them Write a compound query to accomplish this.

Evaluation Procedure	Marks awarded
Query(5)	
Execution (5)	
Viva(5)	
Total (15)	
Faculty Signature	

Ex. No.: 7

USING SET OPERATORS

Initial:

```
CREATE TABLE EMPLOYEES (  
    employee_id NUMBER PRIMARY KEY,  
    last_name VARCHAR2(50),  
    job_id VARCHAR2(10),  
    department_id NUMBER,  
    hire_date DATE  
);
```

```
CREATE TABLE DEPARTMENTS (  
    department_id NUMBER PRIMARY KEY,  
    department_name VARCHAR2(50),  
    country_id VARCHAR2(10)  
);
```

```
CREATE TABLE JOB_HISTORY (  
    employee_id NUMBER,  
    job_id VARCHAR2(10) PRIMARY KEY,  
    hire_date DATE  
);
```

```
CREATE TABLE COUNTRIES (  
    country_id VARCHAR2(10) PRIMARY KEY,  
    country_name VARCHAR2(50)  
);
```

```
INSERT INTO EMPLOYEES VALUES
(101, 'Smith', 'ST_CLERK', 10, TO_DATE('2015-06-01', 'YYYY-MM-DD'));
INSERT INTO EMPLOYEES VALUES
(102, 'Johnson', 'SA_MAN', 50, TO_DATE('2018-03-12', 'YYYY-MM-DD'));

INSERT INTO EMPLOYEES VALUES
(103, 'Williams', 'ST_CLERK', 20, TO_DATE('2019-07-14', 'YYYY-MM-DD'));
INSERT INTO EMPLOYEES VALUES
(104, 'Brown', 'IT_PROG', 30, TO_DATE('2017-11-25', 'YYYY-MM-DD'));
INSERT INTO EMPLOYEES VALUES
(105, 'Jones', 'HR_REP', 40, TO_DATE('2020-01-03', 'YYYY-MM-DD'));
INSERT INTO EMPLOYEES VALUES
(106, 'Garcia', 'ST_CLERK', 50, TO_DATE('2015-04-19', 'YYYY-MM-DD'));
INSERT INTO EMPLOYEES VALUES
(107, 'Davis', 'IT_PROG', 20, TO_DATE('2019-01-01', 'YYYY-MM-DD'));
INSERT INTO EMPLOYEES VALUES
(108, 'Taylor', 'SA_MAN', 10, TO_DATE('2021-09-12', 'YYYY-MM-DD'));
INSERT INTO EMPLOYEES VALUES
(109, 'Clark', 'IT_PROG', 30, TO_DATE('2018-08-01', 'YYYY-MM-DD'));

INSERT INTO DEPARTMENTS
VALUES (10, 'Administration', 'US');
INSERT INTO DEPARTMENTS
VALUES (20, 'Marketing', 'US');
INSERT INTO DEPARTMENTS
VALUES (30, 'IT', 'UK');
INSERT INTO DEPARTMENTS
VALUES (40, 'HR', 'FR');
INSERT INTO DEPARTMENTS
VALUES (50, 'Sales', 'DE');
INSERT INTO DEPARTMENTS
VALUES (60, 'Finance', 'IN');
```

```
INSERT INTO JOB_HISTORY
VALUES (101, 'ST_CLERK', TO_DATE('2015-06-01', 'YYYY-MM-DD'));
INSERT INTO JOB_HISTORY
VALUES (102, 'SA_MAN', TO_DATE('2018-03-12', 'YYYY-MM-DD'));
INSERT INTO JOB_HISTORY
VALUES (107, 'IT_PROG', TO_DATE('2019-01-01', 'YYYY-MM-DD'));
```

```
INSERT INTO COUNTRIES VALUES ('US', 'United States');
INSERT INTO COUNTRIES VALUES ('UK', 'United Kingdom');
INSERT INTO COUNTRIES VALUES ('FR', 'France');
INSERT INTO COUNTRIES VALUES ('DE', 'Germany');
INSERT INTO COUNTRIES VALUES ('IN', 'India');
INSERT INTO COUNTRIES VALUES ('JP', 'Japan');
```

1.

```
SELECT department_id
FROM DEPARTMENTS
MINUS
SELECT department_id
FROM EMPLOYEES
WHERE job_id = 'ST_CLERK';
```

2.

```
SELECT country_id, country_name
FROM COUNTRIES
WHERE country_id IN (
    SELECT country_id FROM COUNTRIES
    MINUS
    SELECT DISTINCT country_id FROM DEPARTMENTS
    WHERE department_name='HR'
);
```

3.

```
SELECT job_id, department_id
FROM EMPLOYEES
WHERE department_id = 10
UNION ALL
SELECT job_id, department_id
FROM EMPLOYEES
WHERE department_id = 50
UNION ALL
SELECT job_id, department_id
FROM EMPLOYEES
WHERE department_id = 20;
```

4.

```
SELECT employee_id, job_id, hire_date
FROM EMPLOYEES
INTERSECT
SELECT employee_id, job_id, hire_date
FROM JOB_HISTORY
ORDER BY hire_date ASC;
```

5.

```
SELECT last_name, department_id, NULL AS department_name
FROM EMPLOYEES
UNION
SELECT NULL AS last_name, department_id, department_name
FROM DEPARTMENTS;
```

Ex.No.: 8		WORKING WITH MULTIPLE TABLES
Date:	12/9/24	

Objective

After the completion of this exercise, the students will be able to do the following:

- Write SELECT statements to access data from more than one table using equality and nonequality joins
 - View data that generally does not meet a join condition by using outer joins
 - Join a table to itself by using a self join
- Sometimes you need to use data from more than one table.

Cartesian Products

- A Cartesian product is formed when:
 - A join condition is omitted
 - A join condition is invalid
 - All rows in the first table are joined to all rows in the second table
- To avoid a Cartesian product, always include a valid join condition in a WHERE clause.

A Cartesian product tends to generate a large number of rows, and the result is rarely useful. You should always include a valid join condition in a WHERE clause, unless you have a specific need to combine all rows from all tables.

Cartesian products are useful for some tests when you need to generate a large number of rows to simulate a reasonable amount of data.

Example:

To displays employee last name and department name from the EMPLOYEES and DEPARTMENTS tables.

```
SELECT last_name, department_name dept_name
FROM employees, departments;
```

Types of Joins

- Equijoin
- Non-equijoin
- Outer join
- Self join
- Cross joins
- Natural joins
- Using clause
- Full or two sided outer joins
- Arbitrary join conditions for outer joins

Joining Tables Using Oracle Syntax

```
SELECT table1.column, table2.column
```



```
FROM table1, table2
WHERE table1.column1 = table2.column2;
```

Write the join condition in the WHERE clause.

- Prefix the column name with the table name when the same column name appears in more than one table.

Guidelines

- When writing a SELECT statement that joins tables, precede the column name with the table name for clarity and to enhance database access.
- If the same column name appears in more than one table, the column name must be prefixed with the table name.
- To join n tables together, you need a minimum of n-1 join conditions. For example, to join four tables, a minimum of three joins is required. This rule may not apply if your table has a concatenated primary key, in which case more than one column is required to uniquely identify each row

What is an Equijoin?

To determine an employee's department name, you compare the value in the DEPARTMENT_ID column in the EMPLOYEES table with the DEPARTMENT_ID values in the DEPARTMENTS table.

The relationship between the EMPLOYEES and DEPARTMENTS tables is an equijoin—that is, values

in the DEPARTMENT_ID column on both tables must be equal. Frequently, this type of join involves

primary and foreign key complements.

Note: Equijoins are also called simple joins or inner joins

```
SELECT employees.employee_id, employees.last_name, employees.department_id,
       departments.department_id, departments.location_id
```

```
FROM employees, departments
```

```
WHERE employees.department_id = departments.department_id;
```

Additional Search Conditions

Using the AND Operator

Example:

To display employee Matos's department number and department name, you need an additional condition in the WHERE clause.

```
SELECT last_name, employees.department_id,
       department_name
```

```
FROM employees, departments
```

```
WHERE employees.department_id = departments.department_id AND last_name = 'Matos';
```

Qualifying Ambiguous

Column Names

- Use table prefixes to qualify column names that are in multiple tables.
- Improve performance by using table prefixes.
- Distinguish columns that have identical names but reside in different tables by using column aliases.

Using Table Aliases

- Simplify queries by using table aliases.
- Improve performance by using table prefixes

Example:

```
SELECT e.employee_id, e.last_name, e.department_id,  
d.department_id, d.location_id  
FROM employees e , departments d WHERE  
e.department_id = d.department_id;
```

Joining More than Two Tables

To join n tables together, you need a minimum of n-1 join conditions. For example, to join three tables, a minimum of two joins is required.

Example:

To display the last name, the department name, and the city for each employee, you have to join the EMPLOYEES, DEPARTMENTS, and LOCATIONS tables.

```
SELECT e.last_name, d.department_name,  
l.city FROM employees e, departments d,  
locations l WHERE e.department_id =  
d.department_id AND d.location_id =  
l.location_id;
```

Non-Equi Joins

A non-equi join is a join condition containing something other than an equality operator. The relationship between the EMPLOYEES table and the JOB_GRADES table has an example of a non-equi join. A relationship between the two tables is that the SALARY column in the EMPLOYEES table must be between the values in the LOWEST_SALARY and HIGHEST_SALARY columns of the JOB_GRADES table. The relationship is obtained using an operator other than equals (=).

Example:

```
SELECT e.last_name, e.salary, j.grade_level  
FROM employees e, job_grades j  
WHERE e.salary  
BETWEEN j.lowest_sal AND j.highest_sal;
```

Outer Joins Syntax

- You use an outer join to also see rows that do not meet the join condition.
- The Outer join operator is the plus sign (+).

```
SELECT table1.column, table2.column
FROM table1, table2
WHERE table1.column(+) = table2.column;
SELECT table1.column, table2.column
FROM table1, table2
WHERE table1.column = table2.column(+);
```

The missing rows can be returned if an outer join operator is used in the join condition. The operator is a plus sign enclosed in parentheses (+), and it is placed on the —side of the join that is deficient in information. This operator has the effect of creating one or more null rows, to which one or more rows from the nondeficient table can be joined.

Example:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e, departments d
WHERE e.department_id(+) = d.department_id ;
```

Outer Join Restrictions

- The outer join operator can appear on only one side of the expression—the side that has information missing. It returns those rows from one table that have no direct match in the other table.
- A condition involving an outer join cannot use the IN operator or be linked to another condition by the OR operator

Self Join

Sometimes you need to join a table to itself.

Example:

To find the name of each employee's manager, you need to join the EMPLOYEES table to itself, or perform a self join.

```
SELECT worker.last_name || ' works for '
|| manager.last_name
FROM employees worker, employees manager WHERE
worker.manager_id = manager.employee_id ;
```

Use a join to query data from more than one table.

```
SELECT table1.column, table2.column
```

```
FROM table1
[CROSS JOIN table2] |
[NATURAL JOIN table2] |
[JOIN table2 USING (column_name)] |
[JOIN table2
ON(table1.column_name = table2.column_name)] |
[LEFT|RIGHT|FULL OUTER JOIN table2
ON (table1.column_name = table2.column_name)];
```

In the syntax:

table1.column Denotes the table and column from which data is retrieved

CROSS JOIN Returns a Cartesian product from the two tables

NATURAL JOIN Joins two tables based on the same column name

JOIN table USING column_name Performs an equijoin based on the column name

JOIN table ON table1.column_name Performs an equijoin based on the condition in the ON clause
= table2.column_name

LEFT/RIGHT/FULL OUTER

Creating Cross Joins

- The CROSS JOIN clause produces the crossproduct of two tables.
- This is the same as a Cartesian product between the two tables.

Example:

```
SELECT last_name, department_name
FROM employees
CROSS JOIN departments ;
SELECT last_name, department_name
FROM employees, departments;
```

Creating Natural Joins

- The NATURAL JOIN clause is based on all columns in the two tables that have the same name.
- It selects rows from the two tables that have equal values in all matched columns.
- If the columns having the same names have different data types, an error is returned.

Example:

```
SELECT department_id, department_name,
location_id, city
FROM departments
NATURAL JOIN locations ;
```

LOCATIONS table is joined to the DEPARTMENT table by the LOCATION_ID column, which is the only column of the same name in both tables. If other common columns were present, the join would have used them all.

Example:

```
SELECT department_id, department_name,  
location_id, city  
FROM departments  
NATURAL JOIN locations  
WHERE department_id IN (20, 50);
```

Creating Joins with the USING Clause

- If several columns have the same names but the data types do not match, the NATURAL JOIN clause can be modified with the USING clause to specify the columns that should be used for an equijoin.
- Use the USING clause to match only one column when more than one column matches.
- Do not use a table name or alias in the referenced columns.
- The NATURAL JOIN and USING clauses are mutually exclusive.

Example:

```
SELECT l.city, d.department_name  
FROM locations l JOIN departments d USING (location_id)  
WHERE location_id = 1400;  
EXAMPLE:
```

```
SELECT e.employee_id, e.last_name, d.location_id  
FROM employees e JOIN departments d  
USING (department_id);
```

Creating Joins with the ON Clause

- The join condition for the natural join is basically an equijoin of all columns with the same name.
- To specify arbitrary conditions or specify columns to join, the ON clause is used.
- The join condition is separated from other searchconditions.
- The ON clause makes code easy to understand.

Example:

```
SELECT e.employee_id, e.last_name, e.department_id,  
d.department_id, d.location_id  
FROM employees e JOIN departments d  
ON (e.department_id =  
d.department_id); EXAMPLE:
```

```
SELECT e.last_name emp, m.last_name mgr  
FROM employees e JOIN employees m
```

ON (e.manager_id =
m.employee_id); INNER Versus
OUTER Joins

- A join between two tables that returns the results of the inner join as well as unmatched rows left (or right) tables is a left (or right) outer join.
- A join between two tables that returns the results of an inner join as well as the results of a left and right join is a full outer join.

LEFT OUTER JOIN

Example:

```
SELECT e.last_name, e.department_id, d.department_name  
FROM employees e  
LEFT OUTER JOIN departments d  
ON (e.department_id = d.department_id) ;
```

Example of LEFT OUTER JOIN

This query retrieves all rows in the EMPLOYEES table, which is the left table even if there is no match in the DEPARTMENTS table.

This query was completed in earlier releases as follows:

```
SELECT e.last_name, e.department_id, d.department_name  
FROM employees e, departments d  
WHERE d.department_id (+) = e.department_id;
```

RIGHT OUTER JOIN

Example:

```
SELECT e.last_name, e.department_id, d.department_name  
FROM employees e  
RIGHT OUTER JOIN departments d  
ON (e.department_id = d.department_id) ;
```

This query retrieves all rows in the DEPARTMENTS table, which is the right table even if there is no match in the EMPLOYEES table.

This query was completed in earlier releases as follows:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e, departments d
WHERE d.department_id = e.department_id (+);
```

FULL OUTER JOIN

Example:

```
SELECT e.last_name, e.department_id, d.department_name
FROM employees e
FULL OUTER JOIN departments d
ON (e.department_id = d.department_id) ;
```

This query retrieves all rows in the EMPLOYEES table, even if there is no match in the DEPARTMENTS table. It also retrieves all rows in the DEPARTMENTS table, even if there is no match in the EMPLOYEES table.

Find the Solution for the following:

1. Write a query to display the last name, department number, and department name for all employees.
2. Create a unique listing of all jobs that are in department 80. Include the location of the department in the output.
3. Write a query to display the employee last name, department name, location ID, and city of all employees who earn a commission

2. Display the employee last name and department name for all employees who have an a(lowercase) in their last names. P
5. Write a query to display the last name, job, department number, and department name for all employees who work in Toronto.
6. Display the employee last name and employee number along with their manager's last name and manager number. Label the columns Employee, Emp#, Manager, and Mgr#, Respectively
7. Modify lab4_6.sql to display all employees including King, who has no manager. Order the results by the employee number.
8. Create a query that displays employee last names, department numbers, and all the employees who work in the same department as a given employee. Give each column an appropriate label
9. Show the structure of the JOB_GRADES table. Create a query that displays the name, job, department name, salary, and grade for all employees

10. Create a query to display the name and hire date of any employee hired after employee Davies.

11. Display the names and hire dates for all employees who were hired before their managers, along with their manager's names and hire dates. Label the columns Employee, Emp Hired, Manager, and Mgr Hired, respectively.

Evaluation Procedure	Marks awarded
Query(5)	
Execution (5)	
Viva(5)	
Total (15)	
Faculty Signature	

Ex. No.: 8

WORKING WITH MULTIPLE TABLES

Initial:

```
CREATE TABLE EMPLOYEES (  
    EMPLOYEE_ID NUMBER(6) PRIMARY KEY,  
    FIRST_NAME VARCHAR2(20),  
    LAST_NAME VARCHAR2(25) NOT NULL,  
    EMAIL VARCHAR2(50) UNIQUE NOT NULL,  
    PHONE_NUMBER VARCHAR2(20),  
    HIRE_DATE DATE NOT NULL,  
    JOB_ID VARCHAR2(10) NOT NULL,  
    SALARY NUMBER(8,2),  
    COMMISSION_PCT NUMBER(2,2),  
    MANAGER_ID NUMBER(6),  
    DEPARTMENT_ID NUMBER(4)  
);  
  
CREATE TABLE DEPARTMENTS (  
    DEPARTMENT_ID NUMBER(4) PRIMARY KEY,  
    DEPARTMENT_NAME VARCHAR2(30) NOT NULL,  
    MANAGER_ID NUMBER(6),  
    LOCATION_ID NUMBER(4)  
);  
  
CREATE TABLE JOBS (  
    JOB_ID VARCHAR2(10) PRIMARY KEY,  
    JOB_TITLE VARCHAR2(35) NOT NULL,  
    MIN_SALARY NUMBER(8,2),  
    MAX_SALARY NUMBER(8,2)  
);
```

```
CREATE TABLE LOCATIONS (  
    LOCATION_ID NUMBER(4) PRIMARY KEY,  
    STREET_ADDRESS VARCHAR2(40),  
    POSTAL_CODE VARCHAR2(12),  
    CITY VARCHAR2(30) NOT NULL,  
    COUNTRY VARCHAR2(25),  
    COUNTRY_CODE VARCHAR2(20)  
);
```

```
CREATE TABLE JOB_GRADES (  
    GRADE_LEVEL CHAR(1) PRIMARY KEY,  
    LOW_SALARY NUMBER(8,2),  
    HIGH_SALARY NUMBER(8,2)  
);
```

```
INSERT INTO LOCATIONS VALUES  
(1000, '123 Main St', '560001', 'Toronto', 'Ontario', 'CA');  
INSERT INTO LOCATIONS VALUES  
(1001, '456 Park Ave', '110020', 'New York', 'New York', 'US');  
INSERT INTO LOCATIONS VALUES  
(1002, '789 King Rd', '700008', 'London', 'England', 'UK');  
INSERT INTO LOCATIONS VALUES  
(1003, '696 VOC Rd', '600098', 'Chennai', 'India', 'IND');
```

```
INSERT INTO DEPARTMENTS VALUES (10, 'Administration', NULL, 1001);  
INSERT INTO DEPARTMENTS VALUES (20, 'Marketing', 101, 1002);  
INSERT INTO DEPARTMENTS VALUES (30, 'IT', 102, 1001);  
INSERT INTO DEPARTMENTS VALUES (40, 'HR', 103, 1000);  
INSERT INTO DEPARTMENTS VALUES (50, 'Sales', 104, 1000);  
INSERT INTO DEPARTMENTS VALUES (80, 'Finance', 105, 1003);
```

```
INSERT INTO JOBS VALUES
('AD_PRES', 'President', 20000, 40000);
INSERT INTO JOBS VALUES
('MK_MAN', 'Marketing Manager', 10000, 20000);
INSERT INTO JOBS VALUES
('IT_PROG', 'Programmer', 5000, 15000);
INSERT INTO JOBS VALUES
('HR_REP', 'HR Representative', 6000, 12000);
INSERT INTO JOBS VALUES
('FI_MGR', 'Finance Manager', 12000, 25000);
INSERT INTO JOBS VALUES
('SA_REP', 'Sales Representative', 5000, 10000);
```

```
INSERT INTO JOB_GRADES VALUES
('A', 5000, 7000);
INSERT INTO JOB_GRADES VALUES
('B', 7001, 12000);
INSERT INTO JOB_GRADES VALUES
('C', 12001, 15000);
INSERT INTO JOB_GRADES VALUES
('D', 15001, 20000);
INSERT INTO JOB_GRADES VALUES
('E', 20001, 40000);
```

```
INSERT INTO EMPLOYEES VALUES
(101, 'John', 'King', 'JKing@example.com', '1234567890', TO_DATE('2010-01-01',
'YYYY-MM-DD'), 'AD_PRES', 30000, NULL, NULL, 10);
INSERT INTO EMPLOYEES VALUES
(102, 'Sara', 'Davies', 'SDavies@example.com', '2234567890', TO_DATE('2013-05-10',
'YYYY-MM-DD'), 'MK_MAN', 15000, NULL, 101, 20);
```

INSERT INTO EMPLOYEES VALUES

(103, 'Mike', 'Smith', 'MSmith@example.com', '3234567890', TO_DATE('2012-03-15', 'YYYY-MM-DD'), 'IT_PROG', 9000, NULL, 102, 80);

INSERT INTO EMPLOYEES VALUES

(104, 'Anna', 'Brown', 'ABrown@example.com', '4234567890', TO_DATE('2013-09-20', 'YYYY-MM-DD'), 'HR_REP', 7000, 0.10, 102, 40);

INSERT INTO EMPLOYEES VALUES

(105, 'James', 'Wilson', 'JWilson@example.com', '5234567890', TO_DATE('2014-07-23', 'YYYY-MM-DD'), 'FI_MGR', 18000, NULL, 101, 80);

INSERT INTO EMPLOYEES VALUES

(106, 'Sophia', 'Johnson', 'SJohnson@example.com', '6234567890', TO_DATE('2015-11-05', 'YYYY-MM-DD'), 'SA_REP', 8000, 0.15, 103, 50);

INSERT INTO EMPLOYEES VALUES

(107, 'Emily', 'Taylor', 'ETaylor@example.com', '7234567890', TO_DATE('2016-04-18', 'YYYY-MM-DD'), 'SA_REP', 8500, 0.12, 104, 50);

1.

```
SELECT e.LAST_NAME, e.DEPARTMENT_ID, d.DEPARTMENT_NAME
FROM EMPLOYEES e
JOIN DEPARTMENTS d ON e.DEPARTMENT_ID = d.DEPARTMENT_ID;
```

2.

```
SELECT DISTINCT e.JOB_ID, d.LOCATION_ID, l.COUNTRY
FROM EMPLOYEES e
JOIN DEPARTMENTS d ON e.DEPARTMENT_ID = d.DEPARTMENT_ID
JOIN LOCATIONS l ON d.LOCATION_ID=l.LOCATION_ID
WHERE e.DEPARTMENT_ID = 80;
```

3.

```
SELECT e.LAST_NAME, d.DEPARTMENT_NAME, d.LOCATION_ID, l.CITY
FROM EMPLOYEES e
JOIN DEPARTMENTS d ON e.DEPARTMENT_ID = d.DEPARTMENT_ID
JOIN LOCATIONS l ON d.LOCATION_ID = l.LOCATION_ID
WHERE e.COMMISSION_PCT IS NOT NULL;
```

4.

```
SELECT e.LAST_NAME, d.DEPARTMENT_NAME
FROM EMPLOYEES e
JOIN DEPARTMENTS d ON e.DEPARTMENT_ID = d.DEPARTMENT_ID
WHERE LOWER(e.LAST_NAME) LIKE '%a%';
```

5.

```
SELECT e.LAST_NAME, e.JOB_ID, e.DEPARTMENT_ID, d.DEPARTMENT_NAME
FROM EMPLOYEES e
JOIN DEPARTMENTS d ON e.DEPARTMENT_ID = d.DEPARTMENT_ID
JOIN LOCATIONS l ON d.LOCATION_ID = l.LOCATION_ID
WHERE l.CITY = 'Toronto';
```

6.

```
SELECT e.LAST_NAME AS "Employee", e.EMPLOYEE_ID AS "Emp#",
       m.LAST_NAME AS "Manager", m.EMPLOYEE_ID AS "Mgr#"
FROM EMPLOYEES e
JOIN EMPLOYEES m ON e.MANAGER_ID = m.EMPLOYEE_ID;
```

7.

```
SELECT e.LAST_NAME AS "Employee", e.EMPLOYEE_ID AS "Emp#",
       m.LAST_NAME AS "Manager", m.EMPLOYEE_ID AS "Mgr#"
FROM EMPLOYEES e
LEFT JOIN EMPLOYEES m ON e.MANAGER_ID = m.EMPLOYEE_ID
ORDER BY e.EMPLOYEE_ID;
```

8.

```
SELECT e1.LAST_NAME AS "Employee", e1.DEPARTMENT_ID, e2.LAST_NAME AS
"Co-Workers"
FROM EMPLOYEES e1
JOIN EMPLOYEES e2 ON e1.DEPARTMENT_ID = e2.DEPARTMENT_ID
WHERE e1.EMPLOYEE_ID = 106 AND e1.EMPLOYEE_ID <> e2.EMPLOYEE_ID;
```

9.

```
DESCRIBE JOB_GRADES;
```

```
SELECT e.LAST_NAME, e.JOB_ID, d.DEPARTMENT_NAME, e.SALARY, jg.GRADE_LEVEL  
FROM EMPLOYEES e  
JOIN DEPARTMENTS d ON e.DEPARTMENT_ID = d.DEPARTMENT_ID  
JOIN JOB_GRADES jg ON e.SALARY BETWEEN jg.LOW_SALARY AND jg.HIGH_SALARY;
```

10.

```
SELECT e.LAST_NAME AS "Employee", e.HIRE_DATE AS "Hire Date"  
FROM EMPLOYEES e  
JOIN EMPLOYEES r ON r.LAST_NAME = 'Davies'  
WHERE e.HIRE_DATE > r.HIRE_DATE;
```

11.

```
SELECT e.LAST_NAME AS "Employee", e.HIRE_DATE AS "Emp Hired",  
       m.LAST_NAME AS "Manager", m.HIRE_DATE AS "Mgr Hired"  
FROM EMPLOYEES e  
JOIN EMPLOYEES m ON e.MANAGER_ID = m.EMPLOYEE_ID  
WHERE e.HIRE_DATE < m.HIRE_DATE AND e.EMPLOYEE_ID <> m.EMPLOYEE_ID;
```

Ex.No.: 9	SUB QUERIES
Date: 21/9/24	

Objectives

After completing this lesson, you should be able to do the following:

- Define subqueries
- Describe the types of problems that subqueries can solve
- List the types of subqueries
- Write single-row and multiple-row subqueries

Using a Subquery to Solve a Problem

Who has a salary greater than Abel's?

Main query:

Which employees have salaries greater than Abel's salary?

Subquery:

What is Abel's salary?

Subquery Syntax

SELECT *select_list* FROM *table* WHERE *expr operator* (SELECT *select_list* FROM *table*);

- The subquery (inner query) executes once before the main query (outer query).
- The result of the subquery is used by the main query.

A subquery is a SELECT statement that is embedded in a clause of another SELECT statement. You can build powerful statements out of simple ones by using subqueries. They can be very useful when you need to select rows from a table with a condition that depends on the data in the table itself.

You can place the subquery in a number of SQL clauses, including the following:

- WHERE clause
- HAVING clause
- FROM clause

In the syntax:

operator includes a comparison condition such as >, =, or IN

Note: Comparison conditions fall into two classes: single-row operators

(>, =, >=, <, <>, <=) and multiple-row operators (IN, ANY, ALL). statement. The subquery generally executes first, and its output is used to complete the query condition for the main (or outer) query

Using a Subquery

```
SELECT last_name FROM employees WHERE salary > (SELECT salary FROM employees  
WHERE last_name = 'Abel');
```

The inner query determines the salary of employee Abel. The outer query takes the result of the inner query and uses this result to display all the employees who earn more than this amount.

Guidelines for Using Subqueries

- Enclose subqueries in parentheses.
- Place subqueries on the right side of the comparison condition.
- The ORDER BY clause in the subquery is not needed unless you are performing Top-N analysis.
- Use single-row operators with single-row

subqueries, and use multiple-row operators with multiple-row subqueries.

Types of Subqueries

- Single-row subqueries: Queries that return only one row from the inner SELECT statement.
- Multiple-row subqueries: Queries that return more than one row from the inner SELECT statement.

Single-Row Subqueries

- Return only one row
- Use single-row comparison operators

Example

Display the employees whose job ID is the same as that of employee 141:

```
SELECT last_name, job_id FROM employees WHERE job_id = (SELECT job_id FROM  
employees  
WHERE employee_id = 141);
```

Displays employees whose job ID is the same as that of employee 141 and whose salary is greater than that of employee 143.

```
SELECT last_name, job_id, salary FROM employees WHERE job_id =(SELECT job_id FROM employees WHERE employee_id = 141) AND salary > (SELECT salary FROM employees WHERE employee_id = 143);
```

Using Group Functions in a Subquery

Displays the employee last name, job ID, and salary of all employees whose salary is equal to the minimum salary. The MIN group function returns a single value (2500) to the outer query.

```
SELECT last_name, job_id, salary FROM employees WHERE salary = (SELECT MIN(salary) FROM employees);
```

The HAVING Clause with Subqueries

- The Oracle server executes subqueries first.
 - The Oracle server returns results into the HAVING clause of the main query.
- Displays all the departments that have a minimum salary greater than that of department 50.
- ```
SELECT department_id, MIN(salary)
FROM employees
GROUP BY department_id
HAVING MIN(salary) >
(SELECT MIN(salary)
FROM employees
WHERE department_id = 50);
```

### **Example**

**Find the job with the lowest average salary.**

```
SELECT job_id, AVG(salary)
FROM employees
GROUP BY job_id
HAVING AVG(salary) = (SELECT MIN(AVG(salary))
FROM employees
GROUP BY job_id);
```

**What Is Wrong in this Statements?**

```
SELECT employee_id, last_name
FROM employees
```

```
WHERE salary =(SELECT MIN(salary) FROM employees GROUP BY department_id);
Will This Statement Return Rows?
SELECT last_name, job_id
FROM employees
WHERE job_id =(SELECT job_id FROM employees WHERE last_name = 'Haas');
```

### **Multiple-Row Subqueries**

- Return more than one row
- Use multiple-row comparison operators

### **Example**

Find the employees who earn the same salary as the minimum salary for each department.

```
SELECT last_name, salary, department_id FROM employees WHERE salary IN (SELECT
MIN(salary)
FROM employees GROUP BY department_id);
```

Using the ANY Operator in Multiple-Row Subqueries

```
SELECT employee_id, last_name, job_id, salary FROM employees WHERE salary < ANY
(SELECT salary FROM employees WHERE job_id = 'IT_PROG') AND job_id <> 'IT_PROG';
```

Displays employees who are not IT programmers and whose salary is less than that of any IT programmer. The maximum salary that a programmer earns is \$9,000.

< ANY means less than the maximum. >ANY means more than the minimum. =ANY is equivalent to IN.

### **Using the ALL Operator in Multiple-Row Subqueries**

```
SELECT employee_id, last_name, job_id, salary
FROM employees
WHERE salary < ALL (SELECT salary FROM employees WHERE job_id = 'IT_PROG')
AND job_id <> 'IT_PROG';
```

Displays employees whose salary is less than the salary of all employees with a job ID of IT\_PROG and whose job is not IT\_PROG.

- ALL means more than the maximum, and <ALL means less than the minimum.

The NOT operator can be used with IN, ANY, and ALL operators.

### **Null Values in a Subquery**

```
SELECT emp.last_name FROM employees emp
```

```
WHERE emp.employee_id NOT IN (SELECT mgr.manager_id FROM employees mgr);
```

Notice that the null value as part of the results set of a subquery is not a problem if you use the IN operator. The IN operator is equivalent to =ANY. For example, to display the employees who have subordinates, use the following SQL statement:

```
SELECT emp.last_name
FROM employees emp
WHERE emp.employee_id IN (SELECT mgr.manager_id FROM employees mgr);
```

Display all employees who do not have any subordinates:

```
SELECT last_name FROM employees
WHERE employee_id NOT IN (SELECT manager_id FROM employees WHERE manager_id
IS NOT NULL);
```

**Find the Solution for the following:**

1. The HR department needs a query that prompts the user for an employee last name. The query then displays the last name and hire date of any employee in the same department as the employee whose name they supply (excluding that employee). For example, if the user enters Zlotkey, find all employees who work with Zlotkey (excluding Zlotkey).
2. Create a report that displays the employee number, last name, and salary of all employees who earn more than the average salary. Sort the results in order of ascending salary.
3. Write a query that displays the employee number and last name of all employees who work in a department with any employee whose last name contains a *u*.

4. The HR department needs a report that displays the last name, department number, and job ID of all employees whose department location ID is 1700.

5. Create a report for HR that displays the last name and salary of every employee who reports to King.

6. Create a report for HR that displays the department number, last name, and job ID for every employee in the Executive department.

7. Modify the query 3 to display the employee number, last name, and salary of all employees who earn more than the average salary and who work in a department with any employee whose last name contains a *u*.

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             |               |
| Execution (5)        |               |
| Viva(5)              |               |
| Total (15)           |               |
| Faculty Signature    |               |

## Ex. No.: 9

### SUB QUERIES

#### Initial:

```
CREATE TABLE departments (
 department_id NUMBER PRIMARY KEY,
 department_name VARCHAR2(100),
 location_id NUMBER
);
```

```
CREATE TABLE employees (
 employee_id NUMBER PRIMARY KEY,
 last_name VARCHAR2(100),
 first_name VARCHAR2(100),
 hire_date DATE,
 salary NUMBER(10, 2),
 department_id NUMBER,
 job_id VARCHAR2(10),
 manager_id NUMBER,
 FOREIGN KEY (department_id) REFERENCES departments(department_id)
);
```

```
INSERT INTO departments VALUES (10, 'Executive', 1700);
```

```
INSERT INTO departments VALUES (20, 'HR', 1800);
```

```
INSERT INTO departments VALUES (30, 'IT', 1700);
```

```
INSERT INTO departments VALUES (40, 'Finance', 1600);
```

```
INSERT INTO employees
```

```
VALUES (1, 'King', 'John', TO_DATE('2000-01-01', 'YYYY-MM-DD'), 10000, 10, 'CEO',
NULL);
```

```
INSERT INTO employees
```

```
VALUES (2, 'Zlotkey', 'Jane', TO_DATE('2001-02-15', 'YYYY-MM-DD'), 8000, 10, 'VP', 1);
```

```

INSERT INTO employees
VALUES (3, 'Smith', 'Anna', TO_DATE('2005-03-10', 'YYYY-MM-DD'), 8500, 10, 'Manager',
1);
INSERT INTO employees
VALUES (4, 'Green', 'Tom', TO_DATE('2010-05-20', 'YYYY-MM-DD'), 4500, 20, 'HR Rep', 2);
INSERT INTO employees
VALUES (5, 'Brown', 'Lily', TO_DATE('2011-06-22', 'YYYY-MM-DD'), 4200, 20, 'HR Rep', 2);
INSERT INTO employees
VALUES (6, 'Turner', 'Michael', TO_DATE('2012-07-13', 'YYYY-MM-DD'), 5000, 30,
'Developer', 3);
INSERT INTO employees
VALUES (7, 'Miller', 'Sandra', TO_DATE('2014-08-25', 'YYYY-MM-DD'), 5500, 30,
'Developer', 3);
INSERT INTO employees
VALUES (8, 'Jones', 'Peter', TO_DATE('2018-09-15', 'YYYY-MM-DD'), 6000, 40, 'Accountant',
1);
INSERT INTO employees
VALUES (9, 'Austin', 'James', TO_DATE('2014-06-13', 'YYYY-MM-DD'), 7500, 30,
'Developer', 1);

```

1.

```

SELECT last_name, hire_date
FROM employees
WHERE department_id = (
 SELECT department_id FROM employees
 WHERE last_name = 'Zlotkey'
)
AND last_name != 'Zlotkey';

```



2.

```
SELECT employee_id, last_name, salary
FROM employees
WHERE salary > (
 SELECT AVG(salary) FROM employees
)
ORDER BY salary;
```

3.

```
SELECT employee_id, last_name
FROM employees
WHERE department_id IN (
 SELECT department_id FROM employees
 WHERE last_name LIKE '%u%'
);
```

4.

```
SELECT last_name, department_id, job_id
FROM employees
WHERE department_id IN (
 SELECT department_id FROM departments
 WHERE location_id=1700
);
```

5.

```
SELECT last_name, salary
FROM employees e
WHERE EXISTS(
 SELECT last_name FROM employees m
 WHERE e.manager_id = m.employee_id
 AND m.last_name='King'
);
```

6.

```
SELECT department_id, last_name, job_id
FROM employees
WHERE department_id = (
 SELECT department_id
 FROM departments
 WHERE department_name = 'Executive'
);
```

7.

```
SELECT e.employee_id, e.last_name, e.salary
FROM employees e
WHERE e.salary > (SELECT AVG(salary) FROM employees)
AND EXISTS (
 SELECT *
 FROM employees e2
 WHERE e.department_id = e2.department_id
 AND e2.last_name LIKE '%u%'
);
```

|                   |         |                                               |
|-------------------|---------|-----------------------------------------------|
| <b>Ex.No.: 10</b> |         | <b>AGGREGATING DATA USING GROUP FUNCTIONS</b> |
| <b>Date:</b>      | 30/9/24 |                                               |

### Objectives

After the completion of this exercise, the students be will be able to do the following:

- Identify the available group functions
- Describe the use of group functions
- Group data by using the GROUP BY clause
- Include or exclude grouped rows by using the HAVING clause

### What Are Group Functions?

Group functions operate on sets of rows to give one result per group

### Types of Group Functions

- AVG
- COUNT
- MAX
- MIN
- STDDEV
- SUM
- VARIANCE

Each of the functions accepts an argument. The following table identifies the options that you can use in the syntax:

| Function                                        | Description                                                                                                                                          |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| AVG ( [DISTINCT   <u>ALL</u> ] n)               | Average value of n, ignoring null values                                                                                                             |
| COUNT ( { *   [DISTINCT   <u>ALL</u> ] expr } ) | Number of rows, where <i>expr</i> evaluates to something other than null (count all selected rows using *, including duplicates and rows with nulls) |
| MAX ( [DISTINCT   <u>ALL</u> ] expr)            | Maximum value of <i>expr</i> , ignoring null values                                                                                                  |
| MIN ( [DISTINCT   <u>ALL</u> ] expr)            | Minimum value of <i>expr</i> , ignoring null values                                                                                                  |
| STDDEV ( [DISTINCT   <u>ALL</u> ] x)            | Standard deviation of n, ignoring null values                                                                                                        |
| SUM ( [DISTINCT   <u>ALL</u> ] n)               | Sum values of n, ignoring null values                                                                                                                |
| VARIANCE ( [DISTINCT   <u>ALL</u> ] x)          | Variance of n, ignoring null values                                                                                                                  |

### Group Functions: Syntax

```
SELECT [column,] group_function(column), ...
FROM table
[WHERE condition]
```

[GROUP BY *column*]

[ORDER BY *column*];

### **Guidelines for Using Group Functions**

- DISTINCT makes the function consider only nonduplicate values; ALL makes it consider every value, including duplicates. The default is ALL and therefore does not need to be specified.
- The data types for the functions with an expr argument may be CHAR, VARCHAR2, NUMBER, or DATE.
- All group functions ignore null values.

### **Using the AVG and SUM Functions**

You can use AVG and SUM for numeric data.

```
SELECT AVG(salary), MAX(salary),
MIN(salary), SUM(salary)
FROM employees
WHERE job_id LIKE '%REP%';
```

### **Using the MIN and MAX Functions**

You can use MIN and MAX for numeric, character, and date data types.

```
SELECT MIN(hire_date), MAX(hire_date)
```

```
FROM employees;
```

You can use the MAX and MIN functions for numeric, character, and date data types. example displays the most junior and most senior employees.

The following example displays the employee last name that is first and the employee last name that is last in an alphabetized list of all employees:

```
SELECT MIN(last_name), MAX(last_name)
FROM employees;
```

**Note:** The AVG, SUM, VARIANCE, and STDDEV functions can be used only with numeric data types. MAX and MIN cannot be used with LOB or LONG data types.

### **Using the COUNT Function**

COUNT(\*) returns the number of rows in a table:

```
SELECT COUNT(*)
FROM employees
```

WHERE department\_id = 50;  
COUNT(*expr*) returns the number of rows with nonnull values for the *expr*:

```
SELECT COUNT(commission_pct)
FROM employees
WHERE department_id = 80;
```

### **Using the DISTINCT Keyword**

- COUNT(DISTINCT *expr*) returns the number of distinct non-null values of the *expr*.
- To display the number of distinct department values in the EMPLOYEES table:

```
SELECT COUNT(DISTINCT department_id) FROM employees;
```

Use the DISTINCT keyword to suppress the counting of any duplicate values in a column.

### **Group Functions and Null Values**

Group functions ignore null values in the column:

```
SELECT AVG(commission_pct)
```

```
FROM employees;
```

The NVL function forces group functions to include null values:

```
SELECT AVG(NVL(commission_pct, 0))
FROM employees;
```

### **Creating Groups of Data**

To divide the table of information into smaller groups. This can be done by using the GROUP BY clause.

#### **GROUP BY Clause Syntax**

```
SELECT column, group_function(column)
FROM table
[WHERE condition]
[GROUP BY group_by_expression]
[ORDER BY column];
```

#### **In the syntax:**

*group\_by\_expression* specifies columns whose values determine the basis for grouping rows

## **Guidelines**

- If you include a group function in a SELECT clause, you cannot select individual results as well, *unless* the individual column appears in the GROUP BY clause. You receive an error message if you fail to include the column list in the GROUP BY clause.
- Using a WHERE clause, you can exclude rows before dividing them into groups.
- You must include the *columns* in the GROUP BY clause.
- You cannot use a column alias in the GROUP BY clause.

## **Using the GROUP BY Clause**

All columns in the SELECT list that are not in group functions must be in the GROUP BY clause.

```
SELECT department_id, AVG(salary)
FROM employees
GROUP BY department_id ;
```

The GROUP BY column does not have to be in the SELECT list.

```
SELECT AVG(salary) FROM employees GROUP BY department_id ;
```

You can use the group function in the ORDER BY clause:

```
SELECT department_id, AVG(salary) FROM employees GROUP BY department_id ORDER
BY AVG(salary);
```

## **Grouping by More Than One Column**

```
SELECT department_id dept_id, job_id, SUM(salary) FROM employees
GROUP BY department_id, job_id ;
```

## **Illegal Queries Using Group Functions**

Any column or expression in the SELECT list that is not an aggregate function must be in the GROUP

**BY clause:**

```
SELECT department_id, COUNT(last_name) FROM employees;
```

You can correct the error by adding the GROUP BY clause:

```
SELECT department_id, count(last_name) FROM employees GROUP BY department_id;
```

You cannot use the WHERE clause to restrict groups.

- You use the HAVING clause to restrict groups.
- You cannot use group functions in the WHERE clause.

```
SELECT department_id, AVG(salary) FROM employees WHERE AVG(salary) > 8000
GROUP BY department_id;
```

You can correct the error in the example by using the HAVING clause to restrict groups:

```
SELECT department_id, AVG(salary) FROM employees
HAVING AVG(salary) > 8000 GROUP BY department_id;
```

### **Restricting Group Results**

With the HAVING Clause .When you use the HAVING clause, the Oracle server restricts groups as follows:

1. Rows are grouped.
2. The group function is applied.
3. Groups matching the HAVING clause are displayed.

### **Using the HAVING Clause**

```
SELECT department_id, MAX(salary) FROM employees
GROUP BY department_id HAVING MAX(salary) > 10000 ;
```

The following example displays the department numbers and average salaries for those departments with a maximum salary that is greater than \$10,000:

```
SELECT department_id, AVG(salary) FROM employees GROUP BY department_id
HAVING max(salary) > 10000;
```

Example displays the job ID and total monthly salary for each job that has a total payroll exceeding \$13,000. The example excludes sales representatives and sorts the list by the total monthly salary.

```
SELECT job_id, SUM(salary) PAYROLL FROM employees WHERE job_id NOT LIKE
'%REP%'
GROUP BY job_id HAVING SUM(salary) > 13000 ORDER BY SUM(salary);
```

### **Nesting Group Functions**

**Display the maximum average salary:**

Group functions can be nested to a depth of two. The slide example displays the maximum average salary.

```
SELECT MAX(AVG(salary)) FROM employees GROUP BY department_id;
```

### **Summary**

In this exercise, students should have learned how to:

- Use the group functions COUNT, MAX, MIN, and AVG
- Write queries that use the GROUP BY clause
- Write queries that use the HAVING clause

```
SELECT column, group_function
FROM table
[WHERE condition]
[GROUP BY group_by_expression]
[HAVING group_condition]
[ORDER BY column];
```

### **Find the Solution for the following:**

Determine the validity of the following three statements. Circle either True or False.

1. Group functions work across many rows to produce one result per group. True/False
2. Group functions include nulls in calculations. True/False
3. The WHERE clause restricts rows prior to inclusion in a group calculation. True/False

### **The HR department needs the following reports:**

4. Find the highest, lowest, sum, and average salary of all employees. Label the columns Maximum, Minimum, Sum, and Average, respectively. Round your results to the nearest whole number
5. Modify the above query to display the minimum, maximum, sum, and average salary for each job type.



6. Write a query to display the number of people with the same job. Generalize the query so that the user in the HR department is prompted for a job title.

7. Determine the number of managers without listing them. Label the column Number of Managers. *Hint: Use the MANAGER\_ID column to determine the number of managers.*

8. Find the difference between the highest and lowest salaries. Label the column DIFFERENCE.

9. Create a report to display the manager number and the salary of the lowest-paid employee for that manager. Exclude anyone whose manager is not known. Exclude any groups where the minimum salary is \$6,000 or less. Sort the output in descending order of salary.

10. Create a query to display the total number of employees and, of that total, the number of employees hired in 1995, 1996, 1997, and 1998. Create appropriate column headings.

11. Create a matrix query to display the job, the salary for that job based on department number, and the total salary for that job, for departments 20, 50, 80, and 90, giving each column an appropriate heading.

12. Write a query to display each department's name, location, number of employees, and the average salary for all the employees in that department. Label the column name-Location, Number of people, and salary respectively. Round the average salary to two decimal places.

| Evaluation Procedure | Marks awarded |
|----------------------|---------------|
| Query(5)             |               |
| Execution (5)        |               |
| Viva(5)              |               |
| Total (15)           |               |

|                   |  |
|-------------------|--|
| Faculty Signature |  |
|-------------------|--|

**Ex. No.: 10**

## **AGGREGATING DATA USING GROUP FUNCTIONS**

**Initial:**

```
CREATE TABLE departments (
 department_id NUMBER PRIMARY KEY,
 department_name VARCHAR2(100),
 location_id NUMBER
);
```

```
CREATE TABLE employees (
 employee_id NUMBER PRIMARY KEY,
 last_name VARCHAR2(100),
 first_name VARCHAR2(100),
 hire_date DATE,
 salary NUMBER(10, 2),
 department_id NUMBER,
 job_id VARCHAR2(10),
 manager_id NUMBER,
 FOREIGN KEY (department_id) REFERENCES departments(department_id)
);
```

```
INSERT INTO departments VALUES (10, 'Executive', 1700);
```

```
INSERT INTO departments VALUES (20, 'HR', 1800);
```

```
INSERT INTO departments VALUES (30, 'IT', 1700);
```

```
INSERT INTO departments VALUES (40, 'Finance', 1600);
```

```
INSERT INTO employees
```

```

VALUES (1, 'King', 'John', TO_DATE('1998-01-01', 'YYYY-MM-DD'), 10000, 10, 'CEO',
NULL);
INSERT INTO employees
VALUES (2, 'Zlotkey', 'Jane', TO_DATE('1995-02-15', 'YYYY-MM-DD'), 8000, 10, 'VP', 1);
INSERT INTO employees
VALUES (3, 'Smith', 'Anna', TO_DATE('1996-03-10', 'YYYY-MM-DD'), 8500, 10, 'Manager',
1);
INSERT INTO employees
VALUES (4, 'Green', 'Tom', TO_DATE('1998-05-20', 'YYYY-MM-DD'), 7500, 20, 'HR Rep', 2);
INSERT INTO employees
VALUES (5, 'Brown', 'Lily', TO_DATE('1997-06-22', 'YYYY-MM-DD'), 7200, 20, 'HR Rep', 2);
INSERT INTO employees
VALUES (6, 'Turner', 'Michael', TO_DATE('1995-07-13', 'YYYY-MM-DD'), 5000, 30,
'Developer', 3);
INSERT INTO employees
VALUES (7, 'Miller', 'Sandra', TO_DATE('1992-08-25', 'YYYY-MM-DD'), 5500, 30,
'Developer', 3);
INSERT INTO employees
VALUES (8, 'Jones', 'Peter', TO_DATE('1997-09-15', 'YYYY-MM-DD'), 6500, 40, 'Accountant',
1);
INSERT INTO employees
VALUES (9, 'Austin', 'James', TO_DATE('1996-06-13', 'YYYY-MM-DD'), 7500, 30,
'Developer', 1);

```

1. TRUE                      2. FALSE                      3. TRUE
- 4.

```

SELECT
 ROUND(MAX(salary)) AS Maximum,
 ROUND(MIN(salary)) AS Minimum,
 ROUND(SUM(salary)) AS Sum,
 ROUND(AVG(salary)) AS Average
FROM employees;

```

5.

```
SELECT
 job_id,
 ROUND(MIN(salary)) AS Minimum,
 ROUND(MAX(salary)) AS Maximum,
 ROUND(SUM(salary)) AS Sum,
 ROUND(AVG(salary)) AS Average
FROM employees
GROUP BY job_id;
```

6.

```
SELECT
 job_id,
 COUNT(*) AS Number_of_People
FROM employees
WHERE job_id = 'Developer'
GROUP BY job_id;
```

7.

```
SELECT
 COUNT(DISTINCT manager_id) AS Number_of_Managers
FROM employees
WHERE manager_id IS NOT NULL;
```

8.

```
SELECT
 ROUND(MAX(salary) - MIN(salary)) AS DIFFERENCE
FROM employees;
```

9.

```
SELECT
 manager_id,
 MIN(salary) AS Lowest_Salary
FROM employees
WHERE manager_id IS NOT NULL
GROUP BY manager_id
HAVING MIN(salary) > 6000
ORDER BY Lowest_Salary DESC;
```

10.

```
SELECT
 COUNT(*) AS Total_Employees,
 SUM(CASE WHEN EXTRACT(YEAR FROM hire_date) = 1995 THEN 1 ELSE 0 END) AS
Employees_1995,
 SUM(CASE WHEN EXTRACT(YEAR FROM hire_date) = 1996 THEN 1 ELSE 0 END) AS
Employees_1996,
 SUM(CASE WHEN EXTRACT(YEAR FROM hire_date) = 1997 THEN 1 ELSE 0 END) AS
Employees_1997,
 SUM(CASE WHEN EXTRACT(YEAR FROM hire_date) = 1998 THEN 1 ELSE 0 END) AS
Employees_1998
FROM employees;
```

11.

```
SELECT
 job_id,
 department_id,
 SUM(salary) AS Total_Salary,
 AVG(salary) AS Average_Salary
FROM employees
WHERE department_id IN (20, 50, 80, 90)
GROUP BY job_id, department_id
ORDER BY department_id, job_id;
```

12.

```
SELECT
 d.department_name AS "Name-Location",
 d.location_id AS Location,
 COUNT(e.employee_id) AS "Number of People",
 ROUND(AVG(e.salary), 2) AS Salary
FROM departments d
LEFT JOIN employees e ON d.department_id = e.department_id
GROUP BY d.department_name, d.location_id;
```

|                       |                        |
|-----------------------|------------------------|
| <b>Ex.No.: 11</b>     | <b>PL SQL PROGRAMS</b> |
| <b>Date:</b> 26/10/24 |                        |

## **PROGRAMS**

### **TO DISPLAY HELLO MESSAGE**

```
SQL> set serveroutput on;
SQL> declare
 2 a varchar2(20);
 3 begin
 4 a:='Hello';
 5 dbms_output.put_line(a);
 6 end;
 7 /
Hell
o
```

PL/SQL procedure successfully completed.

### **TO INPUT A VALUE FROM THE USER AND DISPLAY IT**

```
SQL> set serveroutput on;
SQL> declare
 2 a varchar2(20);
 3 begin
 4 a:=&a;
 5 dbms_output.put_line(a);
 6 end;
 7 /
Enter value for a: 5
old 4: a:=&a;
new 4: a:=5;
5
```

PL/SQL procedure successfully completed.

### **GREATEST OF TWO NUMBERS**

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
 2 a number(7);
```



```

3 b number(7);
4 begin
5 a:=&a;
6 b:=&b;
7 if(a>b) then
8 dbms_output.put_line (' The grerater of the two is'|| a);
9 else
10 dbms_output.put_line (' The grerater of the two is'|| b);
11 end if;
12 end;
13 /

```

Enter value for a: 5

old 5: a:=&a;

new 5: a:=5; Enter

value for b: 9 old

6: b:=&b;

new 6: b:=9;

The grerater of the two is9

PL/SQL procedure successfully completed.

### **GREATEST OF THREE NUMBERS**

SQL> set serveroutput on;

SQL> declare

```

2 a number(7);
3 b number(7);
4 c number(7);
5 begin
6 a:=&a;
7 b:=&b;
8 c:=&c;
9 if(a>b and a>c) then
10 dbms_output.put_line (' The greatest of the three is ' || a);
11 else if (b>c) then
12 dbms_output.put_line (' The greatest of the three is ' || b);
13 else
14 dbms_output.put_line (' The greatest of the three is ' || c);
15 end if;
16 end if;
17 end;
18 /

```

Enter value for a: 5

old 6: a:=&a;

new 6: a:=5;

Enter value for b:  
7 old 7: b:=&b;  
new 7: b:=7; Enter  
value for c: 1 old  
8: c:=&c;  
new 8: c:=1;  
The greatest of the three is 7

PL/SQL procedure successfully completed.

### **PRINT NUMBERS FROM 1 TO 5 USING SIMPLE LOOP**

SQL> set serveroutput on;

SQL> declare

```
2 a number:=1;
3 begin
4 loop
5 dbms_output.put_line (a);
6 a:=a+1;
7 exit when a>5;
8 end loop;
9 end;
10 /
1
2
3
4
5
```

PL/SQL procedure successfully completed.

### **PRINT NUMBERS FROM 1 TO 4 USING WHILE LOOP**

SQL> set serveroutput on;

SQL> declare

```
2 a number:=1;
3 begin
4 while(a<5)
5 loop
6 dbms_output.put_line (a);
7 a:=a+1;
8 end loop;
```

```
9 end;
10 /
```

```
1
2
3
4
```

PL/SQL procedure successfully completed.

### **PRINT NUMBERS FROM 1 TO 5 USING FOR LOOP**

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a number:=1;
3 begin
4 for a in 1..5
5 loop
6 dbms_output.put_line (a);
7 end loop;
8 end;
9 /
```

```
1
2
3
4
5
```

PL/SQL procedure successfully completed.

### **PRINT NUMBERS FROM 1 TO 5 IN REVERSE ORDER USING FOR LOOP**

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a number:=1;
3 begin
4 for a in reverse 1..5
5 loop
6 dbms_output.put_line (a);
7 end loop;
8 end;
9 /
```

```
5
4
3
2
1
```

PL/SQL procedure successfully completed.

### **TO CALCULATE AREA OF CIRCLE**

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 pi constant number(4,2):=3.14;
```

```

3 a number(20);
4 r number(20);
5 begin
6 r:=&r;
7 a:= pi* power(r,2);
8 dbms_output.put_line (' The area of circle is ' || a);
9 end;
10 /

```

Enter value for r:

2 old 6: r:=&r;

new 6: r:=2;

The area of circle is 13

PL/SQL procedure successfully completed.

### **TO CREATE SACCOUNT TABLE**

SQL> create table saccount ( accno number(5), name varchar2(20), bal number(10));

Table created.

SQL> insert into saccount values ( 1,'mala',20000);

1 row created.

SQL> insert into saccount values (2,'kala',30000);

1 row created.

SQL> select \* from saccount;

| ACCNO | NAME | BAL   |
|-------|------|-------|
| 1     | mala | 20000 |
| 2     | kala | 30000 |

SQL> set serveroutput on;

SQL> declare

```
2 a_bal number(7);
```

```
3 a_no varchar2(20);
```

```
4 debit number(7):=2000;
```

```
5 minamt number(7):=500;
```

```
6 begin
```

```
7 a_no:=&a_no;
```

```
8 select bal into a_bal from saccount where accno= a_no;
```

```
9 a_bal:= a_bal-debit;
```

```
10 if (a_bal > minamt) then
```

```
11 update saccount set bal=bal-debit where accno=a_no;
```

```
12 end if;
```

```
13 end;
```

```
14
```

```
15 /
```

Enter value for a\_no: 1

old 7: a\_no:=&a\_no;

new 7: a\_no:=1;

PL/SQL procedure successfully completed.

SQL> select \* from saccount;

| ACCNO | NAME | BAL   |
|-------|------|-------|
| 1     | mala | 18000 |
| 2     | kala | 30000 |

### **TO CREATE TABLE SROUTES**

SQL> create table sroutes ( rno number(5), origin varchar2(20), destination varchar2(20), fare

number(10), distance

number(10)); Table created.

SQL> insert into sroutes values ( 2, 'chennai', 'dindugal', 400,230);

1 row created.

SQL> insert into sroutes values ( 3, 'chennai', 'madurai', 250,300);

1 row created.

SQL> insert into sroutes values ( 6, 'thanjavur', 'palani', 350,370);

1 row created.

SQL> select \* from sroutes;

| RNO | ORIGIN    | DESTINATION | FARE | DISTANCE |
|-----|-----------|-------------|------|----------|
| 2   | chennai   | dindugal    | 400  | 230      |
| 3   | chennai   | madurai     | 250  | 300      |
| 6   | thanjavur | palani      | 350  | 370      |

SQL> set serveroutput on;

SQL> declare

2 route sroutes.rno % type;

3 fares sroutes.fare % type;

4 dist sroutes.distance % type;

5 begin

6 route:=&route;

7 select fare, distance into fares , dist from sroutes where rno=route;

8 if (dist < 250) then

9 update sroutes set fare=300 where rno=route;

10 else if dist between 250 and 370 then

11 update sroutes set fare=400 where rno=route;

12 else if (dist > 400) then

13 dbms\_output.put\_line('Sorry');

14 end if;

15 end if;

16 end if;

17 end;

18 /

Enter value for route: 3

```
old 6: route:=&route;
new 6: route:=3;
```

PL/SQL procedure successfully completed.

```
SQL> select * from sroutes;
```

| RNO | ORIGIN    | DESTINATION | FARE | DISTANCE |
|-----|-----------|-------------|------|----------|
| 2   | chennai   | dindugal    | 400  | 230      |
| 3   | chennai   | madurai     | 400  | 300      |
| 6   | thanjavur | palani      | 350  | 370      |

### **TO CREATE SCALCULATE TABLE**

```
SQL> create table scalculate (radius number(3), area number(5,2));
```

Table created.

```
SQL> desc scalculate;
```

| Name   | Null? | Type        |
|--------|-------|-------------|
| RADIUS |       | NUMBER(3)   |
| AREA   |       | NUMBER(5,2) |

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 pi constant number(4,2):=3.14;
3 area number(5,2);
4 radius number(3);
5 begin
6 radius:=3;
7 while (radius <=7)
8 loop
9 area:= pi* power(radius,2);
10 insert into scalculate values (radius,area);
11 radius:=radius+1;
12 end loop;
13 end;
14 /
```

PL/SQL procedure successfully completed.

```
SQL> select * from scalculate;
```

```
 RADIUS AREA
```

-----  
3 28.26  
4 50.24  
5 78.5  
6 113.04  
7 153.86

### **TO CALCULATE FACTORIAL OF A GIVEN NUMBER**

SQL> set serveroutput on;

SQL> declare

2 f number(4):=1;

3 i number(4);

4 begin

5 i:=&i;

6 while(i>=1)

7 loop

8 f:=f\*i;

9 i:=i-1;

10 end loop;

11 dbms\_output.put\_line('The value is ' || f);

12 end;

13 /

Enter value for i: 5

old 5: i:=&i;

new 5: i:=5;

The value is 120

PL/SQL procedure successfully completed.

### PROGRAM 1

Write a PL/SQL block to calculate the incentive of an employee whose ID is 110.

### PROGRAM 2

Write a PL/SQL block to show an invalid case-insensitive reference to a quoted and without quoted user-defined identifier.



### PROGRAM 3

Write a PL/SQL block to adjust the salary of the employee whose ID 122.  
Sample table: employees

### PROGRAM 4

Write a PL/SQL block to create a procedure using the "IS [NOT] NULL Operator" and show AND operator returns TRUE if and only if both operands are TRUE.

### PROGRAM 5

Write a PL/SQL block to describe the usage of LIKE operator including wildcard characters and escape character.

### PROGRAM 6

Write a PL/SQL program to arrange the number of two variable in such a way that the small number will store in num\_small variable and large number will store in num\_large variable.

#### PROGRAM 7

Write a PL/SQL procedure to calculate the incentive on a target achieved and display the message either the record updated or not.

#### PROGRAM 8

Write a PL/SQL procedure to calculate incentive achieved according to the specific sale limit.

#### PROGRAM 9

Write a PL/SQL program to count number of employees in department 50 and check whether this department have any vacancies or not. There are 45 vacancies in this department.

#### PROGRAM 10

Write a PL/SQL program to count number of employees in a specific department and check whether this department have any vacancies or not. If any vacancies, how many vacancies are in that department.

### PROGRAM 11

Write a PL/SQL program to display the employee IDs, names, job titles, hire dates, and salaries of all employees.

### PROGRAM 12

Write a PL/SQL program to display the employee IDs, names, and department names of all employees.

### PROGRAM 13

Write a PL/SQL program to display the job IDs, titles, and minimum salaries of all jobs.

### PROGRAM 14

Write a PL/SQL program to display the employee IDs, names, and job history start dates of all employees.

**PROGRAM 15**

Write a PL/SQL program to display the employee IDs, names, and job history end dates of all employees.

| <b>Evaluation Procedure</b>  | <b>Marks awarded</b> |
|------------------------------|----------------------|
| <b>PL/SQL Procedure(5)</b>   |                      |
| <b>Program/Execution (5)</b> |                      |
| <b>Viva(5)</b>               |                      |
| <b>Total (15)</b>            |                      |
| <b>Faculty Signature</b>     |                      |

## **Ex. No.: 11**

### **PL SQL PROGRAMS**

#### **Initial:**

```
CREATE TABLE employees (
 employee_id NUMBER PRIMARY KEY,
 first_name VARCHAR2(50),
 last_name VARCHAR2(50),
 job_id VARCHAR2(10),
 salary NUMBER(8, 2),
 hire_date DATE,
 department_id NUMBER
);
```

```
CREATE TABLE departments (
 department_id NUMBER PRIMARY KEY,
 department_name VARCHAR2(50),
 manager_id NUMBER
);
```

```
CREATE TABLE jobs (
 job_id VARCHAR2(10) PRIMARY KEY,
 job_title VARCHAR2(50),
 min_salary NUMBER(8, 2), max_salary NUMBER(8, 2)
);
```

```
CREATE TABLE job_history (
 employee_id NUMBER,
 start_date DATE, end_date DATE,
 job_id VARCHAR2(10),
 department_id NUMBER
);
```



```

BEGIN
 INSERT INTO employees VALUES (110, 'John', 'Doe', 'IT_PROG', 60000,
 TO_DATE('2020-01-15', 'YYYY-MM-DD'), 50);
 INSERT INTO employees VALUES (122, 'Jane', 'Smith', 'SA_REP', 55000,
 TO_DATE('2019-07-10', 'YYYY-MM-DD'), 80);

 INSERT INTO departments VALUES (50, 'IT', 110);
 INSERT INTO departments VALUES (80, 'Sales', 122);
 INSERT INTO jobs VALUES ('IT_PROG', 'Programmer', 40000, 80000);
 INSERT INTO jobs VALUES ('SA_REP', 'Sales Representative', 30000, 60000);

 INSERT INTO job_history VALUES (110, TO_DATE('2018-05-01', 'YYYY-MM-DD'),
 TO_DATE('2020-01-14', 'YYYY-MM-DD'), 'HR_REP', 60);
 INSERT INTO job_history VALUES (122, TO_DATE('2017-03-01', 'YYYY-MM-DD'),
 TO_DATE('2019-07-09', 'YYYY-MM-DD'), 'SA_REP', 80);
END;/

```

1.

```

DECLARE
 emp_salary employees.salary%TYPE;
 incentive NUMBER(8,2);
BEGIN
 SELECT salary INTO emp_salary FROM employees WHERE employee_id = 110;
 incentive := emp_salary * 0.1;
 DBMS_OUTPUT.PUT_LINE('Incentive for Employee ID 110: ' || incentive);
END; /

```

2.

```

DECLARE
 "EmployeeID" NUMBER := 110;
BEGIN
 DBMS_OUTPUT.PUT_LINE(EmployeeID);
END; /

```

3.

```
BEGIN
 UPDATE employees SET salary = salary + 5000 WHERE employee_id = 122;
 DBMS_OUTPUT.PUT_LINE('Salary adjusted for Employee ID 122');
END; /
```

4.

```
CREATE OR REPLACE PROCEDURE CheckNullAndOperator IS
 value1 BOOLEAN := TRUE;
 value2 BOOLEAN := TRUE;
BEGIN
 IF value1 IS NOT NULL AND value2 IS NOT NULL AND value1 AND value2 THEN
 DBMS_OUTPUT.PUT_LINE('Both conditions are TRUE');
 ELSE
 DBMS_OUTPUT.PUT_LINE('One or both conditions are FALSE');
 END IF;
END; /
```

5.

```
DECLARE
 emp_name employees.first_name%TYPE;
BEGIN
 FOR rec IN (SELECT first_name FROM employees WHERE first_name LIKE 'J%')
 LOOP
 DBMS_OUTPUT.PUT_LINE('Employee name starting with J: ' ||
 rec.first_name);
 END LOOP;
END; /
```

6.

```
DECLARE
 num1 NUMBER := 10;
 num2 NUMBER := 5;
 num_small NUMBER;
 num_large NUMBER;
BEGIN
 IF num1 < num2 THEN
 num_small := num1;
 num_large := num2;
 ELSE
 num_small := num2;
 num_large := num1;
 END IF;
 DBMS_OUTPUT.PUT_LINE('Small Number: ' || num_small || ', Large Number: ' ||
 num_large);
END; /
```

7.

```
CREATE OR REPLACE PROCEDURE UpdateIncentive IS
 target NUMBER := 100000;
 sales NUMBER := 120000;
 incentive NUMBER;
BEGIN
 IF sales >= target THEN
 incentive := sales * 0.1;
 DBMS_OUTPUT.PUT_LINE('Incentive updated to ' || incentive);
 ELSE
 DBMS_OUTPUT.PUT_LINE('Target not met. No incentive.');
```

```
 END IF;
END; /
```

8.

```
CREATE OR REPLACE PROCEDURE CalculateIncentive(sales_limit IN NUMBER) IS
 incentive NUMBER;
BEGIN
 IF sales_limit > 50000 THEN
 incentive := sales_limit * 0.15;
 ELSE
 incentive := sales_limit * 0.1;
 END IF;
 DBMS_OUTPUT.PUT_LINE('Incentive: ' || incentive);
END; /
```

9.

```
DECLARE
 emp_count NUMBER;
 vacancies NUMBER := 45;
BEGIN
 SELECT COUNT(*) INTO emp_count FROM employees WHERE department_id =
 50;
 IF emp_count < vacancies THEN
 DBMS_OUTPUT.PUT_LINE('Vacancies available: ' || (vacancies -
 emp_count));
 ELSE
 DBMS_OUTPUT.PUT_LINE('No vacancies');
 END IF;
END; /
```

10.

```
DECLARE
 emp_count NUMBER;
 dept_id NUMBER := 80;
 vacancies NUMBER := 45;
BEGIN
 SELECT COUNT(*) INTO emp_count FROM employees WHERE department_id =
 dept_id;
 IF emp_count < vacancies THEN
 DBMS_OUTPUT.PUT_LINE('Vacancies in Department ' || dept_id || ': ' ||
 (vacancies - emp_count));
 ELSE
 DBMS_OUTPUT.PUT_LINE('No vacancies');
 END IF;
END; /
```

11.

```
DECLARE
 CURSOR emp_cursor IS
 SELECT employee_id, first_name, job_id, hire_date, salary FROM
 employees;
BEGIN
 FOR emp IN emp_cursor LOOP
 DBMS_OUTPUT.PUT_LINE('ID: ' || emp.employee_id || ', Name: ' ||
 emp.first_name || ', Job: ' || emp.job_id || ', Hire Date: ' || emp.hire_date || ',
 Salary: ' || emp.salary);
 END LOOP;
END; /
```

12.

```
DECLARE
 CURSOR emp_dept_cursor IS
 SELECT e.employee_id, e.first_name, d.department_name
 FROM employees e
 JOIN departments d ON e.department_id = d.department_id;
BEGIN
 FOR emp IN emp_dept_cursor LOOP
 DBMS_OUTPUT.PUT_LINE('ID: ' || emp.employee_id || ', Name: ' || emp.first_name
 || ', Dept: ' || emp.department_name);
 END LOOP;
END; /
```

13.

```
DECLARE
 CURSOR job_cursor IS SELECT job_id, job_title, min_salary FROM jobs;
BEGIN
 FOR job IN job_cursor LOOP
 DBMS_OUTPUT.PUT_LINE('Job ID: ' || job.job_id || ', Title: ' || job.job_title ||
 ', Min Salary: ' || job.min_salary);
 END LOOP;
END; /
```

14.

```
DECLARE
 CURSOR job_hist_cursor IS SELECT employee_id, start_date FROM job_history;
BEGIN
 FOR job_hist IN job_hist_cursor LOOP
 DBMS_OUTPUT.PUT_LINE('Employee ID: ' || job_hist.employee_id || ', Start
 Date: ' || job_hist.start_date);
 END LOOP;
END; /
```

15.

```
DECLARE
 CURSOR job_hist_cursor IS
 SELECT employee_id, end_date FROM job_history;
BEGIN
 FOR job_hist IN job_hist_cursor LOOP
 DBMS_OUTPUT.PUT_LINE('Employee ID: ' || job_hist.employee_id || ', End
 Date: ' || job_hist.end_date);
 END LOOP;
END; /
```

|                   |          |                                                      |
|-------------------|----------|------------------------------------------------------|
| <b>Ex.No.: 12</b> |          | <b>WORKING WITH CURSOR, PROCEDURES AND FUNCTIONS</b> |
| <b>Date:</b>      | 26/10/24 |                                                      |

**AIM:**

Create PL/SQL Blocks to perform the Item Transaction Operations using CURSOR, FUNCTION and PROCEDURE.

**ALGORITHM:**

**STEP-1:** Start.

**STEP-2:** Create two tables Item Master and Item Trans.

itemmaster(itemid , itemname, stockonhand )

itemtrans(itemid ,itemname ,dateofpurchase ,quantity)

**STEP-3:** Create a PROCEDURE with id, name and quantity as parameters which make a call to the FUNCTION by passing id, name, dop, and quantity as parameters dop is set as sysdate.

**STEP-4:** Using FUNCTION fetch each record from the table Item Master using CURSOR inside a Loop statement,  
If Item Master's ItemId is equal to the entered ID value then exit the loop otherwise fetch the next record.

loop

    fetch master into masterrec

    exit when master%notfound

    if masterrec.itemid=id then

        exit;

    end if;

    end

loop;

**STEP-5:** If Itemmaster's itemid = id then,

    Add the Itemmaster's stockonhand with the given quantity and update the ItemMaster table and insert the Item information into the ItemTrans table.

**STEP-6:** Else, if the inputted item is not present in the ItemMaster table then insert the



new Item in both the tables.

**STEP-7:** Call the Procedure by passing the Item informations which calls the Function.

**STEP-8:** Exit.

## **PROCEDURES – SYNTAX**

```
create or replace procedure <procedure name> (argument {in, out, inout} datatype) {is,as}
variable declaration;
constant declaration;
begin
PL/SQL subprogram body;
exception
exception PL/SQL block;
end;
```

## **FUNCTIONS – SYNTAX**

```
create or replace function <function name> (argument in datatype,.....) return datatype {is,as}
variable declaration;
constant declaration;
begin
PL/SQL subprogram body;
exception
exception PL/SQL block;
end;
```

## **CREATING THE TABLE 'ITITEMS' AND DISPLAYING THE CONTENTS**

```
SQL> create table ititems(itemid number(3), actualprice number(5), ordid number(4), prodid
number(4));
Table created.
```

```
SQL> insert into ititems values(101, 2000, 500, 201);
1 row created.
```

SQL> insert into ititems values(102, 3000, 1600, 202);  
1 row created.

SQL> insert into ititems values(103, 4000, 600, 202);  
1 row created.

SQL> select \* from ititems;  
ITEMID ACTUALPRICE ORCID PRODID  
-----  
101 2000 500 201  
102 3000 1600 202  
103 4000 600 202

**PROGRAM FOR GENERAL PROCEDURE – SELECTED RECORD’S PRICE IS INCREMENTED BY 500 , EXECUTING THE PROCEDURE CREATED AND DISPLAYING THE UPDATED TABLE**

SQL> create procedure itsum(identity number, total number) is price number;  
2 null\_price exception;  
3 begin  
4 select actualprice into price from ititems where itemid=identity;  
5 if price is null then  
6 raise null\_price;  
7 else  
8 update ititems set actualprice=actualprice+total where itemid=identity;  
9 end if;  
10 exception  
11 when null\_price then  
12 dbms\_output.put\_line('price is null');  
13 end;  
14 /

Procedure created.

SQL> exec itsum(101, 500);  
PL/SQL procedure successfully completed.

SQL> select \* from ititems;  
ITEMID ACTUALPRICE ORCID PRODID  
-----  
101 2500 500 201  
102 3000 1600 202  
103 4000 600 202

**PROCEDURE FOR ‘IN’ PARAMETER – CREATION, EXECUTION**

SQL> set serveroutput on;

```

SQL> create procedure yyy (a IN number) is price number;
 2 begin
 3 select actualprice into price from ititems where itemid=a;
 4 dbms_output.put_line('Actual price is ' || price);
 5 if price is null then
 6 dbms_output.put_line('price is null');
 7 end if;
 8 end;
 9 /

```

Procedure created.

```

SQL> exec yyy(103);
Actual price is 4000
PL/SQL procedure successfully completed.

```

### **PROCEDURE FOR 'OUT' PARAMETER – CREATION, EXECUTION**

```

SQL> set serveroutput on;

```

```

SQL> create procedure zzz (a in number, b out number) is identity number;
 2 begin
 3 select ordid into identity from ititems where itemid=a;
 4 if identity<1000 then
 5 b:=100;
 6 end if;
 7 end;
 8 /

```

Procedure created.

```

SQL> declare
 2 a number;
 3 b number;
 4 begin
 5 zzz(101,b);
 6 dbms_output.put_line('The value of b is '|| b);
 7 end;
 8 /

```

The value of b is 100

PL/SQL procedure successfully completed.

### **PROCEDURE FOR 'INOUT' PARAMETER – CREATION, EXECUTION**

```

SQL> create procedure itit (a in out number) is
 2 begin
 3 a:=a+1;

```

```
4 end;
5 /
Procedure created.
```

```
SQL> declare
2 a number:=7;
3 begin
4 itit(a);
5 dbms_output.put_line('The updated value is '||a);
6 end;
7 /
```

The updated value is 8  
PL/SQL procedure successfully completed.

### **CREATE THE TABLE 'ITTRAIN' TO BE USED FOR FUNCTIONS**

```
SQL>create table ittrain (tno number(10), tfare number(10));
Table created.
```

```
SQL>insert into ittrain values (1001, 550);
1 row created.
```

```
SQL>insert into ittrain values (1002, 600);
1 row created.
```

```
SQL>select * from
ittrain; TNO
TFARE
```

```

1001 550
1002 600
```

### **PROGRAM FOR FUNCTION AND IT'S EXECUTION**

```
SQL> create function aaa (trainnumber number) return number is
2 trainfunction ittrain.tfare % type;
3 begin
4 select tfare into trainfunction from ittrain where tno=trainnumber;
5 return(trainfunction);
6 end;
7 /
```

Function created.

```
SQL> set serveroutput on;
```

```
SQL> declare
2 total number;
3 begin
4 total:=aaa (1001);
5 dbms_output.put_line('Train fare is Rs. '||total);
6 end;
7 /
```

Train fare is Rs.550

PL/SQL procedure successfully completed.

### **FACTORIAL OF A NUMBER USING FUNCTION — PROGRAM AND EXECUTION**

```
SQL> create function itfact (a number) return number is
```

```
2 fact number:=1;
3 b number;
4 begin
5 b:=a;
6 while b>0
7 loop
8 fact:=fact*b;
9 b:=b-1;
10 end loop;
11 return(fact);
12 end;
13 /
```

Function created.

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a number:=7;
3 f number(10);
4 begin
5 f:=itfact(a);
6 dbms_output.put_line('The factorial of the given number is'||f);
7 end;
8 /
```

The factorial of the given number is 5040

PL/SQL procedure successfully completed.

**Program 1**

**FACTORIAL OF A NUMBER USING FUNCTION**

## Program 2

**Write a PL/SQL program using Procedures IN,INOUT,OUT parameters to retrieve the corresponding book information in library**

**TO WRITE A PL/SQL BLOCK TO DISPLAY THE EMPLOYEE ID AND EMPLOYEE NAME WHERE DEPARTMENT NUMBER IS 11 USING EXPLICIT CURSORS**

```
1 declare
2 cursor cen1 is select eid,sal from ssempp where dno=11;
3 ecode ssempp.eid%type;
4 esal empp.sal%type;
5 begin
6 open cen1;
7 loop
8 fetch cen1 into ecode,esal;
9 exit when cen1%notfound;
10 dbms_output.put_line(' Employee code and employee salary are' || ecode _and'|| esal);
```

```

11 end loop;
12 close
 cenl;
13* end;

```

SQL> /

Employee code and employee salary are 1 and 39000  
 Employee code and employee salary are 5 and 35000  
 Employee code and employee salary are 6 and 23000

PL/SQL procedure successfully completed.

**TO WRITE A PL/SQL BLOCK TO UPDATE THE SALARY BY 5000 WHERE THE JOB IS LECTURER , TO CHECK IF UPDATES ARE MADE USING IMPLICIT CURSORS AND TO DISPLAY THE UPDATED TABLE**

SQL> declare

```

2 county number;
3 begin
4 update ssempp set sal=sal+10000 where job='lecturer';
5 county:= sql%rowcount;
6 if county > 0 then
7 dbms_output.put_line('The number of rows are '|| county);
8 end if;
9 if sql %found then
10 dbms_output.put_line('Employee record modification successful');
11 else if sql%notfound then
12 dbms_output.put_line('Employee record is not found');
13 end if;
14 end if;
15 end;
16 /

```

The number of rows are 3

Employee record modification successful

PL/SQL procedure successfully completed.

SQL> select \* from ssempp;

| EID | ENAME | JOB            | SAL   | DNO |
|-----|-------|----------------|-------|-----|
| 1   | nala  | lecturer       | 44000 | 11  |
| 2   | kala  | seniorlecturer | 20000 | 12  |
| 5   | ajay  | lecturer       | 40000 | 11  |
| 6   | vijay | lecturer       | 28000 | 11  |



3      nila                   professor                   60000                   12

| <b>Evaluation Procedure</b>  | <b>Marks awarded</b> |
|------------------------------|----------------------|
| <b>PL/SQL Procedure(5)</b>   |                      |
| <b>Program/Execution (5)</b> |                      |
| <b>Viva(5)</b>               |                      |
| <b>Total (15)</b>            |                      |
| <b>Faculty Signature</b>     |                      |

## Ex. No.: 12

### WORKING WITH CURSOR, PROCEDURES AND FUNCTIONS

1.

```
CREATE OR REPLACE FUNCTION factorial(n NUMBER) RETURN NUMBER IS
```

```
 result NUMBER := 1;
```

```
BEGIN
```

```
 IF n < 0 THEN
```

```
 RETURN NULL;
```

```
 ELSIF n = 0 THEN
```

```
 RETURN 1;
```

```
 ELSE
```

```
 FOR i IN 1..n LOOP
```

```
 result := result * i;
```

```
 END LOOP;
```

```
 END IF;
```

```
 RETURN result;
```

```
END factorial; /
```

```
DECLARE
```

```
 num NUMBER := 5;
```

```
 fact NUMBER;
```

```
BEGIN
```

```
 fact := factorial(num);
```

```
 DBMS_OUTPUT.PUT_LINE('Factorial of ' || num || ' is: ' || fact);
```

```
END; /
```

## 2. Initial:

```
CREATE TABLE books (
 book_id NUMBER PRIMARY KEY,
 title VARCHAR2(100),
 author VARCHAR2(100),
 genre VARCHAR2(50),
 publication_year NUMBER
); /

BEGIN
 INSERT INTO books VALUES (1, '1984', 'George Orwell', 'Dystopian', 1949);
 INSERT INTO books VALUES (2, 'To Kill a Mockingbird', 'Harper Lee', 'Fiction',
 1960);
 INSERT INTO books VALUES (3, 'The Great Gatsby', 'F. Scott Fitzgerald', 'Classic',
 1925);
 INSERT INTO books VALUES (4, 'Moby-Dick', 'Herman Melville', 'Adventure',
 1851);
 INSERT INTO books VALUES (5, 'Pride and Prejudice', 'Jane Austen', 'Romance',
 1813);
END; /
```

## 2.

```
CREATE OR REPLACE PROCEDURE get_book_info (
 p_book_id IN NUMBER,
 p_title IN OUT VARCHAR2,
 p_author OUT VARCHAR2,
 p_genre OUT VARCHAR2,
 p_publication_year OUT NUMBER
) IS
BEGIN
 SELECT title, author, genre, publication_year
 INTO p_title, p_author, p_genre, p_publication_year
 FROM books
 WHERE book_id = p_book_id;
```

```
EXCEPTION
 WHEN NO_DATA_FOUND THEN
 DBMS_OUTPUT.PUT_LINE('No book found with ID: ' || p_book_id);
END get_book_info; /

DECLARE
 book_id NUMBER := 3;
 title VARCHAR2(100) := 'Default Title';
 author VARCHAR2(100);
 genre VARCHAR2(50);
 publication_year NUMBER;
BEGIN
 get_book_info(book_id, title, author, genre, publication_year);
 DBMS_OUTPUT.PUT_LINE('Title: ' || title);
 DBMS_OUTPUT.PUT_LINE('Author: ' || author);
 DBMS_OUTPUT.PUT_LINE('Genre: ' || genre);
 DBMS_OUTPUT.PUT_LINE('Publication Year: ' || publication_year);
END; /
```

|                   |          |                                                      |
|-------------------|----------|------------------------------------------------------|
| <b>Ex.No.: 13</b> |          | <b>WORKING WITH TRIGGER</b><br><b><u>TRIGGER</u></b> |
| <b>Date:</b>      | 26/10/24 |                                                      |

### **DEFINITION**

A trigger is a statement that is executed automatically by the system as a side effect of a modification to the database. The parts of a trigger are,

- **Trigger statement:** Specifies the DML statements and fires the trigger body. It also specifies the table to which the trigger is associated.
- **Trigger body or trigger action:** It is a PL/SQL block that is executed when the triggering statement is used.
- **Trigger restriction:** Restrictions on the trigger can be achieved

The different uses of triggers are as follows,

- *To generate data automatically*
- *To enforce complex integrity constraints*
- *To customize complex securing authorizations*
- *To maintain the replicate table*
- To audit data modifications

### **TYPES OF TRIGGERS**

The various types of triggers are as follows,

- **Before:** It fires the trigger before executing the trigger statement.
- **After:** It fires the trigger after executing the trigger statement
- .
- **For each row:** It specifies that the trigger fires once per row
- .
- **For each statement:** This is the default trigger that is invoked. It specifies that the trigger fires once per statement.

### **VARIABLES USED IN TRIGGERS**

- :new
- :old

These two variables retain the new and old values of the column updated in the database. The values in these variables can be used in the database triggers for data manipulation

### **SYNTAX**

```
create or replace trigger triggername [before/after] {DML statements}
on [tablename] [for each row/statement]
begin

exception
end;
```

### **USER DEFINED ERROR MESSAGE**

The package `—raise_application_error` is used to issue the user defined error messages

**Syntax:** `raise_application_error(error number, _error message_);`

The error number can lie between -20000 and -20999.

The error message should be a character string.

### **TABLE CREATION:**

```
create table employeebonus(empno number(5)constraint emppk primary key, empname
varchar2(25)not null, experience number(2)not null, bonus number(7,2));
```

Table created.

### **TRIGGER CREATION FOR BONUS CALCULATION:**

```
SQL> set serveroutput on
```

```
SQL> create or replace trigger employeebonus_tgr
```

```
after insert on employeebonus
```

```
declare
```

```
cursor emp is select * from employeebonus;
```

```
emprec employeebonus%rowtype;
```

```
begin
```

```

open emp;
loop
fetch emp into emprec;
exit when emp%notfound;
if(emprec.experience<5)
then emprec.bonus:=5000;
elsif(emprec.experience>=5 and emprec.experience<8) then
emprec.bonus:=8000;
else
emprec.bonus:=10000;
end if;
update employeebonus set bonus=emprec.bonus where empno=emprec.empno;
end loop;
close emp;

dbms_output.put_line('Bonus calculated and Updated Sucessfully');
end;

/

```

Trigger created.

#### **TABLE DESCRIPTION:**

SQL> desc employeebonus;

Name Null? Type

```

EMPNO NOT NULL NUMBER(5)
EMPNAME NOT NULL VARCHAR2(25)
EXPERIENCE NOT NULL NUMBER(2)
BONUS NUMBER(7,2)

```

#### **RECORD INSERTION:**

SQL> insert into employeebonus(empno,empname,experience)  
values(&empno,'&empname',&experience);

Enter value for empno: 101

Enter value for empname: murugan

Enter value for experience: 25

old 1: insert into employeebonus(empno,empname,experience)

```
values(&empno,&empname,&experience)
```

```
new 1: insert into employeebonus(empno,empname,experience)
```

```
values(101,'murugan',25)
```

Bonus calculated and Updated Sucessfully

1 row created.

### **RECORD SELECTION:**

```
SQL> select * from employeebonus;
```

```
EMPNO EMPNAME EXPERIENCE BONUS
```

```

```

```
101 murugan 25 10000
```

```
102 suresh 3 5000
```

```
103 akash 7 8000
```

```
104 mahesh 2 5000
```

### **RESULT:**

Thus, the above program was Created and Executed Successfully.



### Program 1

Write a code in PL/SQL to develop a trigger that enforces referential integrity by preventing the deletion of a parent record if child records exist.

### Program 2

Write a code in PL/SQL to create a trigger that checks for duplicate values in a specific column and raises an exception if found.

### Program 3

Write a code in PL/SQL to create a trigger that restricts the insertion of new rows if the total of a column's values exceeds a certain threshold.

### Program 4

Write a code in PL/SQL to design a trigger that captures changes made to specific columns and logs them in an audit table.

### Program 5

Write a code in PL/SQL to implement a trigger that records user activity (inserts, updates, deletes) in an audit log for a given set of tables.

### Program 7

Write a code in PL/SQL to implement a trigger that automatically calculates and updates a running total column for a table whenever new rows are inserted.

### Program 8

Write a code in PL/SQL to create a trigger that validates the availability of items before allowing an order to be placed, considering stock levels and pending orders.

| Evaluation Procedure  | Marks awarded |
|-----------------------|---------------|
| PL/SQL Procedure(5)   |               |
| Program/Execution (5) |               |
| Viva(5)               |               |
| Total (15)            |               |
| Faculty Signature     |               |
|                       |               |

## Ex. No.: 13

### WORKING WITH TRIGGER

#### Initial:

```
CREATE TABLE orders (
 order_id NUMBER PRIMARY KEY,
 item_id NUMBER,
 quantity NUMBER,
 order_date DATE,
 running_total NUMBER,
 user_id NUMBER,
 FOREIGN KEY (item_id) REFERENCES items(item_id)
);
```

```
INSERT INTO orders (order_id, item_id, quantity, order_date, running_total, user_id)
VALUES (1, 1, 20, SYSDATE, 20, 101);
INSERT INTO orders (order_id, item_id, quantity, order_date, running_total, user_id)
VALUES (2, 2, 30, SYSDATE, 50, 102);
```

```
CREATE TABLE items (
 item_id NUMBER PRIMARY KEY,
 item_name VARCHAR2(50),
 stock_level NUMBER,
 pending_orders NUMBER DEFAULT 0
);
```

```
INSERT INTO items (item_id, item_name, stock_level, pending_orders)
VALUES (1, 'Item A', 100, 0);
INSERT INTO items (item_id, item_name, stock_level, pending_orders)
VALUES (2, 'Item B', 50, 0);
INSERT INTO items (item_id, item_name, stock_level, pending_orders)
VALUES (3, 'Item C', 150, 0);
```

```
CREATE TABLE audit_log (
 log_id NUMBER PRIMARY KEY,
 table_name VARCHAR2(50),
 operation VARCHAR2(10),
 change_time TIMESTAMP DEFAULT CURRENT_TIMESTAMP,
 user_id NUMBER,
 details VARCHAR2(200)
);
```

```
CREATE SEQUENCE audit_log_seq
START WITH 1
INCREMENT BY 1;
```

**1.**

```
CREATE OR REPLACE TRIGGER prevent_parent_delete
BEFORE DELETE ON items
FOR EACH ROW
DECLARE
 child_count NUMBER;
BEGIN
 SELECT COUNT(*) INTO child_count FROM orders
 WHERE item_id = :OLD.item_id;

 IF child_count > 0 THEN
 RAISE_APPLICATION_ERROR(-20001, 'Cannot delete item; dependent
 orders exist.');
```

END IF;  
END; /

2.

```
CREATE OR REPLACE TRIGGER check_for_duplicates
BEFORE INSERT OR UPDATE ON orders
FOR EACH ROW
DECLARE
 duplicate_count NUMBER;
BEGIN
 SELECT COUNT(*) INTO duplicate_count FROM orders
 WHERE item_id = :NEW.item_id AND order_id != :NEW.order_id;

 IF duplicate_count > 0 THEN
 RAISE_APPLICATION_ERROR(-20002, 'Duplicate item entry found in
 orders.');
```

```
 END IF;
```

```
END; /
```

3.

```
CREATE OR REPLACE TRIGGER restrict_insertion
BEFORE INSERT ON orders
FOR EACH ROW
DECLARE
 total_quantity NUMBER;
BEGIN
 SELECT SUM(quantity) INTO total_quantity FROM orders;
 IF (total_quantity + :NEW.quantity) > 500 THEN
 RAISE_APPLICATION_ERROR(-20003, 'Cannot insert order; total quantity
 exceeds threshold.');
```

```
 END IF;
```

```
END; /
```

4.

```
CREATE OR REPLACE TRIGGER log_changes
AFTER UPDATE ON orders
FOR EACH ROW
BEGIN
 INSERT INTO audit_log (log_id, table_name, operation, user_id, details) VALUES
 (audit_log_seq.NEXTVAL, 'orders', 'UPDATE', :NEW.user_id, 'Order ' ||
 :NEW.order_id || ' changed from ' || :OLD.quantity || ' to ' || :NEW.quantity);
END; /
```

5.

```
CREATE OR REPLACE TRIGGER log_user_activity
AFTER INSERT OR DELETE OR UPDATE ON orders
FOR EACH ROW
BEGIN
 INSERT INTO audit_log (log_id, table_name, operation, user_id, details) VALUES
 (audit_log_seq.NEXTVAL, 'orders',
 CASE
 WHEN INSERTING THEN 'INSERT'
 WHEN UPDATING THEN 'UPDATE'
 WHEN DELETING THEN 'DELETE'
 END,
 NVL(:NEW.user_id, :OLD.user_id), 'User action recorded on order ' ||
 NVL(:NEW.order_id, :OLD.order_id));
END; /
```



7.

```
CREATE OR REPLACE TRIGGER update_running_total
AFTER INSERT ON orders
FOR EACH ROW
BEGIN
 UPDATE orders SET running_total = (SELECT SUM(quantity) FROM orders)
 WHERE order_id = :NEW.order_id;
END; /
```

8.

```
CREATE OR REPLACE TRIGGER validate_item_availability
BEFORE INSERT ON orders
FOR EACH ROW
DECLARE
 available_stock NUMBER;
BEGIN
 SELECT stock_level - pending_orders INTO available_stock FROM items
 WHERE item_id = :NEW.item_id;

 IF :NEW.quantity > available_stock THEN
 RAISE_APPLICATION_ERROR(-20004, 'Insufficient stock available for the
 order.');
```

```
 END IF;

 UPDATE items SET pending_orders = pending_orders + :NEW.quantity
 WHERE item_id = :NEW.item_id;
END; /
```

|                   |         |                 |
|-------------------|---------|-----------------|
| <b>Ex.No.: 14</b> |         | <b>MONGO DB</b> |
| <b>Date:</b>      | 8/11/24 |                 |

MongoDB is a free and open-source cross-platform document-oriented database. Classified as a NoSQL database, MongoDB avoids the traditional table-based relational database structure in favor of JSON-like documents with dynamic schemas, making the integration of data in certain types of applications easier and faster.

Create Database using mongosh

After connecting to your database using mongosh, you can see which database you are using by typing db in your terminal.

If you have used the connection string provided from the MongoDB Atlas dashboard, you should be connected to the myFirstDatabase database.

Show all databases

To see all available databases, in your terminal type show dbs.

Notice that myFirstDatabase is not listed. This is because the database is empty. An empty database is essentially non-existent.

Change or Create a Database

You can change or create a new database by typing use then the name of the database.

Create Collection using mongosh

You can create a collection using the createCollection() database method.

Insert Documents

insertOne()

db.posts.insertOne({

title: "Post Title 1",

body: "Body of post.",

category: "News",

likes: 1,

tags: ["news", "events"],

```
date: Date()

})
```

## EXERCISE 18

Structure of 'restaurants' collection:

```
{
 "address": {
 "building": "1007",
 "coord": [-73.856077, 40.848447],
 "street": "Morris Park Ave",
 "zipcode": "10462"
 },
 "borough": "Bronx",
 "cuisine": "Bakery",

 "grades": [
 { "date": { "$date": 1393804800000 }, "grade": "A", "score": 2 },
 { "date": { "$date": 1378857600000 }, "grade": "A", "score": 6 },
 { "date": { "$date": 1358985600000 }, "grade": "A", "score": 10 },
 { "date": { "$date": 1322006400000 }, "grade": "A", "score": 9 },
 { "date": { "$date": 1299715200000 }, "grade": "B", "score": 14 }
],
 "name": "Morris Park Bake Shop",
 "restaurant_id": "30075445"
}
```

1. Write a MongoDB query to find the restaurant Id, name, borough and cuisine for those restaurants which prepared dish except 'American' and 'Chinees' or restaurant's name begins with letter 'Wil'.
2. Write a MongoDB query to find the restaurant Id, name, and grades for those restaurants which achieved a grade of "A" and scored 11 on an ISODate "2014-08-11T00:00:00Z" among many of survey dates..

3. Write a MongoDB query to find the restaurant Id, name and grades for those restaurants where the 2nd element of grades array contains a grade of "A" and score 9 on an ISODate "2014-08- 11T00:00:00Z".
4. Write a MongoDB query to find the restaurant Id, name, address and geographical location for those restaurants where 2nd element of coord array contains a value which is more than 42 and upto 52..
5. Write a MongoDB query to arrange the name of the restaurants in ascending order along with all the columns.
6. Write a MongoDB query to arrange the name of the restaurants in descending along with all the columns.
7. Write a MongoDB query to arranged the name of the cuisine in ascending order and for that same cuisine borough should be in descending order.
8. Write a MongoDB query to know whether all the addresses contains the street or not.

9. Write a MongoDB query which will select all documents in the restaurants collection where the coord field value is Double.
10. Write a MongoDB query which will select the restaurant Id, name and grades for those restaurants which returns 0 as a remainder after dividing the score by 7.
11. Write a MongoDB query to find the restaurant name, borough, longitude and attitude and cuisine for those restaurants which contains 'mon' as three letters somewhere in its name.
12. Write a MongoDB query to find the restaurant name, borough, longitude and latitude and cuisine for those restaurants which contain 'Mad' as first three letters of its name.
13. Write a MongoDB query to find the restaurants that have at least one grade with a score of less than 5.
14. Write a MongoDB query to find the restaurants that have at least one grade with a score of less than 5 and that are located in the borough of Manhattan.

15. Write a MongoDB query to find the restaurants that have at least one grade with a score of less than 5 and that are located in the borough of Manhattan or Brooklyn.

16. Write a MongoDB query to find the restaurants that have at least one grade with a score of less than 5 and that are located in the borough of Manhattan or Brooklyn, and their cuisine is not American.

17. Write a MongoDB query to find the restaurants that have at least one grade with a score of less than 5 and that are located in the borough of Manhattan or Brooklyn, and their cuisine is not American or Chinese.

18. Write a MongoDB query to find the restaurants that have a grade with a score of 2 and a grade with a score of 6.

19. Write a MongoDB query to find the restaurants that have a grade with a score of 2 and a grade with a score of 6 and are located in the borough of Manhattan.

20. Write a MongoDB query to find the restaurants that have a grade with a score of 2 and a grade with a score of 6 and are located in the borough of Manhattan or Brooklyn.

21. Write a MongoDB query to find the restaurants that have a grade with a score of 2 and a grade with a score of 6 and are located in the borough of Manhattan or Brooklyn, and their cuisine is not American.

22. Write a MongoDB query to find the restaurants that have a grade with a score of 2 and a grade with a score of 6 and are located in the borough of Manhattan or Brooklyn, and their cuisine is not American or Chinese.

23. Write a MongoDB query to find the restaurants that have a grade with a score of 2 or a grade with a score of 6.

### **Sample document of 'movies' collection**

```
{
 _id: ObjectId("573a1390f29313caabcd42e8"),
 plot: 'A group of bandits stage a brazen train hold-up, only to find a determined posse hot on their heels.',
 genres: ['Short', 'Western'],
 runtime: 11,
 cast: [
 'A.C. Abadie',
 "Gilbert M. 'Broncho Billy' Anderson",
 'George Barnes',
 'Justus D. Barnes'
],
}
```



poster: 'https://m.media-amazon.com/images/M/MV5BMTU3NjE5NzYtYTYyNS00MDVmLWIwYjgtMmYwYWlxdYyNzU2XkEyXkFqcGdeQXVyNzQzNzQxNzI@.\_V1\_SY1000\_SX677\_AL\_.jpg',  
title: 'The Great Train Robbery',

fullplot: "Among the earliest existing films in American cinema - notable as the first film that presented a narrative story to tell - it depicts a group of cowboy outlaws who hold up a train and rob the passengers. They are then pursued by a Sheriff's posse. Several scenes have color included - all hand tinted.",

languages: [ 'English' ],  
released: ISODate("1903-12-01T00:00:00.000Z"),  
directors: [ 'Edwin S. Porter' ],  
rated: 'TV-G',  
awards: { wins: 1, nominations: 0, text: '1 win.' },  
lastupdated: '2015-08-13 00:27:59.177000000',  
year: 1903,  
imdb: { rating: 7.4, votes: 9847, id: 439 },  
countries: [ 'USA' ],  
type:  
'movie',  
tomatoes: {  
viewer: { rating: 3.7, numReviews: 2559, meter: 75 },  
fresh: 6,  
critic: { rating: 7.6, numReviews: 6, meter: 100 },  
rotten: 0,  
lastUpdated: ISODate("2015-08-08T19:16:10.000Z")  
}

1. Find all movies with full information from the 'movies' collection that released in the year 1893.

2. Find all movies with full information from the 'movies' collection that have a runtime greater than 120 minutes.

3. Find all movies with full information from the 'movies' collection that have "Short" genre.
4. Retrieve all movies from the 'movies' collection that were directed by "William K.L. Dickson" and include complete information for each movie.
6. Retrieve all movies from the 'movies' collection that were released in the USA and include complete information for each movie.
7. Retrieve all movies from the 'movies' collection that have complete information and are rated as "UNRATED".

8. Retrieve all movies from the 'movies' collection that have complete information and have received more than 1000 votes on IMDb.
9. Retrieve all movies from the 'movies' collection that have complete information and have an IMDb rating higher than 7.
10. Retrieve all movies from the 'movies' collection that have complete information and have a viewer rating higher than 4 on Tomatoes.
11. Retrieve all movies from the 'movies' collection that have received an award.
12. Find all movies with title, languages, released, directors, writers, awards, year, genres, runtime, cast, countries from the 'movies' collection in MongoDB that have at least one nomination.

13. Find all movies with title, languages, released, directors, writers, awards, year, genres, runtime, cast, countries from the 'movies' collection in MongoDB with cast including "Charles Kayser".

14. Retrieve all movies with title, languages, released, directors, writers, countries from the 'movies' collection in MongoDB that released on May 9, 1893.

14. Retrieve all movies with title, languages, released, directors, writers, countries from the 'movies' collection in MongoDB that have a word "scene" in the title.

| <b>Evaluation Procedure</b>  | <b>Marks awarded</b> |
|------------------------------|----------------------|
| <b>PL/SQL Procedure(5)</b>   |                      |
| <b>Program/Execution (5)</b> |                      |
| <b>Viva(5)</b>               |                      |
| <b>Total (15)</b>            |                      |
| <b>Faculty Signature</b>     |                      |

**Ex. No.: 14**

## **MongoDB**

### **A. Restaurants**

**Initial:**

```
db.restaurants.insertMany([
 {
 restaurant_id: "100001",
 name: "Wilma's Diner",
 borough: "Manhattan",
 cuisine: "Italian",
 grades: [
 {
 grade: "A",
 score: 11,
 date: ISODate("2014-08-11T00:00:00Z")
 },
 {
 grade: "B",
 score: 9,
 date: ISODate("2014-08-12T00:00:00Z")
 }
],
 address: {
 street: "1st Ave",
 coord: [-73.856077, 40.848447]
 }
 },
 {
 restaurant_id: "100002",
 name: "Golden Dragon",
 borough: "Brooklyn",
 cuisine: "Chinese",
 grades: [
 {
 grade: "A",
 score: 10,
 date: ISODate("2014-08-10T00:00:00Z")
 }
],
 },
])
```

```

address: {
 street: "2nd Ave",
 coord: [-73.856077, 40.748447]
},
{
 restaurant_id: "100003",
 name: "Big Apple Eats",
 borough: "Manhattan",
 cuisine: "American",
 grades: [
 {
 grade: "B",
 score: 15,
 date: ISODate("2015-08-10T00:00:00Z")
 }
],
 address: {
 street: "3rd Ave",
 coord: [-73.956077, 40.748447]
 }
}
])

```

**1.**

```

db.restaurants.find(
{
 $or: [
 { cuisine: { $nin: ["American", "Chinese"] } },
 { name: /^Wil/ }
]
},
{ restaurant_id: 1, name: 1, borough: 1, cuisine: 1 }
)

```

2.

```
db.restaurants.find(
 {
 grades: {
 $elemMatch: {
 grade: "A",
 score: 11,
 date: ISODate("2014-08-11T00:00:00Z")
 }
 }
 },
 { restaurant_id: 1, name: 1, grades: 1 }
)
```

3.

```
db.restaurants.find(
 {
 "grades.1.grade": "A",
 "grades.1.score": 9,
 "grades.1.date": ISODate("2014-08-11T00:00:00Z")
 },
 { restaurant_id: 1, name: 1, grades: 1 }
)
```

4.

```
db.restaurants.find(
 { "address.coord.1": { $gt: 42, $lte: 52 } },
 { restaurant_id: 1, name: 1, address: 1, "address.coord": 1 }
)
```

5.

```
db.restaurants.find().sort({ name: 1 })
```

6.

```
db.restaurants.find().sort({ name: -1 })
```

7.

```
db.restaurants.find().sort({ cuisine: 1, borough: -1 })
```

8.

```
db.restaurants.find({ "address.street": { $exists: true } })
```

9.  
db.restaurants.find({ "address.coord": { \$type: "double" } })
10.  
db.restaurants.find(  
  { "grades.score": { \$mod: [7, 0] } },  
  { restaurant\_id: 1, name: 1, grades: 1 }  
)
11.  
db.restaurants.find(  
  { name: /mon/i },  
  { name: 1, borough: 1, "address.coord": 1, cuisine: 1 }  
)
12.  
db.restaurants.find(  
  { name: /^Mad/ },  
  { name: 1, borough: 1, "address.coord": 1, cuisine: 1 }  
)
13.  
db.restaurants.find({ "grades.score": { \$lt: 5 } })
14.  
db.restaurants.find({ "grades.score": { \$lt: 5 }, borough: "Manhattan" })
15.  
db.restaurants.find({ "grades.score": { \$lt: 5 }, borough: { \$in: ["Manhattan",  
"Brooklyn"] } })
16.  
db.restaurants.find(  
  { "grades.score": { \$lt: 5 }, borough: { \$in: ["Manhattan", "Brooklyn"] }, cuisine: {  
  \$ne: "American" } }  
)
17.  
db.restaurants.find(  
  { "grades.score": { \$lt: 5 }, borough: { \$in: ["Manhattan", "Brooklyn"] }, cuisine: {  
  \$nin: ["American", "Chinese"] } }  
)



**18.**

```
db.restaurants.find({
 grades: {
 $all: [
 { $elemMatch: { score: 2 } },
 { $elemMatch: { score: 6 } }
]
 }
})
```

**19.**

```
db.restaurants.find({
 grades: {
 $all: [
 { $elemMatch: { score: 2 } },
 { $elemMatch: { score: 6 } }
]
 },
 borough: "Manhattan"
})
```

**20.**

```
db.restaurants.find({
 grades: {
 $all: [
 { $elemMatch: { score: 2 } },
 { $elemMatch: { score: 6 } }
]
 },
 borough: { $in: ["Manhattan", "Brooklyn"] }
})
```

**21.**

```
db.restaurants.find({
 grades: {
 $all: [
 { $elemMatch: { score: 2 } },
 { $elemMatch: { score: 6 } }
]
 },
 borough: { $in: ["Manhattan", "Brooklyn"] },
 cuisine: { $ne: "American" }
})
```

22.

```
db.restaurants.find({
 grades: {
 $all: [
 { $elemMatch: { score: 2 } },
 { $elemMatch: { score: 6 } }
]
 },
 borough: { $in: ["Manhattan", "Brooklyn"] },
 cuisine: { $nin: ["American", "Chinese"] }
})
```

23.

```
db.restaurants.find({
 grades: { $elemMatch: { score: { $in: [2, 6] } } }
})
```

## B. Movies

**Initial:**

```
db.movies.insertMany([
 {
 title: "Blacksmith Scene",
 year: 1893,
 runtime: 1,
 genres: ["Short"],
 directors: ["William K.L. Dickson"],
 countries: ["USA"],
 rated: "UNRATED",
 imdb: {
 votes: 1200,
 rating: 7.5
 },
 tomatoes: {
 viewer: {
 rating: 4.5
 }
 },
 awards: {
```

```

 wins: 1,
 nominations: 0
 },
 released: ISODate("1893-05-09T00:00:00Z"),
 languages: ["English"],
 writers: ["William K.L. Dickson"],
 cast: ["Charles Kayser"]
},
{
 title: "The Arrival of a Train",
 year: 1896,
 runtime: 1,
 genres: ["Short", "Documentary"],
 directors: ["Lumière Brothers"],
 countries: ["France"],
 rated: "UNRATED",
 imdb: {
 votes: 2000,
 rating: 8.1
 },
 tomatoes: {
 viewer: {
 rating: 4.8
 }
 },
 awards: {
 wins: 2,
 nominations: 1
 },
 released: ISODate("1896-01-25T00:00:00Z"),
 languages: ["French"],
 writers: ["Lumière Brothers"],
 cast: ["Unknown"]
}
])

```

1.

```
db.movies.find({ year: 1893 })
```

2.

```
db.movies.find({ runtime: { $gt: 120 } })
```

3. `db.movies.find({ genres: "Short" })`
4. `db.movies.find({ directors: "William K.L. Dickson" })`
5. `db.movies.find({ countries: "USA" })`
6. `db.movies.find({ rated: "UNRATED" })`
7. `db.movies.find({ "imdb.votes": { $gt: 1000 } })`
8. `db.movies.find({ "imdb.rating": { $gt: 7 } })`
9. `db.movies.find({ "tomatoes.viewer.rating": { $gt: 4 } })`
10. `db.movies.find({ "awards.wins": { $gt: 0 } })`
11. `db.movies.find({  
 "awards.nominations": { $gte: 1 }  
},  
{  
 title: 1, languages: 1,  
 released: 1, directors: 1,  
 writers: 1, awards: 1,  
 year: 1, genres: 1,  
 runtime: 1, cast: 1,  
 countries: 1  
})`

**12.**

```
db.movies.find({
 cast: "Charles Kayser"
}, {
 title: 1,
 languages: 1,
 released: 1,
 directors: 1,
 writers: 1,
 awards: 1,
 year: 1,
 genres: 1,
 runtime: 1,
 cast: 1,
 countries: 1
})
```

**13.**

```
db.movies.find({
 released: new Date("1893-05-09")
}, {
 title: 1,
 languages: 1,
 released: 1,
 directors: 1,
 writers: 1,
 countries: 1
})
```

**14.**

```
db.movies.find({
 title: /scene/i
}, {
 title: 1,
 languages: 1,
 released: 1,
 directors: 1,
 writers: 1,
 countries: 1
})
```

|                   |          |                               |
|-------------------|----------|-------------------------------|
| <b>Ex.No.: 15</b> |          | <b>OTHER DATABASE OBJECTS</b> |
| <b>Date:</b>      | 12/11/24 |                               |

## **OTHER DATABASE OBJECTS**

### **Objectives**

After the completion of this exercise, the students will be able to do the following:

- Create, maintain, and use sequences
- Create and maintain indexes

### **Database Objects**

Many applications require the use of unique numbers as primary key values. You can either build code into the application to handle this requirement or use a sequence to generate unique numbers.

If you want to improve the performance of some queries, you should consider creating an index. You

can also use indexes to enforce uniqueness on a column or a collection of columns.

You can provide alternative names for objects by using synonyms.

### **What Is a Sequence?**

A sequence:

- Automatically generates unique numbers
- Is a sharable object
- Is typically used to create a primary key value
- Replaces application code
- Speeds up the efficiency of accessing sequence values when cached in memory

### **The CREATE SEQUENCE Statement Syntax**

Define a sequence to generate sequential numbers automatically:

```
CREATE SEQUENCE sequence
[INCREMENT BY n]
[START WITH n]
[{MAXVALUE n | NOMAXVALUE}]
[{MINVALUE n | NOMINVALUE}]
[{CYCLE | NOCYCLE}]
[{CACHE n | NOCACHE}];
```

#### **In the syntax:**

*sequence* is the name of the sequence generator

INCREMENT BY *n* specifies the interval between sequence numbers where *n* is an integer (If this clause is omitted, the sequence increments by 1.)

START WITH *n* specifies the first sequence number to be generated (If this clause is omitted, the sequence starts with 1.)

MAXVALUE *n* specifies the maximum value the sequence can generate

NOMAXVALUE specifies a maximum value of  $10^{27}$  for an ascending sequence and  $-1$  for a descending sequence (This is the default option.)

MINVALUE *n* specifies the minimum sequence value

NOMINVALUE specifies a minimum value of 1 for an ascending sequence and  $-(10^{26})$  for a descending sequence (This is the default option.)

CYCLE | NOCYCLE specifies whether the sequence continues to generate values after reaching its maximum or minimum value (NOCYCLE is the default option.)

CACHE *n* | NOCACHE specifies how many values the Oracle server preallocates and keep in memory (By default, the Oracle server caches 20 values.)

### **Creating a Sequence**

- Create a sequence named DEPT\_DEPTID\_SEQ to be used for the primary key of the DEPARTMENTS table.
- Do not use the CYCLE option.

### **EXAMPLE:**

```
CREATE SEQUENCE dept_deptid_seq
INCREMENT BY 10
START WITH 120
MAXVALUE 9999
NOCACHE
NOCYCLE;
```

### **Confirming Sequences**

- Verify your sequence values in the USER\_SEQUENCES data dictionary table.
- The LAST\_NUMBER column displays the next available sequence number if NOCACHE is specified.

### **EXAMPLE:**

```
SELECT sequence_name, min_value, max_value, increment_by, last_number
```

### **NEXTVAL and CURRVAL Pseudocolumns**

- NEXTVAL returns the next available sequence value. It returns a unique value every time it is referenced, even for different users.
- CURRVAL obtains the current sequence value.
- NEXTVAL must be issued for that sequence before CURRVAL contains a value.

### **Rules for Using NEXTVAL and CURRVAL**

You can use NEXTVAL and CURRVAL in the following contexts:

- The SELECT list of a SELECT statement that is not part of a subquery
- The SELECT list of a subquery in an INSERT statement
- The VALUES clause of an INSERT statement
- The SET clause of an UPDATE statement

You cannot use NEXTVAL and CURRVAL in the following contexts:

- The SELECT list of a view
- A SELECT statement with the DISTINCT keyword
- A SELECT statement with GROUP BY, HAVING, or ORDER BY clauses
- A subquery in a SELECT, DELETE, or UPDATE statement
- The DEFAULT expression in a CREATE TABLE or ALTER TABLE statement

### **Using a Sequence**

- Insert a new department named —Support in location ID 2500.
- View the current value for the DEPT\_DEPTID\_SEQ sequence.

### **EXAMPLE:**

```
INSERT INTO departments(department_id, department_name, location_id)
VALUES (dept_deptid_seq.NEXTVAL, 'Support', 2500);
```

```
SELECT dept_deptid_seq.CURRVAL FROM dual;
```

The example inserts a new department in the DEPARTMENTS table. It uses the DEPT\_DEPTID\_SEQ sequence for generating a new department number as follows:

You can view the current value of the sequence:

```
SELECT dept_deptid_seq.CURRVAL FROM dual;
```

### **Removing a Sequence**

- Remove a sequence from the data dictionary by using the DROP SEQUENCE statement.
- Once removed, the sequence can no longer be referenced.



### **EXAMPLE:**

```
DROP SEQUENCE dept_deptid_seq;
```

### **What is an Index?**

An index:

- Is a schema object
- Is used by the Oracle server to speed up the retrieval of rows by using a pointer
- Can reduce disk I/O by using a rapid path access method to locate data quickly
- Is independent of the table it indexes
- Is used and maintained automatically by the Oracle server

### **How Are Indexes Created?**

- Automatically: A unique index is created automatically when you define a PRIMARY KEY or UNIQUE constraint in a table definition.
- Manually: Users can create nonunique indexes on columns to speed up access to the rows.

### **Types of Indexes**

Two types of indexes can be created. One type is a unique index: the Oracle server automatically creates this index when you define a column in a table to have a PRIMARY KEY or a UNIQUE key

constraint. The name of the index is the name given to the constraint.

The other type of index is a nonunique index, which a user can create. For example, you can create a FOREIGN KEY column index for a join in a query to improve retrieval speed.

### **Creating an Index**

- Create an index on one or more columns.
- Improve the speed of query access to the LAST\_NAME column in the EMPLOYEES table.

```
CREATE INDEX index
ON table (column [, column]...);
```

### **EXAMPLE:**

```
CREATE INDEX emp_last_name_idx
ON employees(last_name);
```

### **In the syntax:**

*index* is the name of the index

*table* is the name of the table

*column* is the name of the column in the table to be indexed

## **When to Create an Index**

You should create an index if:

- A column contains a wide range of values
- A column contains a large number of null values
- One or more columns are frequently used together in a WHERE clause or a join condition
- The table is large and most queries are expected to retrieve less than 2 to 4 percent of the rows

## **When Not to Create an Index**

It is usually not worth creating an index if:

- The table is small
- The columns are not often used as a condition in the query
- Most queries are expected to retrieve more than 2 to 4 percent of the rows in the table
- The table is updated frequently
- The indexed columns are referenced as part of an Expression

## **Confirming Indexes**

- The USER\_INDEXES data dictionary view contains the name of the index and its uniqueness.
- The USER\_IND\_COLUMNS view contains the index name, the table name, and the column name.

## **EXAMPLE:**

```
SELECT ic.index_name, ic.column_name, ic.column_position col_pos, ix.uniqueness
FROM user_indexes ix, user_ind_columns ic
WHERE ic.index_name = ix.index_name
AND ic.table_name = 'EMPLOYEES';
```

## **Removing an Index**

- Remove an index from the data dictionary by using the DROP INDEX command.
- Remove the UPPER\_LAST\_NAME\_IDX index from the data dictionary.
- To drop an index, you must be the owner of the index or have the DROP ANY INDEX privilege.

```
DROP INDEX upper_last_name_idx;
```

```
DROP INDEX index;
```

## **Find the Solution for the following:**

1. Create a sequence to be used with the primary key column of the DEPT table. The sequence should start at 200 and have a maximum value of 1000. Have your sequence increment by ten numbers. Name the sequence DEPT\_ID\_SEQ.
2. Write a query in a script to display the following information about your sequences: sequence name, maximum value, increment size, and last number

3. Write a script to insert two rows into the DEPT table. Name your script lab12\_3.sql. Be sure to use the sequence that you created for the ID column. Add two departments named Education and Administration. Confirm your additions. Run the commands in your script.
4. Create a nonunique index on the foreign key column (DEPT\_ID) in the EMP table.
5. Display the indexes and uniqueness that exist in the data dictionary for the EMP table.

| <b>Evaluation Procedure</b>  | <b>Marks awarded</b> |
|------------------------------|----------------------|
| <b>PL/SQL Procedure(5)</b>   |                      |
| <b>Program/Execution (5)</b> |                      |
| <b>Viva(5)</b>               |                      |
| <b>Total (15)</b>            |                      |
| <b>Faculty Signature</b>     |                      |

**Ex. No.: 15**

## **OTHER DATABASE OBJECTS**

**Initial:**

```
CREATE TABLE DEPT (
 ID NUMBER PRIMARY KEY,
 DEPARTMENT_NAME VARCHAR2(100)
);
```

```
CREATE TABLE EMP (
 EMP_ID NUMBER PRIMARY KEY,
 NAME VARCHAR2(100),
 DEPT_ID NUMBER,
 FOREIGN KEY (DEPT_ID) REFERENCES DEPT(ID)
);
```

**1.**

```
CREATE SEQUENCE DEPT_ID_SEQ
INCREMENT BY 10
START WITH 200
MAXVALUE 1000
NOCYCLE;
```

**2.**

```
SELECT sequence_name, max_value, increment_by, last_number
FROM user_sequences;
```

**3.**

```
INSERT INTO DEPT VALUES (DEPT_ID_SEQ.NEXTVAL, 'Education');
INSERT INTO DEPT VALUES (DEPT_ID_SEQ.NEXTVAL, 'Administration');
SELECT * FROM DEPT;
```

4.

```
CREATE INDEX emp_dept_id_idx
ON EMP(DEPT_ID);
```

5.


```
SELECT ic.index_name, ic.column_name, ic.column_position AS col_pos,
ix.uniqueness
FROM user_indexes ix
JOIN user_ind_columns ic ON ic.index_name = ix.index_name
WHERE ic.table_name = 'EMP';
```

|                   |          |                                |
|-------------------|----------|--------------------------------|
| <b>Ex.No.: 16</b> |          | <b>CONTROLLING USER ACCESS</b> |
| <b>Date:</b>      | 12/11/24 |                                |

### **Objectives**

After the completion of this exercise, the students will be able to do the following:

- Create users
- Create roles to ease setup and maintenance of the security model
- Use the GRANT and REVOKE statements to grant and revoke object privileges
- Create and access database links

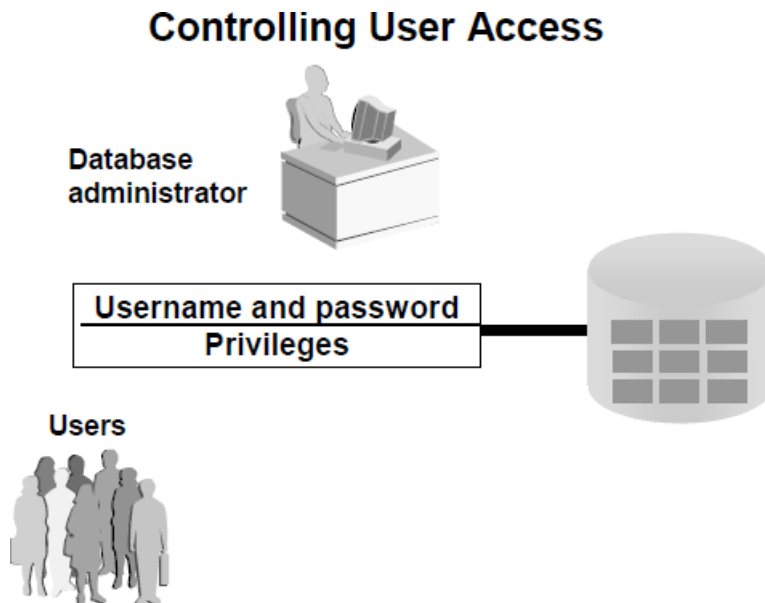

### **Controlling User Access**

In a multiple-user environment, you want to maintain security of the database access and use. With Oracle server database security, you can do the following:

- Control database access
- Give access to specific objects in the database
- Confirm given and received *privileges* with the Oracle data dictionary
- Create synonyms for database objects

### **Privileges**

- Database security:
  - System security
  - Data security

- System privileges: Gaining access to the database
- Object privileges: Manipulating the content of the database objects
- Schemas: Collections of objects, such as tables, views, and sequences

### **System Privileges**

- More than 100 privileges are available.
- The database administrator has high-level system privileges for tasks such as:
  - Creating new users
  - Removing users
  - Removing tables
  - Backing up tables

#### **Typical DBA Privileges**

| System Privilege | Operations Authorized                                                        |
|------------------|------------------------------------------------------------------------------|
| CREATE USER      | Grantee can create other Oracle users (a privilege required for a DBA role). |
| DROP USER        | Grantee can drop another user.                                               |
| DROP ANY TABLE   | Grantee can drop a table in any schema.                                      |
| BACKUP ANY TABLE | Grantee can back up any table in any schema with the export utility.         |
| SELECT ANY TABLE | Grantee can query tables, views, or snapshots in any schema.                 |
| CREATE ANY TABLE | Grantee can create tables in any schema.                                     |

### **Creating Users**

The DBA creates users by using the CREATE USER statement.

#### **EXAMPLE:**

```
CREATE USER scott IDENTIFIED BY tiger;
```

### **User System Privileges**

- Once a user is created, the DBA can grant specific system privileges to a user.
- An application developer, for example, may have the following system privileges:
  - CREATE SESSION
  - CREATE TABLE
  - CREATE SEQUENCE
  - CREATE VIEW
  - CREATE PROCEDURE

```
GRANT privilege [, privilege...]
TO user [, user| role, PUBLIC...];
```

#### **Typical User Privileges**

| System Privilege | Operations Authorized                                                |
|------------------|----------------------------------------------------------------------|
| CREATE SESSION   | Connect to the database                                              |
| CREATE TABLE     | Create tables in the user's schema                                   |
| CREATE SEQUENCE  | Create a sequence in the user's schema                               |
| CREATE VIEW      | Create a view in the user's schema                                   |
| CREATE PROCEDURE | Create a stored procedure, function, or package in the user's schema |

### **In the syntax:**

*privilege* is the system privilege to be granted

*user |role|PUBLIC* is the name of the user, the name of the role, or PUBLIC designates that every user is granted the privilege

**Note:** Current system privileges can be found in the dictionary view SESSION\_PRIVS.

### **Granting System Privileges**

The DBA can grant a user specific system privileges.

GRANT create session, create table, create sequence, create view TO scott;

### **What is a Role?**

A role is a named group of related privileges that can be granted to the user. This method makes it easier to revoke and maintain privileges.

A user can have access to several roles, and several users can be assigned the same role. Roles are typically created for a database application.

### **Creating and Assigning a Role**

First, the DBA must create the role. Then the DBA can assign privileges to the role and users to the role.

### **Syntax**

CREATE ROLE *role*;

In the syntax:

*role* is the name of the role to be created

Now that the role is created, the DBA can use the GRANT statement to assign users to the role as well as assign privileges to the role.



### Creating and Granting Privileges to a Role

CREATE ROLE manager;  
Role created.

GRANT create table, create view TO manager;  
Grant succeeded.

GRANT manager TO DEHAAN, KOCHHAR;  
Grant succeeded.

- Create a role
- Grant privileges to a role
- Grant a role to users

### Changing Your Password

- The DBA creates your user account and initializes your password.
- You can change your password by using the ALTER USER statement.

ALTER USER scott  
IDENTIFIED BY lion;  
User altered.

### Object Privileges

| Object Privilege | Table | View | Sequence | Procedure |
|------------------|-------|------|----------|-----------|
| ALTER            | √     |      | √        |           |
| DELETE           | √     | √    |          |           |
| EXECUTE          |       |      |          | √         |
| INDEX            | √     |      |          |           |
| INSERT           | √     | √    |          |           |
| REFERENCES       | √     | √    |          |           |
| SELECT           | √     | √    | √        |           |
| UPDATE           | √     | √    |          |           |

### Object Privileges

- Object privileges vary from object to object.
- An owner has all the privileges on the object.
- An owner can give specific privileges on that owner's object. GRANT *object\_priv* [(*columns*)]  
ON *object*  
TO {*user*|*role*|PUBLIC}  
[WITH GRANT OPTION];

### **In the syntax:**

*object\_priv* is an object privilege to be granted

ALL specifies all object privileges

*columns* specifies the column from a table or view on which privileges are granted

ON *object* is the object on which the privileges are granted

TO identifies to whom the privilege is granted

PUBLIC grants object privileges to all users

WITH GRANT OPTION allows the grantee to grant the object privileges to other users and roles

### **Granting Object Privileges**

- Grant query privileges on the EMPLOYEES table.
- Grant privileges to update specific columns to users and roles.

```
GRANT
select ON
employees TO
sue, rich;
```

```
GRANT update (department_name, location_id)
ON departments
TO scott, manager;
```

### **Using the WITH GRANT OPTION and PUBLIC Keywords**

- Give a user authority to pass along privileges.
- Allow all users on the system to query data from Alice's DEPARTMENTS table.

```
GRANT select, insert
ON departments
TO scott
WITH GRANT OPTION;
```

```
.
GRANT select
ON
alice.departments TO
PUBLIC;
```

### **How to Revoke Object Privileges**

- You use the REVOKE statement to revoke privileges granted to other users.
- Privileges granted to others through the WITH GRANT OPTION clause are also revoked. REVOKE {privilege [, privilege...]}[ALL]  
ON object  
FROM {user[, user...]}[role|PUBLIC]  
[CASCADE CONSTRAINTS];

#### **In the syntax:**

CASCADE is required to remove any referential integrity constraints made to the CONSTRAINTS object by means of the REFERENCES privilege

### **Revoking Object Privileges**

As user Alice, revoke the SELECT and INSERT privileges given to user Scott on the DEPARTMENTS table.

```
REVOKE select, insert
ON departments
FROM scott;
```

**Find the Solution for the following:**

1. What privilege should a user be given to log on to the Oracle Server? Is this a system or an object privilege?

---

2. What privilege should a user be given to create tables?

---

3. If you create a table, who can pass along privileges to other users on your table?

---

4. You are the DBA. You are creating many users who require the same system privileges. What should you use to make your job easier?

---

5. What command do you use to change your password?

---

6. Grant another user access to your DEPARTMENTS table. Have the user grant you query access to his or her DEPARTMENTS table.

7. Query all the rows in your DEPARTMENTS table.

8. Add a new row to your DEPARTMENTS table. Team 1 should add Education as department number 500. Team 2 should add Human Resources department number 510. Query the other team's table.

9. Query the USER\_TABLES data dictionary to see information about the tables that you own.

10. Revoke the SELECT privilege on your table from the other team.

11. Remove the row you inserted into the DEPARTMENTS table in step 8 and save the changes.

| <b>Evaluation Procedure</b>  | <b>Marks awarded</b> |
|------------------------------|----------------------|
| <b>PL/SQL Procedure(5)</b>   |                      |
| <b>Program/Execution (5)</b> |                      |
| <b>Viva(5)</b>               |                      |
| <b>Total (15)</b>            |                      |
| <b>Faculty Signature</b>     |                      |

## Ex. No.: 16

### CONTROLLING USER ACCESS

#### Initial:

```
CREATE TABLE DEPARTMENTS (
 DEPARTMENT_ID NUMBER PRIMARY KEY
 DEPARTMENT_NAME VARCHAR2(100)
);
```

1.

The user should be given the CREATE SESSION privilege.  
This is a **system privilege**.

2.

The user should be given the CREATE TABLE privilege.

3.

Only the owner of the table (the user who created the table) can pass along privileges to other users on that table.

4.

You should create a **role** with the necessary privileges and then grant this role to each user.

5.

```
ALTER USER username IDENTIFIED BY new_password;
```

6.

```
GRANT SELECT ON departments TO other_user;
GRANT SELECT ON departments TO original_user;
```

**7.**

```
SELECT * FROM departments;
```

**8.**

```
INSERT INTO departments VALUES (500, 'Education');
```

```
INSERT INTO departments VALUES (510, 'Human Resources');
```

**9.**

```
SELECT * FROM other_team_user.departments;
```

**10.**

```
REVOKE SELECT ON departments FROM other_team_user;
```

**11.**

```
DELETE FROM departments WHERE department_id IN (500,510);
```

```
COMMIT;
```