


State Pattern


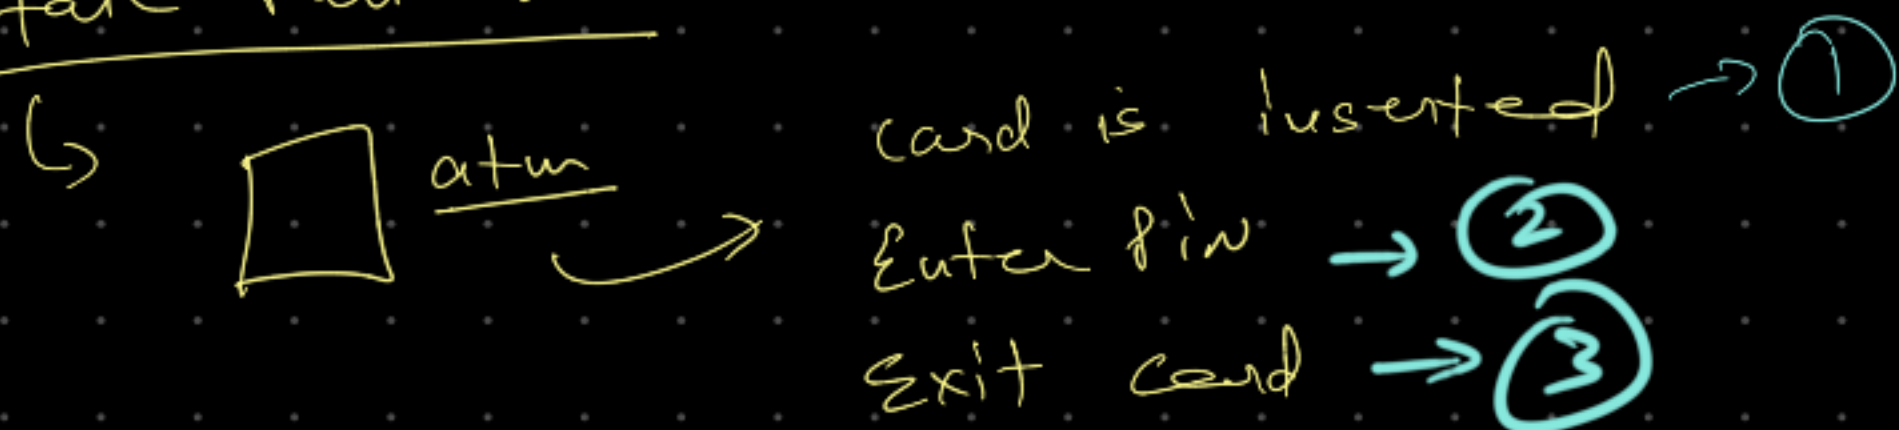


Music Player → Play
Pause
Exit

Pause
P → P
ε → P
PI → Pause

Play
PI → PI
Exit → PI
Pause → Play

Driving factor → [state of the music player]

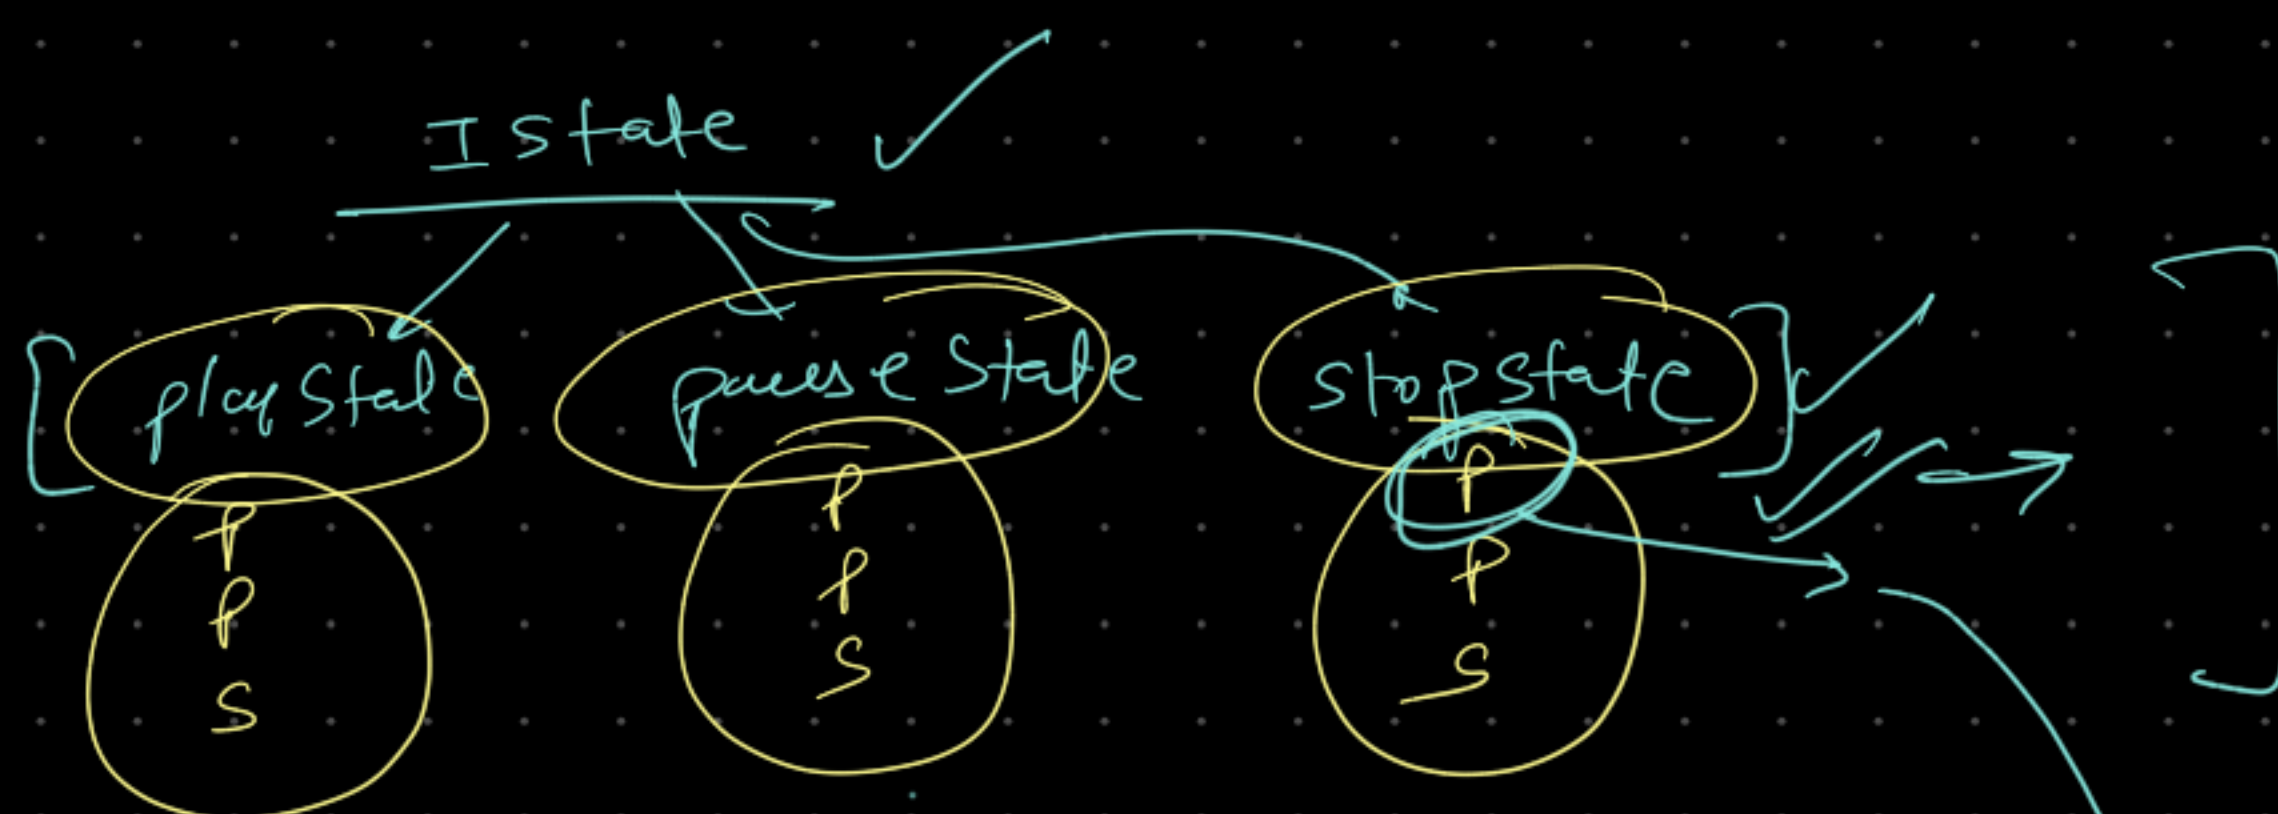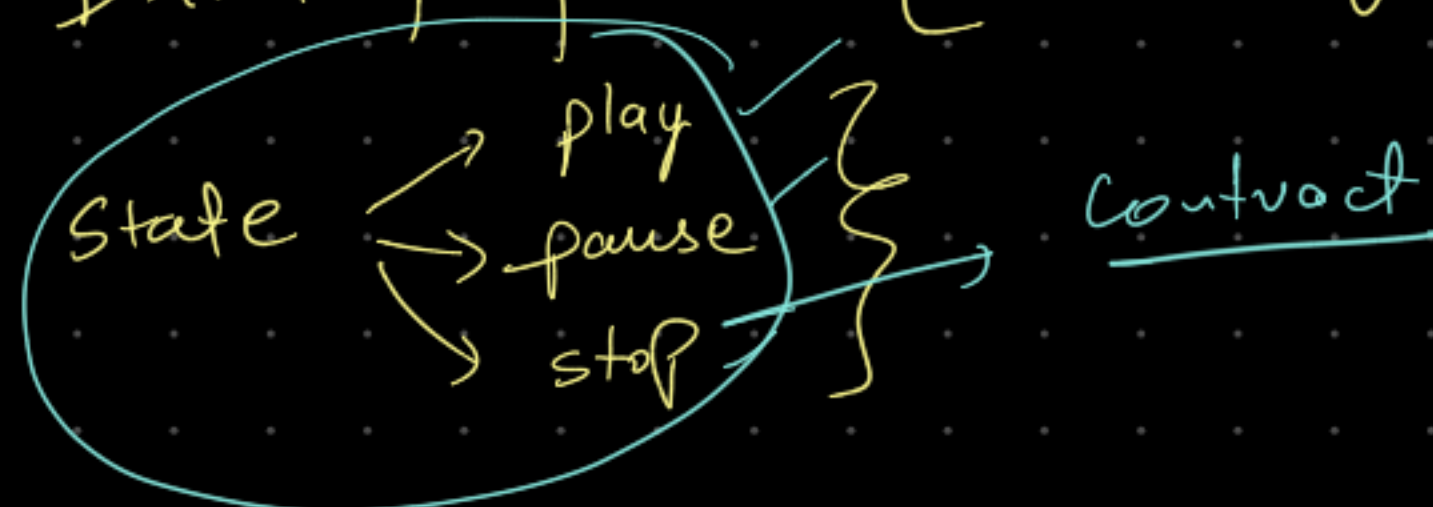

caller → main

play() ✓
setS(P, S) ✓

MediaPlayer → class {
↳ State → stopped (init)
getState

play() → { state: play }
pause() → { state: pause }
stop() → { state: stop }

setstate(state) → this.s = s