

Chi Square Distribution

Previous

Next >

Chi Square Distribution

Chi Square distribution is used as a basis to verify the hypothesis.

It has two parameters:

```
df - (degree of freedom).size - The shape of the returned array.
```

Example

Get your own Python Server

Draw out a sample for chi squared distribution with degree of freedom 2 with size 2x3:

```
from numpy import random

x = random.chisquare(df=2, size=(2, 3))
print(x)
```

Try it Yourself »




Example


```
from numpy import random
import matplotlib.pyplot as plt
import seaborn as sns

sns.displot(random.chisquare(df=1, size=1000), kind="kde")
plt.show()
```

Result

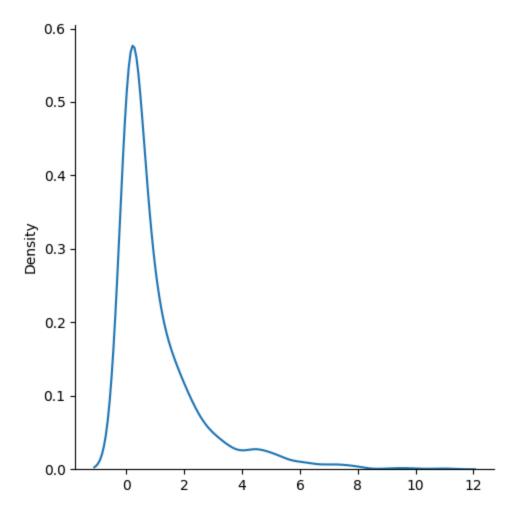

Try it Yourself »

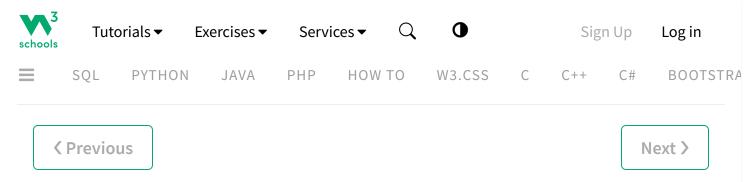

Track your progress - it's free!


Sign Up Log in



COLOR PICKER









SPACES

GET CERTIFIED

FOR TEACHERS

FOR BUSINESS

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References


HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
Angular Reference
jQuery Reference

Top Examples

HTML Examples CSS Examples JavaScript Examples How To Examples

Get Certified

HTML Certificate CSS Certificate JavaScript Certificate Front End Certificate

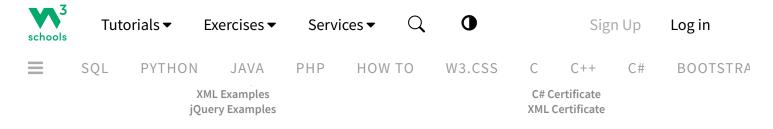



FORUM ABOUT ACADEMY

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.

Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness

of all content. While using W3Schools, you agree to have read and accepted our <u>terms of use</u>, <u>cookie and privacy policy</u>.

Copyright 1999-2025 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.