



NumPy Logs

[< Previous](#)[Next >](#)

Logs

NumPy provides functions to perform log at the base 2, e and 10.

We will also explore how we can take log for any base by creating a custom ufunc.

All of the log functions will place -inf or inf in the elements if the log can not be computed.

Log at Base 2

Use the `log2()` function to perform log at the base 2.

Example

[Get your own Python Server](#)

Find log at base 2 of all elements of following array:

```
import numpy as np

arr = np.arange(1, 10)

print(np.log2(arr))
```



Note: The `arange(1, 10)` function returns an array with integers starting from 1 (included) to 10 (not included).

Log at Base 10

Use the `log10()` function to perform log at the base 10.

Example

Find log at base 10 of all elements of following array:

```
import numpy as np

arr = np.arange(1, 10)

print(np.log10(arr))
```

[Try it Yourself »](#)

Natural Log, or Log at Base e

Use the `log()` function to perform log at the base e.

Example

Find log at base e of all elements of following array:



```
print(np.log(arr))
```

[Try it Yourself »](#)

Log at Any Base

NumPy does not provide any function to take log at any base, so we can use the `frompyfunc()` function along with inbuilt function `math.log()` with two input parameters and one output parameter:

Example

```
from math import log
import numpy as np

nplog = np.frompyfunc(log, 2, 1)

print(nplog(100, 15))
```

[Try it Yourself »](#)

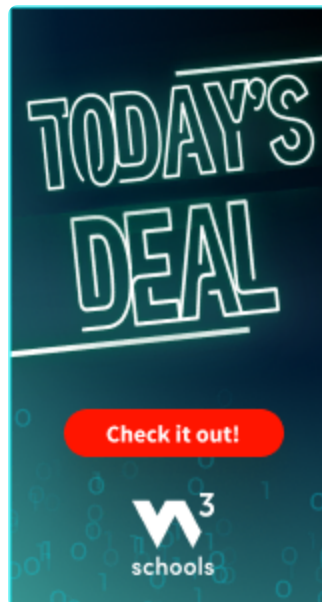
Exercise [?]

What is a correct NumPy syntax to perform log at base 2?

- ☐ `numlog(2)`
- ☐ `log2()`

[Tutorials ▼](#)[Exercises ▼](#)[Services ▼](#)[Sign Up](#)[Log in](#)[SQL](#)[PYTHON](#)[JAVA](#)[PHP](#)[HOW TO](#)[W3.CSS](#)[C](#)[C++](#)[C#](#)[BOOTSTRAP](#)[< Previous](#)[Next >](#)

Track your progress - it's free!

[Sign Up](#)[Log in](#)

COLOR PICKER



[Tutorials ▼](#)[Exercises ▼](#)[Services ▼](#)[Sign Up](#)[Log in](#)[SQL](#) [PYTHON](#) [JAVA](#) [PHP](#) [HOW TO](#) [W3.CSS](#) [C](#) [C++](#) [C#](#) [BOOTSTRAP](#)[PLUS](#)[SPACES](#)[GET CERTIFIED](#)[FOR TEACHERS](#)[FOR BUSINESS](#)[CONTACT US](#)

Top Tutorials

- [HTML Tutorial](#)
- [CSS Tutorial](#)
- [JavaScript Tutorial](#)
- [How To Tutorial](#)
- [SQL Tutorial](#)
- [Python Tutorial](#)
- [W3.CSS Tutorial](#)
- [Bootstrap Tutorial](#)
- [PHP Tutorial](#)
- [Java Tutorial](#)
- [C++ Tutorial](#)
- [jQuery Tutorial](#)

Top References

- [HTML Reference](#)
- [CSS Reference](#)
- [JavaScript Reference](#)
- [SQL Reference](#)
- [Python Reference](#)
- [W3.CSS Reference](#)
- [Bootstrap Reference](#)
- [PHP Reference](#)
- [HTML Colors](#)
- [Java Reference](#)
- [Angular Reference](#)
- [jQuery Reference](#)

[Tutorials ▼](#)[Exercises ▼](#)[Services ▼](#)[Sign Up](#)[Log in](#)[SQL](#)[PYTHON](#)[JAVA](#)[PHP](#)[HOW TO](#)[W3.CSS](#)[C](#)[C++](#)[C#](#)[BOOTSTRAP](#)

[How To Examples](#)
[SQL Examples](#)
[Python Examples](#)
[W3.CSS Examples](#)
[Bootstrap Examples](#)
[PHP Examples](#)
[Java Examples](#)
[XML Examples](#)
[jQuery Examples](#)

[Front End Certificate](#)
[SQL Certificate](#)
[Python Certificate](#)
[PHP Certificate](#)
[jQuery Certificate](#)
[Java Certificate](#)
[C++ Certificate](#)
[C# Certificate](#)
[XML Certificate](#)

[FORUM](#) [ABOUT](#) [ACADEMY](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.
Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

Copyright 1999-2025 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.