

# AMERICAN INTERNATIONAL UNIVERSITY-BANGLADESH (AIUB) FACULTY OF SCIENCE & TECHNOLOGY DEPARTMENT OF COMPUTER SCIENCE

#### ADVANCE DATABASE MANAGEMENT SYSTEM

**Spring 2022-2023** 

**Section: B** 

#### **Supervised By**

Juena Ahmed Noshin

#### GARMENTS FACTORY MANAGEMENT SYSTEM

#### **Group Members**

Name	ID	Contribution
Kamil Ahmed	20-42058-1	Table Creation 100%, Query Writing
		100%, PL/SQL 50%
Md. Aman Ulla Shawon	20-42028-1	Class Diagram, Use Case Diagram and
		Activity Diagram 100%
Farhan Sadik Ferdous	20-42072-1	Introduction 50%, Project Proposal 50%,
		Scenario Description 50%, ER Diagram
		50%, Normalization 50%, Scheme
		Diagram 50%, PL/SQL 20%, Relational
		Algebra 50%, Conclusion 50%
Tapu Biswas	20-42073-1	Introduction 50%, Project Proposal 50%,
		Scenario Description 50%, ER Diagram
		50%, Normalization 50%, Scheme
		Diagram 50%, PL/SQL 20%, Relational
		Algebra 50%, Conclusion 50%
Md. Morshedul Islam	20-42645-1	User Interface 100%, Data Insertion
		100%

Date of Submission: May 14, 2023

# **Content Page**

Introduction	1
Project Proposal	1
Class Diagram, Use Case Diagram and Activity Diagram	2-4
User Interface	5-10
Scenario Description	
ER Diagram	12
Normalization	
Schema Diagram	
Table Creation	24-31
Data Insertion	
Query Writing	
PL/SQL	45-58
Relational Algebra	59
Conclusion	59


#### **Introduction**

Database is basically a collection of data or information from an organization. A database management system (DBMS) is an application that is used to store, retrieve, and modify users' data. In a database, the data is stored in the table. A DBMS helps the user to collect data that is easily accessible in a protected environment. A DBMS helps the user to use the data efficiently. In our project, we are going to discuss the garment factory management system. Hogwart garment Co Limited is situated on Privet Drive, Little Whinging, Surrey. Nowadays the garment factory has a large number of branches, employees, and customers along with many managers to maintain them efficiently. To record their details and supervision we need to use the garment factory management system. A garment factory management system keeps the details of the owner, company, customer, manager, employee, and account details. Everything becomes well-organized and time-efficient. With the help of the garment factory management system, we can record the present data along with the previous data orderly. So, the garment factory management system is required for users to use the data effectively which can be accessed easily.


## **Project Proposal**

Garment factory management system is a database management system that keeps the track of the inside activity of a garment factory. In our project, we are introducing a garment factory management system that will represent the management system of the Hogwart garment factory. Here, Hogwart garment Co Limited is owned by multiple owners. It also takes orders from the client and the factory manufactures the products ordered by the client. Managers manage the factory as well as oversees the employee working in the factory. Each branch has its single account and the company has a single account.


# **Class Diagram**

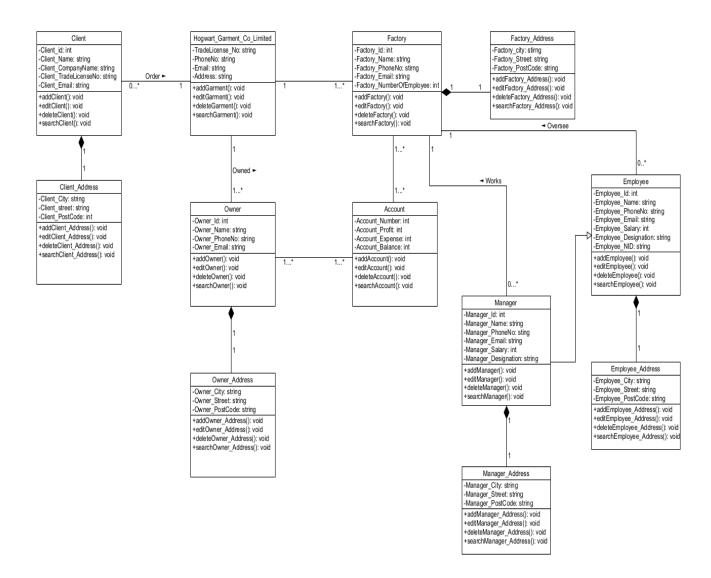


# **Use Case Diagram**

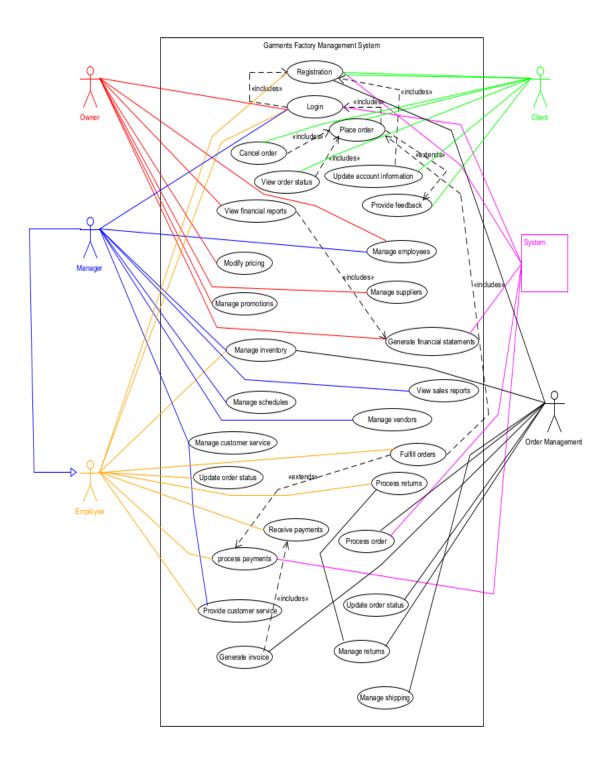



# **Activity Diagram**

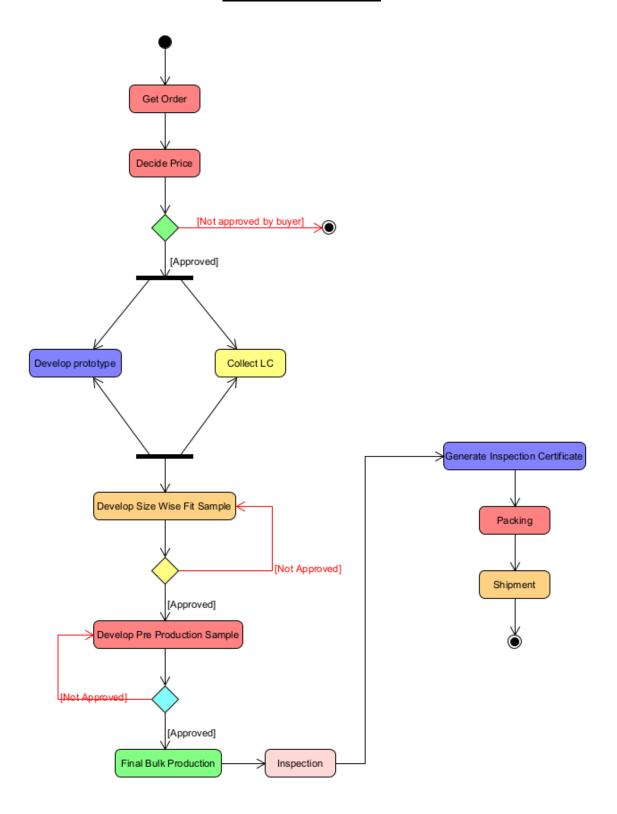



# **User Interface**

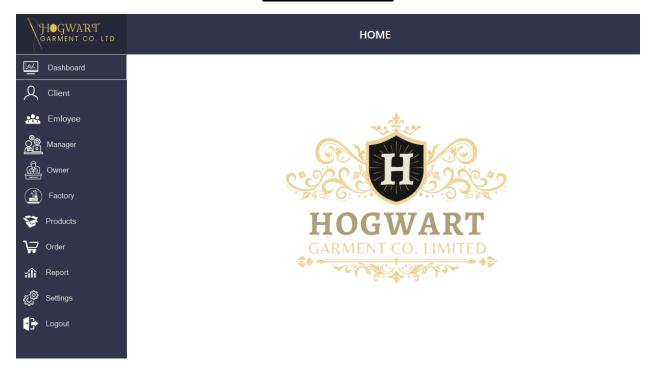


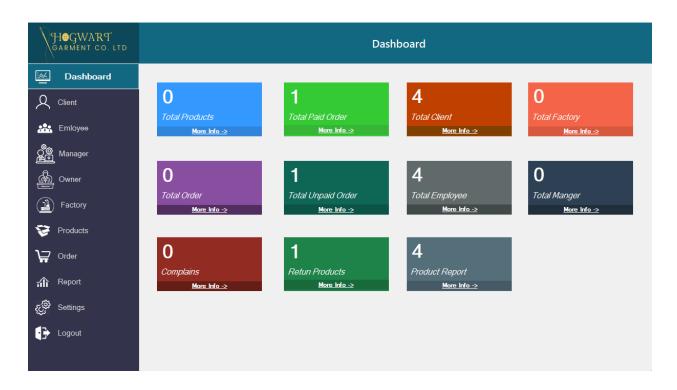


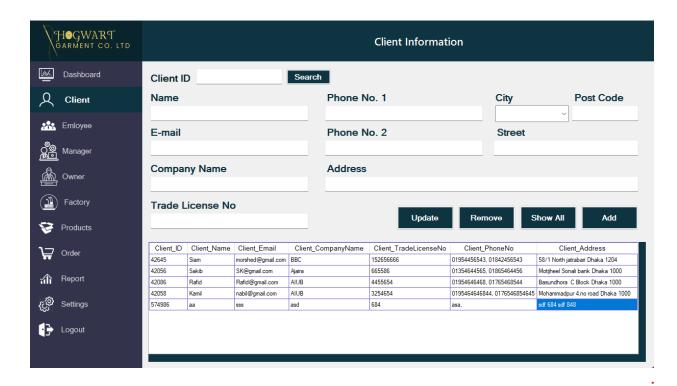

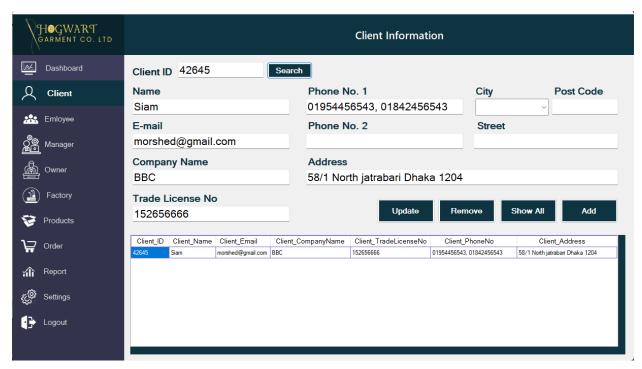


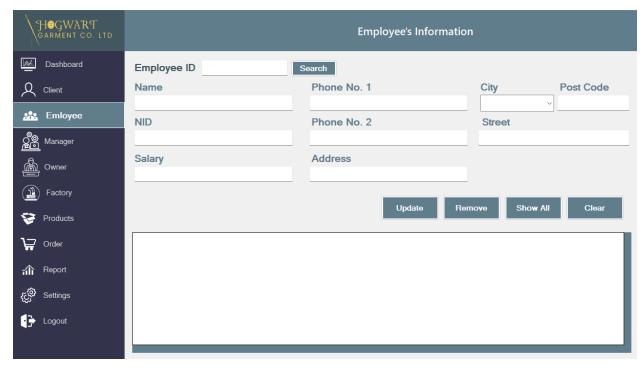


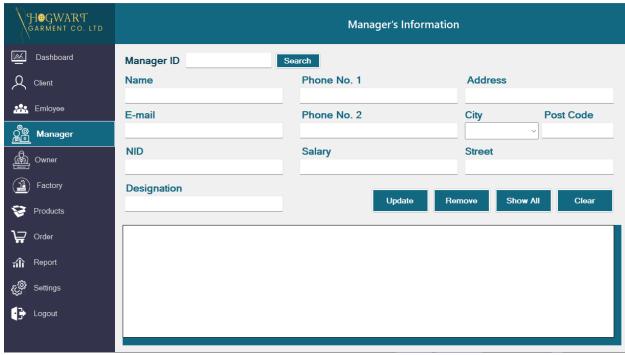


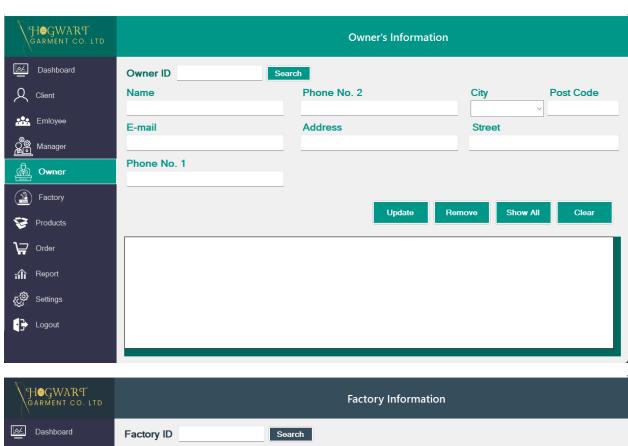


H#GWART GARMENT CO. LTD		Factory Information		
Dashboard	Factory ID Sea	rch		
Q Client	Name	Phone No. 1	City Post Code	
<u>≮R</u> Emloyee	E-Mail	Phone No. 2	Street	
<u>©</u> Manager				
(A) Owner	Number of Employee	Address		
Factory				
Products		Update Rem	ove Show All Clear	
Order				
<b>☆</b> Report				П
Settings				П
Logout				ı

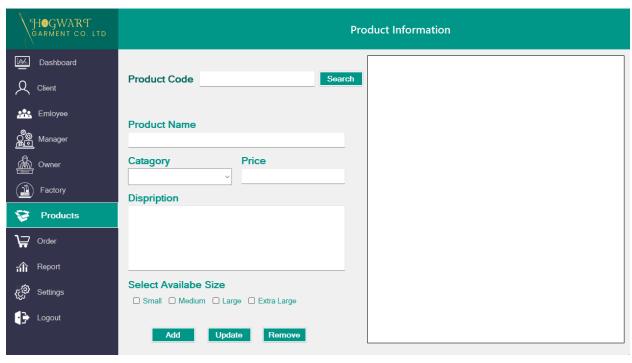

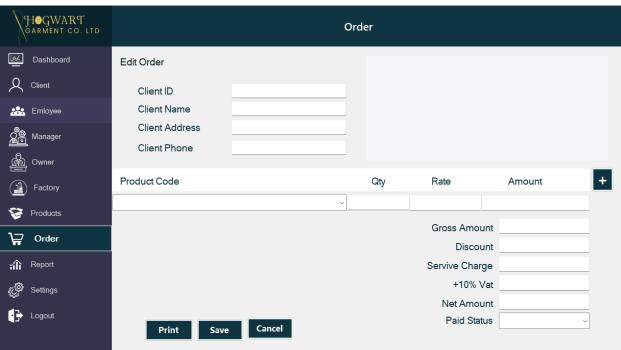

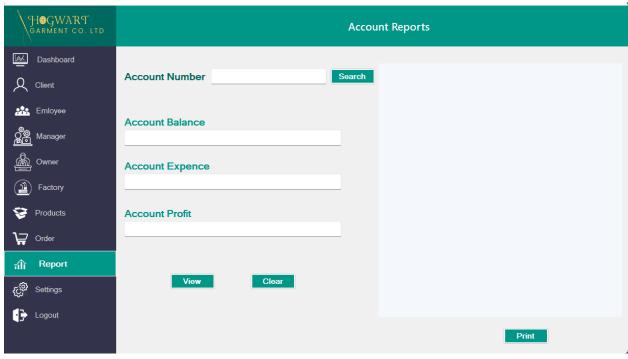


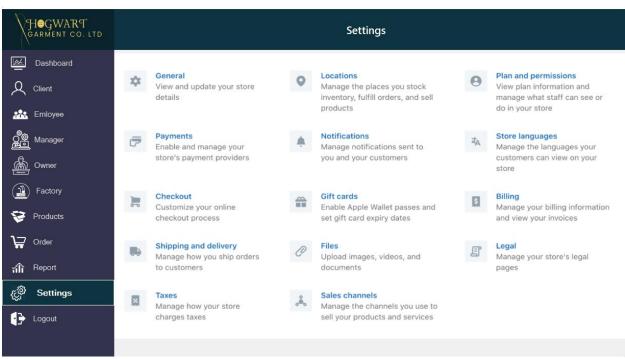

#### **Scenario description**

Hogwart Garment Co. Limited takes orders from multiple clients and all the clients are overseen by Hogwart Garment Co. Limited. It is identified by a unique trade license no. The system also stores phone no, email, and address. Each client is identified by their unique id and it also stores the client's name, company name, trade license number, phone number, email, and address. The client's address is composed of city, street, and postcode. Hogwart Garment Co. Limited and clients can have multiple phone no. Hogwart Garment Co. Limited has many factories and all the factories are managed by Hogwart Garment Co. Limited. Factory is identified by a unique id and can have more than one phone no. The system also stores the name, email, address, and number of employees. The factory address is composed of city, street, and postcode. Many managers work for a factory and all the managers work under that factory. Each manager is identified by their unique id and it also stores the manager's name, phone number, email, salary, designation, address, and NID. The managers can have multiple phone no. Managers oversee employees, while multiple managers can oversee specific one factory's employees but every employee of that factory has to report to the particular managers. Each employee has an individual id to recognize them. it also stores the employee's name, phone number, salary, address, and NID. The employees can have multiple phone no. Each factory has its own single account and Hogwart Garment Co. Limited has a single account. In the system account number, profit, expenses, and balance are also stored. The profit is calculated from the garments and the company's profit and expenses. The whole company is owned by multiple owners. Each of the owners is identified by their owner id. Other data such as name, phone no, email, and address are also stored in the system. The owner's address is composed of city, street, and postcode The owners can have multiple phone no.

# **ER Diagram**

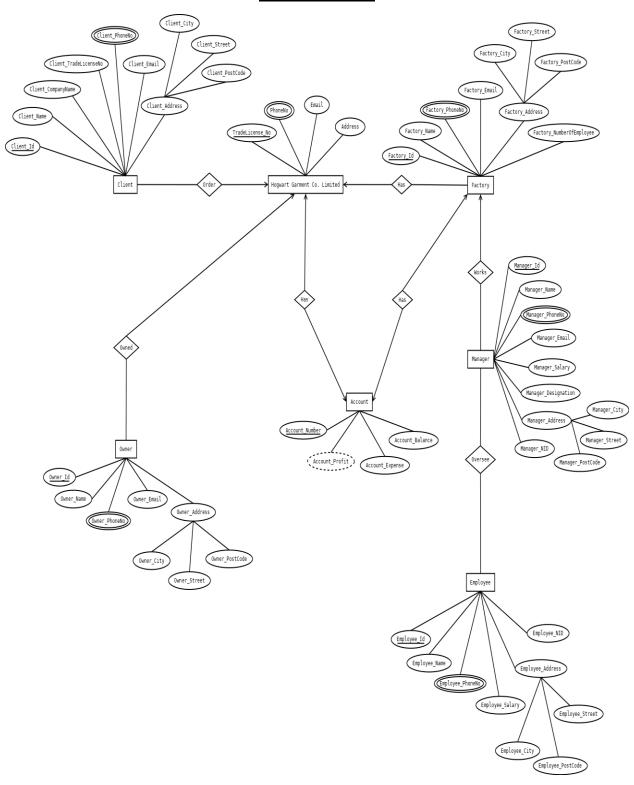

# **Normalization**

#### Order

#### UNF

Order (<u>Client\_Id</u>, Client\_Name, Client\_CompanyName, Client\_TradeLicenseNo, Client\_PhoneNo, Client\_Email, Client\_City, Client\_Street, Client\_PostCode, <u>TradeLicense\_No</u>, PhoneNo, Email, Address)

#### 1NF

Client\_PhoneNo and PhoneNo are multivalued attribute.

1. <u>Client\_Id</u>, Client\_Name, Client\_CompanyName, Client\_TradeLicenseNo, Client\_PhoneNo, Client\_Email, Client\_City, Client\_Street, Client\_PostCode, TradeLicense\_No, PhoneNo, Email, Address

#### 2NF

- 1. <u>Client\_Id</u>, Client\_Name, Client\_CompanyName, Client\_TradeLicenseNo, Client\_PhoneNo, Client\_Email, Client\_City, Client\_Street, Client\_PostCode
- 2. <u>TradeLicense\_No</u>, PhoneNo, Email, Address

#### 3NF

- 1. <u>Client\_Id</u>, Client\_Name, Client\_CompanyName, Client\_TradeLicenseNo, Client\_PhoneNo, Client\_Email
- 2. Client\_City, Client\_Street, Client\_PostCode
- 3. <u>TradeLicense\_No</u>, PhoneNo, Email, Address

#### **Table Creation**

1. <u>Client\_Id</u>, Client\_Name, Client\_CompanyName, Client\_TradeLicenseNo, Client\_PhoneNo, Client\_Email, **C\_Id**, **TradeLicense\_No** 

- 2. C\_Id, Client\_City, Client\_Street, Client\_PostCode
- 3. TradeLicense\_No, PhoneNo, Email, Address

#### Has

#### **UNF**

Has (<u>TradeLicense\_No</u>, PhoneNo, Email, Address, <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_City, Factory\_Street, Factory\_PostCode, Factory\_NumberOfEmployee)

#### 1NF

PhoneNo and Factory\_PhoneNo are multivalued attribute.

1. <u>TradeLicense\_No</u>, PhoneNo, Email, Address, <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_City, Factory\_Street, Factory\_PostCode, Factory\_NumberOfEmployee

# <u>2NF</u>

- 1. TradeLicense\_No, PhoneNo, Email, Address
- 2. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_City, Factory\_Street, Factory\_PostCode, Factory\_NumberOfEmployee

## <u>3NF</u>

- 1. TradeLicense\_No, PhoneNo, Email, Address
- 2. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_NumberOfEmployee
- 3. Factory\_City, Factory\_Street, Factory\_PostCode

- 1. <u>TradeLicense\_No</u>, PhoneNo, Email, Address
- 2. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_NumberOfEmployee, **F\_Id**, **TradeLicense\_No**
- 3. F\_Id, Factory\_City, Factory\_Street, Factory\_PostCode

#### **Owned**

#### **UNF**

Owned (<u>Owner\_Id</u>, Owner\_Name, Owner\_PhoneNo, Owner\_Email, Owner\_City, Owner\_Street, Owner\_PostCode, <u>TradeLicense\_No</u>, PhoneNo, Email, Address)

#### 1NF

Owner\_PhoneNo and PhoneNo are multivalued attribute.

1. Owner\_Id, Owner\_Name, Owner\_PhoneNo, Owner\_Email, Owner\_City, Owner\_Street, Owner\_PostCode, <u>TradeLicense\_No</u>, PhoneNo, Email, Address

#### 2NF

- 1. <u>Owner\_Id</u>, Owner\_Name, Owner\_PhoneNo, Owner\_Email, Owner\_City, Owner\_Street, Owner\_PostCode
- 2. <u>TradeLicense\_No</u>, PhoneNo, Email, Address

# 3NF

- 1. Owner\_Id, Owner\_Name, Owner\_PhoneNo, Owner\_Email
- 2. Owner\_City, Owner\_Street, Owner\_PostCode
- 3. TradeLicense\_No, PhoneNo, Email, Address

- 1. <u>Owner\_Id</u>, Owner\_Name, Owner\_PhoneNo, Owner\_Email, **O\_Id**, **TradeLicense\_No**
- 2. O\_Id, Owner\_City, Owner\_Street, Owner\_PostCode
- 3. <u>TradeLicense\_No</u>, PhoneNo, Email, Address

#### Has

#### **UNF**

Has (<u>TradeLicense\_No</u>, PhoneNo, Email, Address, <u>Account\_Number</u>, Account\_Profit, Account\_Expense, Account\_Balance)

#### 1NF

PhoneNo is multivalued attribute

1. <u>TradeLicense\_No</u>, PhoneNo, Email, Address, <u>Account\_Number</u>, Account\_Profit, Account\_Expense, Account\_Balance

#### 2NF

- 1. <u>TradeLicense\_No</u>, PhoneNo, Email, Address
- 2. Account\_Number, Account\_Profit, Account\_Expense, Account\_Balance

#### <u>3NF</u>

There is no transitive dependency. Relation already in 3NF.

- 1. TradeLicense\_No, PhoneNo, Email, Address
- 2. Account\_Number, Account\_Profit, Account\_Expense, Account\_Balance

- 1. TradeLicense\_No, PhoneNo, Email, Address, Account\_Number
- 2. Account\_Number, Account\_Profit, Account\_Expense, Account\_Balance

#### Has

#### **UNF**

Has (<u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_City, Factory\_Street, Factory\_PostCode, Factory\_NumberOfEmployee, <u>Account\_Number</u>, Account\_Profit, Account\_Expense, Account\_Balance)

#### 1NF

Factory\_PhoneNo is multivalued attribute

1. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_City, Factory\_Street, Factory\_PostCode, Factory\_NumberOfEmployee, <u>Account\_Number</u>, Account\_Profit, Account\_Expense, Account\_Balance

# <u>2NF</u>

- 1. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_City, Factory\_Street, Factory\_PostCode, Factory\_NumberOfEmployee
- 2. Account\_Number, Account\_Profit, Account\_Expense, Account\_Balance

# <u>3NF</u>

- 1. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_NumberOfEmployee
- 2. Factory\_City, Factory\_Street, Factory\_PostCode
- 3. Account\_Number, Account\_Profit, Account\_Expense, Account\_Balance

- 1. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_NumberOfEmployee, **F\_Id**, **Account\_Number**
- 2. <u>F\_Id</u>, Factory\_City, Factory\_Street, Factory\_PostCode
- 3. Account\_Number, Account\_Profit, Account\_Expense, Account\_Balance

#### Works

#### UNF

Works (<u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_City, Factory\_Street, Factory\_PostCode, Factory\_NumberOfEmployee, <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_City, Manager\_Street, Manager\_PostCode, Manager\_NID)

# <u>1NF</u>

Factory\_PhoneNo and Manager\_PhoneNo multivalued attribute

1. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_City, Factory\_Street, Factory\_PostCode, Factory\_NumberOfEmployee, <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_City, Manager\_Street, Manager\_PostCode, Manager\_NID

# <u>2NF</u>

- 1. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_City, Factory\_Street, Factory\_PostCode, Factory\_NumberOfEmployee
- 2. <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_City, Manager\_Street, Manager\_PostCode, Manager\_NID

#### 3NF

- 1. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_NumberOfEmployee
- 2. Factory\_City, Factory\_Street, Factory\_PostCode
- 3. <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_NID
- 4. Manager\_City, Manager\_Street, Manager\_PostCode

#### **Table Creation**

- 1. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_NumberOfEmployee, **F\_Id**
- 2. F\_Id, Factory\_City, Factory\_Street, Factory\_PostCode
- 3. <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_NID, **M\_Id**, **Factory\_Id**
- 4. M\_Id, Manager\_City, Manager\_Street, Manager\_PostCode

#### **Oversee**

#### <u>UNF</u>

Oversee (<u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_City, Manager\_Street, Manager\_PostCode, Manager\_NID, <u>Employee\_Id</u>, Employee\_Name, Employee\_PhoneNo, Employee\_Salary, Employee\_City, Employee\_PostCode, Employee\_Street, Employee\_NID)

#### <u>1NF</u>

Manager\_PhoneNo and Employee\_PhoneNo are multivalued attribute

1. <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_City, Manager\_Street, Manager\_PostCode, Manager\_NID, <u>Employee\_Id</u>, Employee\_Name, Employee\_PhoneNo, Employee\_Salary, Employee\_City, Employee\_PostCode, Employee\_Street, Employee\_NID

#### 2NF

- 1. <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_City, Manager\_Street, Manager\_PostCode, Manager\_NID
- 2. <u>Employee\_Id</u>, Employee\_Name, Employee\_PhoneNo, Employee\_Salary, Employee\_City, Employee\_PostCode, Employee\_Street, Employee\_NID

#### 3NF

- 1. <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_NID
- 2. Manager\_City, Manager\_Street, Manager\_PostCode
- 3. <u>Employee\_Id</u>, Employee\_Name, Employee\_PhoneNo, Employee\_Salary, Employee\_NID
- 4. Employee\_City, Employee\_PostCode, Employee\_Street

# **Table Creation**

- 1. <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_NID, **M\_Id**
- 2. <u>M\_Id</u>, Manager\_City, Manager\_Street, Manager\_PostCode
- 3. <u>Employee\_Id</u>, Employee\_Name, Employee\_PhoneNo, Employee\_Salary, Employee\_NID, **E\_Id**
- 4. E\_Id, Employee\_City, Employee\_PostCode, Employee\_Street
- 5. Manager\_Id, Employee\_Id

# **Temporary Table**


- 1. <u>Client\_Id</u>, Client\_Name, Client\_CompanyName, Client\_TradeLicenseNo, Client\_PhoneNo, Client\_Email, **C\_Id**, **TradeLicense\_No**
- 2. <u>C\_Id</u>, Client\_City, Client\_Street, Client\_PostCode
- 3. TradeLicense No, PhoneNo, Email, Address
- 4. TradeLicense No, PhoneNo, Email, Address
- 5. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_NumberOfEmployee, **F\_Id**, **TradeLicense\_No**
- 6. <u>F\_Id</u>, Factory\_City, Factory\_Street, Factory\_PostCode
- 7. <u>Owner\_Id</u>, Owner\_Name, Owner\_PhoneNo, Owner\_Email, **O\_Id**, **TradeLicense\_No**
- 8. O\_Id, Owner\_City, Owner\_Street, Owner\_PostCode
- 9. TradeLicense No, PhoneNo, Email, Address
- 10. TradeLicense\_No, PhoneNo, Email, Address, Account\_Number
- 11. Account\_Number, Account\_Profit, Account\_Expense, Account\_Balance
- 12. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo, Factory\_Email, Factory\_NumberOfEmployee, **F\_Id**, **Account\_Number**
- 13. <u>F\_Id</u>, Factory\_City, Factory\_Street, Factory\_PostCode
- 14. Account\_Number, Account\_Profit, Account\_Expense, Account\_Balance
- 15. <u>Factory\_Id</u>, <u>Factory\_Name</u>, <u>Factory\_PhoneNo</u>, <u>Factory\_Email</u>, <u>Factory\_NumberOfEmployee</u>, <u>F\_Id</u>
- 16. F\_Id, Factory\_City, Factory\_Street, Factory\_PostCode
- 17. <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_NID, **M\_Id**, **Factory\_Id**
- 18. M\_Id, Manager\_City, Manager\_Street, Manager\_PostCode
- 19. <u>Manager\_Id</u>, <u>Manager\_Name</u>, <u>Manager\_PhoneNo</u>, <u>Manager\_Email</u>, <u>Manager\_Salary</u>, <u>Manager\_Designation</u>, <u>Manager\_NID</u>, <u>M\_Id</u>

- 20. M. Id, Manager City, Manager Street, Manager PostCode
- 21. <u>Employee\_Id</u>, Employee\_Name, Employee\_PhoneNo, Employee\_Salary, Employee\_NID, **E\_Id**
- 22. <u>E\_Id</u>, Employee\_City, Employee\_PostCode, Employee\_Street
- 23. Manager\_Id, Employee\_Id

# **Final Table**

- 1. <u>Client\_Id</u>, Client\_Name, Client\_CompanyName, Client\_TradeLicenseNo, Client\_PhoneNo1, Client\_PhoneNo2, Client\_Email, **C\_Id**, **TradeLicense\_No**
- 2. C\_Id, Client\_City, Client\_Street, Client\_PostCode
- 3. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo1, Factory\_PhoneNo2, Factory\_Email, Factory\_NumberOfEmployee, **F\_Id**, **TradeLicense\_No**
- 4. F\_Id, Factory\_City, Factory\_Street, Factory\_PostCode
- 5. Owner\_Id, Owner\_Name, Owner\_PhoneNo1, Owner\_PhoneNo2, Owner\_Email, O\_Id, TradeLicense\_No
- 6. O\_Id, Owner\_City, Owner\_Street, Owner\_PostCode
- 7. <u>TradeLicense\_No</u>, PhoneNo1, PhoneNo2, Email, Address, Account\_Number
- 8. Account\_Number, Account\_Profit, Account\_Expense, Account\_Balance
- 9. <u>Factory\_Id</u>, Factory\_Name, Factory\_PhoneNo1, Factory\_PhoneNo2, Factory\_Email, Factory\_NumberOfEmployee, **F\_Id**, **Account\_Number**
- 10. <u>Manager\_Id</u>, Manager\_Name, Manager\_PhoneNo1, Manager\_PhoneNo2, Manager\_Email, Manager\_Salary, Manager\_Designation, Manager\_NID, **M\_Id**, **Factory\_Id**
- 11. M\_Id, Manager\_City, Manager\_Street, Manager\_PostCode
- 12. <a href="mailto:Employee\_Id">Employee\_Id</a>, Employee\_Id, Employee\_PhoneNo1, Employee\_PhoneNo2, Employee\_Salary, Employee\_NID, **E\_Id**
- 13. <u>E\_Id</u>, Employee\_City, Employee\_PostCode, Employee\_Street
- 14. Manager\_Id, Employee\_Id


# **Schema Diagram**

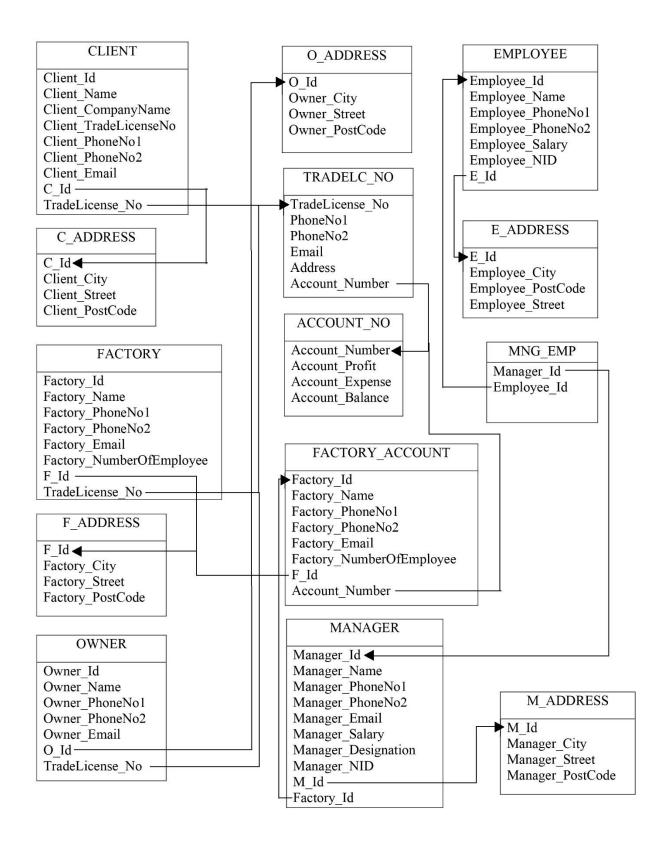

Create Table Account\_No (Account\_Number Number, Account\_Profit Number, Account\_Expense Number, Account\_Balance Number, Primary Key (Account\_Number));

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
ACCOUNT_NO	ACCOUNT_NUMBER	Number	-	-	-	1	-	-	-
	ACCOUNT_PROFIT	Number	-	-	-	-	/	-	-
	ACCOUNT_EXPENSE	Number	-	-	-	-	/	-	-
	ACCOUNT_BALANCE	Number	-	-	-	-	~	-	-
								1	- 4

create table tradelc\_no (tradelicense\_no number, phoneno1 number, phoneno2 number, email varchar2(255), address varchar2(255), account\_number number, primary key (tradelicense\_no), foreign key (account\_number) references account\_no);

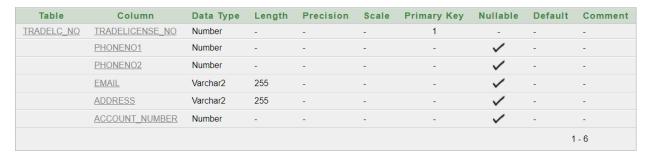

Create Table C\_Address (C\_Id Number, Client\_City Varchar2 (255), Client\_Street Varchar2 (255), Client\_Postcode Varchar2 (255), Primary Key (C\_Id));

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
C_ADDRESS	<u>C_ID</u>	Number	-	-	-	1	-	-	-
	CLIENT_CITY	Varchar2	255	-	-	-	~	-	-
	CLIENT_STREET	Varchar2	255	-	-	-	/	-	-
	CLIENT_POSTCODE	Varchar2	255	-	-	-	~	-	-
								1	- 4

Create Table Client (Client\_Id Number, Client\_Name Varchar2 (255), Client\_Companyname Varchar2 (255), Client\_Tradelicenseno Number, Client\_Phoneno1 Number, Client\_Phoneno2 Number, Client\_Email Varchar2 (255), C\_Id Number, Tradelicense\_No Number,Primary Key (Client\_Id),Foreign Key (C\_Id) References C\_Address,Foreign Key (Tradelicense\_No) References Tradelc\_No);

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
CLIENT	CLIENT_ID	Number	-	-	-	1	-	-	-
	CLIENT_NAME	Varchar2	255	-	-	-	/	-	-
	CLIENT_COMPANYNAME	Varchar2	255	-	-	-	~	-	-
	CLIENT_TRADELICENSENO	Number	-	-	-	-	/	-	-
	CLIENT_PHONENO1	Number	-	-	-	-	~	-	-
	CLIENT_PHONENO2	Number	-	-	-	-	/	-	-
	CLIENT_EMAIL	Varchar2	255	-	-	-	/	-	-
	<u>C_ID</u>	Number	-	-	-	-	/	-	-
	TRADELICENSE_NO	Number	-	-	-	-	~	-	-
									1 - 9

Create Table F\_Address (F\_Id Number, Factory\_City Varchar2(255), Factory\_Street Varchar2(255), Factory\_Postcode Varchar2(255), Primary Key (F\_Id));

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
F_ADDRESS	F_ID	Number	-	-	-	1	-	-	-
	FACTORY_CITY	Varchar2	255	-	-	-	~	-	-
	FACTORY_STREET	Varchar2	255	-	-	-	/	-	-
	FACTORY_POSTCODE	Varchar2	255	-	-	-	/	-	-
								1	- 4

Create Table Factory (Factory\_Id Number, Factory\_Name Varchar2 (255), Client\_Companyname Varchar2 (255), Factory\_Phoneno1 Number, Factory\_Phoneno2 Number, Factory\_Email Varchar2 (255), Factory\_Numberofemployee Number, F\_Id Number, Tradelicense\_No Number, Primary Key (Factory\_Id), Foreign Key (F\_Id) References F\_Address, Foreign Key (Tradelicense\_No) References Tradelc\_No);

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
FACTORY	FACTORY_ID	Number	-	-	-	1	-	-	-
	FACTORY_NAME	Varchar2	255	-	-	-	/	-	-
	CLIENT_COMPANYNAME	Varchar2	255	-	-	-	/	-	-
	FACTORY_PHONENO1	Number	-	-	-	-	/	-	-
	FACTORY_PHONENO2	Number	-	-	-	-	/	-	-
	FACTORY_EMAIL	Varchar2	255	-	-	-	/	-	-
	FACTORY_NUMBEROFEMPLOYEE	Number	-	-	-	-	/	-	-
	F_ID	Number	-	-	-	-	/	-	-
	TRADELICENSE_NO	Number	-	-	-	-	/	-	-
								1	- 9

Create Table Factory\_Account (Factory\_Id Number, Factory\_Name Varchar2 (255), Client\_Companyname Varchar2 (255), Factory\_Phoneno1 Number, Factory\_Phoneno2 Number, Factory\_Email Varchar2 (255), Factory\_Numberofemployee Number, F\_Id Number, Account\_Number Number, Primary Key (Factory\_Id), Foreign Key (F\_Id) References F\_Address, Foreign Key (Account\_Number) References Account\_No);

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
FACTORY_ACCOUNT	FACTORY_ID	Number	-	-	-	1	-	-	-
	FACTORY_NAME	Varchar2	255	-	-	-	/	-	-
	CLIENT_COMPANYNAME	Varchar2	255	-	-	-	/	-	-
	FACTORY_PHONENO1	Number	-	-	-	-	/	-	-
	FACTORY_PHONENO2	Number	-	-	-	-	/	-	-
	FACTORY_EMAIL	Varchar2	255	-	-	-	/	-	-
	FACTORY_NUMBEROFEMPLOYEE	Number	-	-	-	-	/	-	-
	F_ID	Number	-	-	-	-	/	-	-
	ACCOUNT_NUMBER	Number	-	-	-	-	/	-	-
								1	- 9

Create Table M\_Address (M\_Id Number, Manager\_City Varchar2(255), Manager\_Street Varchar2(255), Manager\_Postcode Varchar2(255), Primary Key (M\_Id));

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
M_ADDRESS	M_ID	Number	-	-	-	1	-	-	-
	MANAGER_CITY	Varchar2	255	-	-	-	/	-	-
	MANAGER_STREET	Varchar2	255	-	-	-	~	-	-
	MANAGER_POSTCODE	Varchar2	255	-	-	-	/	-	-
								1	- 4

Create Table Manager (Manager\_Id Number, Manager\_Name Varchar2 (255), Manager\_Phoneno1 Number, Manager\_Phoneno2 Number, Manager\_Email Varchar2 (255), Manager\_Salary Number, Manager\_Designation Varchar2 (255), Manager\_Nid Number, M\_Id Number, Factory\_Id Number, Primary Key (Manager\_Id), Foreign Key (M\_Id) References M\_Address, Foreign Key (Factory\_Id) References Factory);

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
MANAGER	MANAGER_ID	Number	-	-	-	1	-	-	-
	MANAGER_NAME	Varchar2	255	-	-	-	~	-	-
	MANAGER_PHONENO1	Number	-	-	-	-	~	-	-
	MANAGER_PHONENO2	Number	-	-	-	-	/	-	-
	MANAGER_EMAIL	Varchar2	255	-	-	-	~	-	-
	MANAGER_SALARY	Number	-	-	-	-	~	-	-
	MANAGER_DESIGNATION	Varchar2	255	-	-	-	~	-	-
	MANAGER_NID	Number	-	-	-	-	/	-	-
	M_ID	Number	-	-	-	-	/	-	-
	FACTORY_ID	Number	-	-	-	-	~	-	-
								1	- 10

Create Table E\_Address (E\_Id Number, Employee\_City Varchar2 (255), Employee\_Street Varchar2 (255), Employee\_Postcode Varchar2(255), Primary Key (E\_Id));

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
E_ADDRESS	E_ID	Number	-	-	-	1	-	-	-
	EMPLOYEE_CITY	Varchar2	255	-	-	-	/	-	-
	EMPLOYEE_STREET	Varchar2	255	-	-	-	/	-	-
	EMPLOYEE_POSTCODE	Varchar2	255	-	-	-	/	-	-
								•	- 4

Create Table Employee (Employee\_Id Number, Employee\_Name Varchar2 (255), Employee\_Phoneno1 Number, Employee\_Phoneno2 Number, Employee\_Salary Number, Employee\_Nid Number, E\_Id Number, Primary Key (Employee\_Id), Foreign Key (E\_Id) References E\_Address);

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
<u>EMPLOYEE</u>	EMPLOYEE_ID	Number	-	-	-	1	-	-	-
	EMPLOYEE_NAME	Varchar2	255	-	-	-	/	-	=
	EMPLOYEE_PHONENO1	Number	-	-	-	-	/	-	-
	EMPLOYEE_PHONENO2	Number	-	-	-	-	/	-	-
	EMPLOYEE_SALARY	Number	-	-	-	-	~	-	-
	EMPLOYEE_NID	Number	-	-	-	-	/	-	-
	E_ID	Number	-	-	-	-	/	-	-
								1	I - 7


Create Table O\_Address (O\_Id Number, Owner\_City Varchar2 (255), Owner\_Street Varchar2 (255), Owner\_Postcode Varchar2 (255), Primary Key (O\_Id));

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
O_ADDRESS	<u>O_ID</u>	Number	-	-	-	1	-	-	-
	OWNER_CITY	Varchar2	255	-	-	-	/	-	-
	OWNER_STREET	Varchar2	255	-	-	-	/	-	-
	OWNER_POSTCODE	Varchar2	255	-	-	-	/	-	-
									1 - 4

Create Table Owner (Owner\_Id Number, Owner\_Name Varchar2 (255), Owner\_Phoneno1 Number, Owner\_Phoneno2 Number, Owner\_Email Varchar2 (255), O\_Id Number, Tradelicense\_No Number, Primary Key (Owner\_Id), Foreign Key (O\_Id) References O\_Address, Foreign Key (Tradelicense\_No) References Tradelc\_No);

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
<u>OWNER</u>	OWNER_ID	Number	-	-	-	1	-	-	-
	OWNER_NAME	Varchar2	255	-	-	-	/	-	-
	OWNER_PHONENO1	Number	-	-	-	-	~	-	-
	OWNER_PHONENO2	Number	-	-	-	-	/	-	-
	OWNER_EMAIL	Varchar2	255	-	-	-	/	-	-
	O_ID	Number	-	-	-	-	/	-	-
	TRADELICENSE_NO	Number	-	-	-	-	/	-	-
								1	- 7

Create Table Mng\_Emp (Manager\_Id Number, Employee\_Id Number, Foreign Key (Manager\_Id) References Manager, Foreign Key (Employee\_Id) References Employee);



#### **Sequence**

Create Sequence Client\_Add

Increment By 1

Start With 1

Maxvalue 90

Nocache

Nocycle;

Create Sequence Emp\_Add

Increment By 1

Start With 1

Maxvalue 90

Nocache

Nocycle;

Create Sequence Manager\_Add


Increment By 1

Start With 1

Maxvalue 90

Nocache

Nocycle;

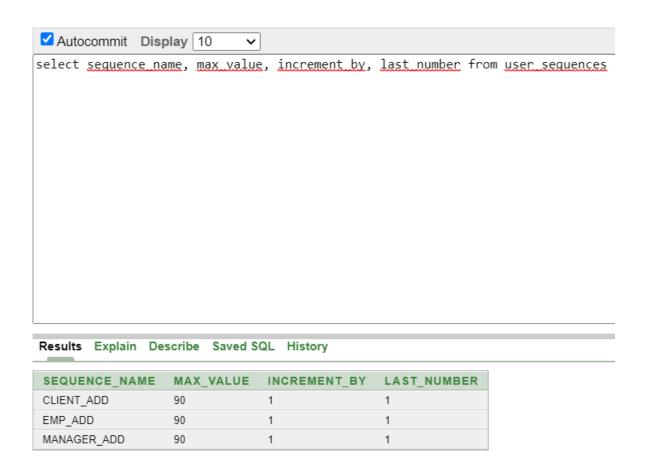

#### **Index**

Create Index Manager\_Address\_Idx On M\_Address (M\_Id,Manager\_City);

Create Index Employee\_Address\_Idx On E\_Address (E\_Id,Employee\_City);

Create Index Owner\_Address\_Idx On O\_Address (O\_Id,Owner\_City);

Create Index Factory\_Address\_Idx On F\_Address (F\_Id);

Create Index Manager\_Idx On Manager (Manager\_Id, Manager\_Name);

Create Index Employee\_Idx On Employee (Employee\_Id,Employee\_Name);

Create Index Owner\_Idx On Owner (Owner\_Id,Owner\_Name);

Create Index Factory\_Idx On Factory (Factory\_Id,Factory\_Name);

Create Index Account\_Idx On Account\_No (Account\_Number, Account\_Profit);

Create Index Trade\_Licsense\_Idx on Tradelc\_No (Tradelicense\_No, Account\_Number);

Create Index Client\_Address\_Idx On C\_Address (C\_Id,Client\_City);

Create Index Client\_Idx On Client (Client\_Id,Client\_Name);

Create Index Factory\_Acc\_Idx On Factory\_Account (Factory\_Id,Factory\_Name);

Create Index Mng\_Emp\_Idx on Mng\_Emp (Manager\_Id);

#### Create users, assign roles and grant privileges

#### \*login as System

Create user Project identified by pass;

Grant unlimited tablespace to Project;

Grant create all privileges, session, create role, create table, create sequence, create view, create procedure, connect, resource to Project with admin option;

#### \*login as Project

Create Role Admin;

Grant create session, create role, create table, create sequence, create view, create procedure, connect, resource to Admin with admin option;

Create user Emp identified by password;

Grant unlimited tablespace to Emp;

Grant Admin to Emp;

#### **Data Insertion**

- 1.insert into account\_no values (1001, 30000,20000,50000)
- 2.insert into account\_no values (1002, 20000,20000, 40000)
- 3.insert into account\_no values (1003, 10000,20000, 30000)
- 4.insert into account\_no values (1004, 10000,10000, 20000)
- 5.insert into account\_no values (1005, 5000,5000, 10000)

ACCOUNT_NUMBER	ACCOUNT_PROFIT	ACCOUNT_EXPENSE	ACCOUNT_BALANCE
1003	10000	20000	30000
1004	10000	10000	20000
1005	5000	5000	10000
1001	30000	20000	50000
1002	20000	20000	40000

- 1.insert into tradelc\_no values (5001,013544664,014554666, 'abc@gmail.com','dhanmondi',1001)
- 2.insert into tradelc\_no values (5002,019544664,019554666, 'abd@gmail.com','jatabari',1002)
- 3.insert into tradelc\_no values (5003,013556964,013554656, 'abv@gmail.com','kuril',1003)
- 4.insert into tradelc\_no values (5004,019544864,016554666, 'aax@gmail.com','dhanmondi',1004)
- 5.insert into tradelc\_no values (5005,017544664,017554666, 'xyz@gmail.com','motijheel',1005)

TRADELICENSE_NO	PHONENO1	PHONENO2	EMAIL	ADDRESS	ACCOUNT_NUMBER
5001	13544664	14554666	abc@gmail.com	dhanmondi	1001
5002	19544664	19554666	abd@gmail.com	jatabari	1002
5003	13556964	13554656	abv@gmail.com	kuril	1003
5004	19544864	16554666	aax@gmail.com	dhanmondi	1004
5005	17544664	17554666	xyz@gmail.com	motijheel	1005

1.insert into c\_address values (Client\_Add.nextval,'New York','Wall STREET','1204')

2.insert into c\_address values (Client\_Add.nextval,'Dhaka','blue STREET','1004')

3.insert into c\_address values (Client\_Add.nextval, 'Barishal', 'folk STREET', '1000')

4.insert into c\_address values (Client\_Add.nextval,'London','normal STREET','1302')

5.insert into c\_address values (Client\_Add.nextval, 'Kolkata', 'posh STREET', '1050')

C_ID	CLIENT_CITY	CLIENT_STREET	CLIENT_POSTCODE
1	New York	Wall STREET	1204
2	Dhaka	blue STREET	1004
3	Barishal	folk STREET	1000
4	London	normal STREET	1302
5	Kolkata	posh STREET	1050

1.insert into client values (1101,'BLAKE','NY CLOTHING LD.',2201,017654680,0136546485, 'blake1@gmail.com',1,5001)

2.insert into client values (1102,'carl','hm CLOTHING LD.',2202,017654769,0126546485, 'blake2@gmail.com',2,5002)

3.insert into client values (1103, 'rashid', 'gyf CLOTHING LD.', 2203, 017654689, 0166546485, 'blake3@gmail.com', 3,5003)

4.insert into client values (1104, 'alen', 'cmy CLOTHING LD.', 2204, 017654679, 0136546485, 'blake4@gmail.com', 4,5004)

5.insert into client values (1105, 'scott', 'rock CLOTHING LD.',2205,017654689,0196546485, 'blake5@gmail.com',5,5005)

CLIENT_ID	CLIENT_NAME	CLIENT_COMPANYNAME	CLIENT_TRADELICENSENO	CLIENT_PHONENO1	CLIENT_PHONENO2	CLIENT_EMAIL	C_ID	TRADELICENSE_NO
1101	BLAKE	NY CLOTHING LD.	2201	17654680	136546485	blake1@gmail.com	1	5001
1102	carl	hm CLOTHING LD.	2202	17654769	126546485	blake2@gmail.com	2	5002
1103	rashid	gyf CLOTHING LD.	2203	17654689	166546485	blake3@gmail.com	3	5003
1104	alen	cmy CLOTHING LD.	2204	17654679	136546485	blake4@gmail.com	4	5004
1105	scott	rock CLOTHING LD.	2205	17654689	196546485	blake5@gmail.com	5	5005

- 1.insert into f\_address values (11,'NEW YORK','WALL STREET','1002')
- 2.insert into f\_address values (12,'DELHI','SAHID STREET','1000')
- 3.insert into f\_address values (13,'CUMILLA','HAQ TOWER','1024')
- 4.insert into f\_address values (14,'HONGKONG','NEW MARKET','1202')
- 5.insert into f\_address values (15,'SYDNEY','NEW STREET','1602')

F_ID	FACTORY_CITY	FACTORY_STREET	FACTORY_POSTCODE
11	NEW YORK	WALL STREET	1002
12	DELHI	SAHID STREET	1000
13	CUMILLA	HAQ TOWER	1024
14	HONGKONG	NEW MARKET	1202
15	SYDNEY	NEW STREET	1602

- 1.insert into factory values (3001, 'FAST APRREAL', 'BLUE DENIM LD.', 0192366572, 013345456, 'fastappreal1@gmail.com', 500, 11, 5005)
- 2.insert into factory values (3002, 'SNOW WHITE', 'WHITE DENIM LD.', 0182366572, 017645456, 'fastappreal2@gmail.com', 230, 12, 5004)
- 3.insert into factory values (3003, 'REG DRAGON', 'RED DENIM LD.', 0132366572, 017349456, 'fastappreal3@gmail.com', 300, 13, 5003)
- 4.insert into factory values (3004, 'GREEN WORLD', 'GREEN DENIM LD.', 0172366572, 017645456, 'fastappreal4@gmail.com', 550, 14, 5002)
- 5.insert into factory values (3005, 'BEXIMCO', 'YELLOW', 0132366572, 017345006, 'fastappreal5@gmail.com', 600, 15, 5001)

FACTORY_ID	FACTORY_NAME	CLIENT_COMPANYNAME	FACTORY_PHONENO1	FACTORY_PHONENO2	FACTORY_EMAIL	FACTORY_NUMBEROFEMPLOYEE	F_ID	TRADELICENSE_NO
3001	FAST APRREAL	BLUE DENIM LD.	192366572	13345456	fastappreal1@gmail.com	500	11	5005
3002	SNOW WHITE	WHITE DENIM LD.	182366572	17645456	fastappreal2@gmail.com	230	12	5004
3003	REG DRAGON	RED DENIM LD.	132366572	17349456	fastappreal3@gmail.com	300	13	5003
3004	GREEN WORLD	GREEN DENIM LD.	172366572	17645456	fastappreal4@gmail.com	550	14	5002
3005	BEXIMCO	YELLOW	132366572	17345006	fastappreal5@gmail.com	600	15	5001

1.insert into factory\_account values (3001,'FAST APRREAL','BLUE DENIM LD.',0192366572,013345456, 'fast1@gmail.com',500,11,1001)

2.insert into factory\_account values (3002,'SNOW WHITE','WHITE DENIM LD.',0182366572,017645456, 'fast2@gmail.com',230,12,1002)

3.insert into factory\_account values (3003,'REG DRAGON','RED DENIM LD.',0132366572,017349456, 'fast3@gmail.com',300,13,1003)

4.insert into factory\_account values (3004,'GREEN WORLD','GREEN DENIM LD.',0172366572,017645456, 'fast4@gmail.com',550,14,1004)

5.insert into factory\_account values (3005,'BEXIMCO','YELLOW',0132366572,017345006, 'fast5@gmail.com',600,15,1005)

FACTORY_ID	FACTORY_NAME	CLIENT_COMPANYNAME	FACTORY_PHONENO1	FACTORY_PHONENO2	FACTORY_EMAIL	FACTORY_NUMBEROFEMPLOYEE	F_ID	ACCOUNT_NUMBER
3001	FAST APRREAL	BLUE DENIM LD.	192366572	13345456	fast1@gmail.com	500	11	1001
3002	SNOW WHITE	WHITE DENIM LD.	182366572	17645456	fast2@gmail.com	230	12	1002
3003	REG DRAGON	RED DENIM LD.	132366572	17349456	fast3@gmail.com	300	13	1003
3004	GREEN WORLD	GREEN DENIM LD.	172366572	17645456	fast4@gmail.com	550	14	1004
3005	BEXIMCO	YELLOW	132366572	17345006	fast5@gmail.com	600	15	1005

1.insert into m\_address values (Manager\_Add.nextval,'New York','WALL STREET','1102')

2.insert into m\_address values (Manager\_Add.nextval,'Florida','200 NW 27TH CT MIAMI','33125')

3.insert into m\_address values (Manager\_Add.nextval,'Florida','401 NW 2ND AVE STE N708 MIAMI','33128')

4.insert into m\_address values (Manager\_Add.nextval,'California','200 West Arbor Drive San Diego','92103')

5.insert into m\_address values (Manager\_Add.nextval,'California','3350 La Jolla Village Drive San Diego','92161')

M_ID         MANAGER_CITY         MANAGER_STREET         MANAGER_POSTCODE           1         New York         WALL STREET         1102           2         Florida         200 NW 27TH CT MIAMI         33125           3         Florida         401 NW 2ND AVE STE N708 MIAMI         33128           4         California         200 West Arbor Drive San Diego         92103           5         California         3350 La Jolla Village Drive San Diego         92161				
2       Florida       200 NW 27TH CT MIAMI       33125         3       Florida       401 NW 2ND AVE STE N708 MIAMI       33128         4       California       200 West Arbor Drive San Diego       92103	M_ID	MANAGER_CITY	MANAGER_STREET	MANAGER_POSTCODE
3 Florida 401 NW 2ND AVE STE N708 MIAMI 33128 4 California 200 West Arbor Drive San Diego 92103	1	New York	WALL STREET	1102
4 California 200 West Arbor Drive San Diego 92103	2	Florida	200 NW 27TH CT MIAMI	33125
	3	Florida	401 NW 2ND AVE STE N708 MIAMI	33128
5 California 3350 La Jolla Village Drive San Diego 92161	4	California	200 West Arbor Drive San Diego	92103
	5	California	3350 La Jolla Village Drive San Diego	92161

- 1.insert into manager values (8001, 'MR. A', 11111111111, 1111111112, 'mr.a@gmail.com', 10000, 'GENERAL MANAGER', 17655, 1,3001)
- 2.insert into manager values (8002, 'MR. B', 1111111113, 1111111114, 'mr.b@gmail.com', 2000, 'FINANCE MANAGER', 25655, 2,3002)
- 3.insert into manager values (8003, 'MR.C', 1111111115, 111111116, 'mr.c@gmail.com', 3000, 'SUPPLY CHAIN MANAGER', 18695, 3, 3003)
- 4.insert into manager values (8004, 'MR. D', 1111111117, 1111111118, 'mr.d@gmail.com', 4000, 'PRODUCTION MANAGER', 11651, 4,3004)
- 5.insert into manager values (8005, 'MR. E', 1111111119, 1111111101, 'mr.e@gmail.com', 5000, 'RETAIL MANAGER', 12600, 5,3005)

MANAGER_ID	MANAGER_NAME	MANAGER_PHONENO1	MANAGER_PHONENO2	MANAGER_EMAIL	MANAGER_SALARY	MANAGER_DESIGNATION	MANAGER_NID	M_ID	FACTORY_ID
8001	MR. A	1111111111	1111111112	mr.a@gmail.com	10000	GENERAL MANAGER	17655	1	3001
8002	MR. B	1111111113	1111111114	mr.b@gmail.com	2000	FINANCE MANAGER	25655	2	3002
8003	MR.C	1111111115	1111111116	mr.c@gmail.com	3000	SUPPLY CHAIN MANAGER	18695	3	3003
8004	MR. D	1111111117	1111111118	mr.d@gmail.com	4000	PRODUCTION MANAGER	11651	4	3004
8005	MR. E	1111111119	1111111101	mr.e@gmail.com	5000	RETAIL MANAGER	12600	5	3005

- 1.insert into e\_address values (Emp\_Add.nextval,'MUMBAI','MODI STREET','2002')
- 2.insert into e\_address values (Emp\_Add.nextval,'DHAKA','SF STREET','1202')
- 3.insert into e\_address values (Emp\_Add.nextval,'RANGPUR',' MANIK ROAD','2609')
- 4.insert into e\_address values (Emp\_Add.nextval,'LONDON','NILKHET','2902')
- 5.insert into e\_address values (Emp\_Add.nextval,'MELBARN','KANDIRPAR','3001')

E_ID	EMPLOYEE_CITY	EMPLOYEE_STREET	EMPLOYEE_POSTCODE
1	MUMBAI	MODI STREET	2002
2	DHAKA	SF STREET	1202
3	RANGOPUR	MANIK ROAD	2609
4	LONDON	NILKHET	2902
5	MELBARN	KANDIRPAR	3001

1.insert into employee values (7001, 'KAMIL', 013542232, 013454556, 70000, 1768655, 1)

2.insert into employee values (7002, 'SIAM,', 01223222, 013450456, 50000, 5617655, 2)

3.insert into employee values (7003, 'FARHAN', 01223442, 013454556, 30000, 1754655, 3)

4.insert into employee values (7004, 'TAPU', 01220032, 0134540056, 100000, 1457655, 4)

5.insert into employee values (7005,'AMAN',01223002,0134540056,20000,6817655,5)

EMPLOYEE_ID	EMPLOYEE_NAME	EMPLOYEE_PHONENO1	EMPLOYEE_PHONENO2	EMPLOYEE_SALARY	EMPLOYEE_NID	E_ID
7001	KAMIL	13542232	13454556	70000	1768655	1
7002	SIAM,	1223222	13450456	50000	5617655	2
7003	FARHAN	1223442	13454556	30000	1754655	3
7004	TAPU	1220032	134540056	100000	1457655	4
7005	AMAN	1223002	134540056	20000	6817655	5

1.insert into o\_address values (1,'New York','WALL STREET','1102')

2.insert into o\_address values (2,'Dhaka','Banani','1103')

3.insert into o\_address values (3,'New Work','WALL STREET','1104')

4.insert into o\_address values (4,'Delhi','India Gate','1105')

5.insert into o\_address values (5,'New Work','WALL STREET','1106')

O_ID	OWNER_CITY	OWNER_STREET	OWNER_POSTCODE
1	NEW YORK	WALL STREET	1102
2	Dhaka	Banani	1103
3	New Work	WALL STREET	1104
4	Delhi	India Gate	1105
5	New Work	WALL STREET	1106

- 1.insert into owner values (1,'MR.BOSS',112233, 112234, 'mrboss@gmail.com',1,5001)
- 2.insert into owner values (2,'MR.BOSS2', 112235, 112236, 'mrboss2@gmail.com',2,5002)
- 3.insert into owner values (3,'MR.BOSS3', 112237, 112238, 'mrboss3@gmail.com',3,5003)
- 4.insert into owner values (4,'MR.BOSS4', 112239, 112200, 'mrboss4@gmail.com',4,5004)
- 5.insert into owner values (5,'MR.BOSS5', 112201, 112202, 'mrboss5@gmail.com',5,5005)

OWNER_ID	OWNER_NAME	OWNER_PHONENO1	OWNER_PHONENO2	OWNER_EMAIL	O_ID	TRADELICENSE_NO
3	MR.BOSS3	112237	112238	mrboss3@gmail.com	3	5003
1	MR.BOSS	112233	112234	mrboss@gmail.com	1	5001
2	MR.BOSS2	112235	112236	mrboss2@gmail.com	2	5002
4	MR.BOSS4	112239	112200	mrboss4@gmail.com	4	5004
5	MR.BOSS5	112201	112202	mrboss5@gmail.com	5	5005

## **Query Writing**

#### **Single Row Function**

1. Print manager ID,name and salary using Single Row Function (CASE CONVERSION FUNCTION)

select manager\_id,manager\_name,manager\_salary from manager where lower(manager\_name)='mr.a'

MANAGER_ID	MANAGER_NAME	MANAGER_SALARY
8801	MR.A	10000

2. Print Employee name, concat name and id, length of employee name and the position of 'A' in employee name using Single Row Function (CHARACTER MANIPULATION FUNCTIONS)

select employee\_name, concat (employee\_id, employee\_name), length(employee\_name), instr(employee\_name, 'a') from employee where employee\_id=7002

EMPLOYEE_NAME	CONCAT(EMPLOYEE_ID,EMPLOYEE_NAME)	LENGTH(EMPLOYEE_NAME)	INSTR(EMPLOYEE_NAME,'A')
SIAM,	7002SIAM,	5	3

3. Print the account number and the modulus of account profit and account expense whose account number is 1003 by using Single Row Function(NUMBER FUNCTION-MOD)

select account\_number, account\_profit,account\_expense, mod(account\_profit, account\_expense) from account\_no where account\_number = 1003

ACCOUNT_NUMBER	ACCOUNT_PROFIT	ACCOUNT_EXPENSE	MOD(ACCOUNT_PROFIT,ACCOUNT_EXPENSE)
1003	2800	307	37

### **Group Function**

1.Display the name and salary of the managers who has the max salary group by  $m_i$ d

select manager\_name, manager\_salary from manager where manager\_salary in (select max(manager\_salary) from manager group by m\_id)

MANAGER_NAME	MANAGER_SALARY
MR. A	10000
MR. B	2000
MR.C	3000
MR. D	4000
MR. E	5000

2.Display the number of managers from each designation group by their designation in descending order

select manager\_designation, count(\*) from manager group by manager\_designation order by manager\_designation desc

MANAGER_DESIGNATION	COUNT(*)
SUPPLY CHAIN MANAGER	1
RETAIL MANAGER	1
PRODUCTION MANAGER	1
GENERAL MANAGER	1
FINANCE MANAGER	1

3.Display the employee salary, average salary, no of emplyees group by salay select employee\_salary, count(\*) as num\_employees, avg(employee\_salary) as average\_salary from employee group by employee\_salary

EMPLOYEE_SALARY	NUM_EMPLOYEES	AVERAGE_SALARY
100000	1	100000
50000	1	50000
30000	1	30000
70000	1	70000
20000	1	20000

#### **Subqueries**

1. Write a subquery that displays manager's name, id, salary those salaries are greater than RETAIL MANAGER.

select manager\_id, manager\_name, manager\_salary from manager where manager\_salary > (select manager\_salary from manager where manager\_designation='RETAIL MANAGER')

MANAGER_ID	MANAGER_NAME	MANAGER_SALARY
8001	MR. A	10000

2.Display the account information from account table which has the highest account expense

select \*from account\_no where account\_expense in (select max(account\_expense) from account\_no)

ACCOUNT_NUMBER	ACCOUNT_PROFIT	ACCOUNT_EXPENSE	ACCOUNT_BALANCE
1003	10000	20000	30000
1001	30000	20000	50000
1002	20000	20000	40000

3.Display the factory name, employee numbers which has the lowest number of employee

select factory\_name, factory\_numberofemployee from factory where factory\_numberofemployee in (select min(factory\_numberofemployee) from factory)

FACTORY_NAME	FACTORY_NUMBEROFEMPLOYEE
SNOW WHITE	230

### **Joining**

1. Display the manager name, id, city who lives in New York.

select m.manager\_name, m.manager\_id, n.manager\_city from manager m join m\_address n on m.m\_id = n.m\_id where n.manager\_city = 'New York';

MANAGER_NAME	MANAGER_ID	MANAGER_CITY
MR. A	8001	New York

2.Display client name and client of only those clients who lives in DHAKA using natural join

select c.client\_name, d.client\_city from client c natural join c\_address d where d.client\_city = 'Dhaka';

CLIENT_NAME	CLIENT_CITY
carl	Dhaka

3.Display the trade license number address and account\_profit

select t.tradelicense\_no, t.address, a.account\_profit from tradelc\_no t join account no a on t.account number = a.account number

TRADELICENSE_NO	ADDRESS	ACCOUNT_PROFIT
5003	kuril	10000
5004	dhanmondi	10000
5005	motijheel	5000
5001	dhanmondi	30000
5002	jatabari	20000

#### **View**

1.Create a view named FACTORY\_VIEW based on FACTORY table which shows the factory id, name, number of employees.

create view factory\_view as select factory\_id, factory\_name, factory\_numberofemployee from factory

FACTORY_ID	FACTORY_NAME	FACTORY_NUMBEROFEMPLOYEE
3001	FAST APRREAL	500
3002	SNOW WHITE	230
3003	REG DRAGON	300
3004	GREEN WORLD	550
3005	BEXIMCO	600

2.Create a view named CLIENT\_VIEW based on CLIENT table which shows the client name, company name.

create view client\_view as select client\_name, client\_companyname from client

CLIENT_NAME	CLIENT_COMPANYNAME
BLAKE	NY CLOTHING LD.
carl	hm CLOTHING LD.
rashid	gyf CLOTHING LD.
alen	cmy CLOTHING LD.
scott	rock CLOTHING LD.

3.Create a view named MANAGER\_VIEW based on MANAGER table which shows the manager name, email, designation.

create view manager\_view as select manager\_name, manager\_email, manager\_designation from manager

MANAGER_NAME	MANAGER_EMAIL	MANAGER_DESIGNATION
MR. A	mr.a@gmail.com	GENERAL MANAGER
MR. B	mr.b@gmail.com	FINANCE MANAGER
MR.C	mr.c@gmail.com	SUPPLY CHAIN MANAGER
MR. D	mr.d@gmail.com	PRODUCTION MANAGER
MR. E	mr.e@gmail.com	RETAIL MANAGER

# **Synonym**

# 1.create synonym production\_house for factory

FACTORY_ID	FACTORY_NAME	CLIENT_COMPANYNAME	FACTORY_PHONENO1	FACTORY_PHONENO2	FACTORY_EMAIL	FACTORY_NUMBEROFEMPLOYEE	F_ID	TRADELICENSE_NO
3001	FAST APRREAL	BLUE DENIM LD.	192366572	13345456	fastappreal1@gmail.com	500	11	5005
3002	SNOW WHITE	WHITE DENIM LD.	182366572	17645456	fastappreal2@gmail.com	230	12	5004
3003	REG DRAGON	RED DENIM LD.	132366572	17349456	fastappreal3@gmail.com	300	13	5003
3004	GREEN WORLD	GREEN DENIM LD.	172366572	17645456	fastappreal4@gmail.com	550	14	5002
3005	BEXIMCO	YELLOW	132366572	17345006	fastappreal5@gmail.com	600	15	5001

# 2.create synonym employee\_address for e\_address

E_ID	EMPLOYEE_CITY	EMPLOYEE_STREET	EMPLOYEE_POSTCODE
1	MUMBAI	MODI STREET	2002
2	DHAKA	SF STREET	1202
3	RANGOPUR	MANIK ROAD	2609
4	LONDON	NILKHET	2902
5	MELBARN	KANDIRPAR	3001

# 3.create synonym consumers for client

CLIENT_ID	CLIENT_NAME	CLIENT_COMPANYNAME	CLIENT_TRADELICENSENO	CLIENT_PHONENO1	CLIENT_PHONENO2	CLIENT_EMAIL	C_ID	TRADELICENSE_NO
1101	BLAKE	NY CLOTHING LD.	2201	17654680	136546485	blake1@gmail.com	1	5001
1102	carl	hm CLOTHING LD.	2202	17654769	126546485	blake2@gmail.com	2	5002
1103	rashid	gyf CLOTHING LD.	2203	17654689	166546485	blake3@gmail.com	3	5003
1104	alen	cmy CLOTHING LD.	2204	17654679	136546485	blake4@gmail.com	4	5004
1105	scott	rock CLOTHING LD.	2205	17654689	196546485	blake5@gmail.com	5	5005

### PL/SQL

### **Function**

```
1. Create a function that returns the total number of clients.
create or replace function total_clients
return number as
 total number := 0;
begin
 select count(*) into total from client;
 return total;
end;
declare
 c number;
begin
 c := total_clients();
 dbms_output.put_line('Total no of Clients: ' || c);
end;
                               Total no of Clients: 5
                               Statement processed.
2.Create a function that returns where employee salary is greater than 2500.
create or replace function salary_employees
return number
is
 v_{count number} := 0;
```

```
begin
 select count(*) into v_count from employee where employee_salary > 2500;
 return v_count;
end;
declare
 s number;
begin
 s := salary_employees();
 dbms_output.put_line(s || 'employees salary is greater than 2500');
end;
                    5 employees salary is greater than 2500
                    Statement processed.
3.Create a fuction that increases the manager salary with 2500 by using only
manager's id number.
create or replace function increase_salary(p_manager_id number)
return number
is
 v_new_salary number;
begin
 select manager_salary + 2500 into v_new_salary from manager where manager_id
= p_manager_id;
 update manager_set manager_salary = v_new_salary where manager_id =
p_manager_id;
```

```
return v_new_salary;
end;
declare
 n_new_salary number;
begin
n_new_salary := increase_salary(8001);
 dbms_output.put_line('New Salary: ' || n_new_salary);
end;
                            New Salary: 15000
                            Statement processed.
Procedure
1.Create a procedure to update the salary of GENERAL MANAGER to 10000.
create or replace procedure update_salary
as
begin
 update
                                          manager_salary=10000
                                                                       where
               manager
                               set
manager_designation='GENERAL MANAGER';
End;
Declare
 sal number(6);
begin
 update_salary;
```

```
select manager_salary into sal from manager where manager_designation =
'GENERAL MANAGER';
 dbms_output.put_line('General manager salary : '||sal);
End;
                         General manager salary: 10000
                         Statement processed.
2. Create a procedure to update the MR.BOSS email address to mrboss@yahoo.com
create or replace procedure update_owner_email (n_email in varchar2)
as
begin
  update owner set owner_email = n_email where owner_name = 'MR.BOSS';
End:
Declare
 v_email varchar2(50);
begin
 update_owner_email('mrboss@yahoo.com');
 select owner_email into v_email from owner where owner_name = 'MR.BOSS';
 dbms_output.put_line('MR.BOSS new email address: ' || v_email);
End;
                   MR.BOSS new email address: mrboss@yahoo.com
                   Statement processed.
3. Create a procedure to update Factory 11's postcode to 1001
create or replace procedure update_postcode (n_postcode in number)
as
```

```
Begin
  update f_{address} set factory_postcode = n_{postcode} where f_{id} = 11;
End;
Declare
 v_factory_postcode number;
Begin
 update_postcode(1001);
 select factory_postcode into v_factory_postcode from f_address where f_id = 11;
 dbms_output_line('New post code: ' || v_factory_postcode);
End;
                              New post code: 1001
                              Statement processed.
Record
1.Create a record that can show the address and postcode where city is Delhi.
declare
 o_address_rec o_address%rowtype;
begin
 select *
 into o_address_rec
 from o_address
 where owner_city = 'Delhi';
 dbms_output.put_line('Address:'||o_address_rec.Owner_Street);
 dbms_output.put_line('Post Code : ' || o_address_rec.Owner_Postcode);
end;
```

Address : India Gate Post Code : 1105

Statement processed.

2.Create a record that can output the id and salary of the employee whose name is KAMIL.

```
declare

cursor c_employee is

select * from employee where employee_name = 'KAMIL';

rec_employee employee%rowtype;

begin

open c_employee;

fetch c_employee into rec_employee;

dbms_output.put_line('ID : ' || rec_employee.Employee_Id);

dbms_output.put_line('Salary : ' || rec_employee.Employee_Salary);

close c_employee;

end;

ID : 7001

Salary : 70000

Statement_processed.
```

3. Create a record that can output the factory names.

declare

```
cursor c_factory is select factory_name from factory;
factory_name factory.factory_name%type;
begin
  open c_factory;
```

```
loop
  fetch c_factory into factory_name;
  exit when c_factory%notfound;
  dbms_output.put_line('Factory name : ' || factory_name);
 end loop;
 close c_factory;
end;
                          Factory name : FAST APRREAL
                          Factory name : SNOW WHITE
                          Factory name : REG DRAGON
                          Factory name : GREEN WORLD
                          Factory name : BEXIMCO
Cursor
1. Create a cursor that will reduce 500 takas from the employee salary.
begin
update employee
set employee_salary = employee_salary - 500;
if sql%notfound then
dbms_output.put_line('NO SALARY HAS BEEN RDUCED');
ELSIF sql%found THEN
dbms_output.put_line(' 500 TAKA HAS BEEN REDUCED FROM EMPLOYEE
SALARY');
end if;
end;
rollback;
select * from employee
```

EMPLOYEE_ID	EMPLOYEE_NAME	EMPLOYEE_PHONENO1	EMPLOYEE_PHONENO2	EMPLOYEE_SALARY	EMPLOYEE_NID	E_ID
7001	KAMIL	13542232	13454556	69500	1768655	21
7002	SIAM,	1223222	13450456	49500	5617655	21
7003	FARHAN	1223442	13454556	29500	1754655	21
7004	TOPU	1220032	134540056	99500	1457655	21
7005	AMAN	1223002	134540056	19500	6817655	21

500 TAKA HAS BEEN REDUCED FROM EMPLOYEE SALARY

Statement processed.

EMPLOYEE_ID	EMPLOYEE_NAME	EMPLOYEE_PHONENO1	EMPLOYEE_PHONENO2	EMPLOYEE_SALARY	EMPLOYEE_NID	E_ID
7001	KAMIL	13542232	13454556	70000	1768655	21
7002	SIAM,	1223222	13450456	50000	5617655	21
7003	FARHAN	1223442	13454556	30000	1754655	21
7004	TOPU	1220032	134540056	100000	1457655	21
7005	AMAN	1223002	134540056	20000	6817655	21

2. Create a cursor that will display the name and designation of all the managers.

```
declare
```

```
cursor mgr_cursor is
select manager_name, manager_designation from manager;
ename_var manager.manager_name%type;
job_var manager.manager_designation%type;
begin
open mgr_cursor;
loop
fetch mgr_cursor into ename_var, job_var;
exit when mgr_cursor%notfound;
dbms_output.put_line('MANAGER NAME: ' || ename_var || ', DESIGNATION: ' || job_var);
end loop;
close mgr_cursor;
End;
```

```
MANAGER NAME: MR.A, DESIGNATION: GENERAL MANAGER
        MANAGER NAME: MR.B, DESIGNATION: FINANCE MANAGER
        MANAGER NAME: MR.C, DESIGNATION: SUPPLY CHAIN MANAGER
        MANAGER NAME: MR.D, DESIGNATION: PRODUCTION MANAGER
        MANAGER NAME: MR.E, DESIGNATION: RETAIL MANAGER
        Statement processed.
3. Create a cursor that will display the name, salary of employee who has the highest
salary.
declare
 cursor emp_cursor is
  select employee_name,employee_salary
  from employee
  where employee_salary = (select max(employee_salary) from employee);
 ename_var employee.employee_name%type;
 sal_var employee.employee_salary%type;
begin
 open emp_cursor;
 fetch emp cursor into ename var, sal var;
 if emp_cursor% found then
  dbms_output.put_line('EMPLOYEE NAME: ' || ename_var || ', SALARY: ' ||
sal_var);
 ELSE
  dbms_output_line('NO EMPLOYEE FOUND');
 END IF;
 close emp_cursor;
End;
                  EMPLOYEE NAME: TOPU, SALARY: 99500
                  Statement processed.
```

#### **Trigger**

1. Create a trigger which will execute when we add a new employee. create or replace trigger employee\_insert\_trigger

after insert on employee

for each row

begin

dbms\_output.put\_line('NEW EMPLOYEE ADDED');

End;

insert into employee values

(7006, 'BATMAN', 010743598, 01642241177, 20000, 43547578, 21)

NEW EMPLOYEE ADDED

1 row(s) inserted.

2. Create a trigger which will execute when we update the employee's salary.

create or replace trigger emp\_salary\_update\_trigger

after update of employee\_salary on employee

for each row

begin

dbms\_output.put\_line('Employee salary updated');

End;

Employee salary updated
500 TAKA HAS BEEN ADDED TO EMPLOYEE SALARY

Statement processed.

3. Create a trigger which will execute when we delete an employee.

create or replace trigger emp\_delete\_trigger

```
after delete on employee
for each row
begin
 dbms_output.put_line('Employee deleted');
End;
delete from employee where employee_id =7006;
                             Employee deleted
                             1 row(s) deleted.
Package
1. Create a package which will display the name, salary, designation of manager
create or replace package mgr_details_pkg
is
 procedure get_mgr_details(mgr_id in number);
end;
create or replace package body mgr_details_pkg
is
 procedure get_mgr_details(mgr_id in number)
 is
  mgr_name manager.manager_name%type;
  mgr_salary manager.manager_salary%type;
  mgr_designation manager.manager_designation%type;
 begin
  select manager_name,manager_salary, manager_designation
  into mgr_name, mgr_salary, mgr_designation
  from manager
```

```
where manager_id = mgr_id;
  dbms_output.put_line('Manager Name: ' || mgr_name);
  dbms_output.put_line('Manager Salary: ' || mgr_salary);
  dbms_output.put_line('Manager Designation: ' || mgr_designation);
 End;
End;
Begin
 mgr_details_pkg.get_mgr_details(8803);
End;
                    Manager Name: MR.C
                    Manager Salary: 7000
                    Manager Designation: SUPPLY CHAIN MANAGER
                    Statement processed.
2. Create a package to display the name, salary of employee who has the lowest
salary from employee table.
create or replace package employee_info_pkg
is
 procedure get_lowest_salary_employee;
end;
create or replace package body employee_info_pkg
is
 procedure get_lowest_salary_employee
 is
  emp_name employee.employee_name%type;
  emp_salary employee.employee_salary%type;
```

```
begin
  select employee_name, employee_salary
  into emp_name, emp_salary
  from employee
  where employee_salary = (select min(employee_salary) from employee);
  dbms_output.put_line('Employee Name: ' || emp_name);
  dbms_output.put_line('Employee Salary: ' || emp_salary);
 End;
End;
Begin
 employee_info_pkg.get_lowest_salary_employee;
End;
                            Employee Name: AMAN
                            Employee Salary: 20500
                            Statement processed.
3. Create a package to display the employee name, salary from employee table who
has slary more than 30000.
create or replace package empl_pkg is
 procedure display_high_salary_emp;
end empl_pkg;
create or replace package body empl_pkg is
 procedure display_high_salary_emp is
   cursor emp_cur is
     select employee_name, employee_salary
```

```
from employee
    where employee_salary > 30000;
   emp_rec emp_cur%rowtype;
 begin
   for emp_rec in emp_cur loop
    dbms_output.put_line(emp_rec.employee_name || ' - '
emp_rec.employee_salary);
   End Loop;
 End display_high_salary_emp;
End empl_pkg;
Begin
 empl_pkg.display_high_salary_emp;
End;
                            KAMIL - 70500
                            SIAM, - 50500
                            FARHAN - 30500
                            TOPU - 100500
                            Statement processed.
```

### **Relational Algebra**

1. Find the factory Id and factory name from the Factory.

$$\prod$$
 Factory\_Id, Factory\_Name (Factory)

2. Find the street name where city is New York from Client Address.

$$\prod_{Client\_Street} (\sigma_{Client\_City} = \text{``New York''} (C\_Address))$$

3. Find the manager name where salary is 10000 from Manager.

$$\prod_{Manager\_Name} (\sigma_{Manager\_Salary="10000"} (Manager))$$

4. Find the factory name where factory trade license no is 5005.

$$\prod$$
 Factory\_Name ( $\sigma$  Tradelicense\_no= "5005" (Factory))

5. Find the account number whose account balance is greater than 10000.

$$\prod_{Account\_number} (\sigma_{Account\_balance} > 10000 (Account\_no))$$

## **Conclusion**

Database Management System is a software that analyses and store data to use later according to our requirements. Our project is about Garment Factory Management System where we stored information about the office, factory, client, manager, employee, owner, and account. In our database, we can also retrieve and modify data. In the future, we can add biometrics and Artificial intelligence to the system and organize it professionally. We can capitalize the cache and use virtualizing technology in our project. We can add more memory to minimize the time of the process. We can also improve the network system to work more efficiently.