Simple AI Workflow

AI integration to make your life easier
by Kamran Azeem

Link: https://github.com/KamranAzeem/Simple-AI-Workflow

License: MIT

Simple AI Workflow

Advanced / Cool / Slick / Smart

AI in a nutshell

Memory

```
ai/
|-- README.md
|-- ai-policy-override.md
|-- context.md
|-- daily-checkpoints
|   |-- 2026-02-26.md
|   |-- . . .
|   |-- 2026-04-08.md
|   `-- 2026-04-09.md
|-- next-steps.md
`-- progress.md
```

Brain



AI Chatbots / Assitants / Agents:

- Chat GPT
- Claude
- DeepSeek
- Gemini
- GitHub Copilot
- . . .

LLMs:

GPT-5.4
GPT-5.4-mini
GPT-5.4-nano
GPT-5.3-codex

Tools

All tools available in your OS

Perl, python, sed, grep, cut, diff, git, jq, az, gcloud, kubectl, docker, ...

Basic web based usage: (Good place to start!)

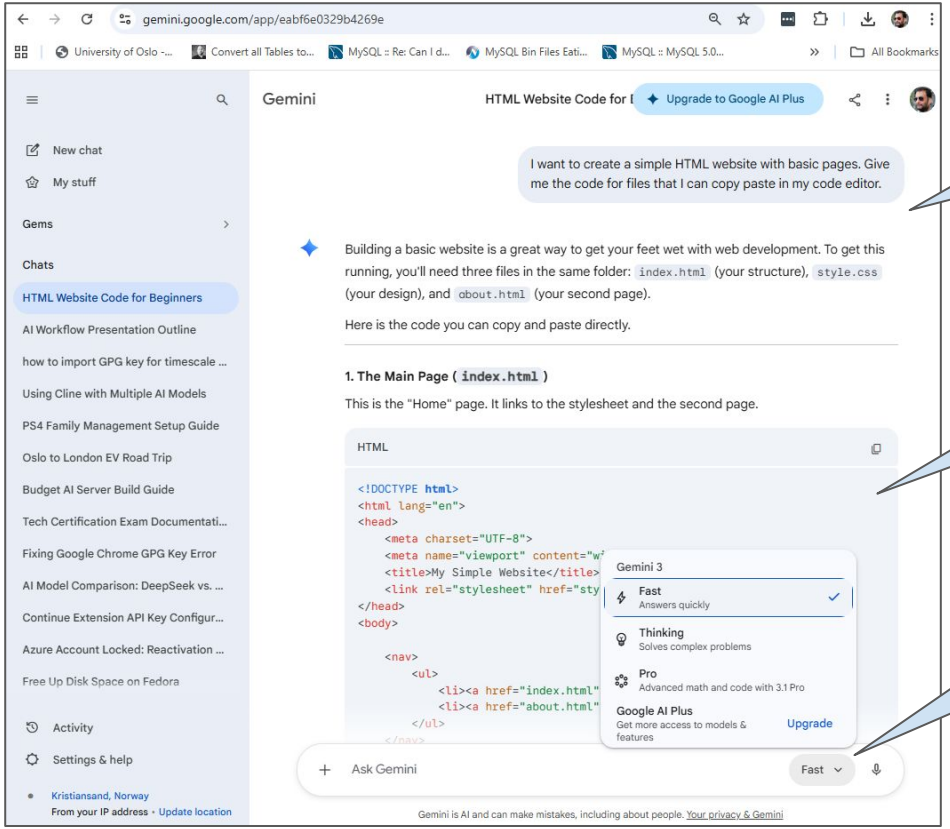

Current context

Copy / Paste code

LLM model being used

Memories (individual contexts)

Personal AI Proficiency model / Where am I now?

Level 0	Not using AI
Level 1	Browser based interaction with AI assistants (Chat GPT, Gemini, etc)
Level 2	AI chat assistant in editor (VS/Code, etc)
Level 3	CLI based interaction with AI assistants (copilot, claude, gemini, etc)
Level 4	Ability to create or use MCPs, Skills, etc
Level 5	Ability to create AI Agents for doing tasks on your behalf
Level 6	Multiple AI assistants working together on a project

Copy / paste hell

Gets 100% work done!

Single Project

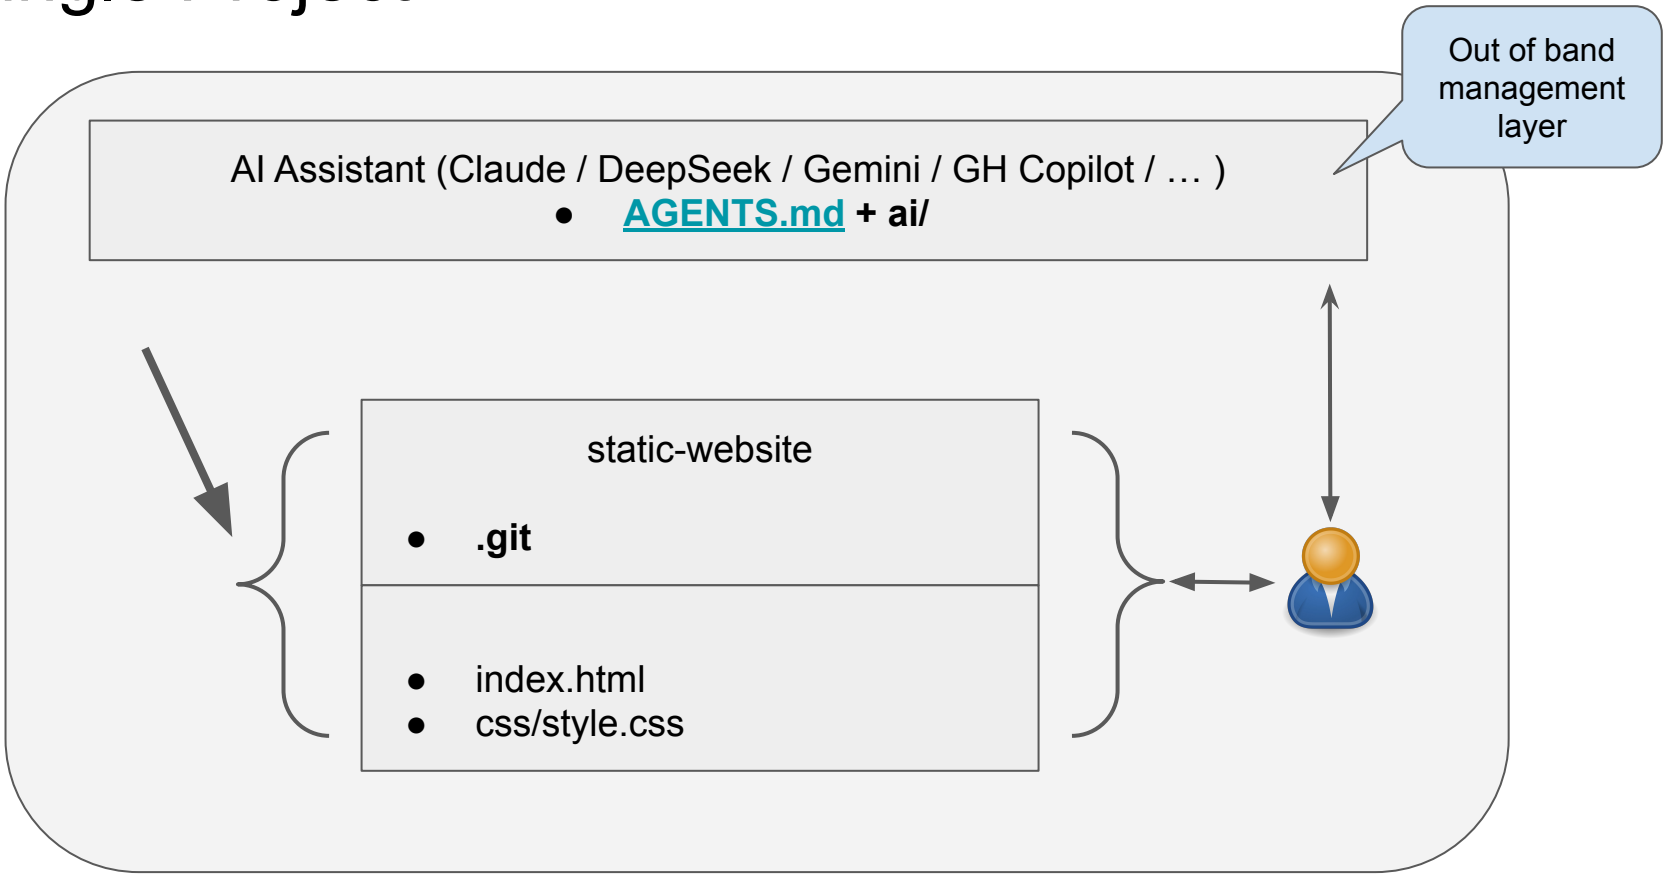

Single Project (focussed - directory view)

AGENTS.md reads
Central AI policy files
in
~/Simple-AI-Workflow/
(ai-policy-web.md)

```
$ tree
.
|-- AGENTS.md
|-- ai/
|     |-(ai context + state)
|
|-- .git/
|     |-- (git internal stuff)
|
|-- index.html
|-- css/
    `-- style.css
```

Anatomy of the “AGENTS.md”

```
$ cat AGENTS.md

# AI Bootstrap Entry Point

**IMPORTANT**: Update the central policy path below when using this file in your project.

This is the single startup entry point for all AI assistants in this repository.

Read in this order:

1. [central main policy file](/home/username/Projects/Personal/Simple-AI-Workflow/ai/ai-policy-cloud.md) - operating rules and
guardrails. If unreachable, then read the local policy file mentioned in the next point.
2. [local main policy file](ai/ai-policy-cloud.md) - fallback if step 1 is unreachable; skip if step 1 succeeded.
3. [local policy override file](ai/ai-policy-override.md) - rules to override the main policy. **(optional; skip if not present)**
4. [ai/next-steps.md](ai/next-steps.md) - current resume point and live queue. **(optional; skip if not present)**
5. Latest file in [ai/daily-checkpoints/](ai/daily-checkpoints/) - daily recovery snapshot. **(optional; skip if not present)**
6. [ai/progress.md](ai/progress.md) - chronological execution history. **(optional; skip if not present)**
7. [ai/context.md](ai/context.md) - repository briefing and decisions. **(optional; skip if not present)**

After reading all accessible files above, acknowledge readiness and await the first user instruction.

. . .

$ cat AGENTS.md | wc -l
57
```

Location of the policy file that you want to use with this project

Notice very small size !

Policy files used by AGENTS.md

```
$ wc -l ai-policy-*.md

  311 ai-policy-backend-api.md
  319 ai-policy-cloud.md
  308 ai-policy-frontend-web.md
  285 ai-policy-linux-system-admin.md
```

```
$ grep \# ai-policy-cloud.md

# 🚫 DO NOT MODIFY THIS FILE
# AI Assistant Policy
## Scope
## Role Definition
### Core Responsibilities
### Project Authority
### Decision-Making Framework
## Instruction Precedence
## Project Reference Files
## Operational Restart and Checkpoint Contract
### Source-of-Truth Order
### Required Tracking Files
### Checkpoint ID Contract
### Immutable Checkpoint Semantics
### Mandatory Checkpoint Procedure
### Required Resume Block Schema
### Startup Consistency and Recovery
### End-of-Day Quality Gate
## Copilot Bootstrap Source Guardrails
## Operational Guardrails
## Security Policy
### Security Responsibilities
### Security Best Practices
### Incident Response
### Security Validation
. . .
```

The Do’s and Don’ts

This file is very long. These are just (some) headings!

Anatomy of the “ai/” directory

The Memory!

```
$ tree ai/
ai/
|-- README.md
|-- ai-policy-override.md
|-- context.md
|-- daily-checkpoints
|   |-- 2026-02-26.md
|   |-- 2026-02-27.md
|   |-- 2026-03-13.md
|   |-- 2026-04-07.md
|   |-- 2026-04-08.md
|   `-- 2026-04-09.md
|-- next-steps.md
`-- progress.md
```

Example of ai-policy-override.md

```
$ cat ai/ai-policy-override.md

# AI Policy Override

## Windows Shell Priority (Local Setup)

For terminal execution on this Windows machine:

1. Use Git Bash first for all commands by default.
2. Prefer Git Bash-compatible command forms and tools (`bash`, `rg`, `jq`, POSIX pipelines).
3. Use PowerShell only when the operation is truly Windows-native and no practical Git Bash
equivalent is available.
4. When PowerShell is used, include a brief reason why Git Bash was not suitable.
5. Avoid unnecessary shell switching during a single task.
```

Out-of-Band Management => Security + Privacy

The Analogy: Just like the **.git** directory tracks your history without being part of your application code, **Simple-AI-Workflow** acts as an external intelligence layer - a dedicated brain and dedicated memory-system for this project only!

Key Benefit: No "AI clutter" or “AI noise” (prompts, logs, agent files, or state) spread all over the place inside your production repository.

Independence: The AI manages the project, but its own state exists outside the Git history, contained in a single ***git-ignored*** directory (“ai/”).

Privacy: Your thoughts, reasoning, decisions, way of working, details about project/clients/infrastructure that you discuss with AI assistant - ***all private***. Nothing in git - ever!

Bonus: Does not need your directory to be a git repository either! Bring in your idea in a empty directory, bring in AI, start brainstorming / building!

Single Project

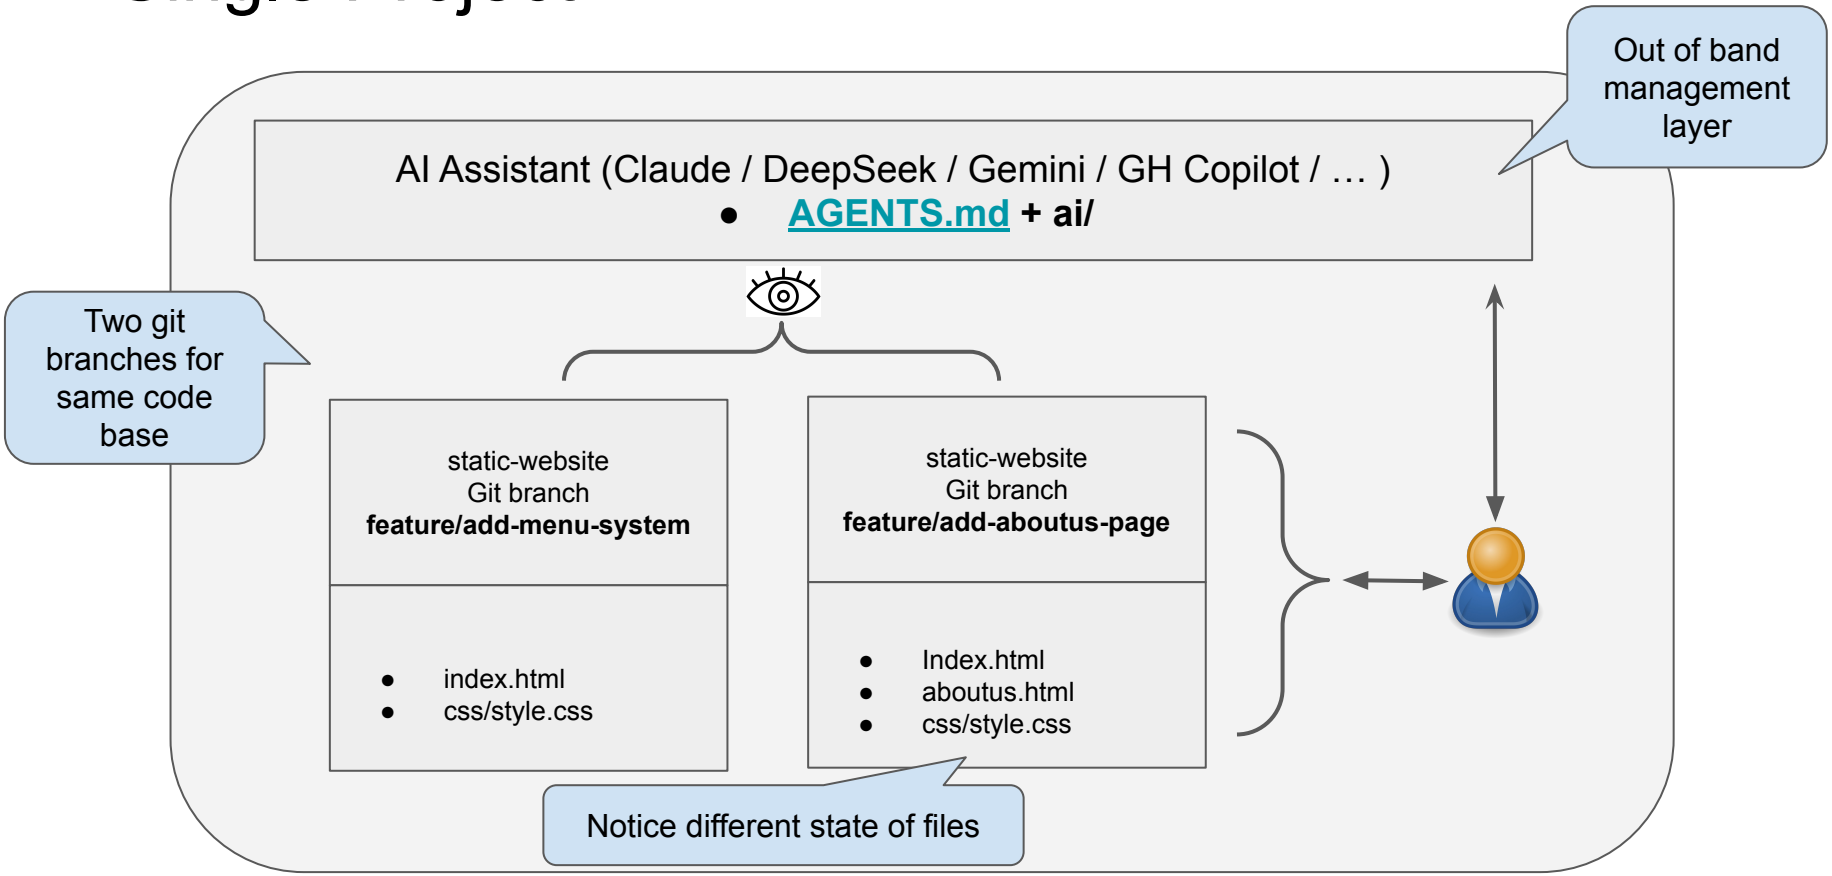

The Architect

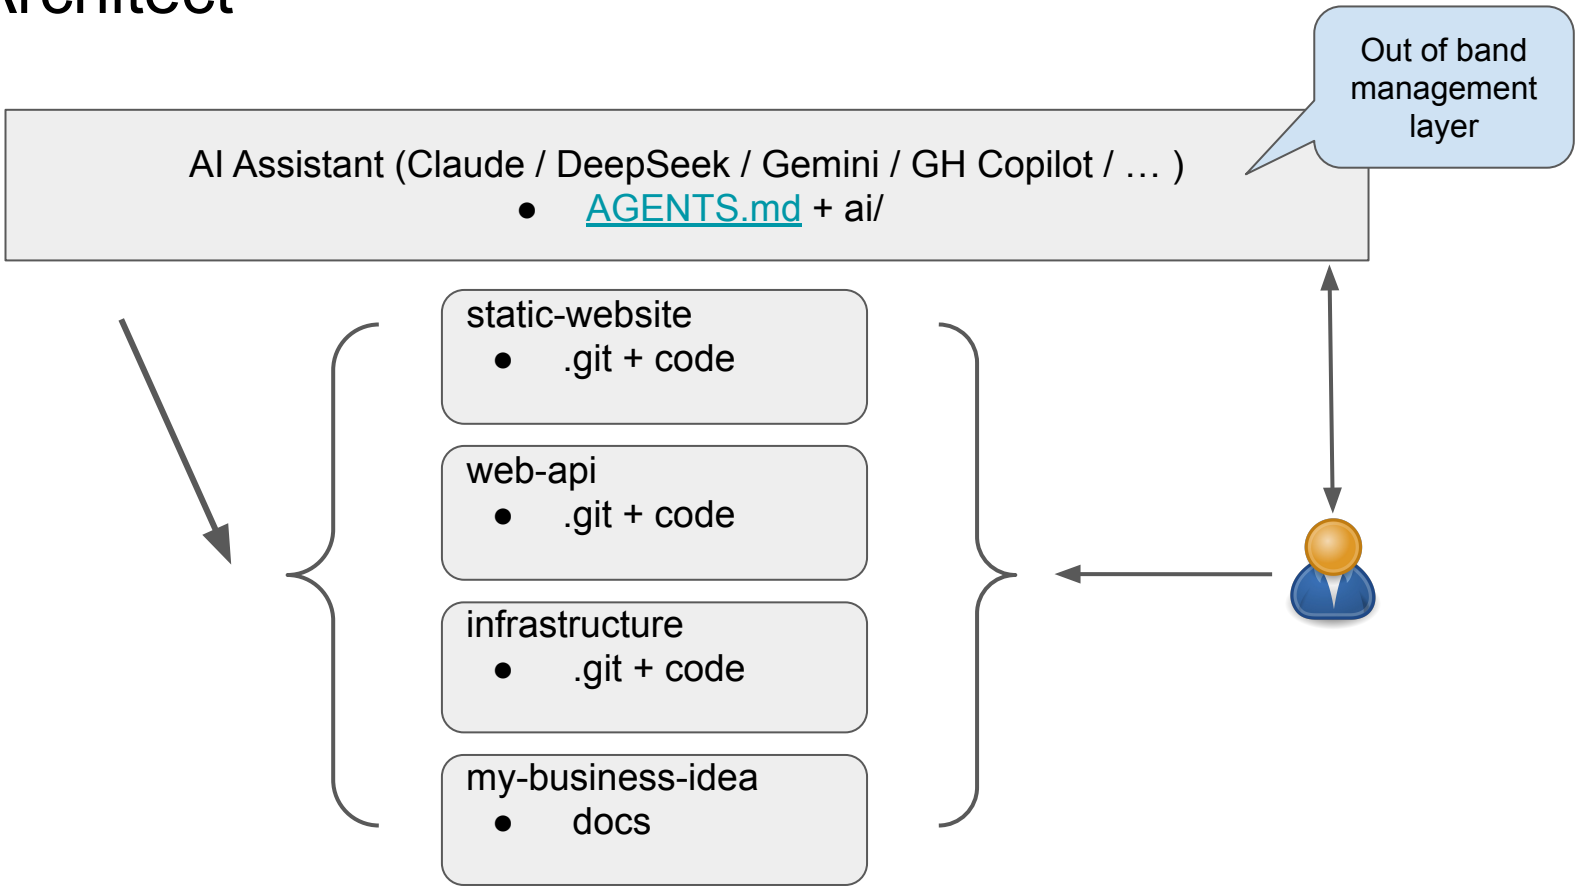

The Architect

AGENTS.md reads Central AI policy files in **~/Simple-AI-Workflow/ (ai-policy-cloud.md)**

```
$ tree
.
|-- AGENTS.md
|-- ai
|   `-- (ai context + state)
|
|-- infrastructure
|    `-- (stuff)
|
|-- infrastructure-new
|    `-- (stuff)
|
|-- static-website
|    `-- (stuff)
|
`-- web-api
     `-- (stuff)
```

How a change in API effects the components of infrastructure , or, vice-versa ?

How do I redesign the infrastructure based on **GKE**, instead of **Azure ContainerApps** ?

Find all PostgreSQL related components and copy them inside the "`infrastructure-new`" directory

Benefits of Architect-level AI setup

Visibility: Complete and full overview of everything / all related components

Cleanliness: Keeps your production repos lean and professional.

Portability: You don’t need to move your AI "brain" from one project to another. Nor do you have several disconnected brains (each project/directory having it’s own AI setup)

Contextual Power: Breaks the "silo" of single-repository AI tools. Has context of everything under it’s umbrella.

How to use this Workflow? (1 / 2)

- Follow https://github.com/KamranAzeem/Simple-AI-Workflow
- Clone this repository at a central location in your home directory
  - E.g. `~/Projects/Personal/Simple-AI-Workflow`
- Copy `AGENTS.md` from this directory into the root of the target project on your local computer. (e.g. inside `~/Projects/Personal/static-website/`
- Update the absolute path for the appropriate policy file that you want to use in the `AGENTS.md` file:
  - E.g. `/home/username/Projects/Personal/Simple-AI-Workflow/ai/ai-policy-frontend-web.md`
  - Make sure to follow the OS specific way of writing the path.
- When an AI assistant reads `AGENTS.md`, it will access the central policy directly from that path.
- Write "`/init using AGENTS.md`" or "`bootstrap using AGENTS.md protocol`" in the AI chat window.

How to use this Workflow? (2 / 2)

- Whenever you complete important activities, or take a pause, or before closing VScode or shutting down your computer:
  - Use the instruction: “`checkpoint`” - which updates all AI related tracking files.
- When you come back from pause, or may be a computer or VScode restart:
  - Use the instruction: “`load context`” or “`Where are we in this project?`”
- Everything related to AI: context, progress, todo, session-states, etc, all live in the “`ai/`” directory that is “git-ignored”.
  - If you lose it, you can rebuild it with “`/init`” again.

How to initialize a repo with AI?

File Edit Selection View Go Run static-website

EXPLORER

STATIC-WEBSITE
- src
  - css
  - index.html U
- .dockerignore U
- .gitignore U
- AGENTS.md
- Dockerfile U

AGENTS.md | index.html U

src > index.html > ...

```html
<!doctype html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Simple Static Website</title>
    <link rel="stylesheet" href="css/style.css">
</head>
<body>
    <p><strong>Under Construction:</strong> This site is currently being updated</p>
    <h1>My Simple Static HTML website</h1>
</body>
</html>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS bash

kamran.azeem@workpc <static-website> (master)
$

OUTLINE
TIMELINE

CHAT

INITIALIZING WITH AGENTS.MD DOCUMENTATION

/init using AGENTS.md

I will run the init bootstrap flow using AGENTS.md, starting by loading the required agent-customization skill and workspace template guidance so I can generate compliant workspace instructions.

Reviewed 2 files

I have the skill loaded and next I will read the workspace-instructions reference template, then inspect existing repo conventions before editing AGENTS.md.

Searched for files matching specific patterns and reviewed skill

I now have the template rules; next I will run a read-only Explore subagent to map build/test commands, architecture, conventions, and doc links so the updated AGENTS.md is accurate and minimal.

Explore: Map repo conventions

index.html

Describe what to build

Agent Auto

Local Default Approvals

master* 0 0 Ln 1, Col 1 Tab Size: 4 UTF-8 LF { } HTML

How to add “To do” to AI ?

File Edit Selection View Go Run static-website

EXPLORER

STATIC-WEBSITE
- ai
- src
  - css
  - aboutus.html U
  - index.html U
- .dockerignore U
- .gitignore U
- AGENTS.md
- Dockerfile U
- README.md U

AGENTS.md | index.html U

src > index.html > ...

```html
<!doctype html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1
    <title>Simple Static Website</title>
    <link rel="stylesheet" href="css/style.css">
</head>
<body>
    <header class="site-header">
        <h1>Simple Static Website</h1>
        <nav>
            <a href="index.html">Home</a>
            <a href="aboutus.html">About Us</a>
        </nav>
    </header>
    <main class="main-content">
        <p><strong>Under Construction:</strong> This site is currently
        <p>Welcome to our simple static website project.</p>
    </main>
</body>
</html>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
Type 'help' to get help.
PS C:\Users\kamran.azeem\AppData\Local\Temp\multi-repo-ai\static-website>
```

bash | PowerShell ... | 1 Hidden T...

OUTLINE | TIMELINE

master* 0 0 Ln 1, Col 1 Tab Size: 4 UTF-8 { } HTML

CHAT

INITIALIZING WITH AGENTS.MD DOCUMENTATION

Add a note to your todo to discuss future hosting options for this website, and also where to buy the cheapest internet domain from.

I'll add that item to the tracked todo queue in the ai state files and log a new checkpoint so it's explicitly queued for our next discussion.

Reviewed 3 files

I found the queue currently empty; next I'll timestamp a new checkpoint and add your hosting/domain research note into the live queue and progress log.

Ran `date -u +"%Y-%m-%dT%H:%M:%SZ"`

Updated next-steps.md and reviewed next-steps.md +9 -0

Added.

I updated the todo queue in `next-steps.md` with your note:

- Discuss future hosting options for this website and identify low-cost domain purchase options.

I also logged this as checkpoint CP-2026-04-09-04 in:

index.html

Describe what to build

Agent Auto

Local Default Approvals

New “to do” for AI

How to use git through AI?

File Edit Selection View Go Run ... static-website

EXPLORER

STATIC-WEBSITE
- ai
- src
  - css
  - aboutus.html
  - index.html
- .dockerignore
- .gitignore
- AGENTS.md
- Dockerfile
- README.md

OUTLINE
TIMELINE

AGENTS.md | index.html

src > index.html > ...

```html
<!doctype html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=devic
    <title>Simple Static Website</title>
    <link rel="stylesheet" href="css/style.css
</head>
<body>
    <header class="site-header">
        <h1>Simple Static Website</h1>
        <nav>
            <a href="index.html">Home</a>
            <a href="aboutus.html">About Us</a
        </nav>
    </header>
    <main class="main-content">
        <p><strong>Under Construction:</strong
        <p>Welcome to our simple static websit
    </main>
</body>
</html>
```

PROBLEMS OUTPUT TERMINAL

```
Type 'help' to get help.

PS C:\Users\kamran.azeem\AppData\Local\Temp
\multi-repo-ai\static-website>
```

bash
PowerShell ...
1 Hidden T...

CHAT

INITIALIZING WITH AGENTS.MD DOCUMENTATION

initialize a git repository here and add all the working code to the git commit with the comment "First commit with working code".

I will initialize Git if needed, review the current changes, run a quick secret scan before staging, and then create the commit with your exact message.

Ran `git rev-parse --is-inside-work-tree && git status ...`

Ran `rg -n --hidden --glob '!.git/**' --glob '!ai/**' "...`

Repository changes are present and ready to commit; I'm re-running the secret scan with a simpler pattern set because the prior terminal session closed unexpectedly.

Ran `rg -n --hidden --glob '!.git/**' --glob '!ai/**' '...`

```
rg -n --hidden --glob '!.git/**' --glob '!ai/**' '(AKIA[0-9A-
Z]{16}|ASIA[0-9A-Z]{16}|ghp_[A-Za-z0-9]{36}|github_pat_[A-Za-
z0-9_]{82}|xox[baprs]-[A-Za-z0-9-]{10,}|-----BEGIN [A-Z
]*PRIVATE KEY-----|AIza[0-9A-Za-z_-]
{35}|password\s*=|secret\s*=|api[_-]?key\s*=|token\s*=)' .
```

No obvious secrets were found in tracked source files, so I'll now initialize/reinitialize Git, stage all files, and create the commit using your exact commit message.

Ran `set -e && git init && git add . && git commit -m "...`

index.html

Describe what to build

Agent Auto

Local Default Approvals

master 0 0 Ln 1, Col 1 Tab Size: 4 UTF-8 { } HTML

New git repo!

New git branch? No problem!

Create git branch through AI

File Edit Selection View Go Run ... static-website

AGENTS.md | index.html

src > index.html > ...

```html
<!doctype html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale
    <title>Simple Static Website</title>
    <link rel="stylesheet" href="css/style.css">
</head>
<body>
    <header class="site-header">
        <h1>Simple Static Website</h1>
        <nav>
            <a href="index.html">Home</a>
            <a href="aboutus.html">About Us</a>
        </nav>
    </header>
    <main class="main-content">
        <p><strong>Under Construction:</strong> This site is current
        <p>Welcome to our simple static website project.</p>
    </main>
</body>
</html>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

kamran.azeem@workpc <static-website> (feature/add-menu-system)

$

CHAT

INITIALIZING WITH AGENTS.MD DOCUMENTATION

I want to work on basic menu system of this website, which will contain the links to the books that I wrote, the technical articles that I wrote, a page to reach me (contact us). I want to do all that work in a separate git branch named feature/add-menu-system . Create the branch and add necessary todos accordingly.

I'll create and switch to the new feature branch first, then update the ai tracking todo queue and checkpoint entries so the menu-system work is clearly staged.

Ran `set -e && git checkout -b feature/add-menu-system ...`

Branch creation is complete; next I'll add targeted menu-system todos to the ai queue and log a new synchronized checkpoint entry.

Ran command and reviewed 3 files

Ran `date -u +"%Y-%m-%dT%H:%M:%SZ"`

I'll now add concrete menu-system todo items into the live queue and record this branch setup as checkpoint CP-2026-04-09-07 across all required tracking files.

Updated next-steps.md and ran command +9 -0

Ran `git branch --show-current`

Completed.

index.html

Describe what to build

Agent Auto

Local Default Approvals

feature/add-menu-system 0 0 Ln 23, Col 1 Tab Size: 4 UTF-8 { } HTML

Notice: AI state is out-of-band from rest of the repository, so AI sees everything irrespective of the git branch you are on!

How to do checkpoint? (this is ***not*** a git commit)

File Edit Selection View Go Run ... static-website

EXPLORER

STATIC-WEBSITE
- ai
- src
  - css
  - aboutus.html U
  - index.html U
- .dockerignore U
- .gitignore U
- AGENTS.md
- Dockerfile U
- README.md U

OUTLINE
TIMELINE

AGENTS.md | index.html U

src > index.html > ...

```html
<!doctype html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width
    <title>Simple Static Website</title>
    <link rel="stylesheet" href="css/style.css">
</head>
<body>
    <header class="site-header">
        <h1>Simple Static Website</h1>
        <nav>
            <a href="index.html">Home</a>
            <a href="aboutus.html">About Us</a>
        </nav>
    </header>
    <main class="main-content">
        <p><strong>Under Construction:</strong> This
        <p>Welcome to our simple static website proje
    </main>
</body>
</html>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

```
Type 'help' to get help.
PS C:\Users\kamran.azeem\AppData\Local\Temp\multi-r
epo-ai\static-website>
```

bash
PowerShell ...
1 Hidden T...

CHAT

INITIALIZING WITH AGENTS.MD DOCUMENTATION

checkpoint

I will create a fresh checkpoint now by backing up current ai tracking files, then updating all required checkpoint files with one new consistent ID and timestamp.

Reviewed 3 files

I confirmed the current checkpoint state; next I will create the required backup and capture a timestamp so I can issue CP-2026-04-09-05 consistently across all tracking files.

Ran `date -u +"%Y-%m-%dT%H:%M:%SZ"`

Ran `set -e && backup_dir="/tmp/ai-backup-2026-04-09T11...`

Updated next-steps.md +9 -0

Checkpoint files are updated; I'll do a final consistency read to confirm matching ID and then share the checkpoint receipt.

Reviewed 3 files

Checkpoint receipt

- Checkpoint ID: CP-2026-04-09-05

index.html

Describe what to build

Agent Auto

Local Default Approvals

master* 0 0 Ln 1, Col 1 Tab Size: 4 UTF-8 { } HTML

checkpoint

How to Resume work?

Load context, then let me know progress so far, and the pending items.

"load context" is enough!

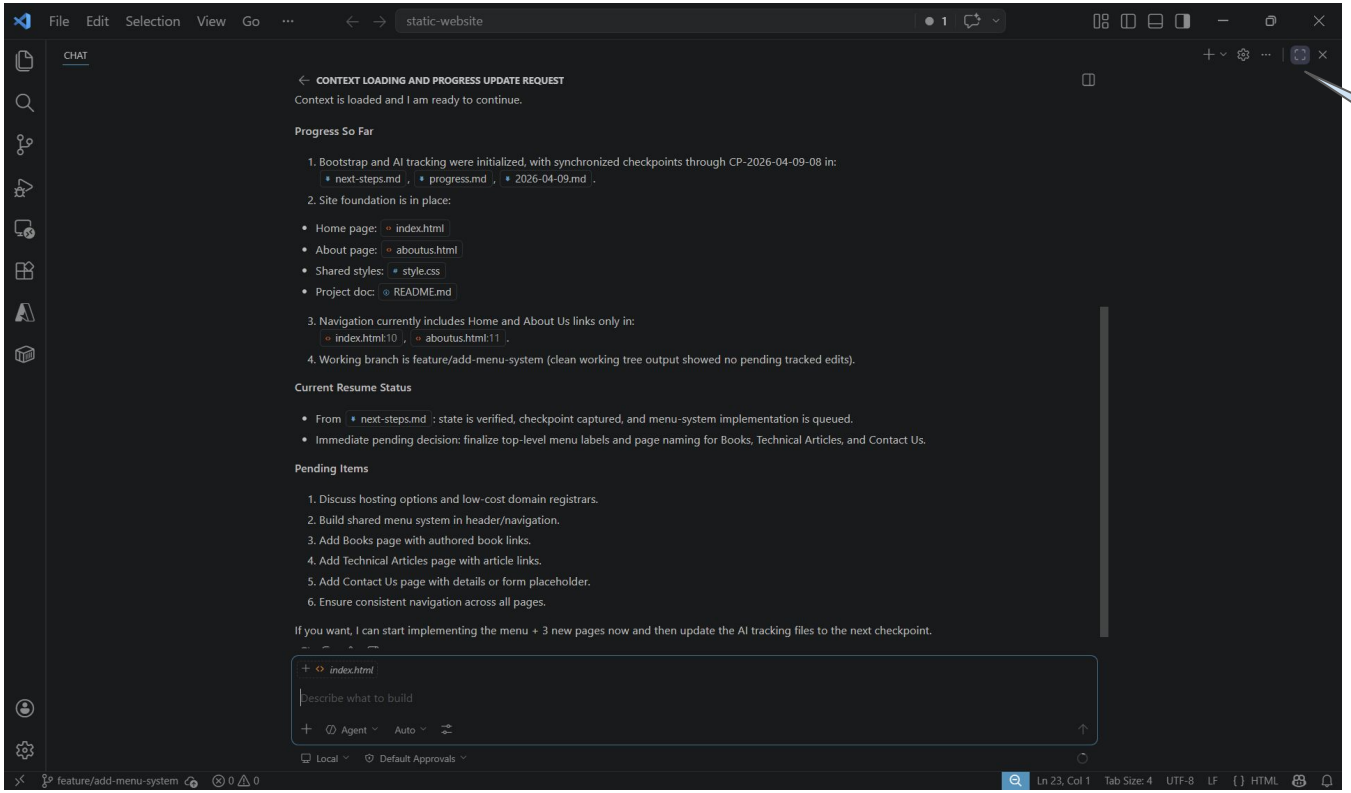

AI Chat window expanded

Background process when loading context:

“load context”

load context. Then show me the progress and the todo list.

Reviewed 4 files

- The user wants me to load context and show progress and todo list. Let me read the relevant files from the ai/ directory.
- Read next-steps.md, lines 1 to 80
- Read progress.md, lines 1 to 80
- Read memory agent-discovery.md
- Let me also read the context.md file to get full context.
- Read context.md
- Now I have a good picture of the context. Let me summarize for the user - the current checkpoint, progress, and todo list.

Context loaded. Here's the summary:

Current Checkpoint: CP-2026-04-08-08

Last updated: 2026-04-08
Status: Documentation cleanup pass — renamed key docs to clearer names and realigned README links.

Recent Progress (last few checkpoints)

- Renamed `docs/guideline-for-developers.md` → guideline-for-devs-to-enable-observability-in-apps.md

Fun stuff: Evolution of the size of AI chat window as you become proficient! (1 / 4)

File Edit Selection View Go Run static-website

EXPLORER
STATIC-WEBSITE
ai
css
style.css U
.gitignore U
AGENTS.md
index.html U

AGENTS.md | index.html U

index.html > ...

```html
<!doctype html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Simple Static Website</title>
    <link rel="stylesheet" href="css/style.css">
</head>
<body>
    <h1>My Simple Static HTML website</h1>
</body>
</html>
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS AZURE

```
https://aka.ms/vscode-powershell
Type 'help' to get help.

PS C:\Users\kamran.azeem\AppData\Local\Temp\multi-repo-ai\static-website>
```

PowerShell ...
1 Hidden T...

OUTLINE
TIMELINE

CHAT
INITIALIZATION COMMAND EXPLANATION

Convert index.html to very simple HTML without extra fluff. Keep it to a minimal.

I'm updating index.html to a minimal valid HTML document with only essential tags and your existing heading text.

Edited index.html +0 -0

Updated to a minimal valid HTML page in index.html.

It now includes only the essentials:

- `<!doctype html>`
- `html`, `head`, `body`
- charset + viewport meta
- title
- stylesheet link to style.css
- one `h1` heading

index.html
Describe what to build
Agent Auto
Local Default Approvals

master* 0 0 Ln 1, Col 1 Spaces: 4 UTF-8 { } HTML

Small window for AI chat

Fun stuff: Evolution of the size of AI chat window as you become proficient! (2 / 4)

Whats the point of looking at code when I am not doing anything with it directly?

Why waste screen space?

File Edit Selection View Go Run static-website

EXPLORER
STATIC-WEBSITE
ai
src
.gitignore U
AGENTS.md

AGENTS.md | index.html

```
<!doctype html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=
    <title>Simple Static Website</title>
    <link rel="stylesheet" href="css/styl
</head>
<body>
    <p><strong>Under Construction:</stror
    <h1>My Simple Static HTML website</h1
</body>
</html>
```

PROBLEMS OUTPUT TERMINAL

```
Type 'help' to get help.

PS C:\Users\kamran.azeem\AppData\Loca
l\Temp\multi-repo-ai\static-website>
```

PowerShell ...
1 Hidden T...

OUTLINE
TIMELINE

master* 0 0 Ln 14, Col 1 Spaces: 4 UTF-8 { } HTML

CHAT

INITIALIZATION COMMAND EXPLANATION

Re-organize the directory by creating a src directory and moving the website related files under that , preserving the current heirarchy.

I'm reorganizing the project structure now by creating src, moving the site files into it, and then verifying the new layout.

Ran `set -e`
`mkdir -p src`
`mv index.html src/`
`mv css src/...`

I'm running a quick verification command because the previous terminal output was incomplete, and I need to confirm the move succeeded.

Ran `pwd && ls -la && find . -maxdepth 3 -type f | sort`

Done. The website files are now under `src`, preserving hierarchy:

- index.html
- style.css

No other project files were moved.

index.html

Describe what to build

Agent Auto

Local Default Approvals

Trying to give more "respect" to AI chat window

Fun stuff: Evolution of the size of AI chat window as you become proficient! (3 / 4)

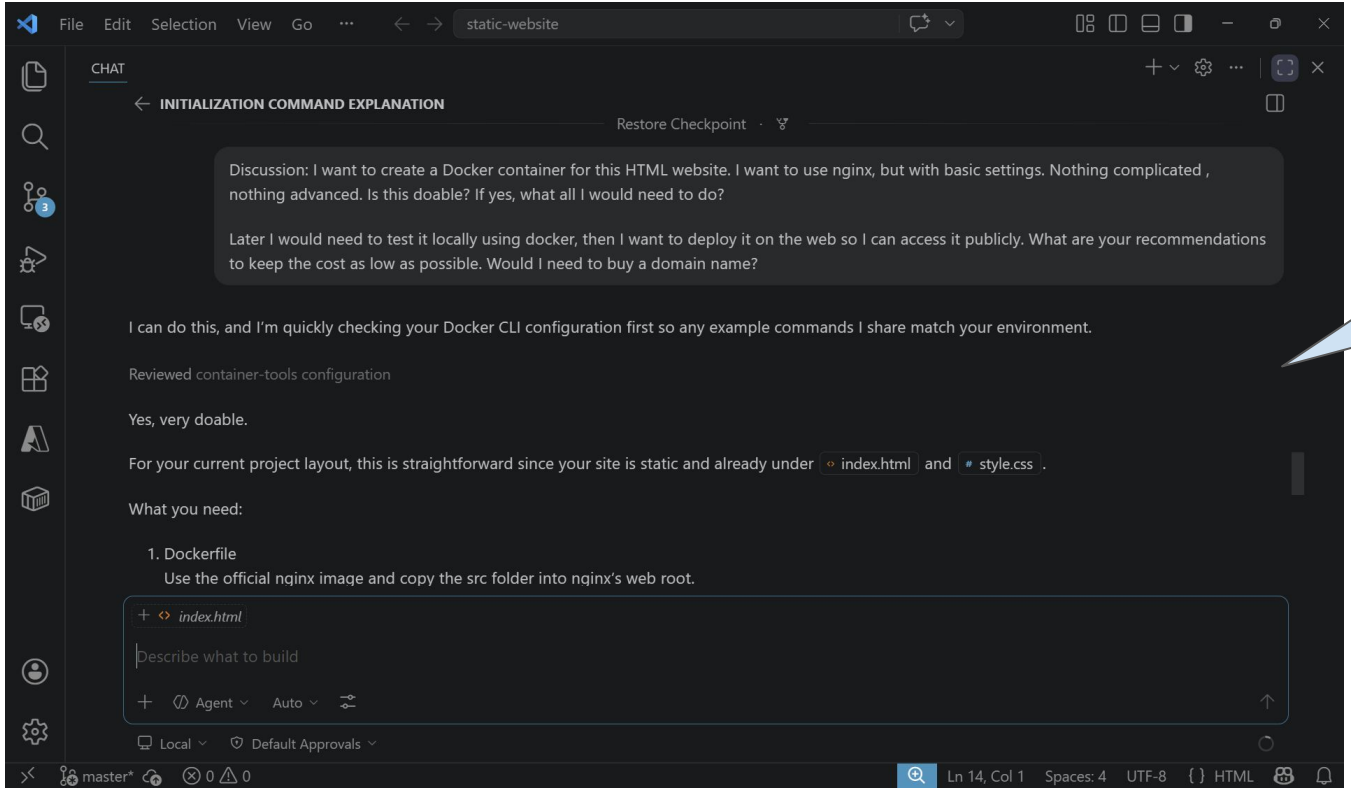

Why not just talk to my AI colleague in a full / maximized window!

Fun stuff: Evolution of the size of AI chat window as you become proficient! (4 / 4)

File Edit Selection View Go static-website

CHAT

INITIALIZATION COMMAND EXPLANATION

Yes. Go ahead.

I'm implementing the minimal nginx container setup now by adding a Dockerfile and .dockerignore, then I'll verify Docker is available and share exact run commands.

Created Dockerfile and .dockerignore files

The container files are created; next I'll validate the Docker CLI and do a quick image build check so you know it works end-to-end locally.

Ran `set -e`
`docker --version`
`docker build -t static-web...`

I'm running a quick follow-up check because the previous terminal response was incomplete, and I want to confirm whether Docker is accessible on your machine.

Ran `docker --version || command -v docker || echo dock...`

index.html

Describe what to build

Agent Auto

Local Default Approvals

master* 0 0 Ln 14, Col 1 Spaces: 4 UTF-8 { } HTML

Yes!

Go ahead!

(I am in heaven!)

Copilot users may (optionally) want to add this to VSCode file:

- `{{VSCODE_USER_PROMPTS_FOLDER}}/init.instructions.md`

- **Linux:** ~/.config/Code/User/prompts/init.instructions.md
- **MacOS:** ~/Library/Application Support/Code/User/prompts/init.instructions.md
- **Windows:** %USERPROFILE%\AppData\Roaming\Code\User\prompts\init.instructions.md

```
---
description: Use when bootstrapping a new repository with /init. Always read AGENTS.md first
as the single source of truth.
applyTo: "**"
---

# /init Bootstrap Guide

When running `/init`, always:
1. Read AGENTS.md first — it is the single source of truth for AI file locations and policy
hierarchy
2. GitHub Copilot files must go under `ai/github-copilot/`, never workspace root
3. If policy conflicts with init task, STOP and ask for clarification

Do not create copilot-instructions.md, *.prompt.md, or other GitHub Copilot customizations
in workspace root.
```

thank you
danke
謝謝
ngiyabonga
شكراً جزيلاً
рахмат
teşekkür ederim
Баярлалаа
спасибо
gracias
dank je
tapadh leat
хвала
bedankt
hvala
mauruuru
dziękuję
obrigado
sukriya
kop khun krap
go raibh maith agat
mochchakkeram
arigatō
takk
dakujem
merci
grazie
terima kasih
감사합니다
ありがとう
мерси
ευχαριστώ
তোমাকে ধন্যবাদ
sagolun
taiku
enkosi
sobodi
dēkuji
mësi
didi madloba
najis tuke
kam sah hamnida
rahmat
tanemirt
rahmet
diolch
dhanyavadagalu
shukriya
merce
xièxie
trugarez
chnorakaloutioun
gratias ago
gràcies
sulpáy
akun
dankon
aciū
djiere dieuf
tau
дякую
mamnun
chokrane
murakoze
tenki
obrigada
asante
manana
mahalo
paldies
grazzi
misaotra
matondo
blagodaram
спасибі
vinaka
faafetai lava
kiitos
dankie
dhanyavad
nanni
nandri
bayarlalaa
gràcie
köszönöm
kia ora
barka
welalin
tack
mersi
spas