

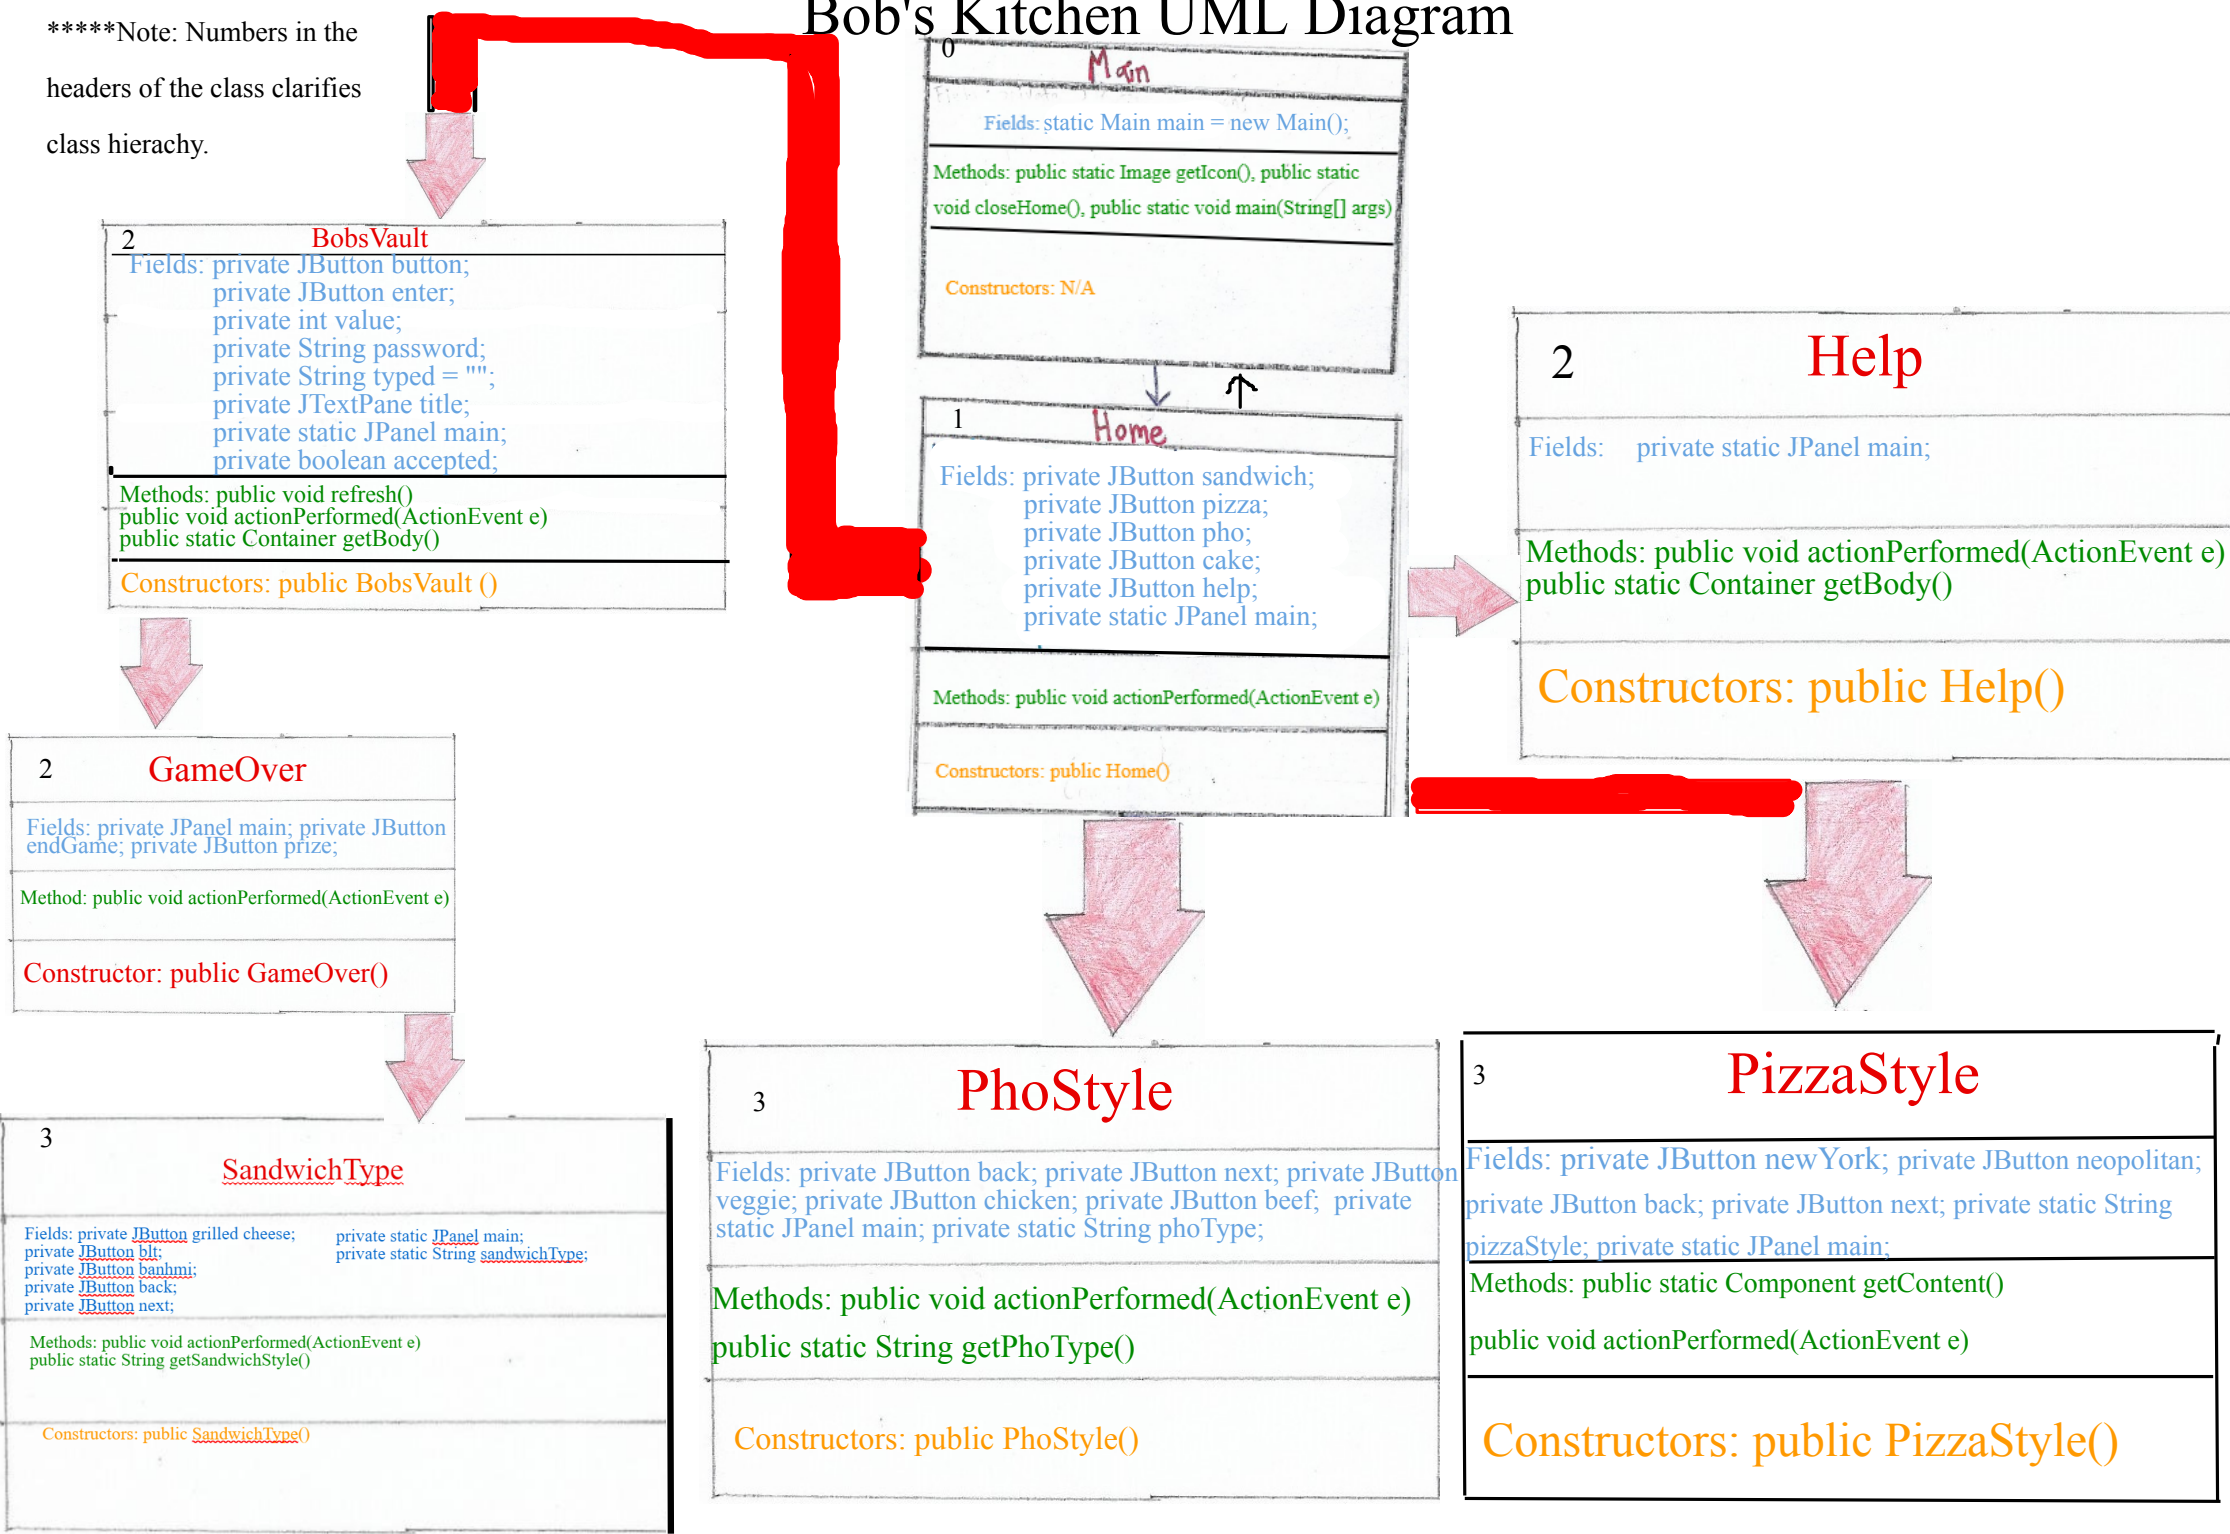



Bob's Kitchen UML Diagram

****Note: Numbers in the headers of the class clarifies class hierachy.





4

Sandwich Bread

Fields: private JButton back;
private JButton next;
private JButton whiteBread;
private JButton garlicBread;
private JButton baguette;
private String breadType;

Methods: public void actionPerformed(ActionEvent e)

Constructors: public SandwichBread()

4

PhoStock

Fields: private JButton back; private JButton next; private JButton vegStock; private JButton beefStock; private JButton chickenStock; private static JPanel main; private static String stock;

Methods: public static String getStock()
public void actionPerformed(ActionEvent e)

Constructors: public PhoStock()

4

PizzaDough

Fields: private JButton newYork; private JButton neopolitan; private JButton back; private JButton next;

Methods: public static Component getContent()
public void actionPerformed(ActionEvent e)

Constructors: public PizzaDough()



5

Sandwich Veggies

Fields: private JButton back;
private JButton next;

Methods: public void actionPerformed(ActionEvent e)

Constructors: public SandwichVeggies()

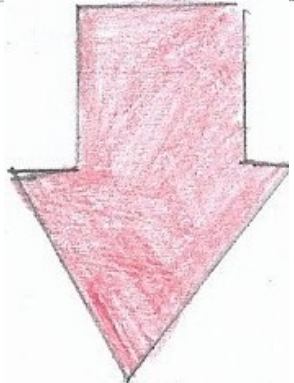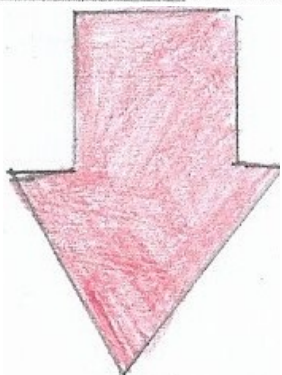

6

Sandwich Meat

Fields: private JButton turkey;
private JButton ham;
private JButton steak;
private JButton bacon;
private JButton back;
private JButton next;
private JButton pork;

Methods: public void actionPerformed(ActionEvent e)

Constructors: public SandwichMeat()

5

PhoMeat

private JButton back; private JButton next; private JButton beefImage1;
private JButton beefImage2; private JButton chickenImage1;
private JButton chickenImage2; private JComboBox<String> beefOptions1;
private JComboBox<String> beefOptions2; private JComboBox<String>
chickenOptions1; private JComboBox<String> chickenOptions2; private String
fattyBrisket = "Fatty Brisket"; private String beefTendon = "Beef Tendon";
private String chickenSkin = "Chicken Skin"; private String chickenBreast =
"Chicken Breast"; private String none = "none"; private static JPanel main;
private static String beef1; private static String beef2;
private static String chick1; private static String chick2;

Methods: public void actionPerformed(ActionEvent e), public static String
getBeef1(), public static String getBeef2(), public static String getChick1(), public
static String getChick2()

Constructors: public PhoMeat()




5

PizzaToppings

Fields: private static String dough; private static String sauce;
private static String cheese; private JButton back; private JButton
next; private JButton doughImage; private JButton sauceImage;
private JButton cheeseImage;

Methods: public static String getVeg1(), public static
String getVeg2(), public static String getMeat(), public
void actionPerformed(ActionEvent e)


Constructors: public PizzaToppings()





7	SandwichCondiments
Fields: private JButton back; private JButton next; private JButton cheeseButton; private JButton sauceButton; private static String sauce; private static String cheese; private JComboBox<String> sauceOptions; private JComboBox<String> cheeseOptions; private static JPanel main; private String empty = ""; private String mustard = "Honey Mustard"; private String mayo = "Mayonnaise"; private String ketchup = "Ketchup"; private String dressing = "1000 Island Dressing"; private String none = "None"; private String cheddar = "Cheddar"; private String mozzarella = "Mozzarella"; private String provolone = "Provolone"; private String american = "American"; private String cream = "Cream Cheese";	
Methods: public static String getSauce(), public static String getCheese()	
Constructors: public SandwichCondiments()	








6	PhoNoodles
Fields: private JButton back; private JButton next; private JButton glassNoodles; private JButton vermicelli; private static JPanel main; private static String noodles;	
Methods: public void actionPerformed(ActionEvent e) public static String getNoodles()	
Constructors: public PhoNoodles()	


6	PizzaFinish
Fields: private JButton submit; private JButton back; private JPanel main;	
Methods: public void actionPerformed(ActionEvent e)	
Constructors: public PizzaFinish()	



7	PhoToppings
Fields: private static String veggie1; private static String veggie2; private static String meat; private JButton back; private JButton next; private JButton veg1Image; private JButton veg2Image; private JButton meatImage; private JComboBox<String> veg1Options; private JComboBox<String> veg2Options; private JComboBox<String> meatOptions; private String select = ""; private String onion = "Onion"; private String olives = "Olives"; private String bellPepper = "Bell Pepper"; private String basil = "Basil"; private String sausage = "Sausage"; private String peperoni = "Peperoni"; private String none = "None"; private static JPanel main;	
Methods: public static Container getBody(), public void actionPerformed(ActionEvent e), public static String getVeg1(), public static String getVeg2(), public static String getMeat()	
Constructors: public PhoToppings()	

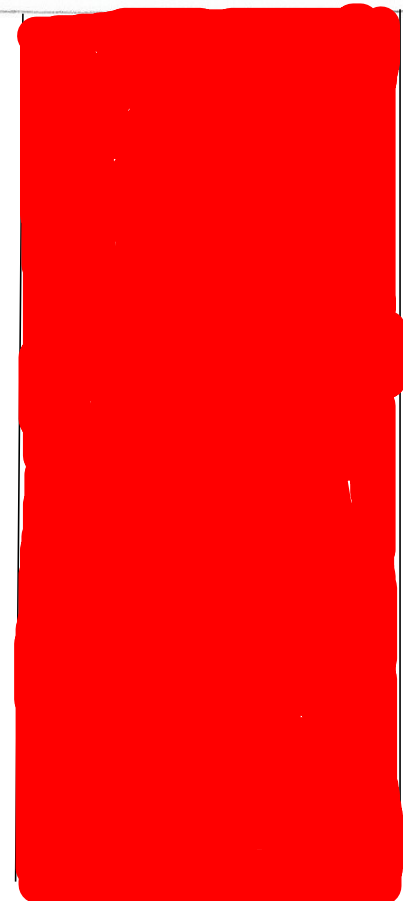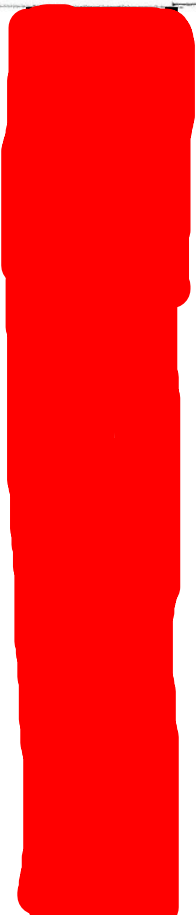

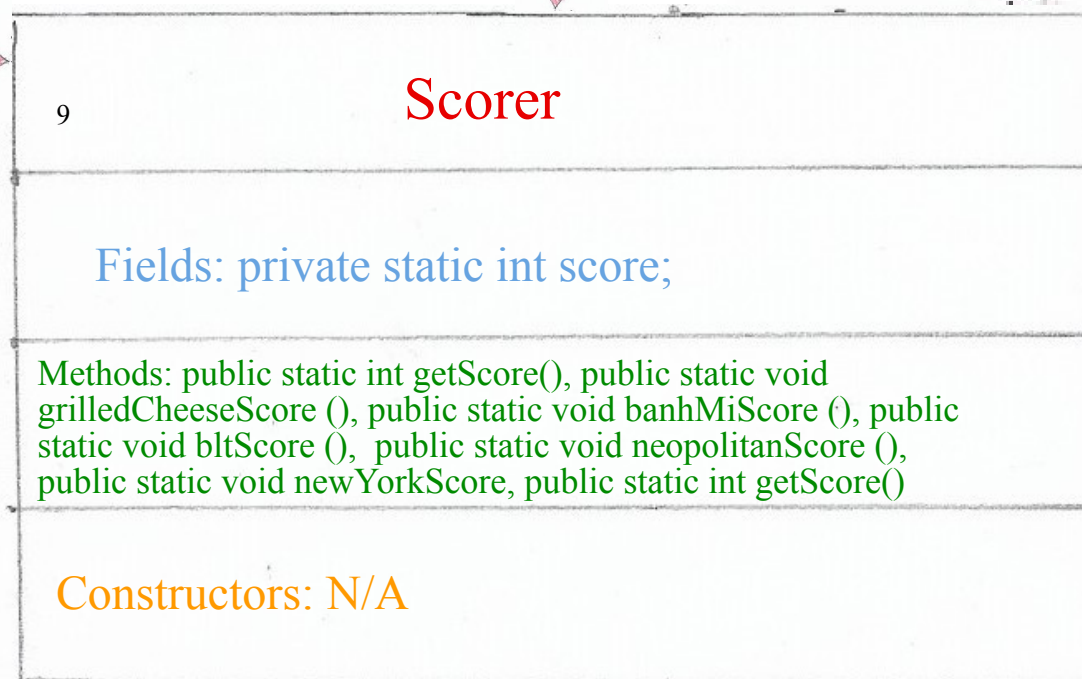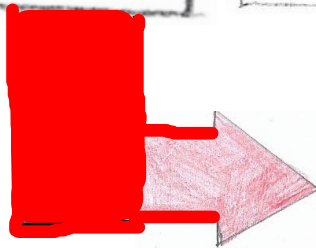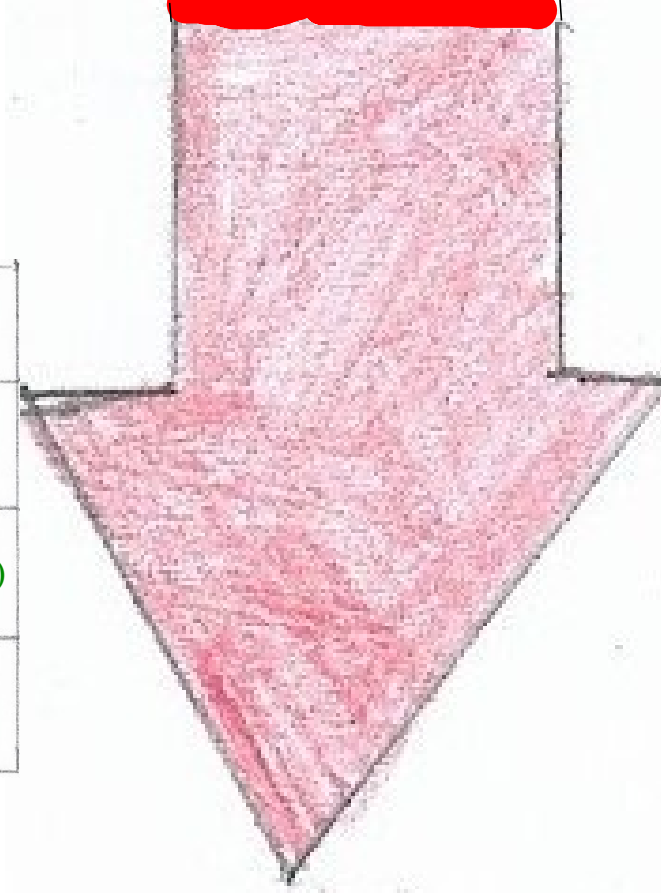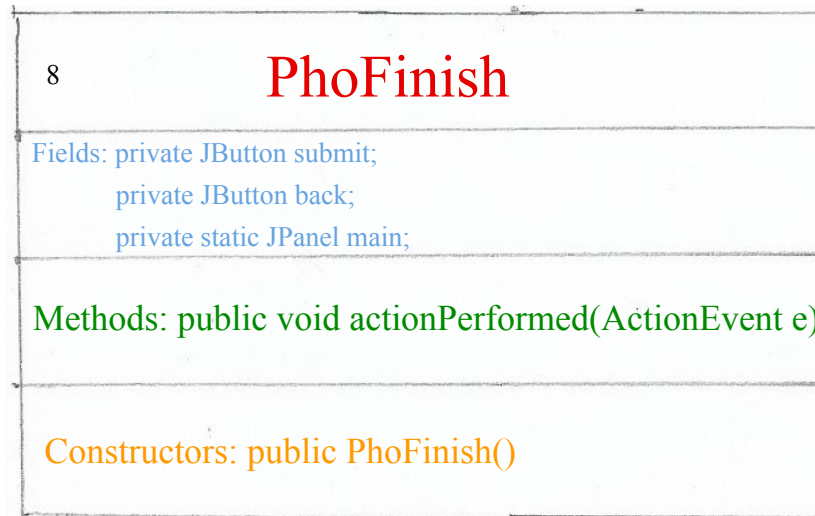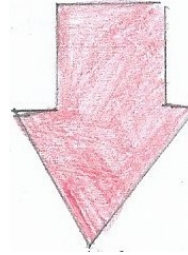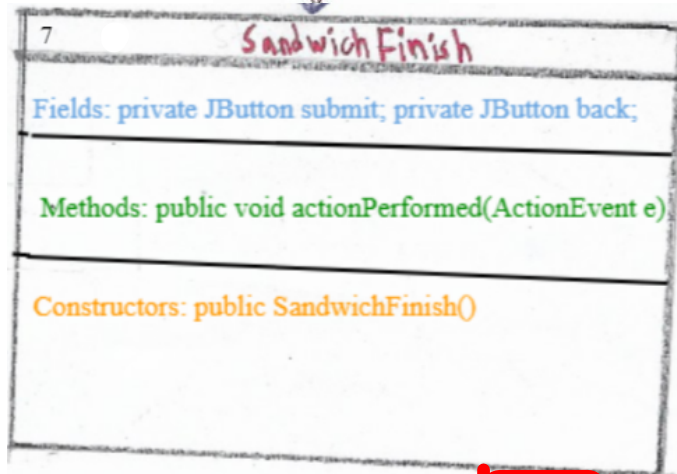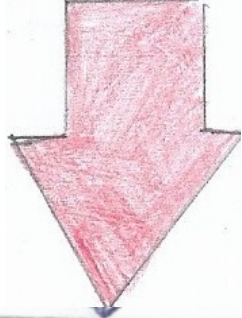

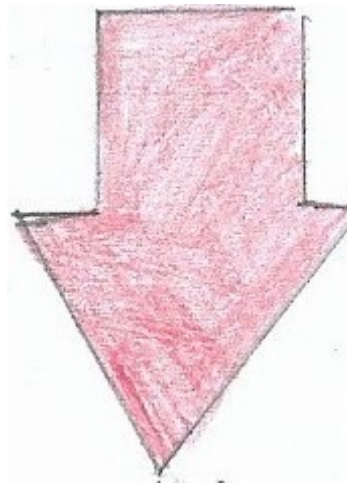

10

Score window

Fields: private JButton home;
private JButton star1;
private JPanel main;

Methods: public void actionPerformed(ActionEvent e)
public void refresh()

Constructors: public ScoreWindow()