

Topic: HTML

Notes

Complete HTML

Contains 1 PDF lessons

Generated: 6 April 2026

KnowledgeGate

Module

HTML

Topic

HTML

Subtopic

HTML

Lesson

Lesson 1 of 1

Full HTML Course Notes

COMPLETE

HTML

4 HOUR

PROJECT

CERTIFICATE

CODE



NOTES



I need

Ex- amazon Microsoft

You Tube

[Video Link](#)

KG Coding

Some Other One shot Video Links:

- [Complete HTML](#)
- [Complete CSS](#)
- [Complete JavaScript](#)
- [Complete React and Redux](#)
- [One shot University Exam Series](#)



<http://www.kgcoding.in/>

Our  Channels

[KG Coding Android App](#)



[KG Coding](#)



[Knowledge GATE](#)



[KG Placement Prep](#)



[Sanchit Socket](#)

Course Levels



Level 0 Setup & Fundamentals

Level 1 HTML Basics

Level 2 Must-Use HTML Tags

Level 3 Browser Tools

Level 4 HTML and Project Structure

Level 5 List, Tables & Forms

Level Bonus Github Pages & CodeSpace

Level 0

Setup & Fundamentals

1. IDE or Code Editor

1. What is IDE
2. Need of IDE
3. IDE Selection
4. Installation and Setup
5. VsCode Extensions


2. Website Components and Fundamentals

1. Client Side vs Server Side
2. FrontEnd / BackEnd / FullStack
3. Role of Browser
4. HTML
5. CSS
6. JS

Level 0

Setup & Fundamentals

1. IDE OR Code Editor

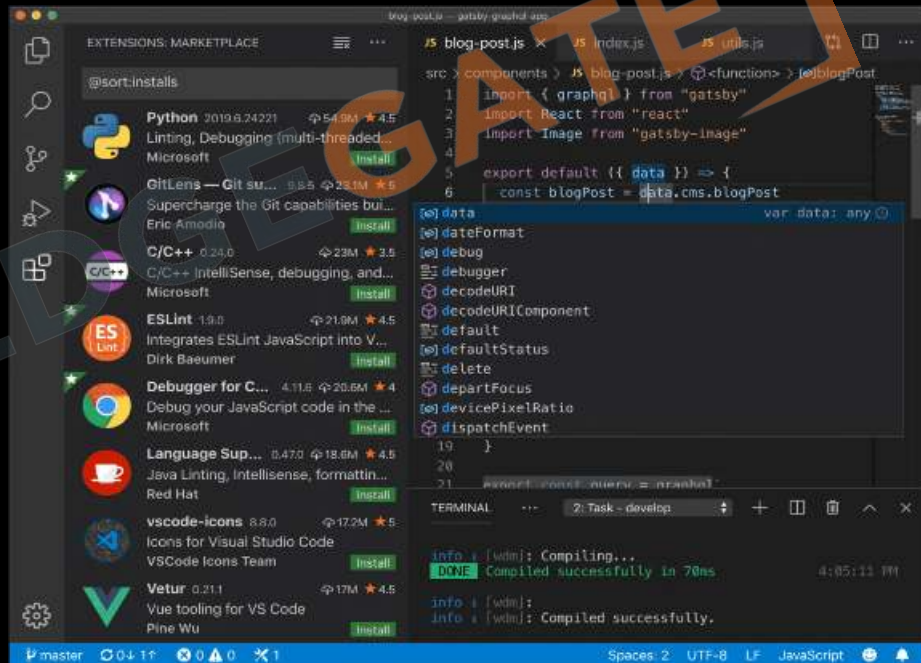

1.1 What is IDE

1. IDE stands for Integrated Development Environment.
2. Software suite that consolidates basic tools required for software development.
3. Central hub for coding, finding problems, and testing.
4. Designed to improve developer efficiency.



1.2 Need of IDE

1. Streamlines development.
2. Increases productivity.
3. Simplifies complex tasks.
4. Offers a unified workspace.
5. IDE Features
 1. Code Autocomplete
 2. Syntax Highlighting
 3. Version Control
 4. Error Checking



The screenshot shows a code editor window titled 'MainActivity.kt'. The code is written in Kotlin and defines a composable function named 'MessageCard'. The function takes a 'Message' object as a parameter. Inside the function, there is a 'Row' composable that contains an 'Image' and a 'Column'. The 'Image' composable uses 'painterResource' to load the 'android_studio_logo' and sets its 'contentDescription' to 'Profile Picture'. The 'Column' composable has a white background and contains a 'Text' element for the author's name and another 'Text' element for the body of the message. The code is syntax-highlighted, with keywords in blue, strings in red, and comments in green. A large 'KNOWLEDGE GATE' watermark is visible across the image.

```
MainActivity.kt

@Composable
fun MessageCard(msg: Message) {
    Row(modifier = Modifier.padding(all = 8.dp)) {
        Image(
            painter = painterResource(R.drawable.android_studio_logo),
            contentDescription = "Profile Picture",
            modifier = Modifier
                .size(45.dp)
        )

        Column(modifier = Modifier
            .background(color = [Color.White]) {
                Text(text = msg.author, color = Color.Black)
                Spacer(modifier = Modifier.height(1.dp))
                Text(text = msg.body, color = Color.Black)
            }
        )
    }
}
```




1.3 IDE Selection

1. Sublime Text

2. Atom

3. VS Code

4. Github CodeSpaces

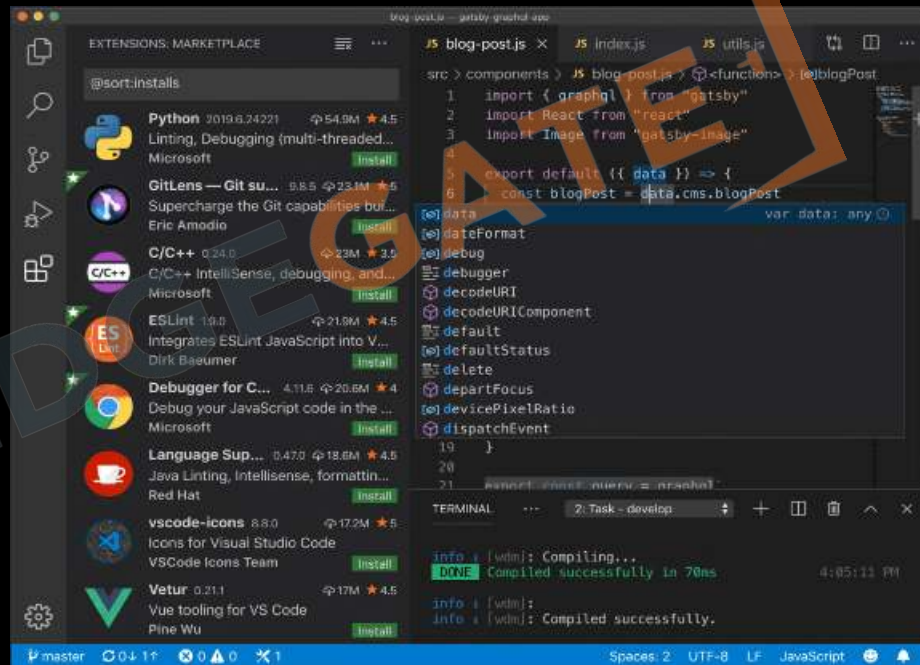



1.4 Installation & Setup

1. Search VS Code

[KNOWLEDGEGATE]



1.5 VsCode Extensions

1. Live Server
2. Prettier



Level 0

Setup & Fundamentals

2. Website Components

And

Fundamentals

2.1 Client Side vs Server Side

	Client Side	Server Side
Execution Location	Executes on user's device.	Executes on a remote machine.
Languages	Primarily JavaScript, HTML, CSS.	PHP, Python, Java, Node.js, etc.
Main Job	Makes clicks and scrolls work	Manages saved information
Access Level	Can't access server data directly	Can read/write files, interact with databases.
Speed	Quicker for UI changes	Slower due to network latency.

2.2 FrontEnd / BackEnd / FullStack



Client Side / Front-End
Web Development



Server Side
Back-End



Full Stack

2.3 Role of Browser



1. **Displays Web Page:** Turns HTML code into what you see on screen.
2. **User Clicks:** Helps you interact with the web page.
3. **Updates Content:** Allows changes to the page using JavaScript.
4. **Loads Files:** Gets HTML, images, etc., from the server.



2.4 HTML

(Hypertext Markup Language)

1. **Structure:** Sets up the layout.
2. **Content:** Adds text, images, links.
3. **Tags:** Uses elements like `<p>`, `<a>`.
4. **Hierarchy:** Organizes elements in a tree.





2.5 CSS

(Cascading Style Sheets)

1. **Style:** Sets the look and feel.
2. **Colors & Fonts:** Customizes text and background.
3. **Layout:** Controls position and size.
4. **Selectors:** Targets specific **HTML** elements.





2.6 JS

(Java Script)

1. JavaScript has nothing to do with Java
2. **Actions:** Enables interactivity.
3. **Updates:** Alters page without reloading.
4. **Events:** **Responds** to user actions.
5. **Data:** Fetches and sends info to server.



Level 0 Revision

Setup & Fundamentals

1. IDE or Code Editor

1. What is IDE
2. Need of IDE
3. IDE Selection
4. Installation and Setup
5. VsCode Extensions

2. Website Components and Fundamentals

1. Client Side vs Server Side
2. FrontEnd / BackEnd / FullStack
3. Role of Browser
4. HTML
5. CSS
6. JS



KG Coding

Some Other One shot Video Links:

- [Complete HTML](#)
- [Complete CSS](#)
- [Complete JavaScript](#)
- [Complete React and Redux](#)
- [One shot University Exam Series](#)



<http://www.kgcoding.in/>

Our  Channels

[KG Coding Android App](#)



[KG Coding](#)



[Knowledge GATE](#)



[KG Placement Prep](#)



[Sanchit Socket](#)

Level 1

HTML Basics

1. Starting up

1. First File using Text Editor
2. File Extension
3. Opening the project in VsCode
4. Index.html

2. Basics of HTML

1. What are Tags
2. Using Emmet ! to generate code
3. Basic HTML Page
4. MDN Documentation
5. Comments
6. Case Sensitivity

Level 1

HTML Basics

1. Starting Up



1.1 First file using Text Editor

1. Create a folder with name **First Project** on your Desktop.
2. Open **Notepad**.
3. Create a file and save it as **index.html**
4. Copy Sample code
5. Open **Browser** and Check.



1.2 File Extension

HTML


1. Most commonly used.
2. Works across all browsers.
3. Widely recognized and supported.
4. Typically saved as .html.

HTM

1. Less commonly used.
2. Originated for compatibility with older systems.
3. Works same as .html.
4. Typically saved as .htm.




1.3 Opening project in VsCode

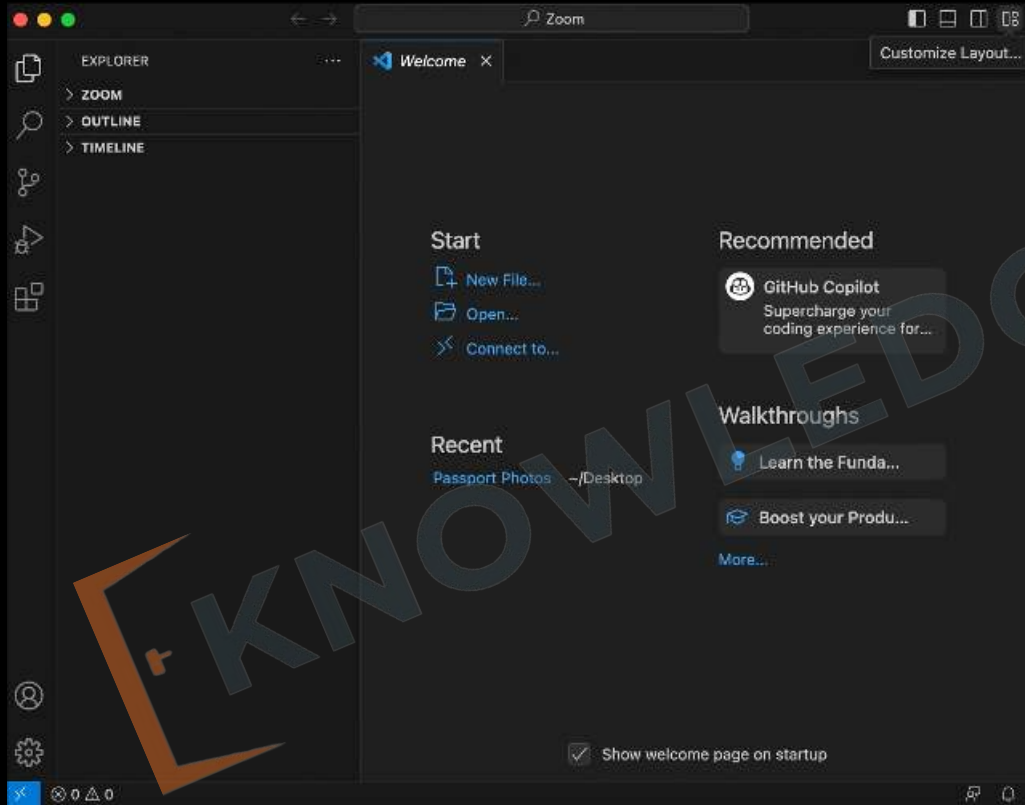

1.4 Importance of `index.html`

1. **Default name** of a website's homepage.
2. **First page** users see when visiting a website
3. Important for **SEO** (Search Engine Optimization)
4. Provides uniform **starting point** across servers
5. Serves as **fallback** when no file is specified in URL

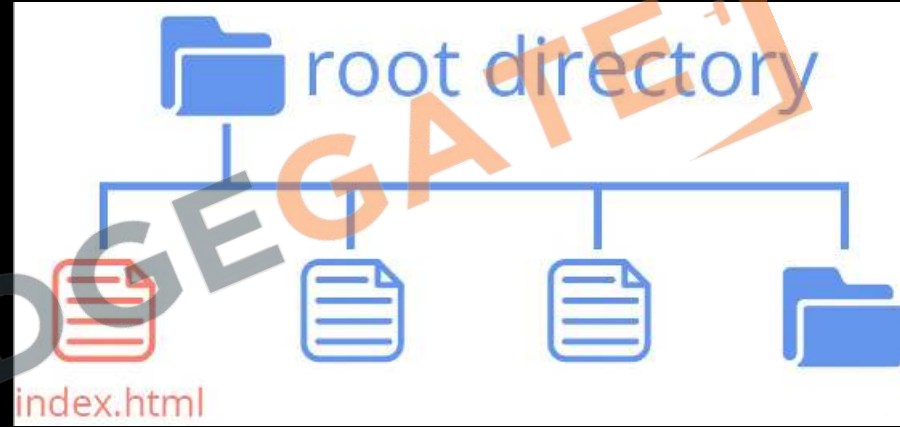

Level 1

HTML Basics



2. Basics of HTML


2.1 What are Tags

1. **Elements** that are used to create a website are called HTML Tags.
2. Tags can contain **content** or **other HTML tags**.
3. Define elements like **text**, **images**, **links**



2.2 Using Emmet ! to generate code

1. Type ! and wait for suggestions.

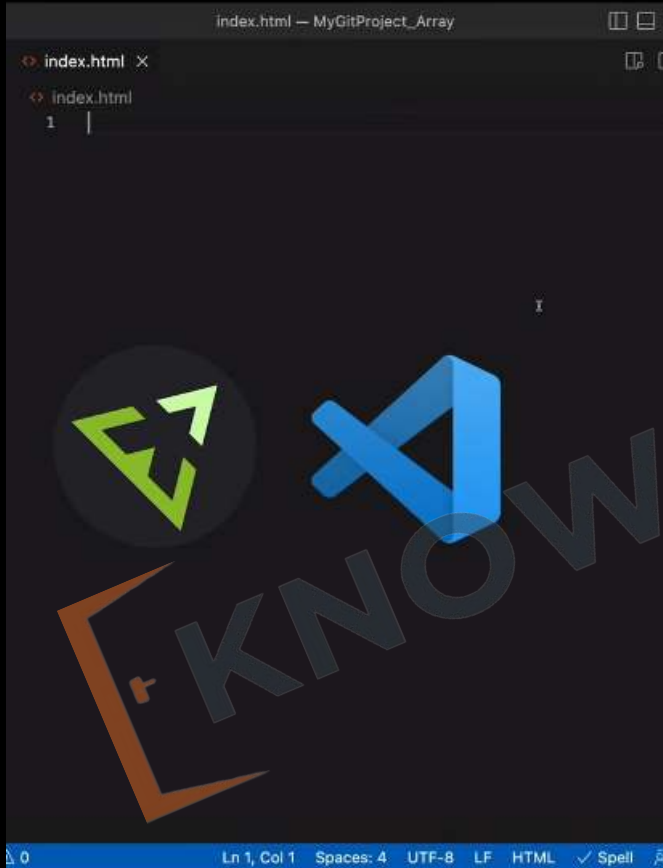

2.3 Basic HTML Page

```
<!DOCTYPE html>
```

Defines the HTML Version

```
<html lang="en">
```

Parent of all HTML tags / Root element

```
<head>
```

Parent of meta data tags

```
<title>My First Webpage</title>
```

Title of the web page

```
</head>
```

```
<body>
```

Parent of content tags

```
<h1>Hello World!</h1>
```


Heading tag

```
</body>
```

```
</html>
```

2.4 MDN Documentation

1. Visit <https://developer.mozilla.org/>
2. **Official resource** for HTML
3. Offers comprehensive guides and tutorials
4. Includes examples for real-world use
5. **Updated** with latest HTML features
6. Trusted by developers worldwide

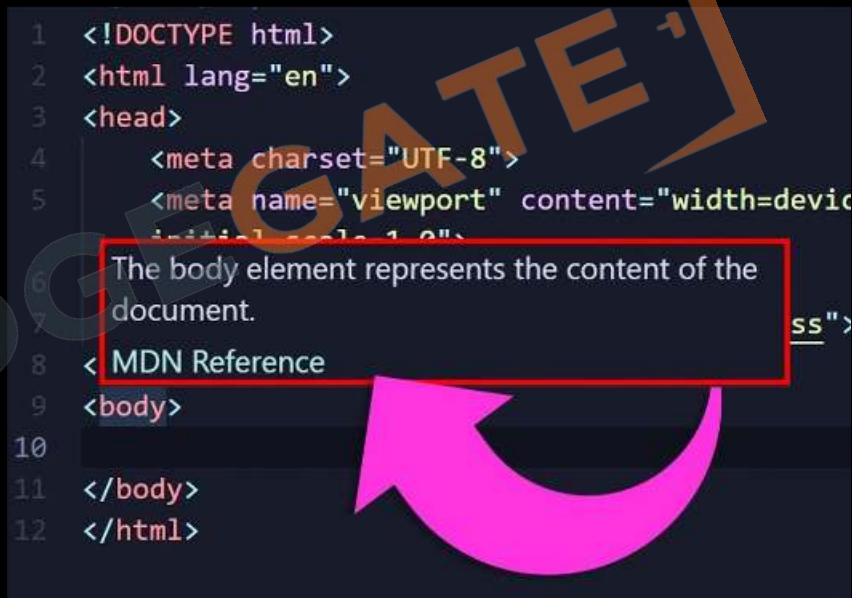

2.5 Comments

1. Used to add **notes** in HTML code
2. **Not displayed** on the web page
3. Syntax: **<!-- Comment here -->**
4. Helpful for **code organization**
5. Can be **multi-line** or **single-line**

Writing comments in HTML

Single-line
Comment

```
1 <!--This is a single line  
comment in HTML. You cannot  
see it on a webpage. Click  
on view-source to see a  
message I left just for you.  
-->
```

Multi-line
Comment

```
1 <!-- This is a multi-line  
comment in HTML.  
2 You cannot see it on a  
webpage.  
3 If you view-source on the  
browser you can see the  
comment there.-->
```

2.6 Case Sensitivity

1. HTML is **case-insensitive** for tag names
2. Attribute names are also be case-insensitive
3. Best practice: **use lowercase** for consistency

`<html>` = `<HTML>`

`<p>` = `<P>`

`<head>` = `<HEAD>`

`<body>` = `<BODY>`

Level 1 Revision

HTML Basics

1. Starting up

1. First File using Text Editor
2. File Extension
3. Opening the project in VsCode
4. Index.html

2. Basics of HTML


1. What are Tags
2. Using Emmet ! to generate code
3. Basic HTML Page
4. MDN Documentation
5. Comments
6. Case Sensitivity



Project Level 1

HTML Basics

1. Create a **new project** with Index.html
2. Generate boilerplate code using Emmet
3. Write "I am learning with **Prashant sir**"
4. Use **comments**
5. Also use **Case insensitive** tags

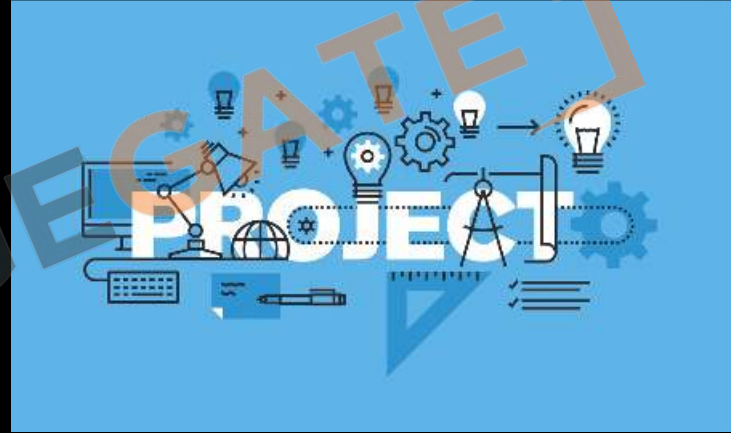

KG Coding

Some Other One shot Video Links:

- [Complete HTML](#)
- [Complete CSS](#)
- [Complete JavaScript](#)
- [Complete React and Redux](#)
- [One shot University Exam Series](#)



<http://www.kgcoding.in/>

Our  Channels

[KG Coding Android App](#)



[KG Coding](#)



[Knowledge GATE](#)



[KG Placement Prep](#)



[Sanchit Socket](#)

Level 2

Must-Use HTML Tags

1. HTML Attributes

1. What are HTML Attributes
2. Id Property

2. HTML Tags

1. Heading Tag
2. Paragraph Tag
3.
 <HR> tags
4. Image Tag
5. Video Tag
6. Anchor Tag
7. Bold / Italic / Underline / Strikethrough
8. Pre Tag
9. Big / Small Tag
10. Superscript / Subscript


3. Character Entity Reference

1. What are Character Entity References

Level 2


Must-Use HTML Tags

Attribute

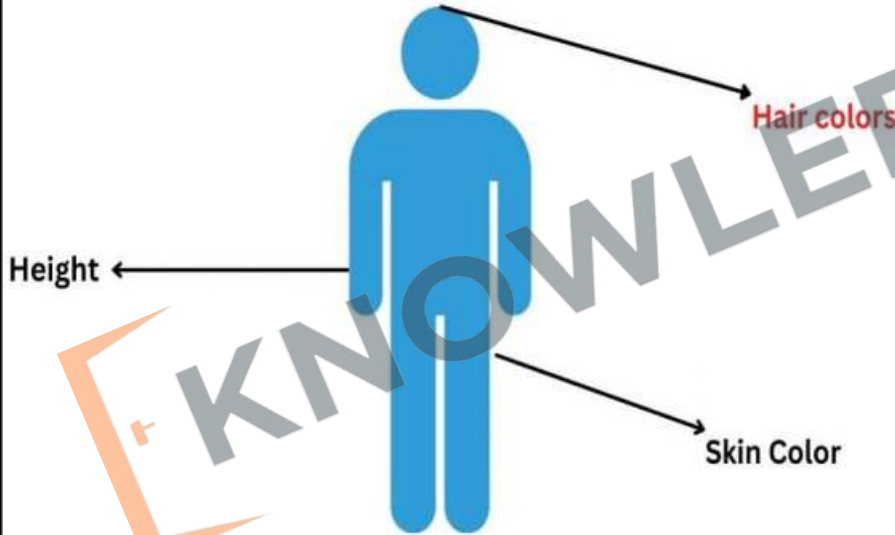


1. HTML Attributes

1.1 What are HTML Attributes?

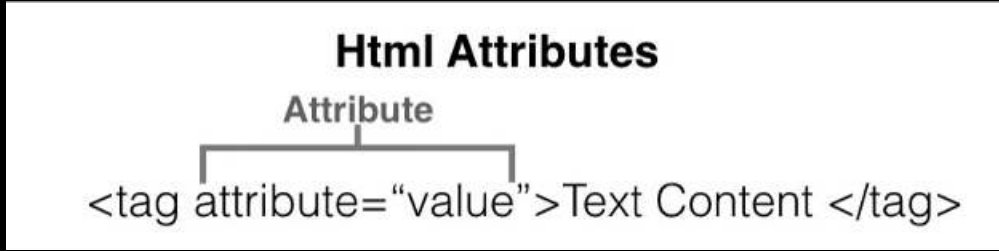


1. Provides additional information about elements
2. Placed within opening tags
3. Common examples: href, src, alt
4. Use name=value format
5. Can be single or multiple per element

1.2 id property

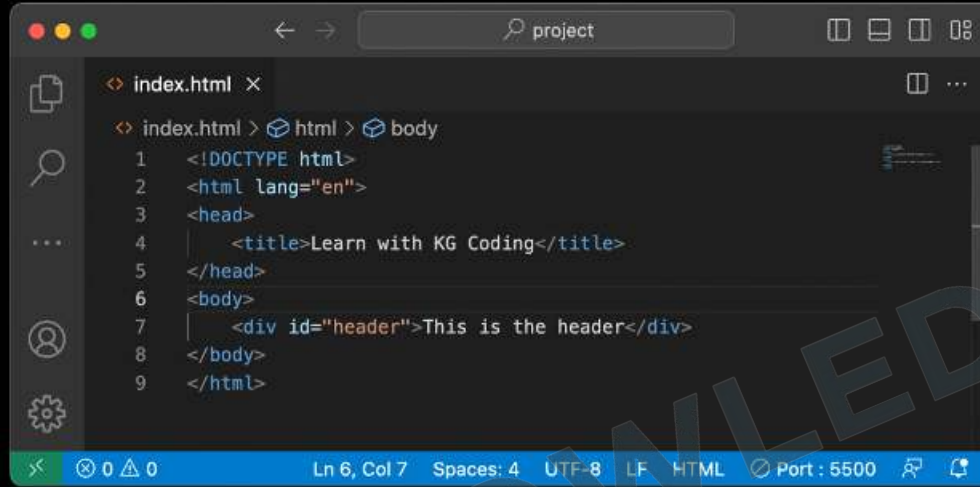

```
<?xml version="1.0" encoding="UTF-8" ?>
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Learn with KG Coding</title>
</head>
<body>
  <div id="header">This is the header</div>
</body>
</html>
```

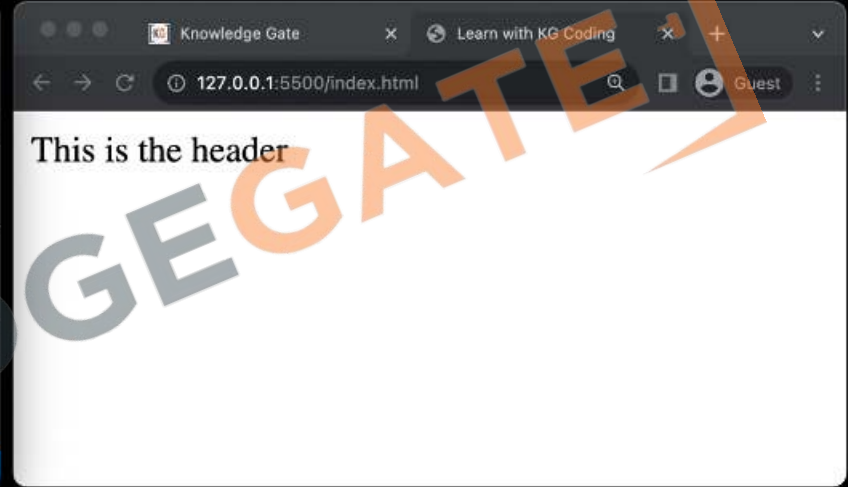

- **Unique Identifier:** Each id should be unique within a page.
- **Anchoring:** Allows for direct links to sections using the `#id` syntax in URLs.
- **CSS & JavaScript:** Used for selecting elements for styling or scripting.


Level 2

Must-Use HTML Tags



2. HTML Tags

2.1 Heading Tag

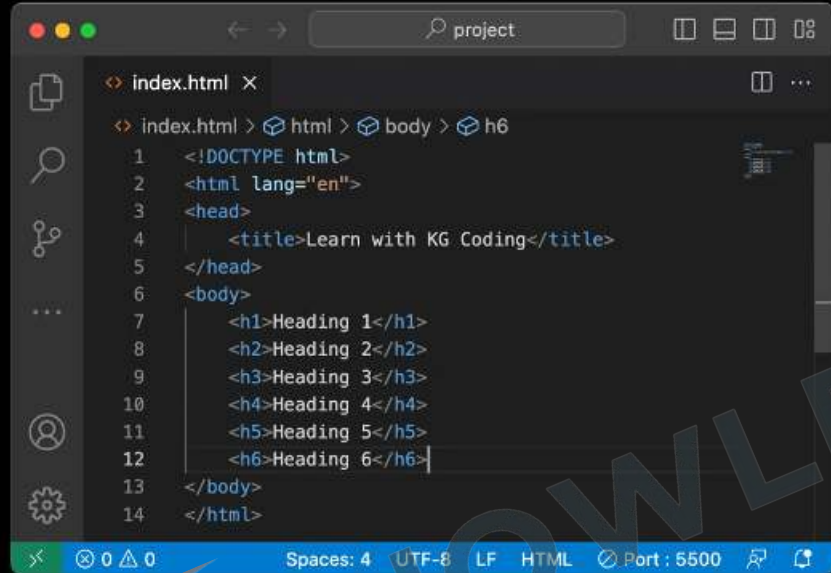


```
<?xml version="1.0" encoding="UTF-8" ?>
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Learn with KG Coding</title>
</head>
<body>
  <h1>Heading 1</h1>
  <h2>Heading 2</h2>
  <h3>Heading 3</h3>
  <h4>Heading 4</h4>
  <h5>Heading 5</h5>
  <h6>Heading 6</h6>
</body>
</html>
```




1. Defines **headings** in a document
2. Ranges from **<h1>** to **<h6>**
3. **<h1>** is most important, **<h6>** is least
4. Important for **SEO**
5. Helps in structuring content

2.2 Paragraph Tag

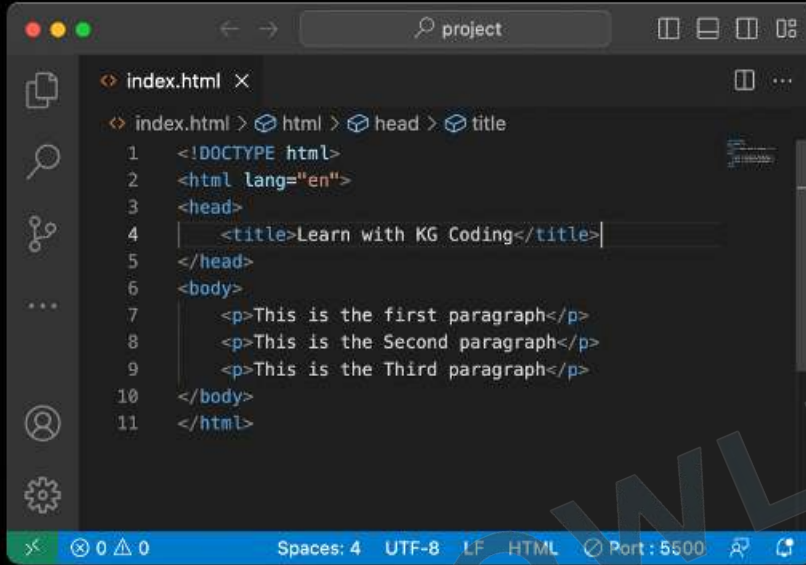


```
index.html X
index.html > html > head > title
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <p>This is the first paragraph</p>
8   <p>This is the Second paragraph</p>
9   <p>This is the Third paragraph</p>
10 </body>
11 </html>
```

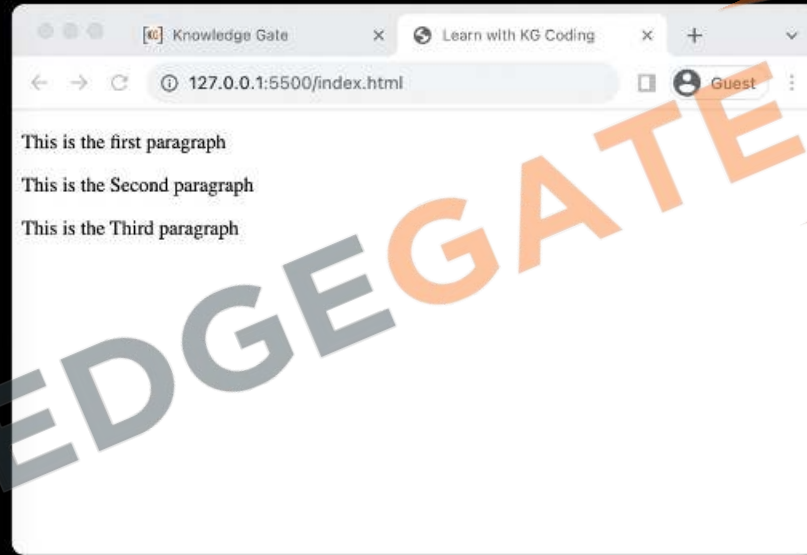


1. Used for defining paragraphs
2. Enclosed within `<p>` and `</p>` tags
3. Adds automatic spacing before and after
4. Text wraps to next line inside tag
5. Common in text-heavy content

2.3
 Tag

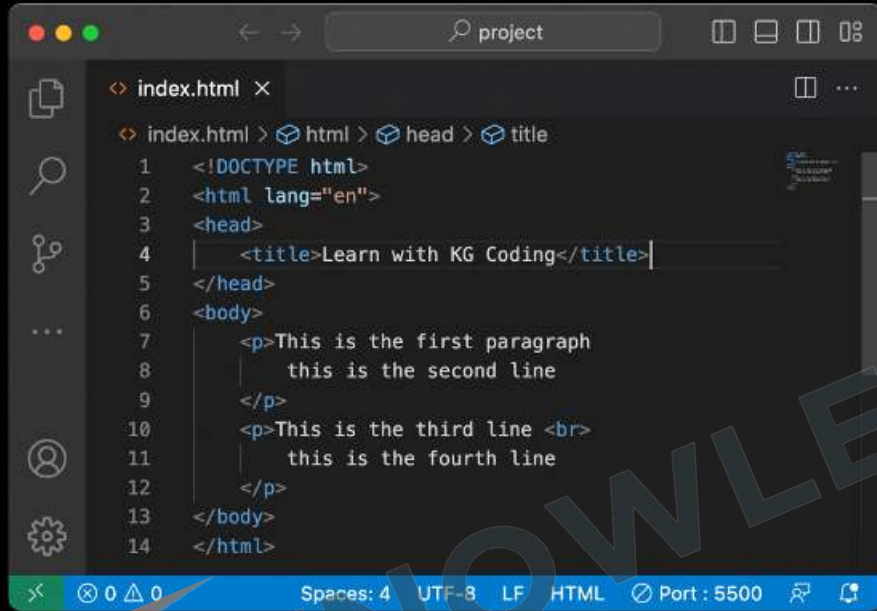


```
<?xml version="1.0" encoding="UTF-8" ?>
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Learn with KG Coding</title>
</head>
<body>
  <p>This is the first paragraph
    this is the second line
  </p>
  <p>This is the third line <br>
    this is the fourth line
  </p>
</body>
</html>
```

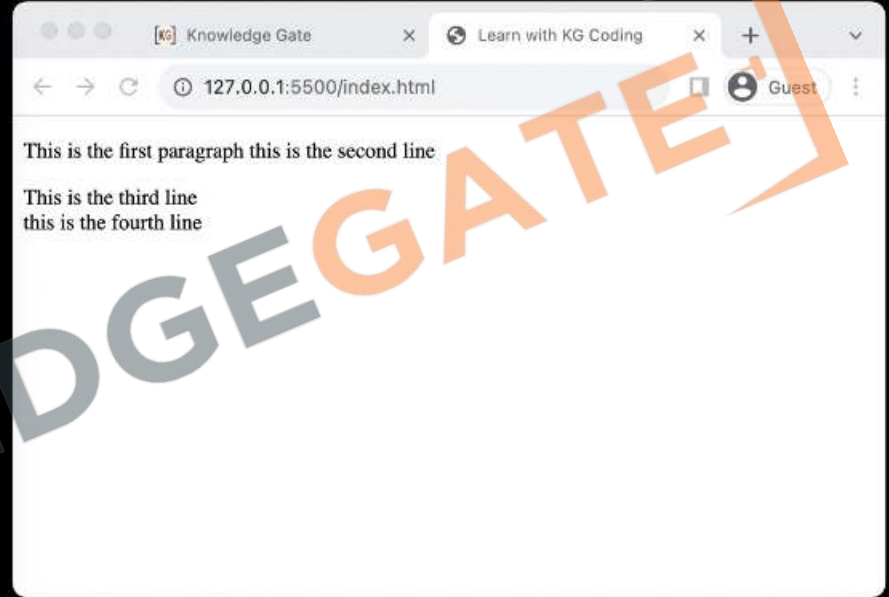


1. **
** adds a **line break** within text
2. **
** is empty, no closing tag needed
3. **
** and **
** are both valid

2.3 <HR> Tag

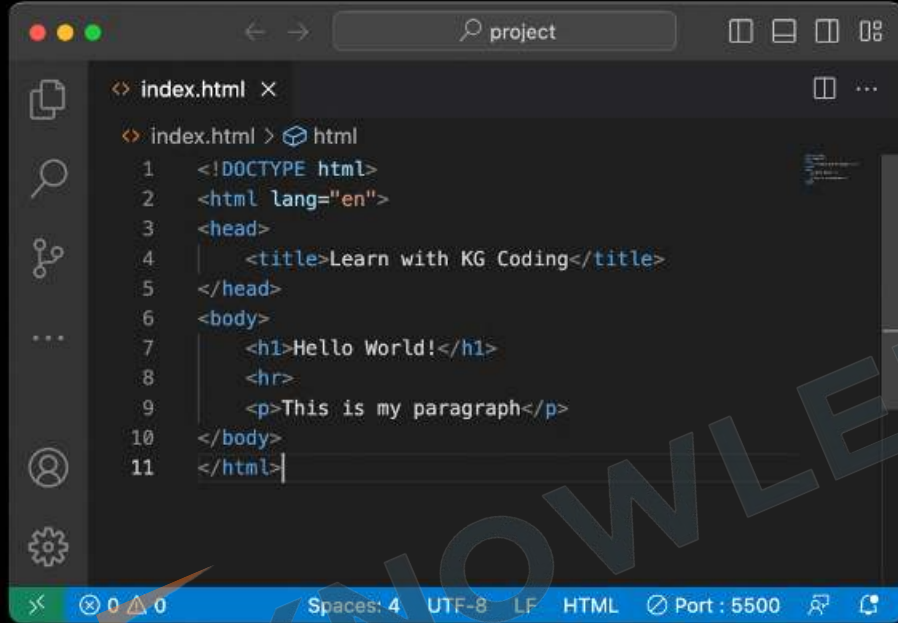


```
<code>index.html x
index.html > html
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <h1>Hello World!</h1>
8   <hr>
9   <p>This is my paragraph</p>
10 </body>
11 </html>|</code>
```

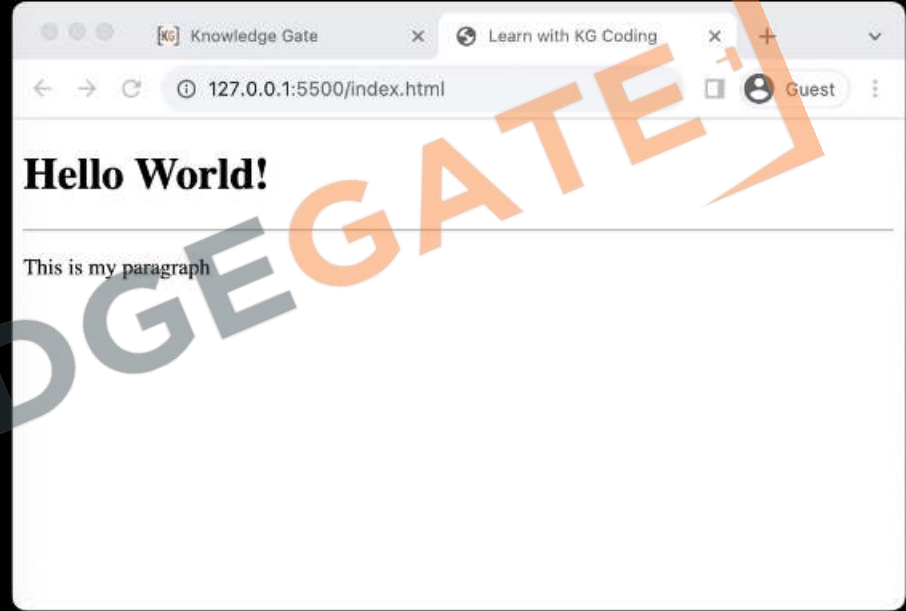

1. `<hr>` creates a horizontal rule or line
2. `<hr>` also empty, acts as a divider


2.4 Image Tag

```
index.html x
index.html > html > body > image
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <image src="sanchitsir.png"
8     alt="Sanchit Sir Passport photo"
9     height="300px">
10 </body>
11 </html>
```

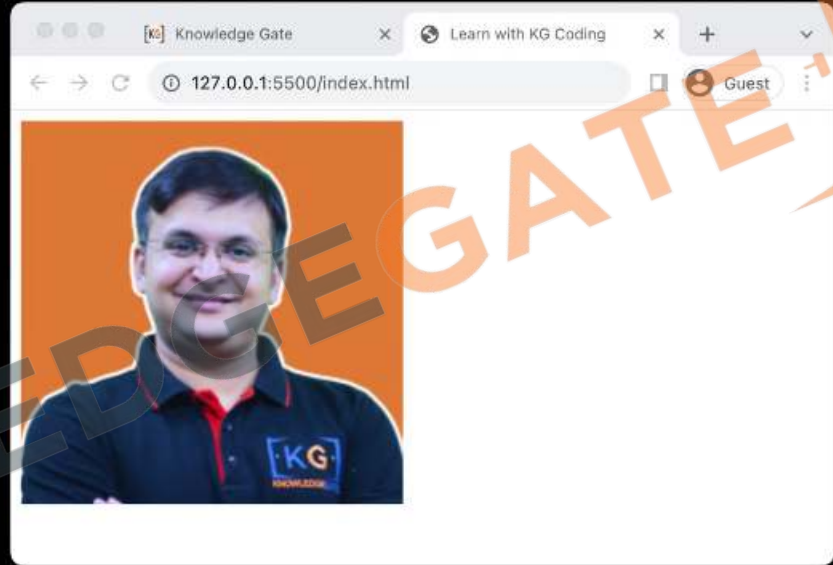


1. Used to embed **images**
2. Utilizes the **src** attribute for image URL
3. **alt** attribute for alternative text
4. Can be resized using **width** and **height**
5. **Self-closing**, doesn't require an end tag

2.5 Video Tag

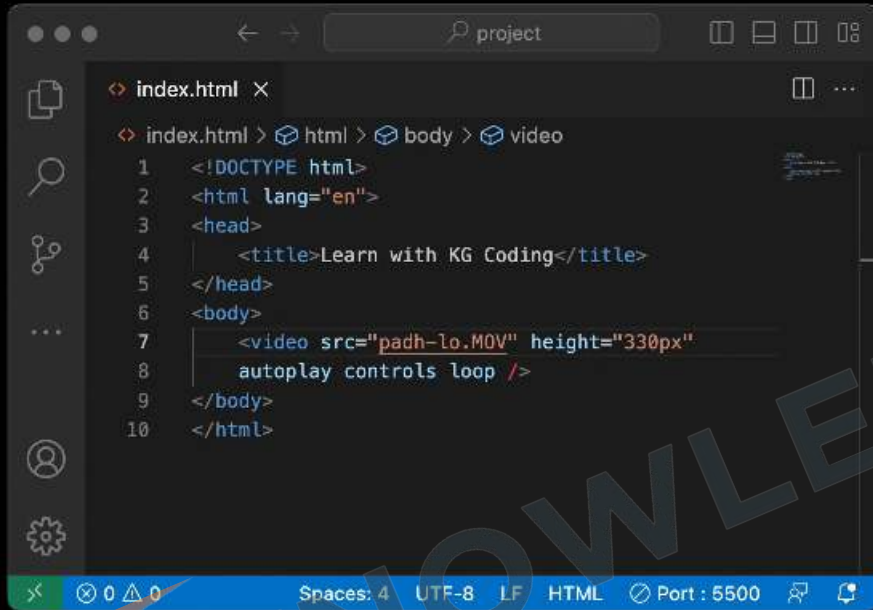


```
index.html X
index.html > html > body > video
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <video src="padh-lo.MOV" height="330px"
8     autoplay controls loop />
9 </body>
10 </html>
```

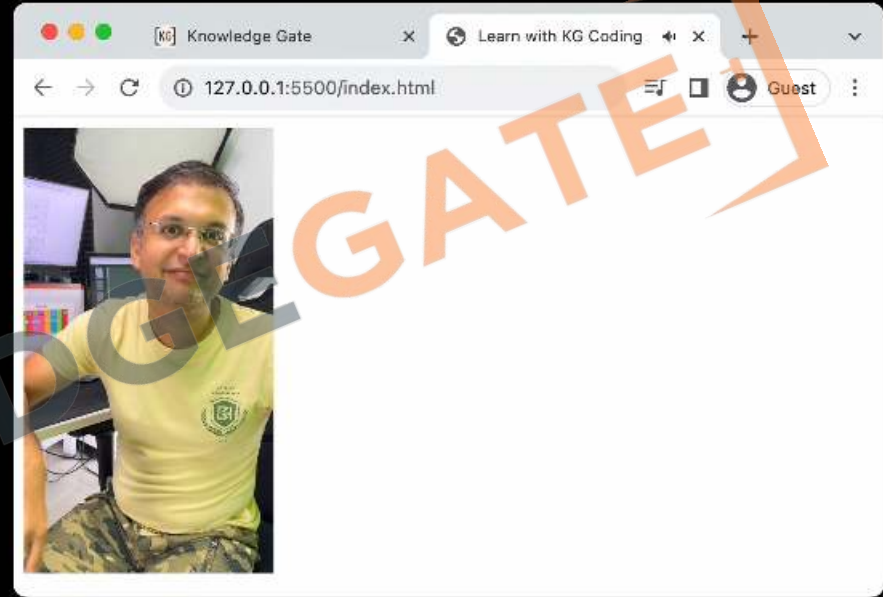

1. Embeds video files on a page
2. Uses **src** attribute for video URL
3. Supports **multiple formats** like MP4, WebM
4. Allows for built-in controls via attributes like **autoplay, controls, loop**


2.6 Anchor Tag

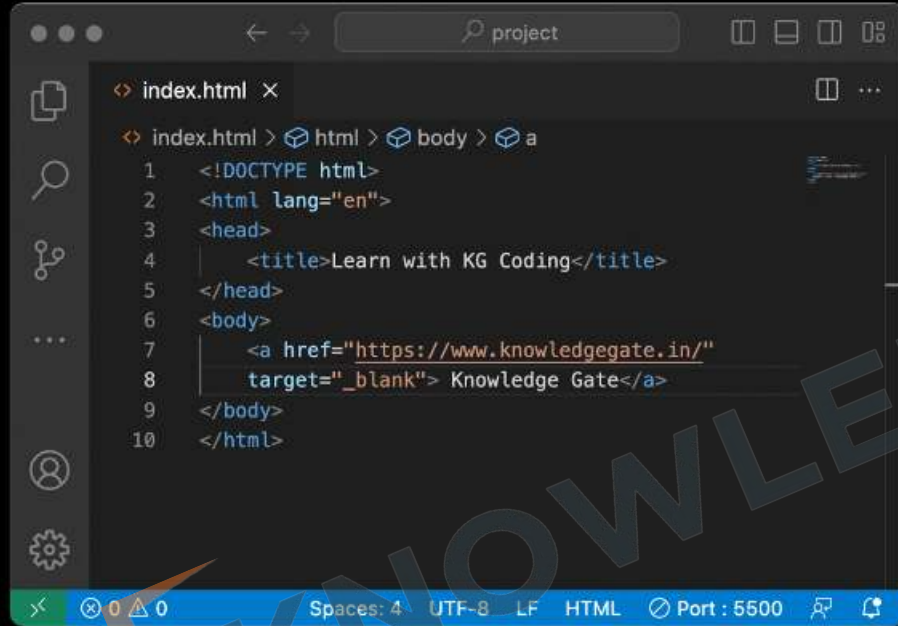

A screenshot of a code editor window titled 'index.html'. The editor shows the following HTML code:


```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <a href="https://www.knowledgegate.in/"
8     target="_blank"> Knowledge Gate</a>
9 </body>
10 </html>
```

The editor interface includes a sidebar on the left with icons for file explorer, search, and other tools. The bottom status bar shows 'Spaces: 4', 'UTF-8', 'LF', 'HTML', and 'Port : 5500'.

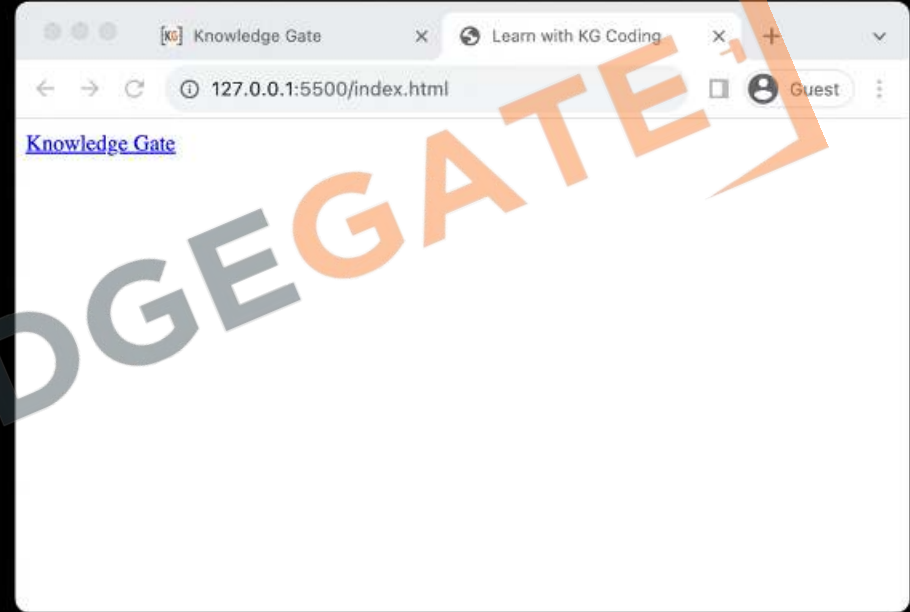

1. Used for creating **hyperlinks**
2. Requires **href** attribute for URL
3. Can link to external sites or internal pages
4. Supports **target** attribute to control link behavior


2.7 Bold/Italic/Underline/Strikethrough Tag

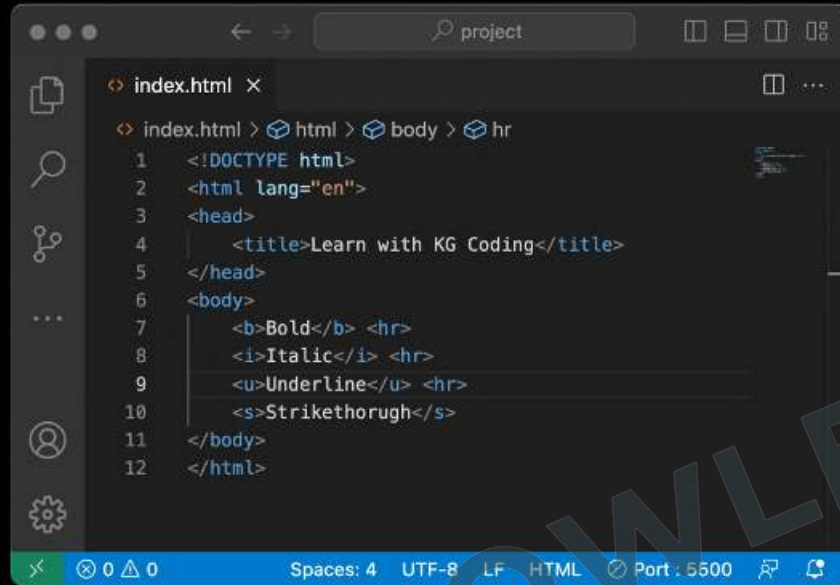

A screenshot of a code editor window titled 'index.html'. The editor shows the following HTML code:


```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <b>Bold</b> <hr>
8   <i>Italic</i> <hr>
9   <u>Underline</u> <hr>
10  <s>Strikethrough</s>
11 </body>
12 </html>
```

The status bar at the bottom indicates 'Spaces: 4', 'UTF-8', 'LF', 'HTML', and 'Port: 5500'.

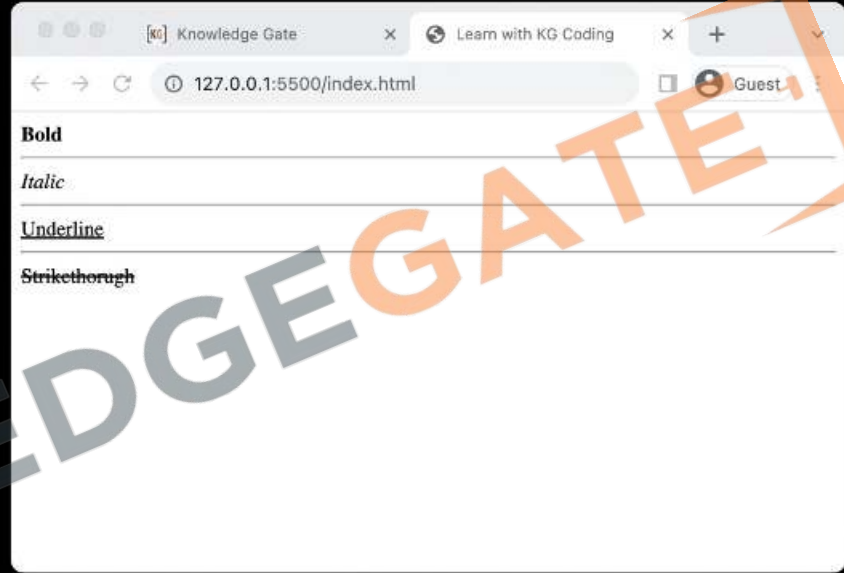


1. `<b>` makes text **bold**
2. `<i>` makes text *italic*
3. `<u>` underlines text
4. `<s>` or `<strike>` applies ~~strikethrough~~
5. Primarily used for text styling and emphasis

2.8 Pre Tag

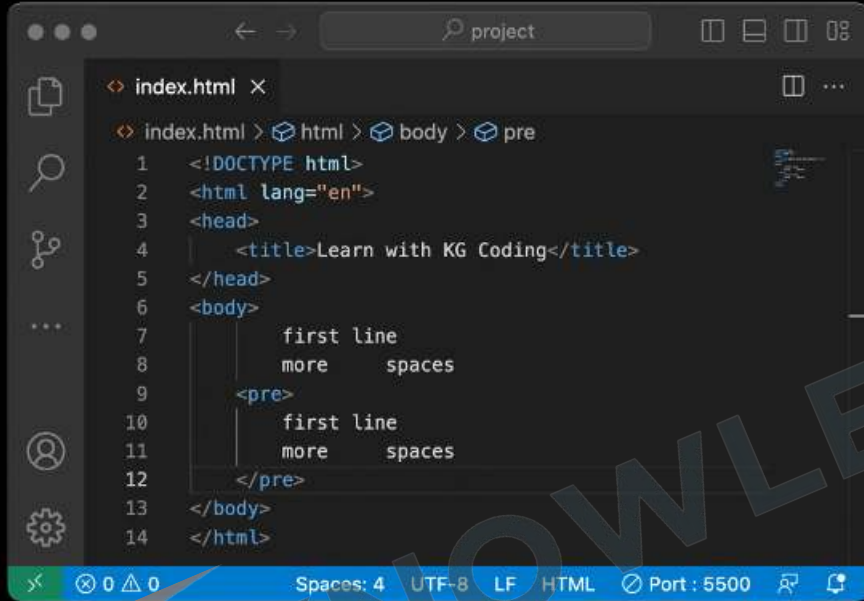


```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Learn with KG Coding</title>
</head>
<body>
  first line
  more   spaces
  <pre>
    first line
    more   spaces
  </pre>
</body>
</html>
```

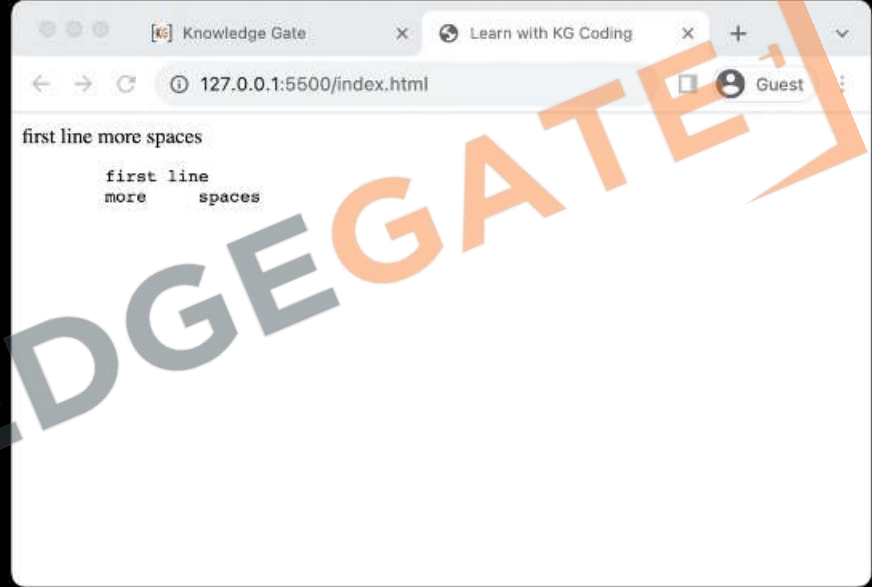


1. Preserves text formatting
2. Maintains whitespace and line breaks
3. Useful for displaying code
4. Enclosed within `<pre>` and `</pre>` tags

2.9 Big/Small Tag

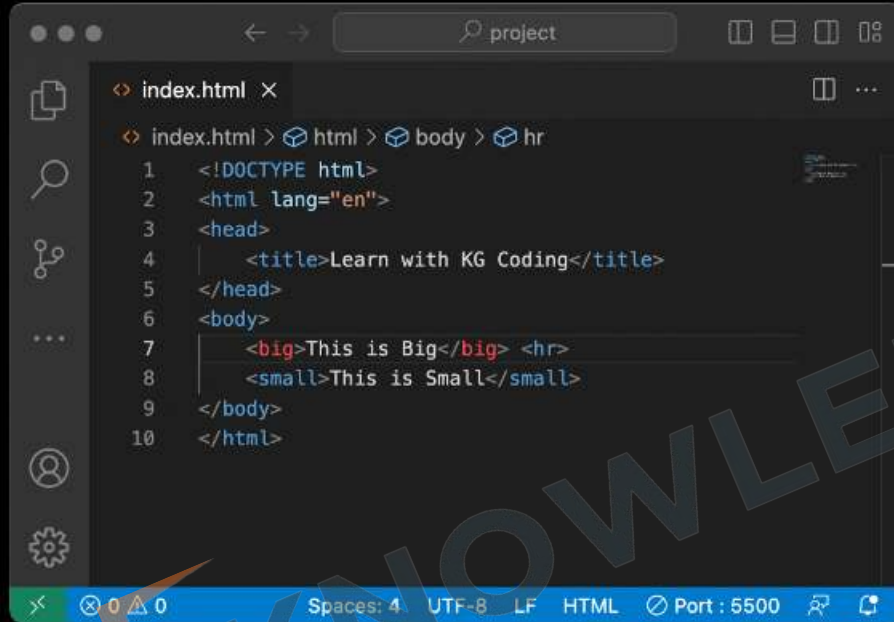


```
index.html X
index.html > html > body > hr
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <big>This is Big</big> <hr>
8   <small>This is Small</small>
9 </body>
10 </html>
```

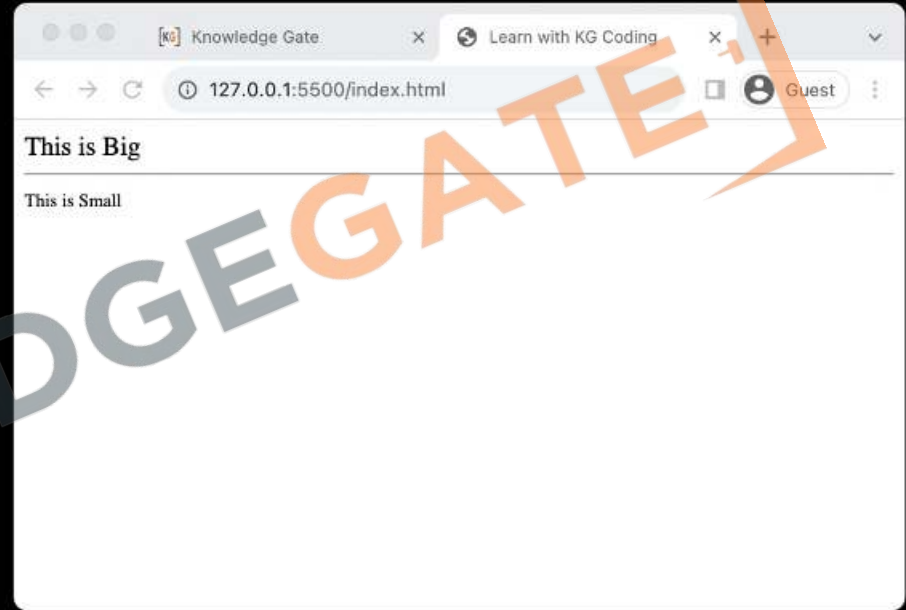


1. **<big>** increases text size
2. **<small>** decreases text size
3. Less common due to CSS alternatives

2.10 Superscript/Subscript Tag

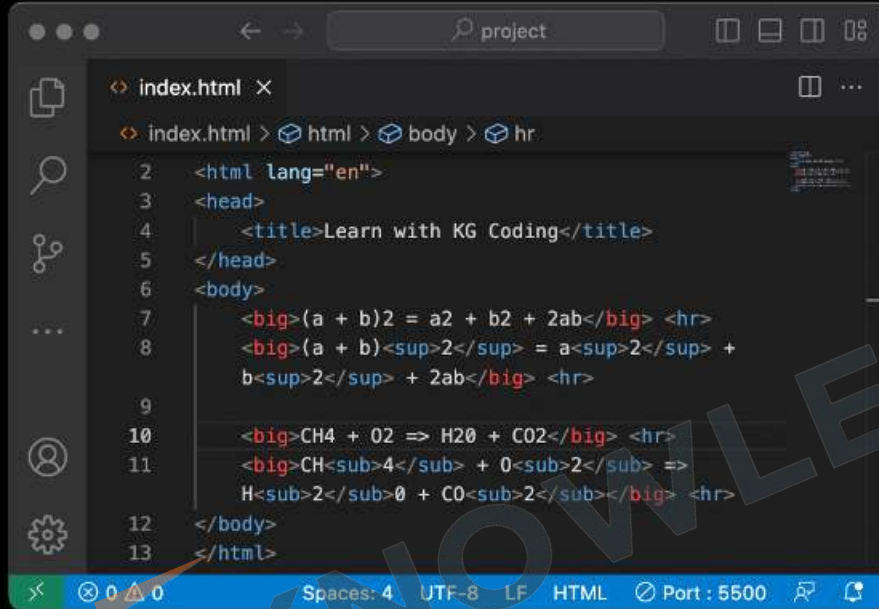

```
index.html > html > body > hr
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <big>(a + b)2 = a2 + b2 + 2ab</big> <hr>
8   <big>(a + b)<sup>2</sup> = a<sup>2</sup> +
9     b<sup>2</sup> + 2ab</big> <hr>
10  <big>CH4 + O2 => H2O + CO2</big> <hr>
11  <big>CH<sub>4</sub> + O<sub>2</sub> =>
12    H<sub>2</sub>O + CO<sub>2</sub></big> <hr>
13 </body>
14 </html>
```

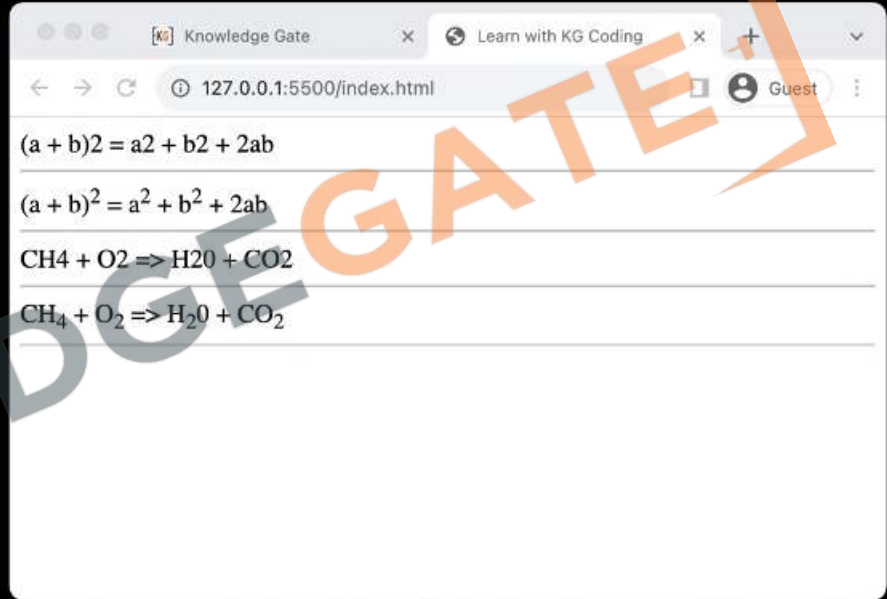

1. **<sup>** makes text superscript
2. **<sub>** makes text subscript
3. Used for mathematical equations, footnotes
4. Does not change font size, just position

Level 2

Must-Use HTML Tags

3. Character Entity Reference

3.1 Character Entity Reference

1. Used to display **reserved** or **special** characters
2. Syntax often starts with **&** and ends with **;** (e.g., **&** for **&**)

	 	–	–	–	−	°	°	Δ	Δ	α	α
€	€	—	—	±	±	°	º	Λ	Λ	β	β
¢	¢	...	…	√	√	ª	ª	⊖	Θ	γ	γ
£	£	§	§	∞	∞	¹	¹	Ξ	Ξ	δ	δ
¥	¥	¶	¶	∞	∝	²	²	Π	Π	ε	ε
¤	¤	†	†	×	×	³	³	Σ	Σ	ζ	ζ
ƒ	ƒ	‡	‡	÷	÷	¼	¼	Φ	Φ	η	η
©	©	¡	¡	~	∼	½	½	Ψ	Ψ	θ	θ
®	®	¿	¿	≈	≈	¾	¾	Ω	Ω	ι	ι
™	™	%	&perml;	≡	≅	∴	∴	∇	∇	κ	κ

Level 2 Revision

Must-Use HTML Tags

1. HTML Attributes

1. What are HTML Attributes
2. Id Property

2. HTML Tags

1. Heading Tag
2. Paragraph Tag
3. `<BR>` `<HR>` tags
4. Image Tag
5. Video Tag
6. Anchor Tag
7. Bold / Italic / Underline / Strikethrough
8. Pre Tag
9. Big / Small Tag
10. Superscript / Subscript

3. Character Entity Reference


1. What are Character Entity References



Project Level 2

Must-Use HTML Tags

1. Create a page with **heading**, **paragraph**, **line breaks** and **separators**.
2. Use an **image** with height 300, which is a **link** to another page.
3. Use **bold**, *italic*, **underline** and ~~**strike through**~~ in one line.
4. Write third equation of motion using **superscript** and **subscript**.

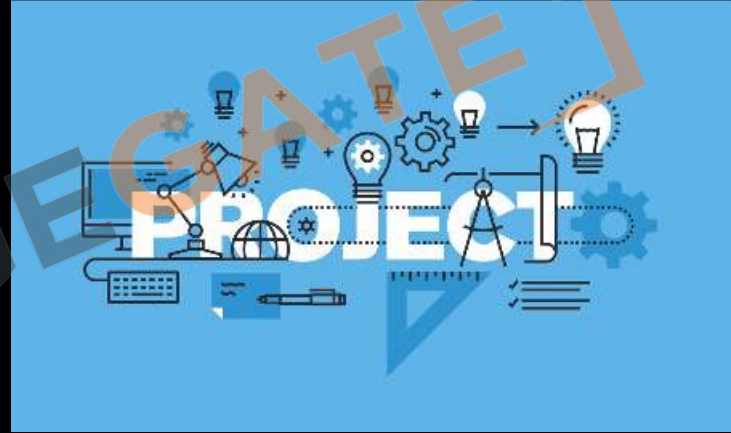

KG Coding

Some Other One shot Video Links:

- [Complete HTML](#)
- [Complete CSS](#)
- [Complete JavaScript](#)
- [Complete React and Redux](#)
- [One shot University Exam Series](#)



<http://www.kgcoding.in/>

Our  Channels

[KG Coding Android App](#)



[KG Coding](#)



[Knowledge GATE](#)



[KG Placement Prep](#)



[Sanchit Socket](#)

Level 3

Browser Tools

1. Browser Tools

1. View Page Source
2. Inspect Element
3. HTML without CSS

2. Responsive Design

1. Different screen size

3. Live Edit Code

1. Live edit HTML
2. Live edit CSS
3. Live edit JS
4. Changes only happening at client

4. Validating Web pages

1. Using validator.w3.org


Level 3

Browser Tools




1. Browser Tools

1.1 View Page Source

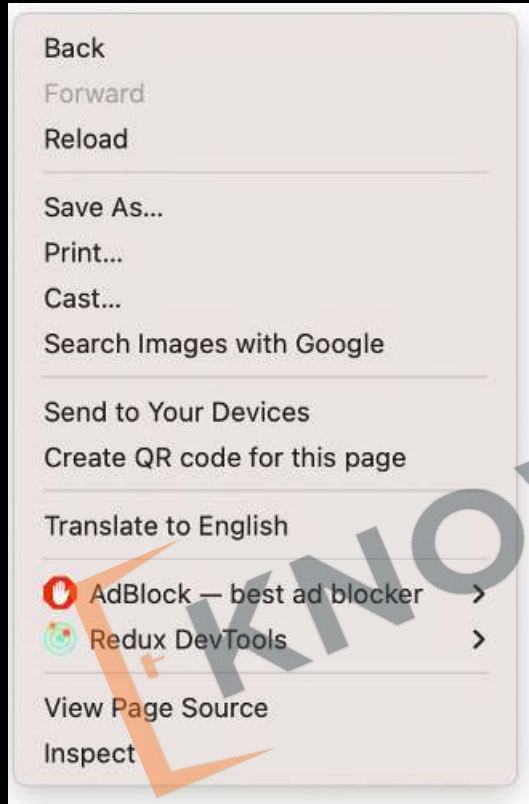


1. Displays raw HTML and CSS
2. Useful for debugging and learning
3. Shows external files like JavaScript links

1.2 Inspect Element

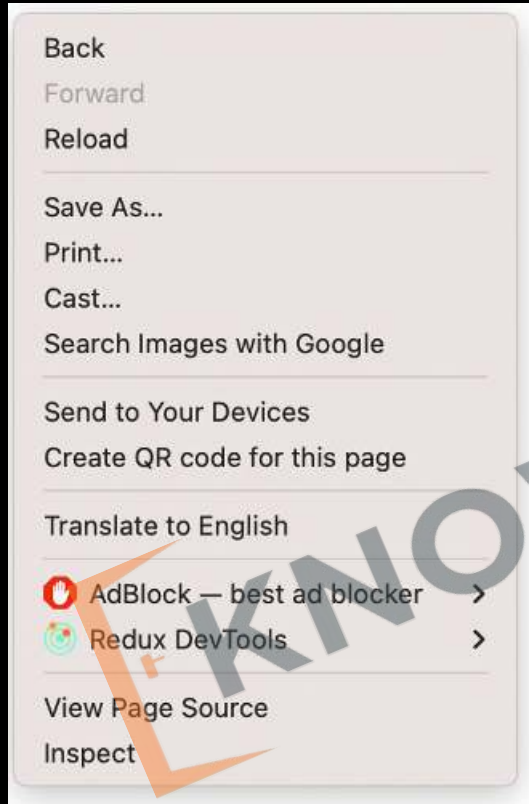

1. Allows **real-time editing** of HTML/CSS
2. Useful for debugging and testing
3. Shows **element hierarchy** and layout
4. Includes console for JavaScript
5. **Highlights** selected elements on page

1.3 HTML without CSS

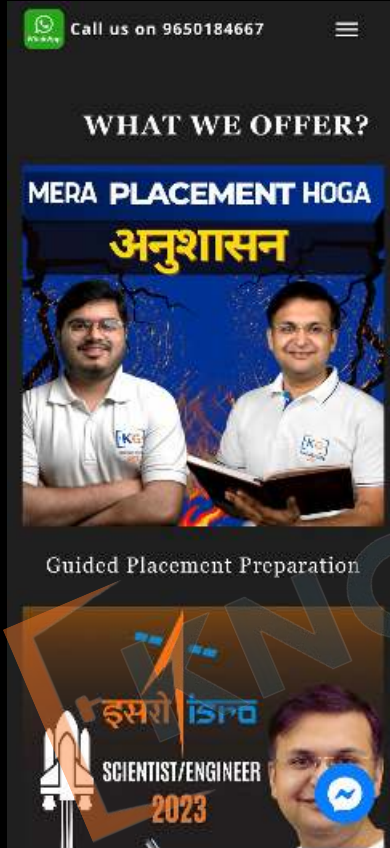

Level 3

Browser Tools



2.
Responsive
Design

2.1 Different Screen Sizes



1. Adapts layout for different screen sizes
2. Flexible layouts
3. Optimizes images and assets
4. Enhances user experience on mobile and desktop


Level 3

Browser Tools



3. Live Edit
Code


3.1 Live edit HTML

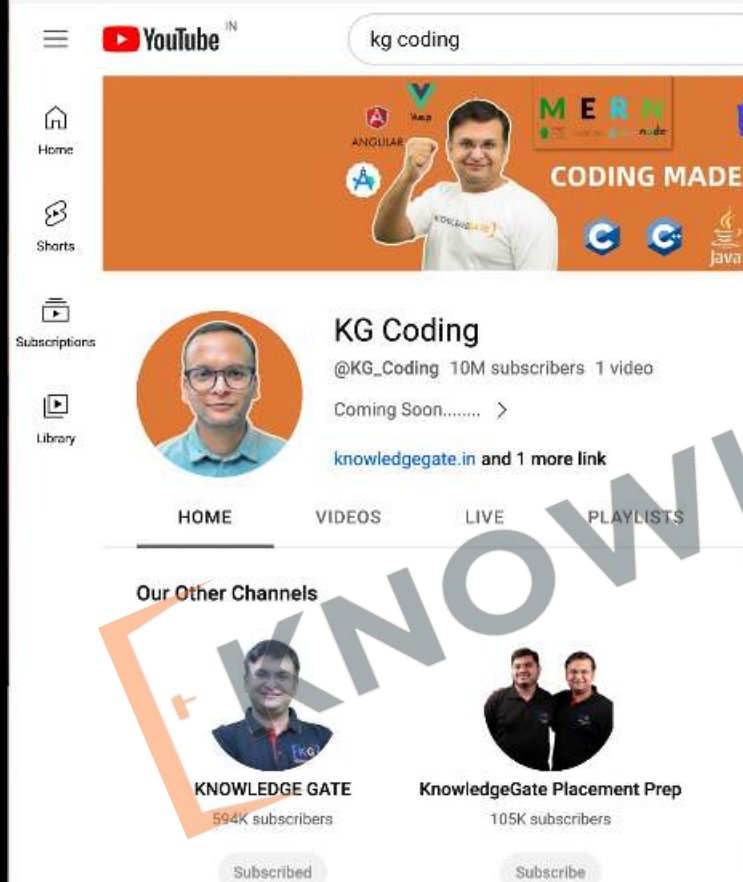

Changed **Subscriber** count

3.2 Live edit CSS

Changed **Channel**
Name color

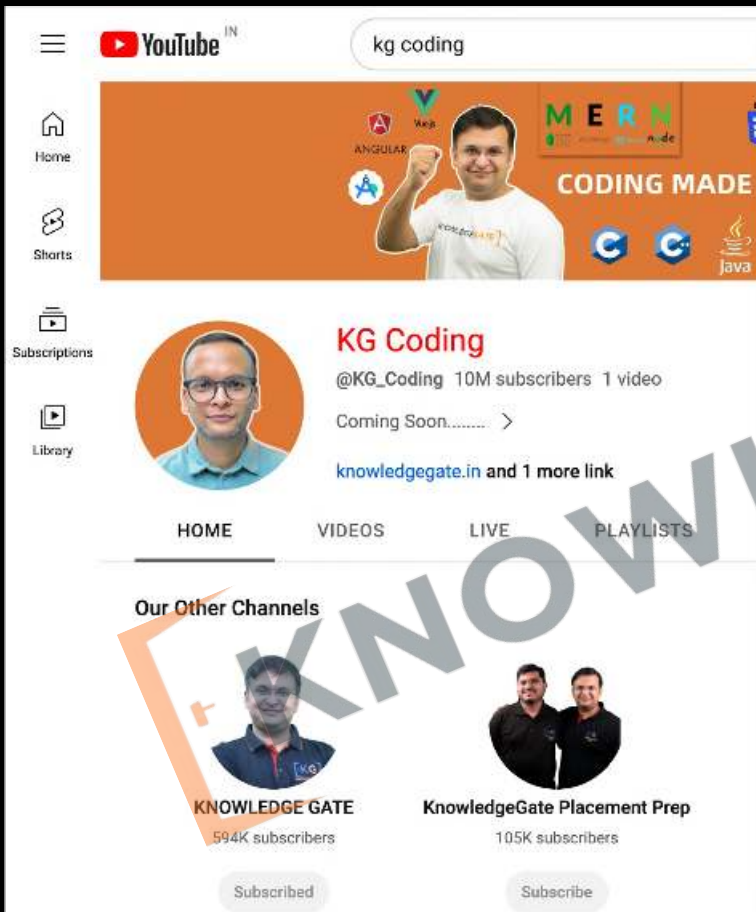[illegible]

3.3 Live edit JS

The image shows a web browser displaying the YouTube homepage. The page features the YouTube logo, a search bar, and navigation links for Home, Shorts, Subscriptions, and Library. The main content area shows a promotional banner for MERN (MongoDB, Express, React, Node) coding, featuring a man in a white t-shirt. Below the banner are four tabs: HOME, VIDEOS, LIVE, and PLAYLISTS. The DevTools console is open on the right side, showing several error messages. The errors include:

- HTTP error: status code 404, net::ERR_HTTP_RESPONSE_CODE_FAILURE
- DevTools failed to load source map: Could not load content for <https://www.youtube.com/s/desktop/462a8d5d/jsbin/web-animations-next-lite.min.js.map>: HTTP error: status code 404, net::ERR_HTTP_RESPONSE_CODE_FAILURE
- DevTools failed to load source map: Could not load content for https://www.youtube.com/s/desktop/462a8d5d/jsbin/webcomponents-sd.vflset/blm_party/javascript/polymer/v2/webcomponentsjs/webcomponents-sd.js.map: HTTP error: status code 404, net::ERR_HTTP_RESPONSE_CODE_FAILURE
- LegacyDataMixin will be applied to all `desktop_polymer_enable_will_icons.js:4482` legacy elements. Set `_legacyUndefinedCheck: true` on element class to enable.
- GET <https://googleads.g.doubleclick.net/pagead/id> net::ERR_BLOCKED_BY_CLIENT VM15538:201
- GET https://www.google.com/pagead/lv_www.google.com/pagead/5C0wHrV_7RpGsmVg:1z7evtId=ACd6KtZ40hOLZg8BunYYZ8qxW6cXPBX2-4_inAppBootstrap3AUnclassified&sz=1&sig=AB9vU40PfuZ9FivI5C0wHrV_7RpGsmVg net::ERR_BLOCKED_BY_CLIENT
- GET https://www.google.co.in/pagead/5C0wHrV_7RpGsmVg:1z7evtId=ACd6KtZ40hOLZg8BunYYZ8qxW6cXPBX2-4_inAppBootstrap3AUnclassified&sz=1&sig=AB9vU40PfuZ9FivI5C0wHrV_7RpGsmVg net::ERR_BLOCKED_BY_CLIENT
- GET <chrome-extension://invalid/> net::ERR_FAILED cast_sender.js:10
- GET <chrome-extension://invalid/> net::ERR_FAILED cast_sender.js:10
- GET <https://static.doubleclick.net/instream/ad/status.js> net::ERR_BLOCKED_BY_CLIENT spf.js:34
- document.getElementById("inner-header-container").style.visibility = 'hidden'
- The resource https://i.ytimg.com/generate_204 was preloaded using link featured:1 preload but not used within a few seconds from the window's load event. Please make sure it has an appropriate 'as' value and it is preloaded intentionally.

3.4 Changes happening at Client

1. Changes made are **temporary**
2. Affect **only** the current session
3. **Not saved** to the server
4. Reset upon page **reload**
5. Useful for **testing**, not permanent fixes



Like: If you change the question in your question paper that has no effect on actual exam.

Level 3

Browser Tools



4. Validating WebPages

4.1 Using validator.w3.org

Nu Html Checker

This tool is an ongoing experiment in better HTML checking, and its behavior remains subject to change

Showing results for contents of text-input area

Checker Input

Show ☒ source ☐ outline ☐ image report [Options...](#)

Check by ☐ css

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>My First Webpage</title>
</head>
<body>
  <h1>Hello World!</h1>
</body>
<html>
```

[Check](#)

Use the Message Filtering button below to hide/show particular messages, and to see total counts of errors and warnings.

[Message Filtering](#)

1. **Error** Stray start tag: html .
From line 9, column 1; to line 9, column 6
></body><html>

1. Ensures **HTML** adheres to standards
2. Minimizes **cross-browser** issues
3. Helps in achieving better **SEO** results
4. Easier to debug and maintain
5. **Optimizes** performance by reducing parsing errors

Level 3 Revision

Browser Tools

1. Browser Tools

1. View Page Source
2. Inspect Element
3. HTML without CSS

2. Responsive Design

1. Different screen size

3. Live Edit Code

1. Live edit HTML
2. Live edit CSS
3. Live edit JS
4. Changes only happening at client

4. Validating Web pages


1. Using validator.w3.org



Project Level 3

Browser Tools

1. Save Source of **Instagram** in a file and check the render.
2. **Inspect** the likes element on the page and read the code to understand.
3. Change number of likes on Your **Instagram** post
4. **Validate** the page we created in last project.

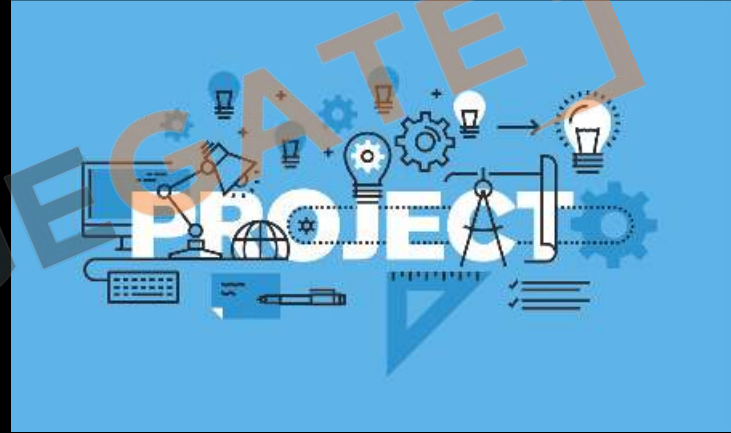

KG Coding

Some Other One shot Video Links:

- [Complete HTML](#)
- [Complete CSS](#)
- [Complete JavaScript](#)
- [Complete React and Redux](#)
- [One shot University Exam Series](#)



<http://www.kgcoding.in/>

Our  Channels

[KG Coding Android App](#)



[KG Coding](#)



[Knowledge GATE](#)



[KG Placement Prep](#)



[Sanchit Socket](#)

Level 4

HTML and Project Structure

1. Semantic Tags

1. Semantic / Non-Semantic Tags

2. Body Tags

1. Header Tag
2. Main Tag
 1. Section Tag
 2. Article Tag
 3. Aside Tag
3. Footer Tag

3. Folder Structure


1. Recommended Folder structure

4. More Tags

1. Navigation tags
2. Block / Inline Elements
3. Div tags
4. Span Tags

Level 4

HTML and Project Structure

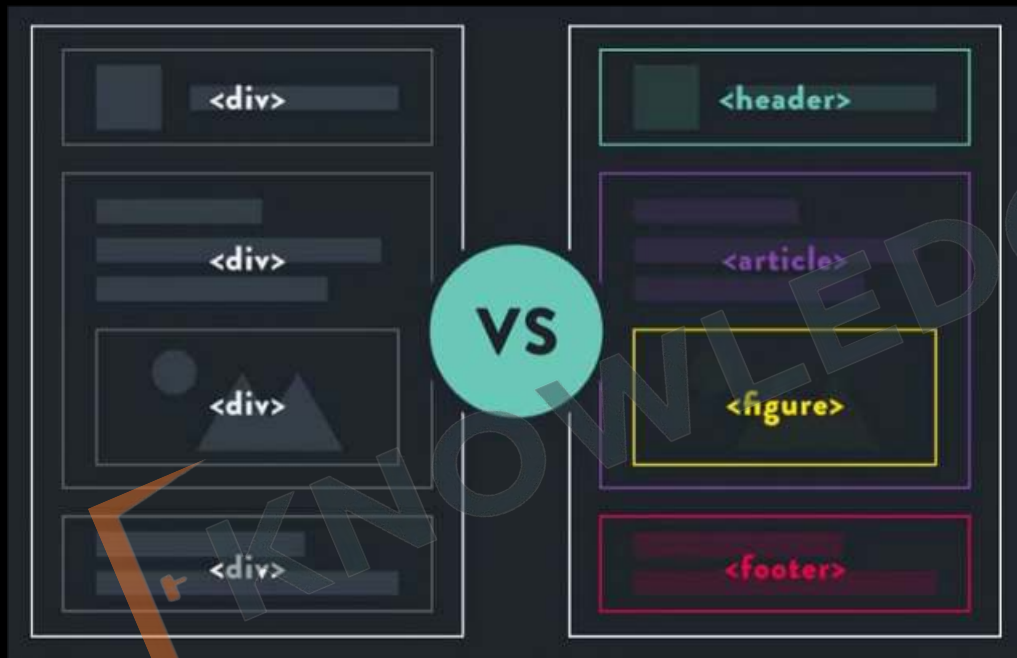

1. Semantic Tags

1.1 Semantic/Non-Semantic Tags

Semantic Tags

- **Meaningful**: Describe content.
- **SEO**: Good for search engines.
- **Accessibility**: Useful for screen readers.
- Examples: `<header>`, `<footer>`, `<article>`, `<section>`, `<nav>`.

Non-Semantic Tags

- **Generic**: No specific meaning.
- **For Styling**: Used for layout.
- **No SEO**: Not SEO-friendly.
- Examples: `<div>`, `<span>`, `<i>`, `<b>`.


Level 4

HTML and Project Structure




2. Body Tags

2.1 Header Tag

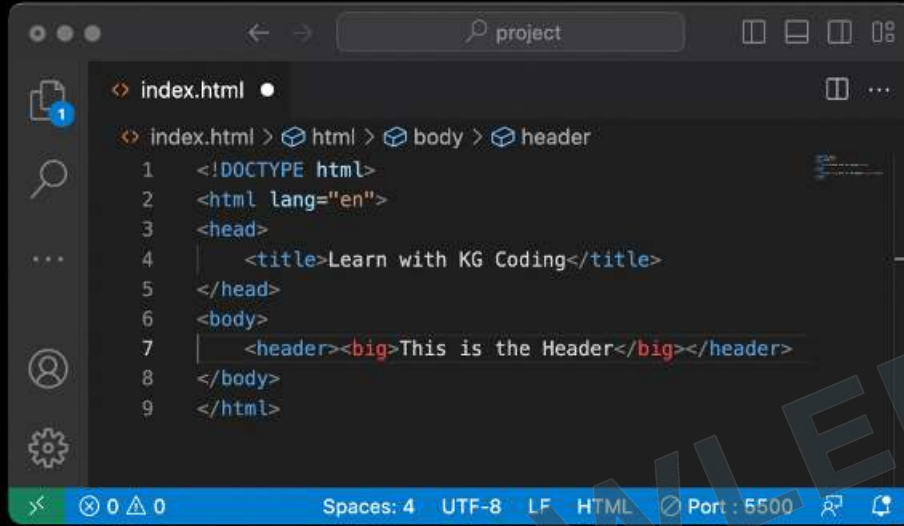


```
<?index.html>
<?index.html> > html > body > header
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4    <title>Learn with KG Coding</title>
5  </head>
6  <body>
7    <header><big>This is the Header</big></header>
8  </body>
9  </html>
```

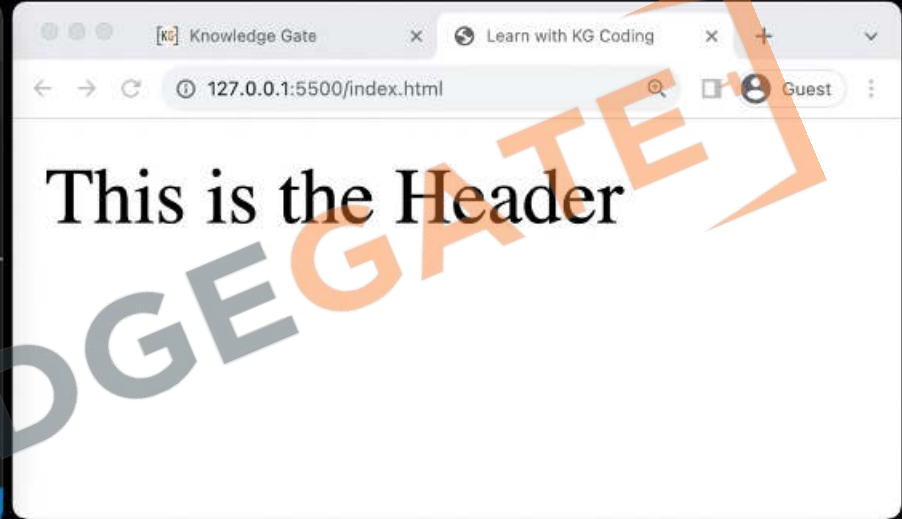


1. **Purpose:** Used to contain introductory content or navigation links.
2. **Semantic:** It's a semantic tag, providing meaning to the enclosed content.
3. **Location:** Commonly found at the top of web pages, but can also appear within `<article>` or `<section>` tags.
4. **Multiple Instances:** Can be used more than once on a page within different sections.

2.2 Main Tag

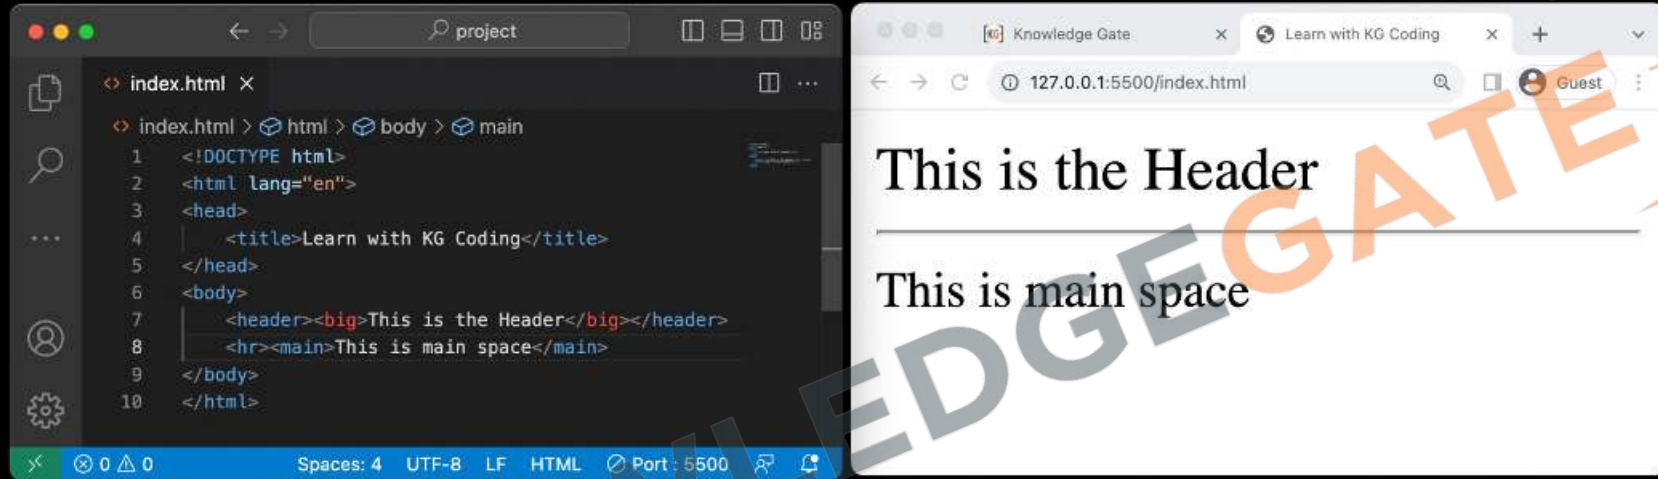


1. **Purpose:** Encloses the primary content of a webpage.
2. **Semantic:** Adds meaning, indicating the main content area.
3. **Unique:** Should appear only once per page.
4. **Accessibility:** Helps screen readers identify key content.
5. **Not for Sidebars:** Excludes content repeated across multiple pages like site navigation or footer.

2.2.1 Section Tag

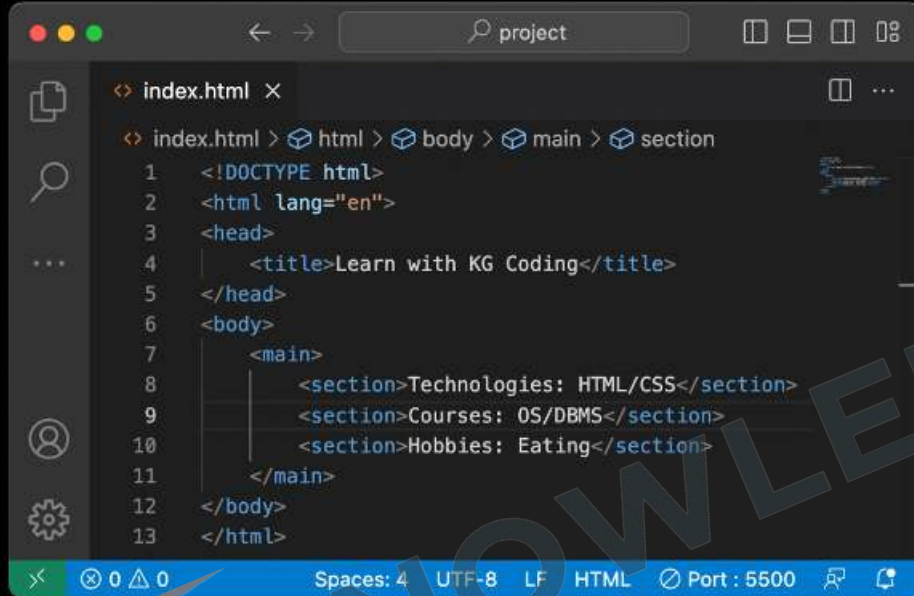


```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Learn with KG Coding</title>
</head>
<body>
  <main>
    <section>Technologies: HTML/CSS</section>
    <section>Courses: OS/DBMS</section>
    <section>Hobbies: Eating</section>
  </main>
</body>
</html>
```

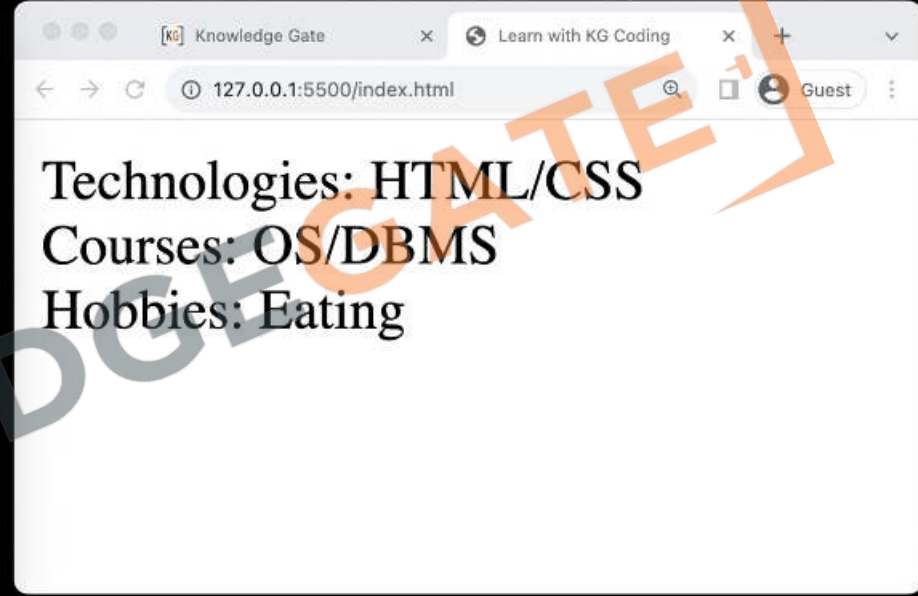


1. **Purpose:** Groups related content in a distinct section.
2. **Semantic:** Adds structure and meaning.
3. **Headers:** Often used with a heading `<h1>` to `<h6>` to indicate section topic.
4. **Nested:** Can be nested within other `<section>` or `<article>` tags.

2.2.2 Article Tag

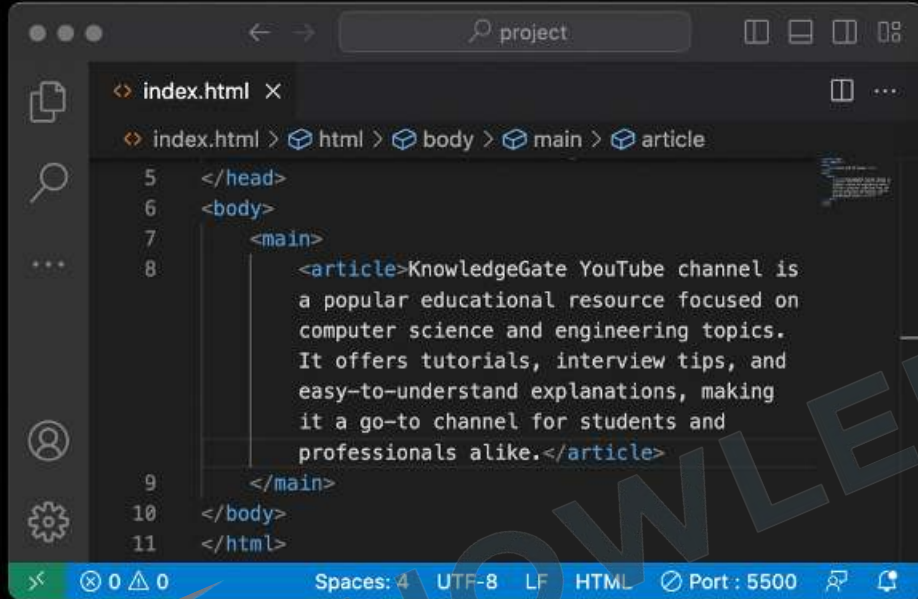


```
5 </head>
6 <body>
7   <main>
8     <article>KnowledgeGate YouTube channel is
      a popular educational resource focused on
      computer science and engineering topics.
      It offers tutorials, interview tips, and
      easy-to-understand explanations, making
      it a go-to channel for students and
      professionals alike.</article>
9   </main>
10 </body>
11 </html>
```

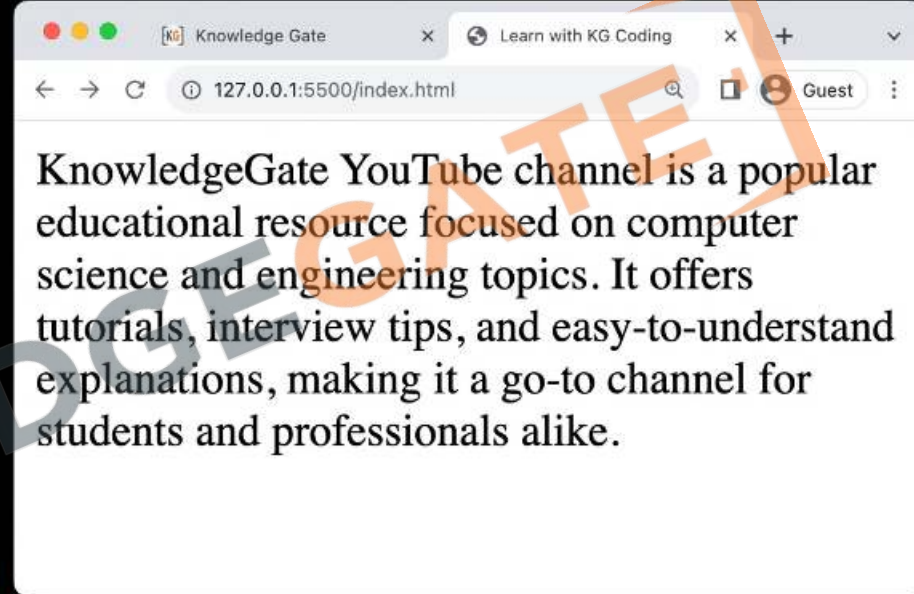

1. **Purpose:** Encloses content that stands alone, like a **blog post or news** story.
2. **Semantic:** Provides contextual meaning.
3. **Independence:** Content should make sense even if taken out of the page context.
4. **Multiple Instances:** Can be used multiple times on the same page


2.2.3 Aside Tag

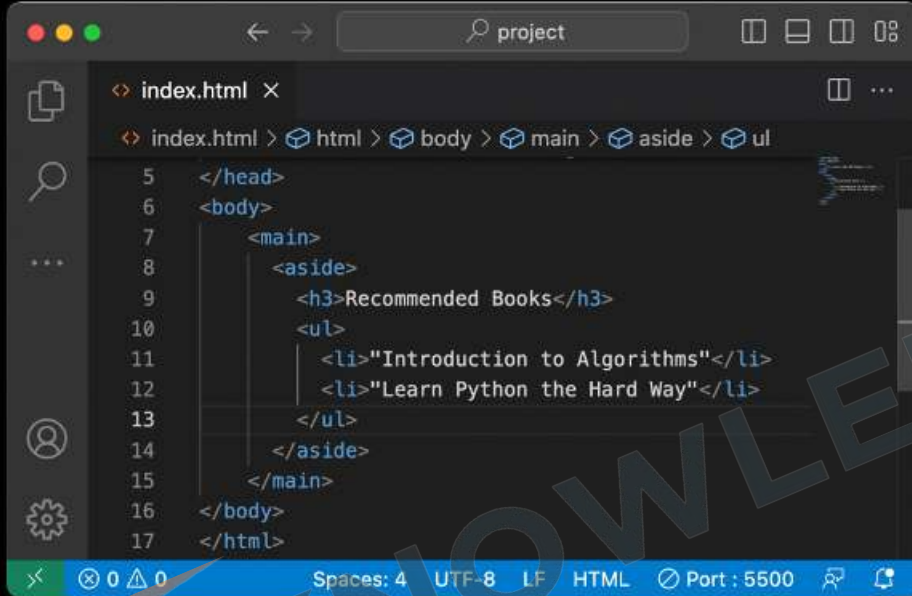

A screenshot of a code editor window titled 'project'. The editor shows the following HTML code:


```
5 </head>
6 <body>
7   <main>
8     <aside>
9       <h3>Recommended Books</h3>
10      <ul>
11        <li>"Introduction to Algorithms"</li>
12        <li>"Learn Python the Hard Way"</li>
13      </ul>
14    </aside>
15  </main>
16 </body>
17 </html>
```

The breadcrumb navigation at the top of the editor shows the path: index.html > html > body > main > aside > ul.

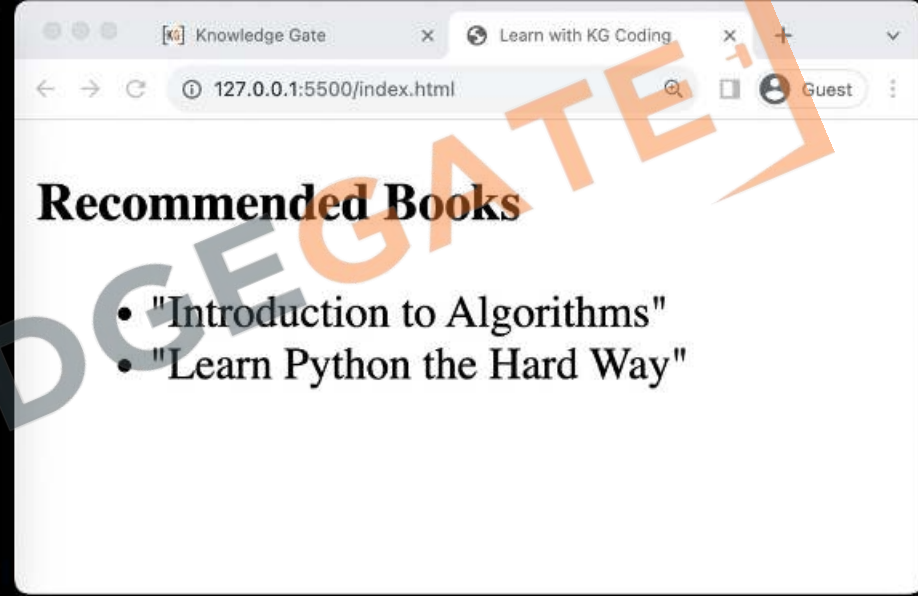


1. **Purpose:** Contains sidebar or supplementary content.
2. **Semantic:** Indicates content tangentially related to the main content.
3. **Not Crucial:** Content is not essential to understanding the main content.
4. **Examples:** Could hold **widgets, quotes, or ads.**

2.3 Footer Tag

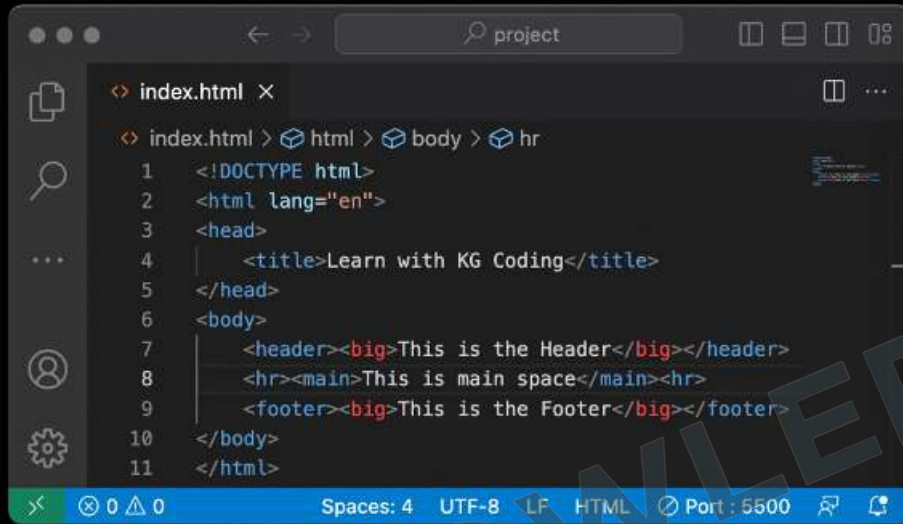

```
<?index.html x>
<?index.html > html > body > hr
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4  |   <title>Learn with KG Coding</title>
5  </head>
6  <body>
7  |   <header><big>This is the Header</big></header>
8  |   <hr><main>This is main space</main><hr>
9  |   <footer><big>This is the Footer</big></footer>
10 </body>
11 </html>
```

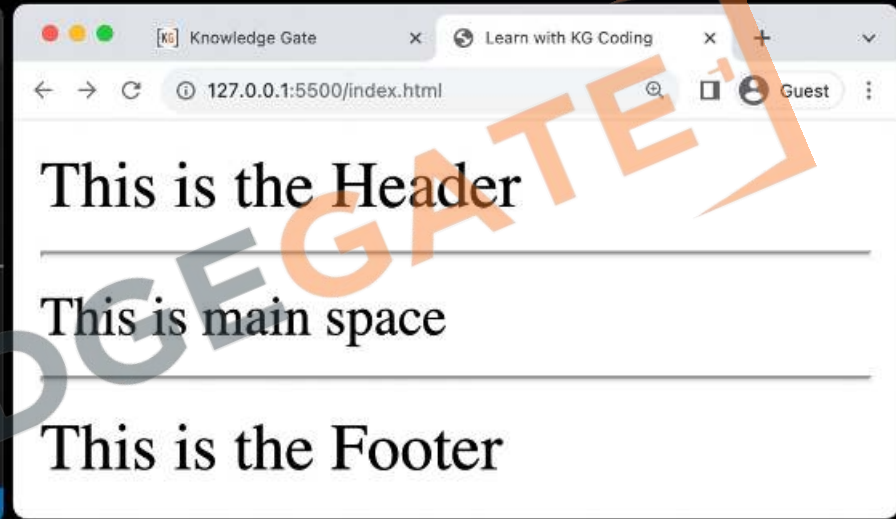

1. **Purpose:** For footer content like extra info or links.
2. **Semantic:** Provides meaning to enclosed content.
3. **Location:** Typically at the **bottom** of pages or sections.
4. **Content:** Includes copyrights, contact info, and social links.
5. **Multiple Instances:** Can be used more than once on a page.


Level 4

HTML and Project Structure



3. Folder Structure

3.1 Recommended Folder Structure

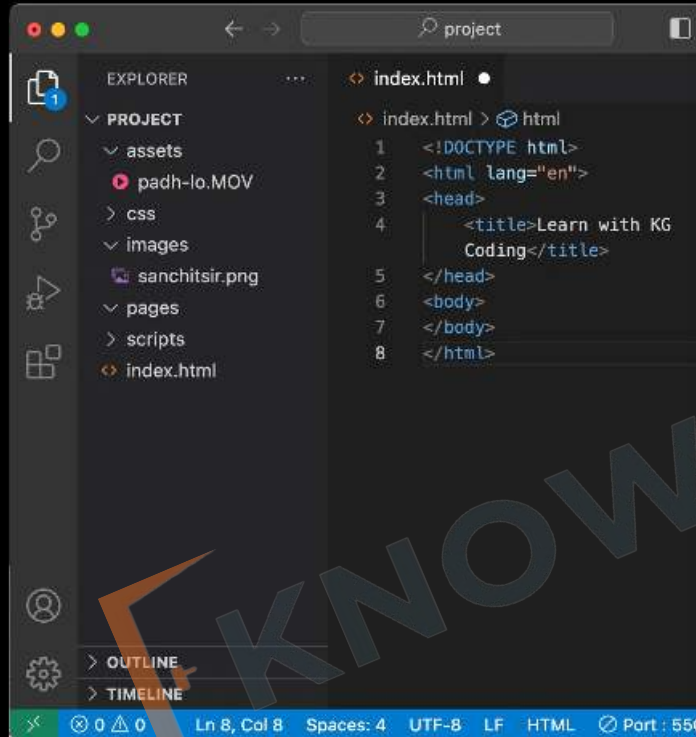

1. **Root Directory:** Main folder containing all website files.
2. **HTML Files:** Store main .html files at the root level for easy access.
3. **CSS Folder:** Create a css/ folder for all Cascading Style Sheets.
4. **JS Folder:** Use a scripts/ folder for JavaScript files.
5. **Images Folder:** Store images in an images/ or images/ folder.
6. **Assets:** Other assets like fonts can go in an assets/ folder.
7. **Sub-directories:** For multi-page websites, use sub-folders to categorize content.


Level 4

HTML and Project Structure

4. More Tags



4.1 Navigation Tags

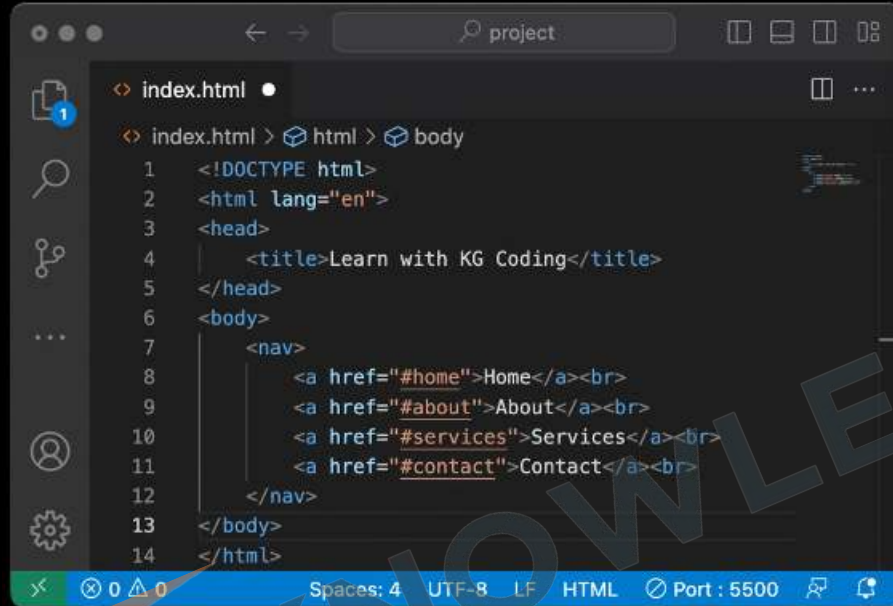

```
<?xml version="1.0" encoding="UTF-8" ?>
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Learn with KG Coding</title>
</head>
<body>
  <nav>
    <a href="#home">Home</a><br>
    <a href="#about">About</a><br>
    <a href="#services">Services</a><br>
    <a href="#contact">Contact</a><br>
  </nav>
</body>
</html>
```



1. **Purpose:** Encloses navigation links or menus.
2. **Semantic:** Signals that the content is meant for navigating the site.
3. **Common Content:** Usually contains lists `<ul>`, `<ol>` of links `<a>`.
4. **Accessibility:** Aids screen readers in identifying site navigation.

4.2 Block / Inline Elements


Block Elements

- **New Line:** Start on a new line.
- **Full Width:** Take up all horizontal space.
- **Styling:** Can have margins and padding.
- **Size:** Width and height can be set.
- **Examples:** `<div>`, `<p>`, `<h1>`, `<ul>`, `<li>`.

Inline Elements


- **Flow:** Stay in line with text.
- **Width:** Just as wide as the content.
- **No Break:** No new line between elements.
- **Limited Styling:** Can't set size easily.
- **Examples:** `<span>`, `<a>`, `<strong>`, `<em>`, `<img>`.

4.3 Div Tags

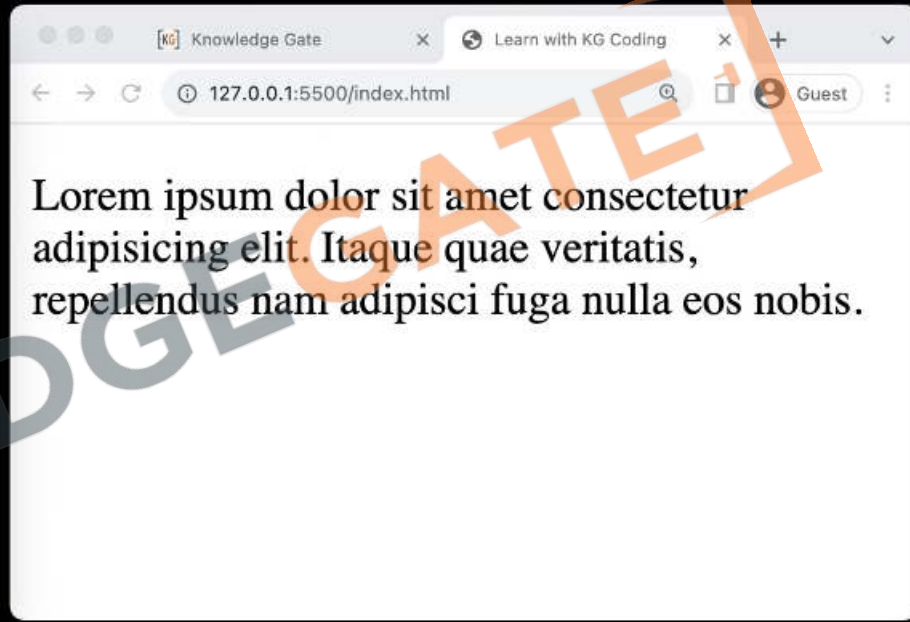


1. **Purpose:** Acts as a container for other **HTML** elements.
2. **Non-Semantic:** Doesn't provide inherent meaning to enclosed content.
3. **Styling:** Commonly used for layout and styling via **CSS**.
4. **Flexibility:** Highly versatile and can be customized using classes or IDs.

4.4 Span Tags

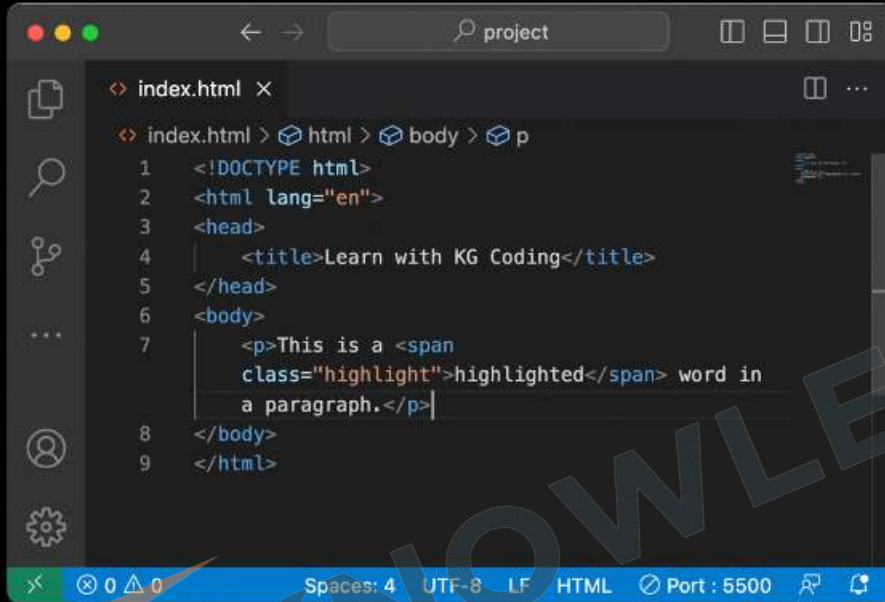

```
<?index.html>  
1 <!DOCTYPE html>  
2 <html lang="en">  
3 <head>  
4   <title>Learn with KG Coding</title>  
5 </head>  
6 <body>  
7   <p>This is a <span  
   class="highlight">highlighted</span> word in  
   a paragraph.</p>  
8 </body>  
9 </html>
```

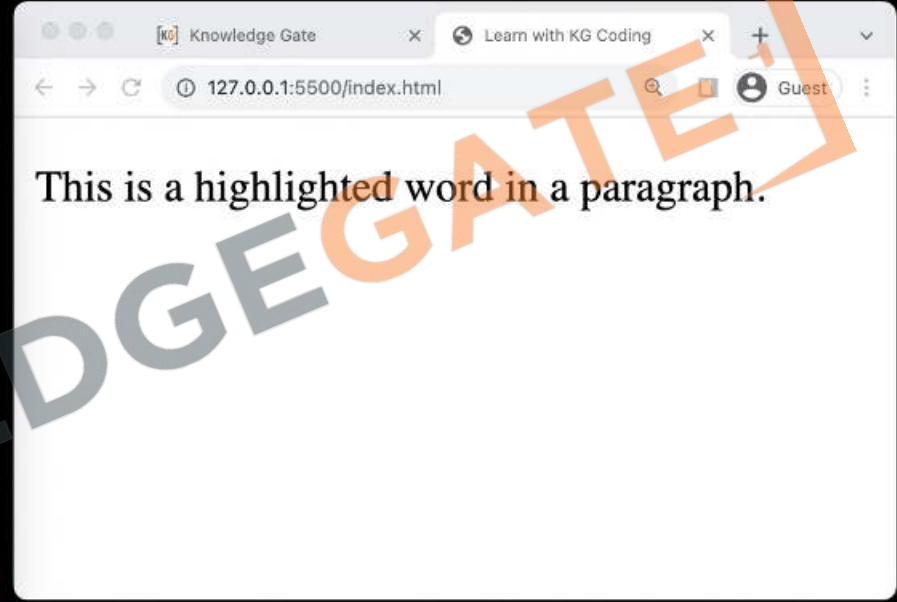

1. **Purpose:** Used for inline elements to style or manipulate a portion of text.
2. **Non-Semantic:** Doesn't add specific meaning to the enclosed text.
3. **Styling:** Commonly used for changing color, font, or adding effects via CSS.
4. **Inline Nature:** Doesn't break text flow or create a new block-level element.

Level 4 Revision

HTML and Project Structure

1. Semantic Tags

1. Semantic / Non-Semantic Tags

2. Body Tags

1. Header Tag
2. Main Tag
 1. Section Tag
 2. Article Tag
 3. Aside Tag
3. Footer Tag

3. Folder Structure

1. Recommended Folder structure

4. More Tags


1. Navigation tags
2. Block / Inline Elements
3. Div tags
4. Span Tags



Project Level 4

HTML and Project Structure

1. Create a **page** with header, footer, main(section, article, aside tag).
2. Make sure the project from level 3 has correct **folder structure**.
3. Create **groupings** of multiple tags using div.
4. Create **navigation** to important sections of your page.

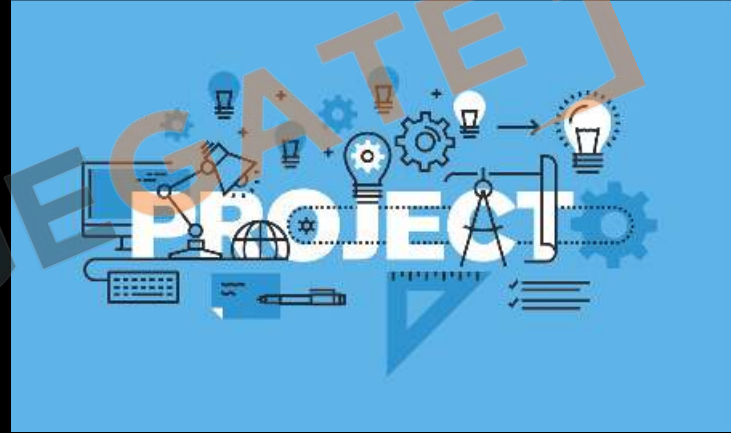

KG Coding

Some Other One shot Video Links:

- [Complete HTML](#)
- [Complete CSS](#)
- [Complete JavaScript](#)
- [Complete React and Redux](#)
- [One shot University Exam Series](#)



<http://www.kgcoding.in/>

Our  Channels

[KG Coding Android App](#)



[KG Coding](#)



[Knowledge GATE](#)



[KG Placement Prep](#)



[Sanchit Socket](#)

Level 5

List, Tables & Forms

1. List Tag

1. Ordered Lists
2. Types of Ordered Lists
3. Unordered Lists

2. Table Tag

1. `<tr>`, `<td>`, `<th>` tags
2. Captions
3. Col spans

3. Forms

1. Input tag
2. Action Attributes
3. Name and Value Property
4. Label Tag
5. Exploring Types

4. iFrame Tag

1. Using iFrames


Level 5

List, Tables & Forms




1. List Tag

1.1 Ordered Lists

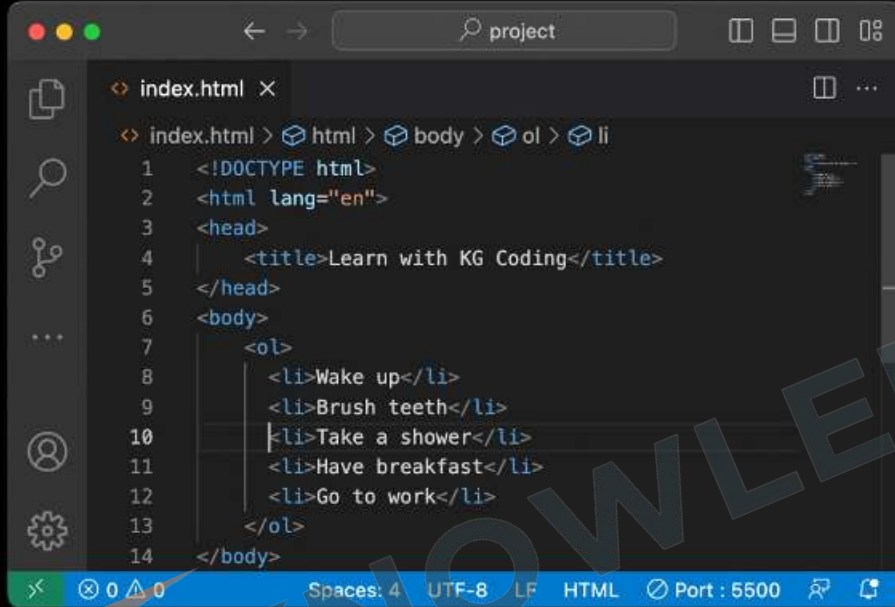

```
<?xml version="1.0" encoding="UTF-8" ?>
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Learn with KG Coding</title>
</head>
<body>
  <ol>
    <li>Wake up</li>
    <li>Brush teeth</li>
    <li>Take a shower</li>
    <li>Have breakfast</li>
    <li>Go to work</li>
  </ol>
</body>
</html>
```

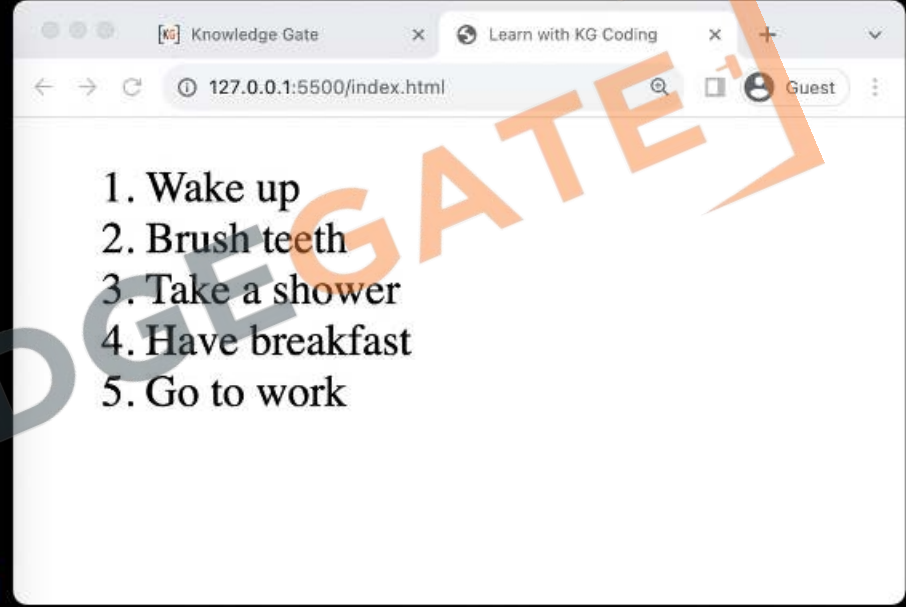

1. **Purpose:** Used for creating lists with items that have a specific order.
2. **Default:** Items are automatically numbered.
3. **Nesting:** Can be nested within other lists.

1.2 Types of Ordered Lists

Ordered Lists

- **Numeric:** Default type, (1, 2, 3, ...)
Attribute: `type="1"`
- **Uppercase Letters:** (A, B, C, ...)
Attribute: `type="A"`
- **Lowercase Letters:** (a, b, c, ...)
Attribute: `type="a"`
- **Uppercase Roman:** (I, II, III, ...)
Attribute: `type="I"`
- **Lowercase Roman:** (i, ii, iii, ...)
Attribute: `type="i"`


A. Apple
B. Banana
C. Cherry
D. Dragonfruit

a. Apple
b. Banana
c. Cherry
d. Dragonfruit

I. Apple
II. Banana
III. Cherry
IV. Dragonfruit

i. Apple
ii. Banana
iii. Cherry
iv. Dragonfruit


1.3 Unordered Lists

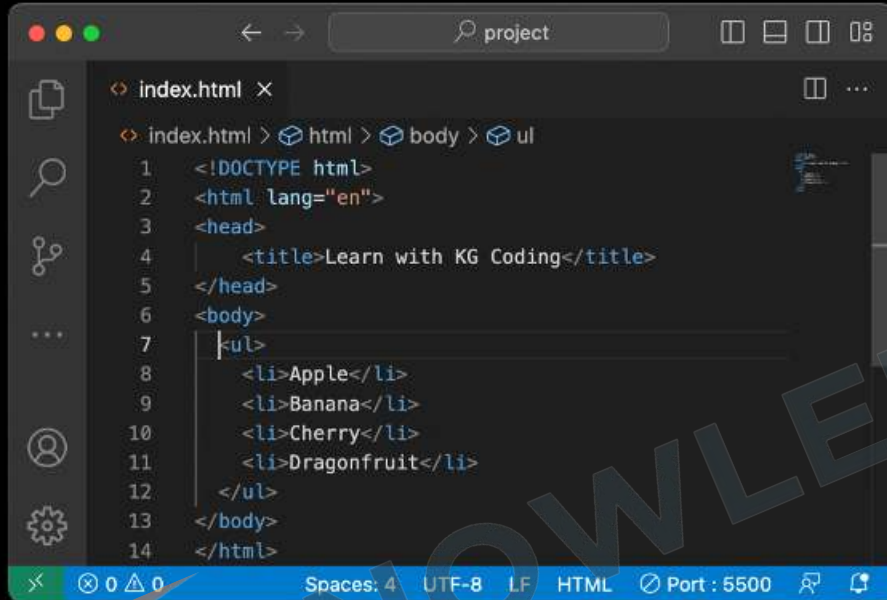

A screenshot of a code editor window titled 'project'. The editor shows the content of 'index.html'. The code is as follows:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <ul>
8     <li>Apple</li>
9     <li>Banana</li>
10    <li>Cherry</li>
11    <li>Dragonfruit</li>
12  </ul>
13 </body>
14 </html>
```

The status bar at the bottom indicates 'Spaces: 4', 'UTF-8', 'LF', 'HTML', and 'Port : 5500'.

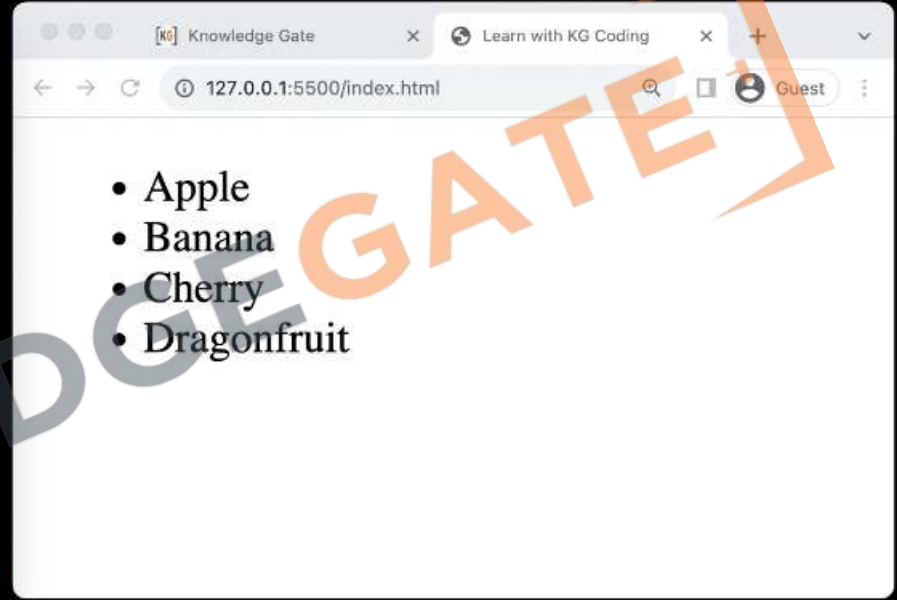

1. **Purpose:** Used for lists where the order of items doesn't matter.
2. **Default:** Items are usually bulleted.
3. **Nesting:** Can be nested within other lists.


Level 5

List, Tables & Forms



2. Table
Tag


2.1 <tr>, <td>, <th> Tags

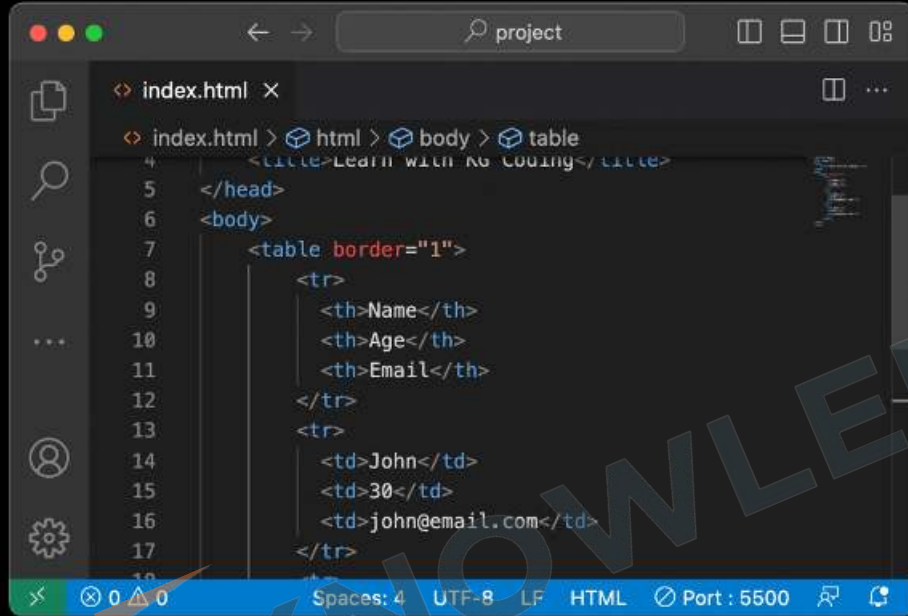

The screenshot shows a code editor with a dark theme. The file is named 'index.html'. The code is as follows:


```
<!DOCTYPE html>
<html>
  <head>
    <title>Learn with KG Coding</title>
  </head>
  <body>
    <table border="1">
      <tr>
        <th>Name</th>
        <th>Age</th>
        <th>Email</th>
      </tr>
      <tr>
        <td>John</td>
        <td>30</td>
        <td>john@email.com</td>
      </tr>
    </table>
  </body>
</html>
```

The status bar at the bottom indicates 'Spaces: 4', 'UTF-8', 'LF', 'HTML', and 'Port : 5500'.

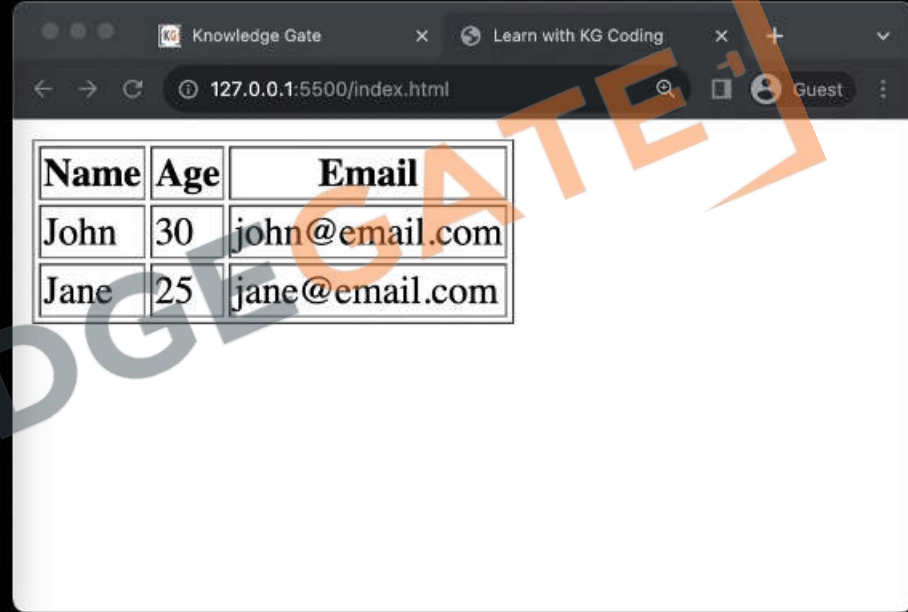


1. **<tr>** Table Row : Used to define a row in an HTML table.
2. **<th>** Table Header : Used for header cells within a row.
Text is bold and centered by default.
3. **<td>** Table Data : This Holds the actual data.

2.2 Captions

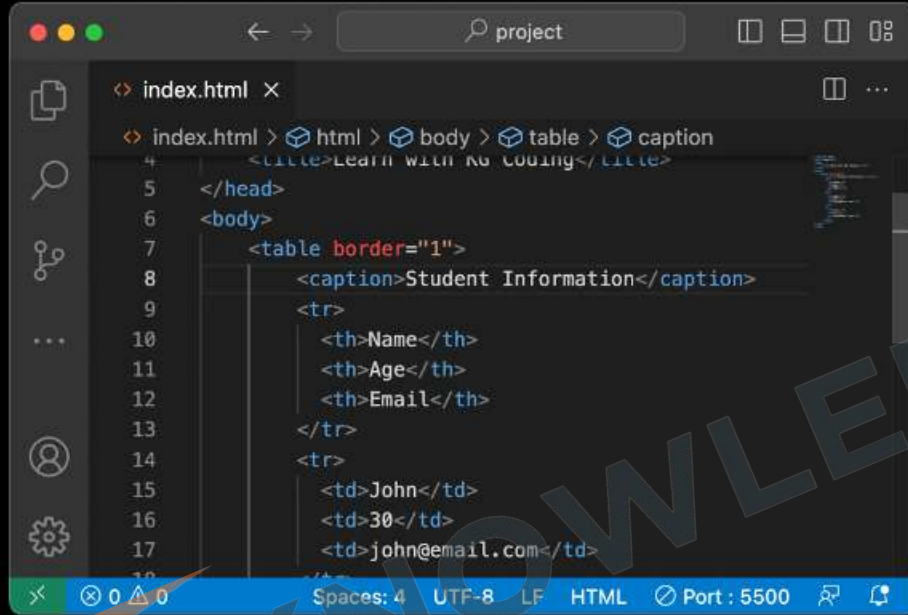


```
<?xml version="1.0"?>
<html>
  <head>
    <title>Learn with KG Coding</title>
  </head>
  <body>
    <table border="1">
      <caption>Student Information</caption>
      <tr>
        <th>Name</th>
        <th>Age</th>
        <th>Email</th>
      </tr>
      <tr>
        <td>John</td>
        <td>30</td>
        <td>john@email.com</td>
      </tr>
      <tr>
        <td>Jane</td>
        <td>25</td>
        <td>jane@email.com</td>
      </tr>
    </table>
  </body>
</html>
```

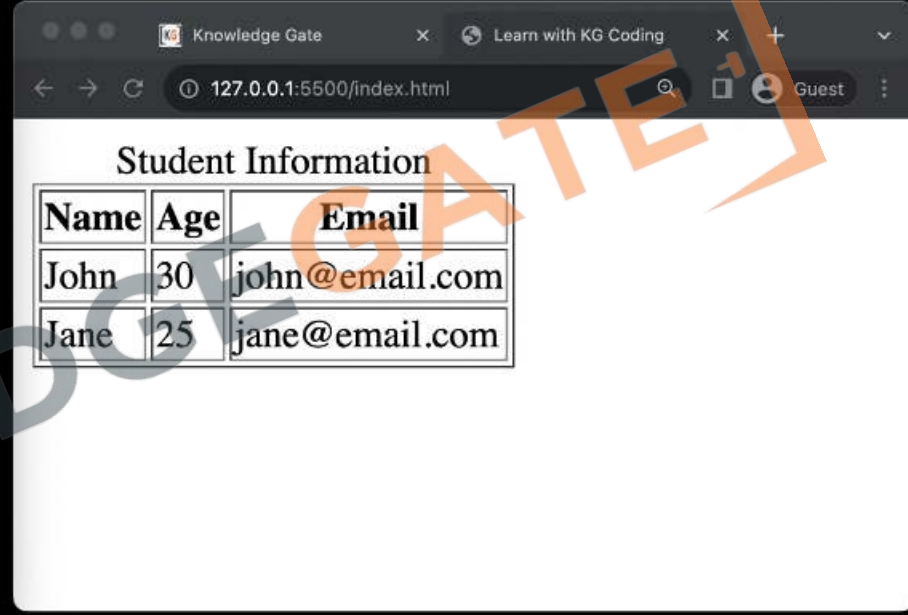


1. **Purpose:** Provides a title or description for a table.
2. **Placement:** Must be inserted **immediately after** the `<table>` opening tag.
3. **Alignment:** **Centered** above the table by default.
4. **Accessibility:** Helps screen readers understand the table's purpose.

2.3 Col Spans

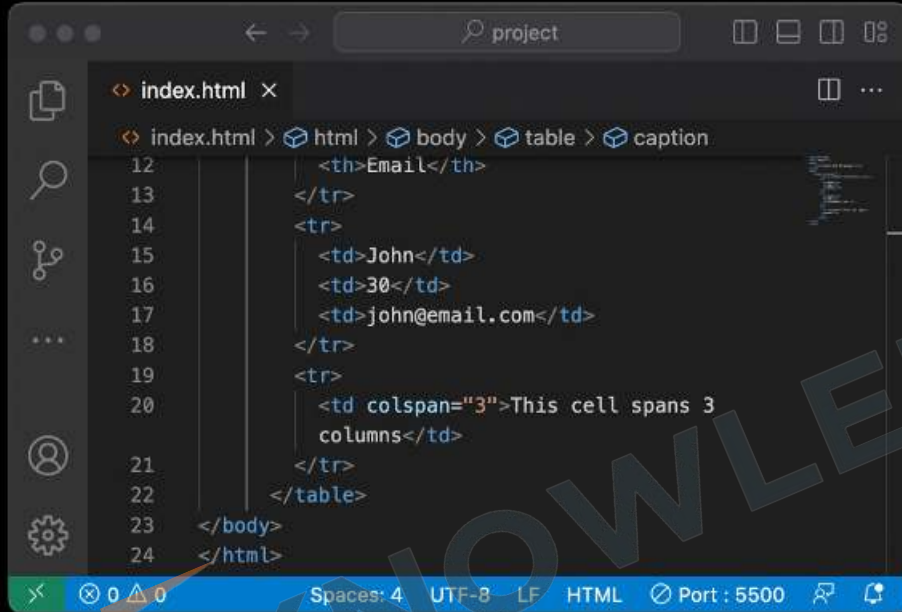

```
index.html x
index.html > html > body > table > caption
12      <th>Email</th>
13    </tr>
14    <tr>
15      <td>John</td>
16      <td>30</td>
17      <td>john@email.com</td>
18    </tr>
19    <tr>
20      <td colspan="3">This cell spans 3
      columns</td>
21    </tr>
22  </table>
23 </body>
24 </html>
```

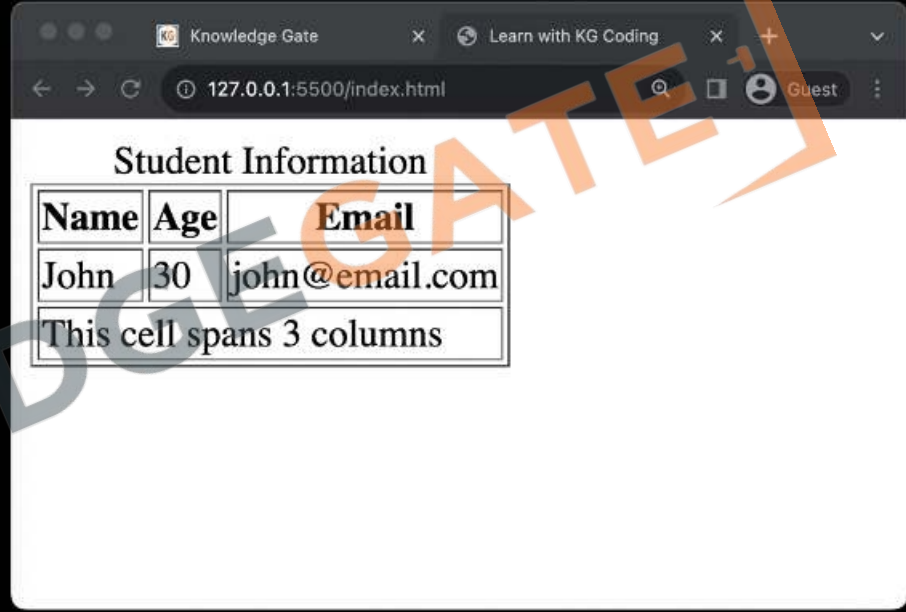

1. **Attribute:** Uses the colspan attribute in `<td>` or `<th>` tags.
2. **Purpose:** Allows a cell to span multiple columns horizontally.
3. **Alignment:** Takes the space of the specified number of columns.
4. **Layout:** Useful for combining cells to create complex table layouts.


Level 5

List, Tables & Forms




3. Forms

3.1 Input Tag

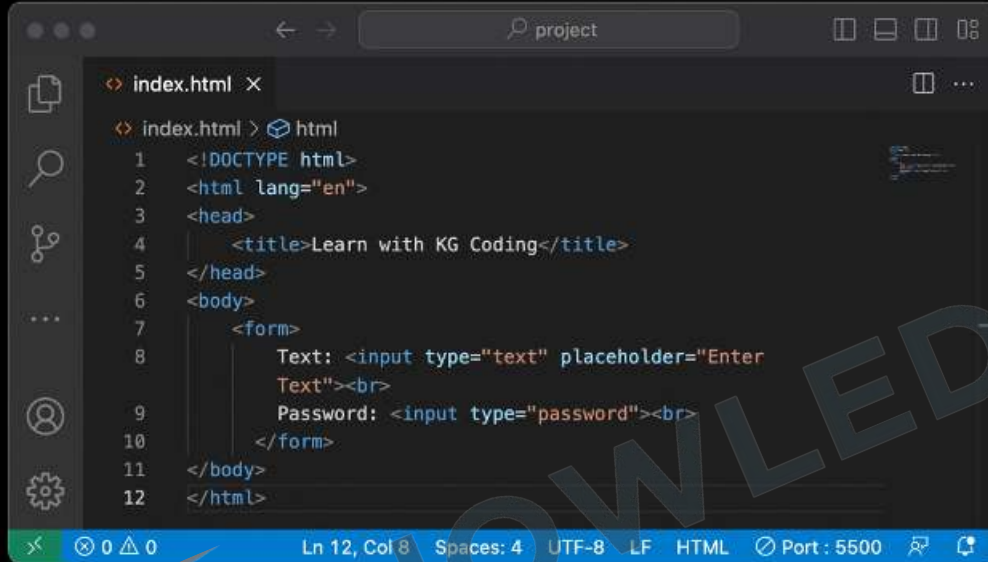


```
index.html X
index.html > html
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <form>
8     Text: <input type="text" placeholder="Enter
9     Text"><br>
10    Password: <input type="password"><br>
11  </form>
12 </body>
13 </html>
```

Ln 12, Col 8 Spaces: 4 UTF-8 LF HTML Port : 5500

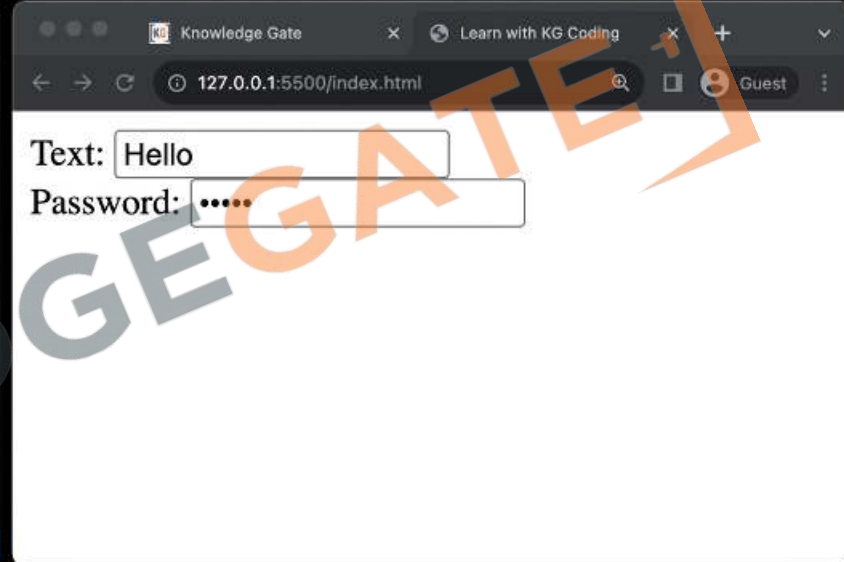


1. **Purpose:** Used within a `<form>` element to collect user input.
2. **Self-Closing:** The `<input>` tag is self-closing; doesn't require a closing tag.
3. **Attributes:** Common attributes are `name`, `value`, `placeholder`, and `required`.

3.2 Action attribute

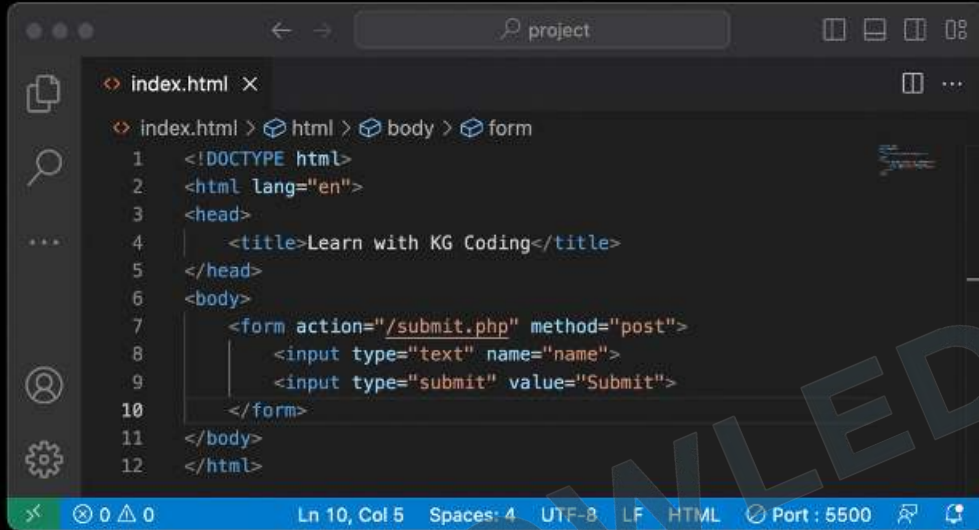


```
index.html x
index.html > html > body > form
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <form action="/submit.php" method="post">
8     <input type="text" name="name">
9     <input type="submit" value="Submit">
10  </form>
11 </body>
12 </html>
```

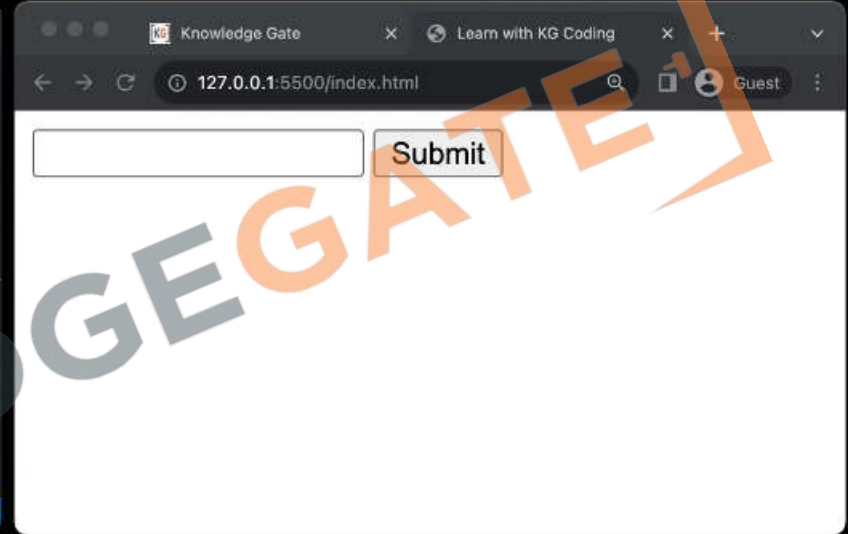


1. **Purpose:** Specifies the URL to which the form data should be sent when submitted.
2. **Default:** If not specified, the form will be submitted to the **current page's** URL.
3. **Server-Side:** Usually points to a server-side script (like **PHP, Python**, etc.) that processes the form data.

3.3 Name and Value property

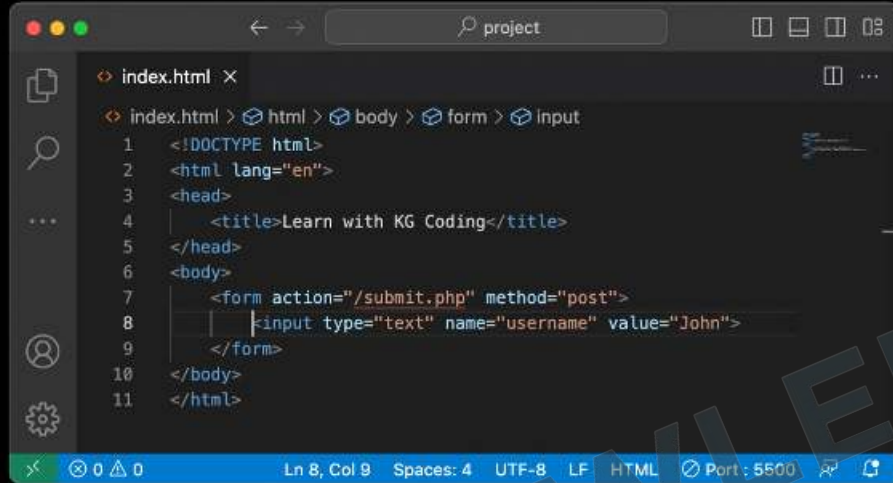


```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <form action="/submit.php" method="post">
8     <input type="text" name="username" value="John">
9   </form>
10 </body>
11 </html>
```

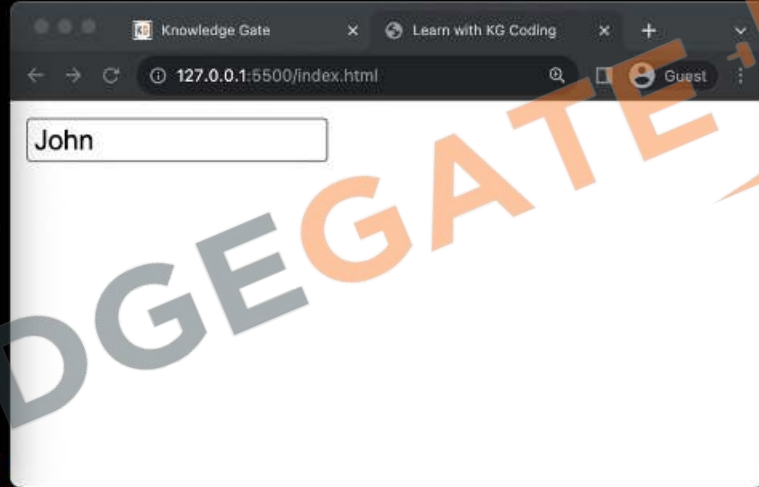


- **'name' Property:**
 - **ID for Data:** Identifies form elements when submitting.
 - **Unique:** Should be unique to each element for clarity.
- **'value' Property:**
 - **Default Data:** Sets initial value for input elements.
 - **Sent to Server:** This is the data sent when form is submitted.

3.4 Label Tag

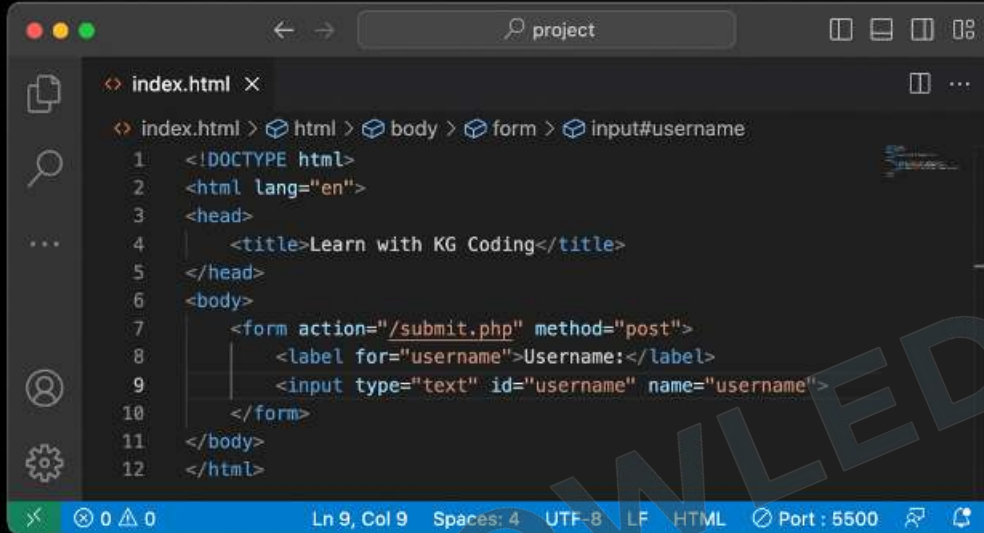


```
<?xml version="1.0" encoding="UTF-8" ?>
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Learn with KG Coding</title>
</head>
<body>
  <form action="/submit.php" method="post">
    <label for="username">Username:</label>
    <input type="text" id="username" name="username">
  </form>
</body>
</html>
```

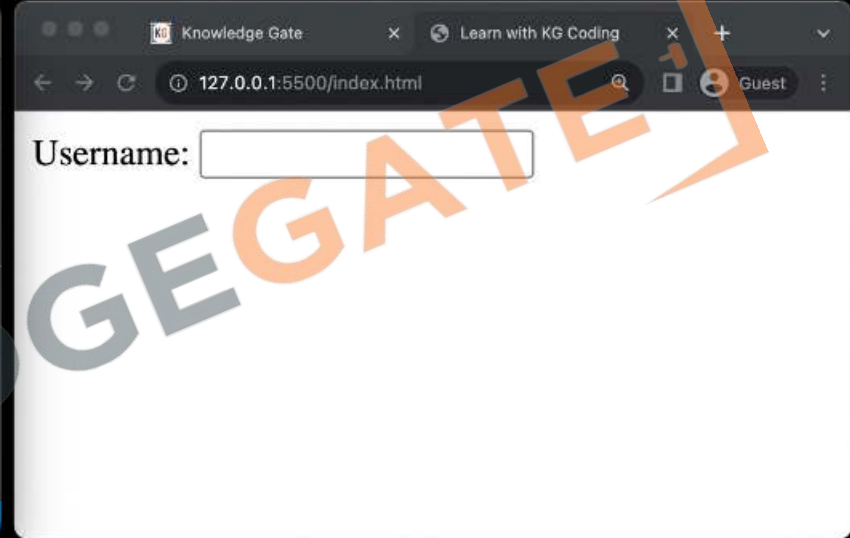


- **Purpose:** Adds a text description to form elements.
- **for Attribute:** Connects the label to a specific **form element** using the element's id.
- **Accessibility:** Makes the form more accessible.
- **Readability:** Enhances form readability and usability.

3.5 Input type: Date

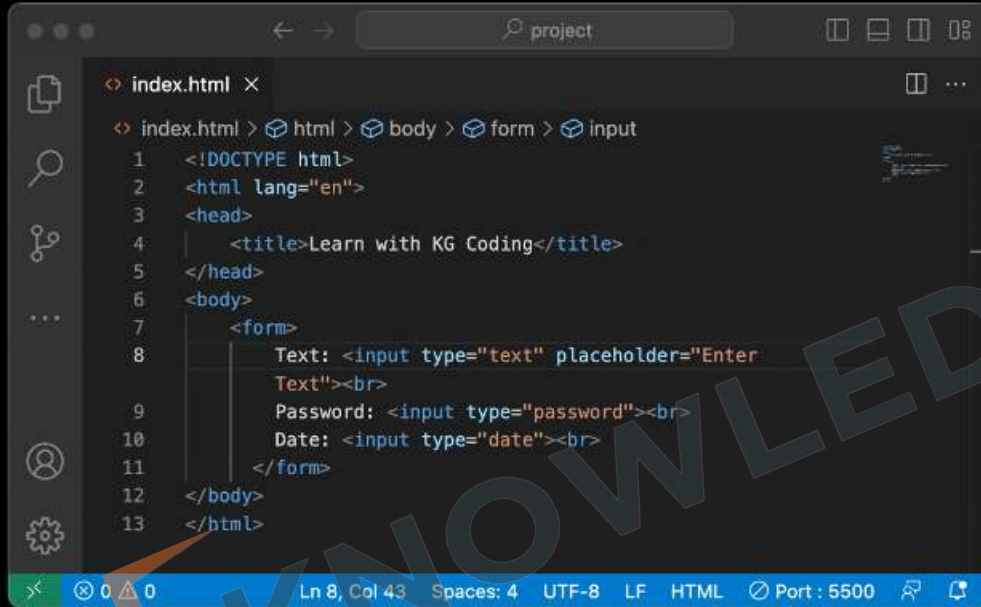

```
index.html x
<index.html> <html> <body> <form> <input>
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <form>
8     Text: <input type="text" placeholder="Enter
9     Text"><br>
10    Password: <input type="password"><br>
11    Date: <input type="date"><br>
12  </form>
13 </body>
14 </html>
```

Ln 8, Col 43 Spaces: 4 UTF-8 LF HTML Port: 5500

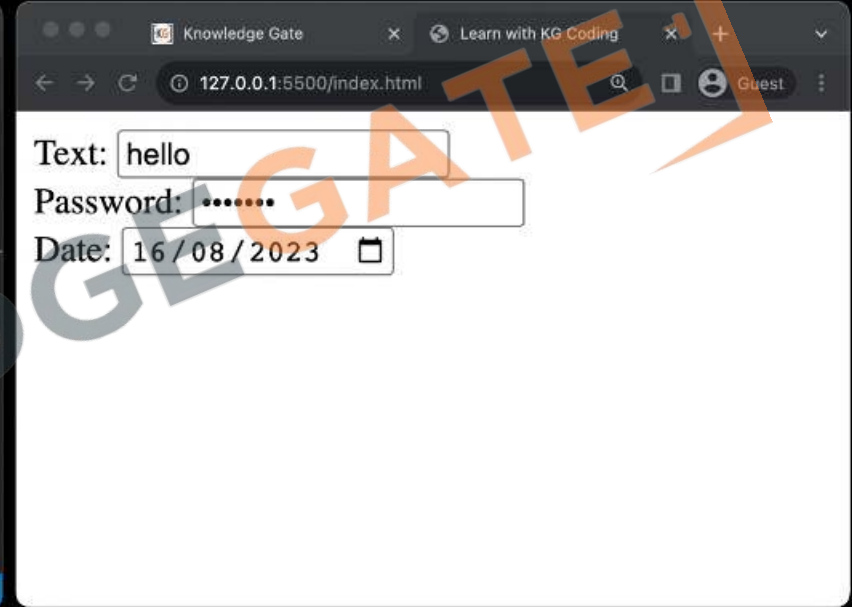

Knowledge Gate x Learn with KG Coding x + v


127.0.0.1:5500/index.html Guest

Text:

Password:


Date:

3.5 Input type: File

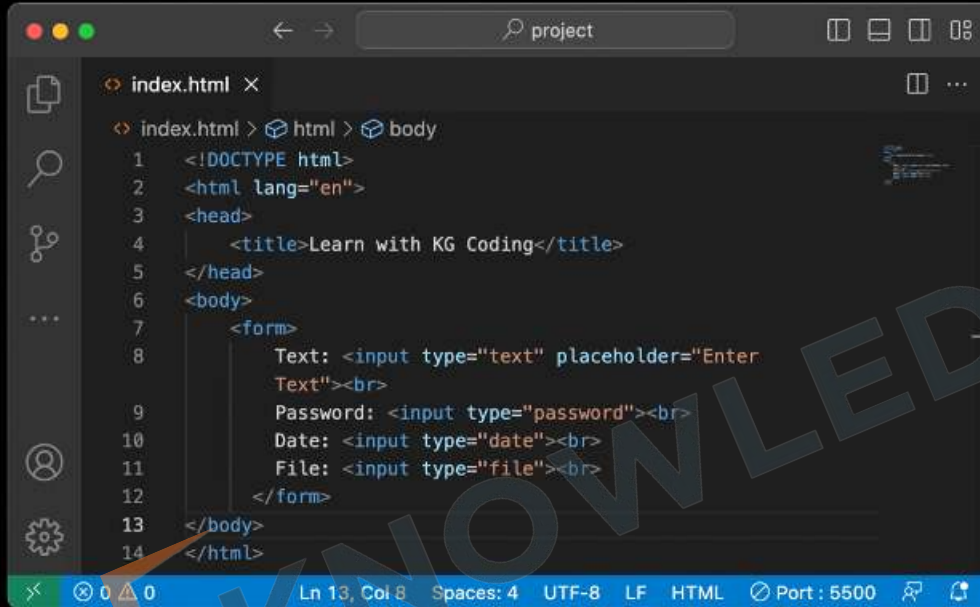

```
index.html X
< index.html > html > body
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <form>
8     Text: <input type="text" placeholder="Enter
9     Text"><br>
10    Password: <input type="password"><br>
11    Date: <input type="date"><br>
12    File: <input type="file"><br>
13  </form>
14 </body>
15 </html>
```

Ln 13, Col 8 Spaces: 4 UTF-8 LF HTML Port : 5500

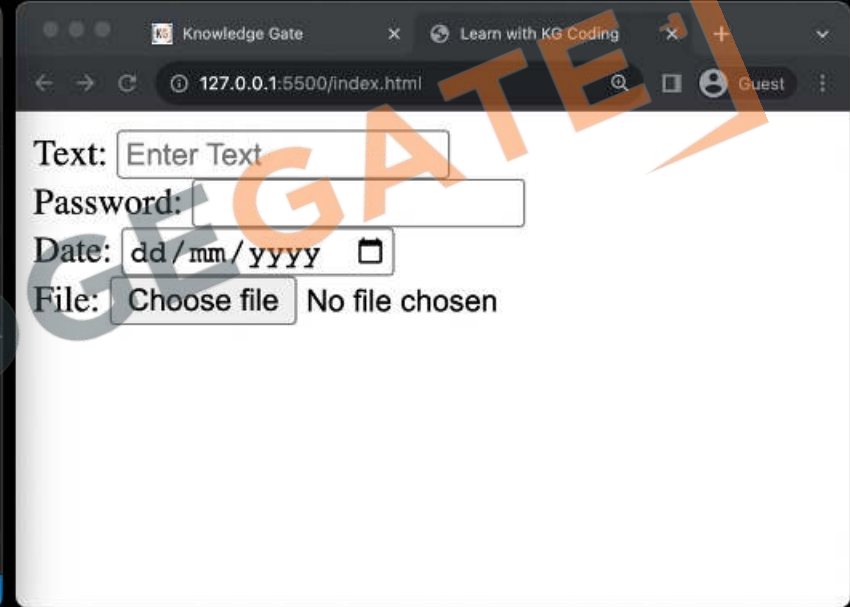

Knowledge Gate X Learn with KG Coding

127.0.0.1:5500/index.html Guest

Text:


Password:

Date:


File: No file chosen

3.5 Input type: Color


```
index.html X
index.html > html
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <form>
8     Color: <input type="color"><br>
9     Text: <input type="text" placeholder="Enter
10    Text"><br>
11    Password: <input type="password"><br>
12    Date: <input type="date"><br>
13    File: <input type="file"><br>
14   </form>
15 </body>
16 </html>
```

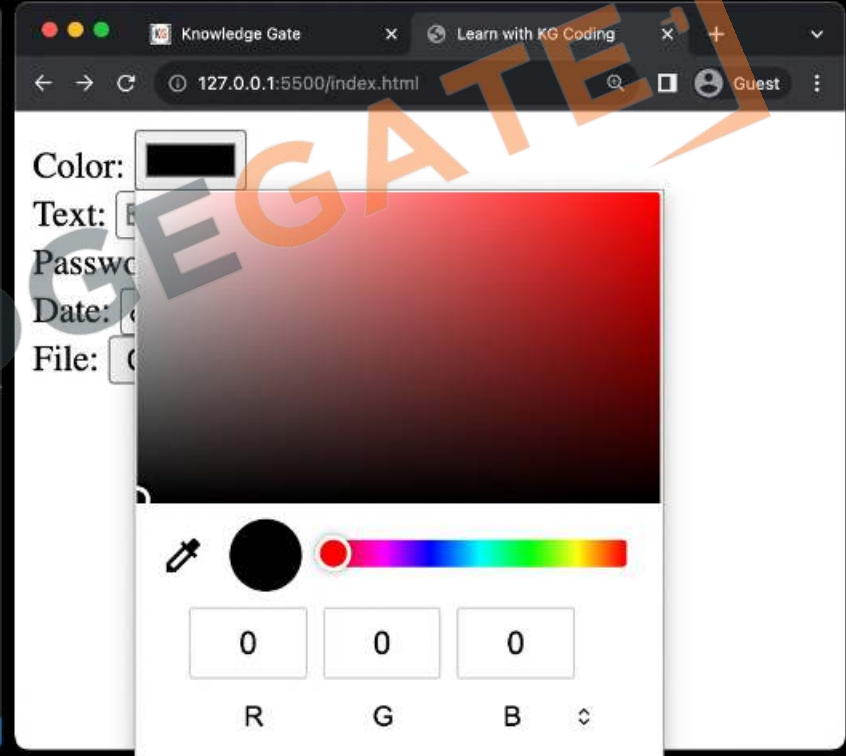

3.5 Input type: Range

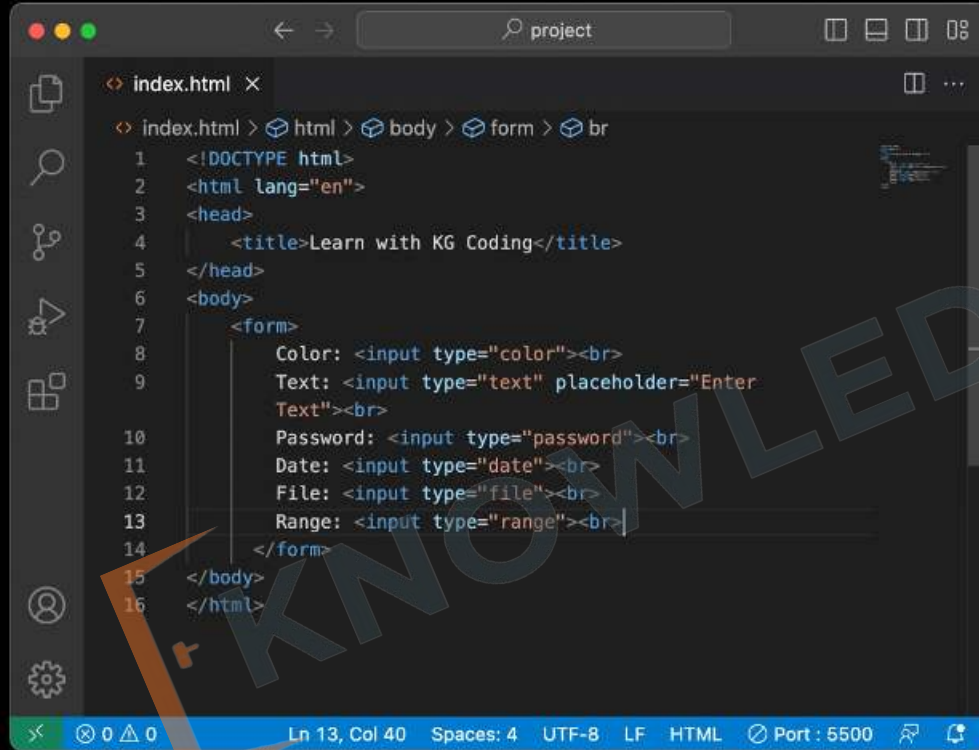

```
<?index.html>
<?index.html> > html > body > form > br
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4    <title>Learn with KG Coding</title>
5  </head>
6  <body>
7    <form>
8      Color: <input type="color"><br>
9      Text: <input type="text" placeholder="Enter
10     Text"><br>
11     Password: <input type="password"><br>
12     Date: <input type="date"><br>
13     File: <input type="file"><br>
14     Range: <input type="range"><br>
15   </form>
16 </body>
</html>
```

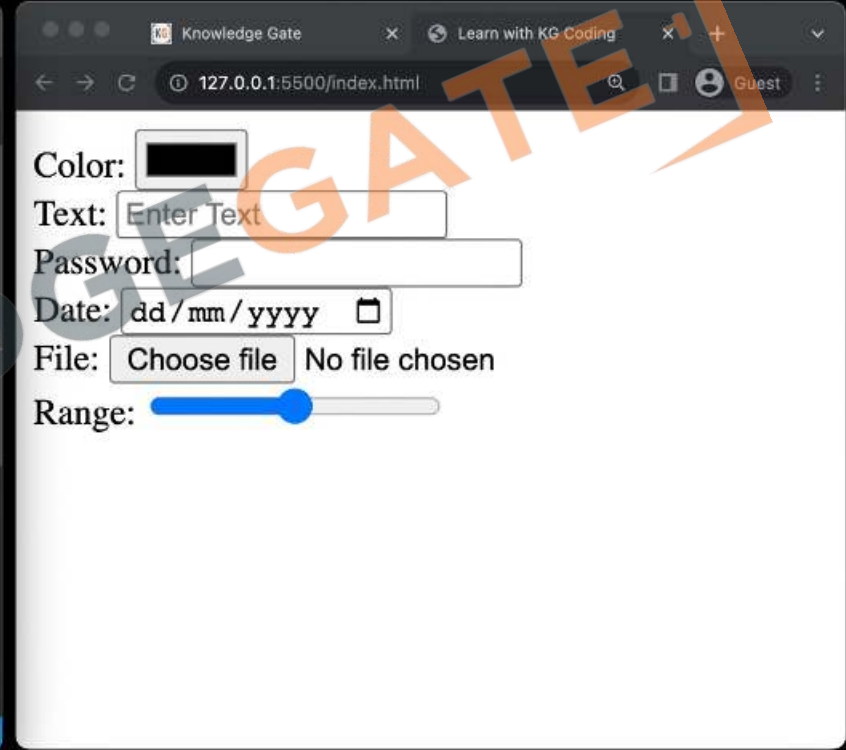

Knowledge Gate x Learn with KG Coding

127.0.0.1:5500/index.html

Color:

Text:


Password:

Date:

File: No file chosen


Range:

3.5 Input type: Button

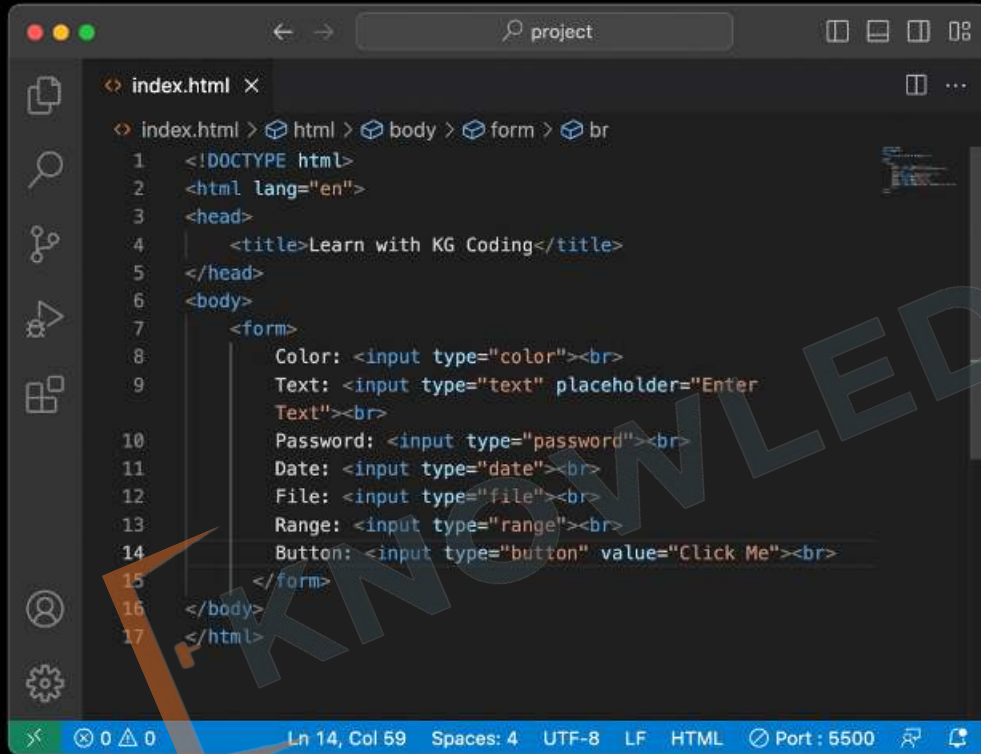


```
index.html x
<index.html> <html> <body> <form> <br>
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <form>
8     Color: <input type="color"><br>
9     Text: <input type="text" placeholder="Enter
10    Text"><br>
11    Password: <input type="password"><br>
12    Date: <input type="date"><br>
13    File: <input type="file"><br>
14    Range: <input type="range"><br>
15    Button: <input type="button" value="Click Me"><br>
16   </form>
17 </body>
</html>
```

Ln 14, Col 59 Spaces: 4 UTF-8 LF HTML Port: 5500

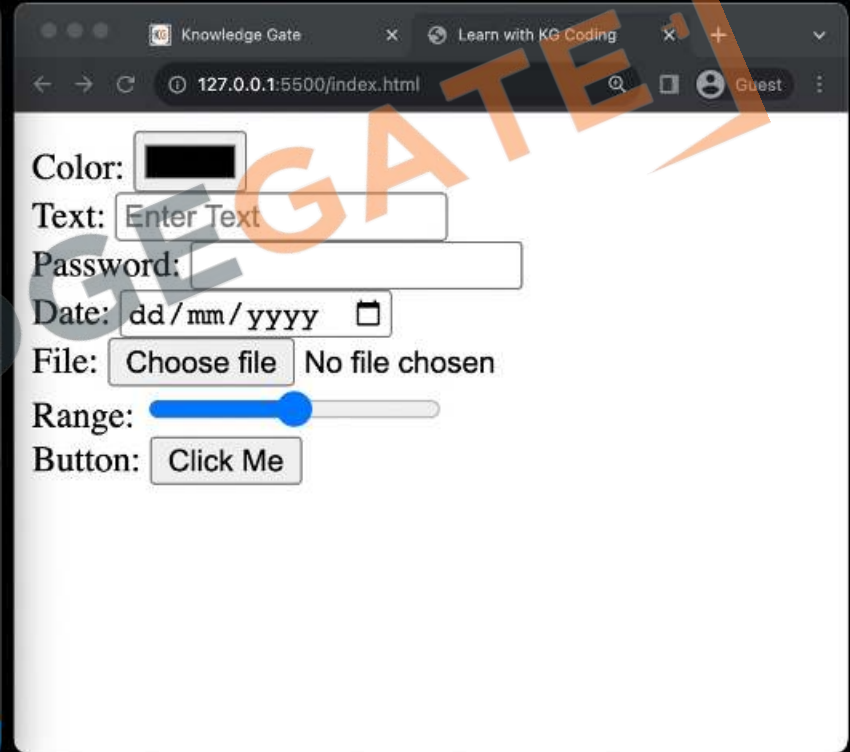


3.5 Input type: Submit

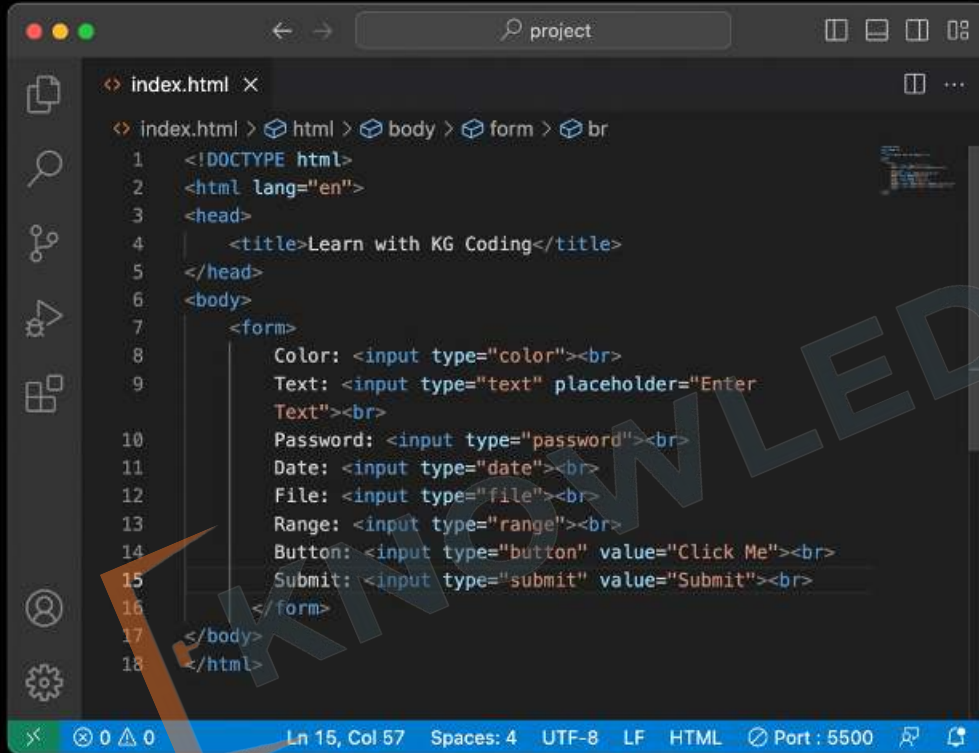

```
<?index.html x>
<? index.html > html > body > form > br
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4    <title>Learn with KG Coding</title>
5  </head>
6  <body>
7    <form>
8      Color: <input type="color"><br>
9      Text: <input type="text" placeholder="Enter
10     Text"><br>
11     Password: <input type="password"><br>
12     Date: <input type="date"><br>
13     File: <input type="file"><br>
14     Range: <input type="range"><br>
15     Button: <input type="button" value="Click Me"><br>
16     Submit: <input type="submit" value="Submit"><br>
17   </form>
18 </body>
</html>
```

Ln 15, Col 57 Spaces: 4 UTF-8 LF HTML Port : 5500

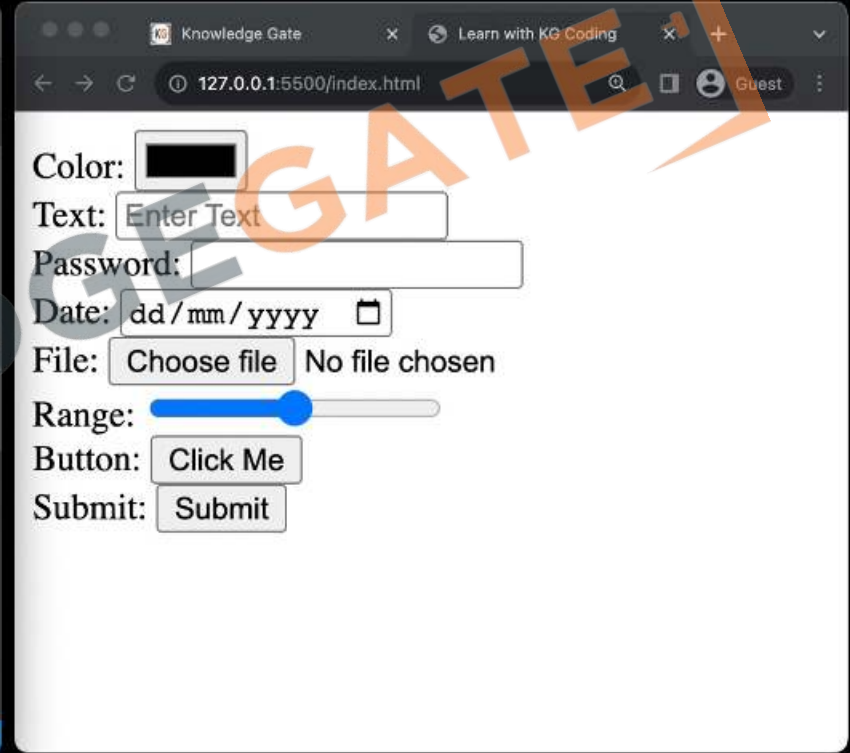

Knowledge Gate Learn with KG Coding Guest

127.0.0.1:5500/index.html

Color:

Text:

Password:

Date:


File: No file chosen

Range:

Button:


Submit:

3.5 Input type: Radio

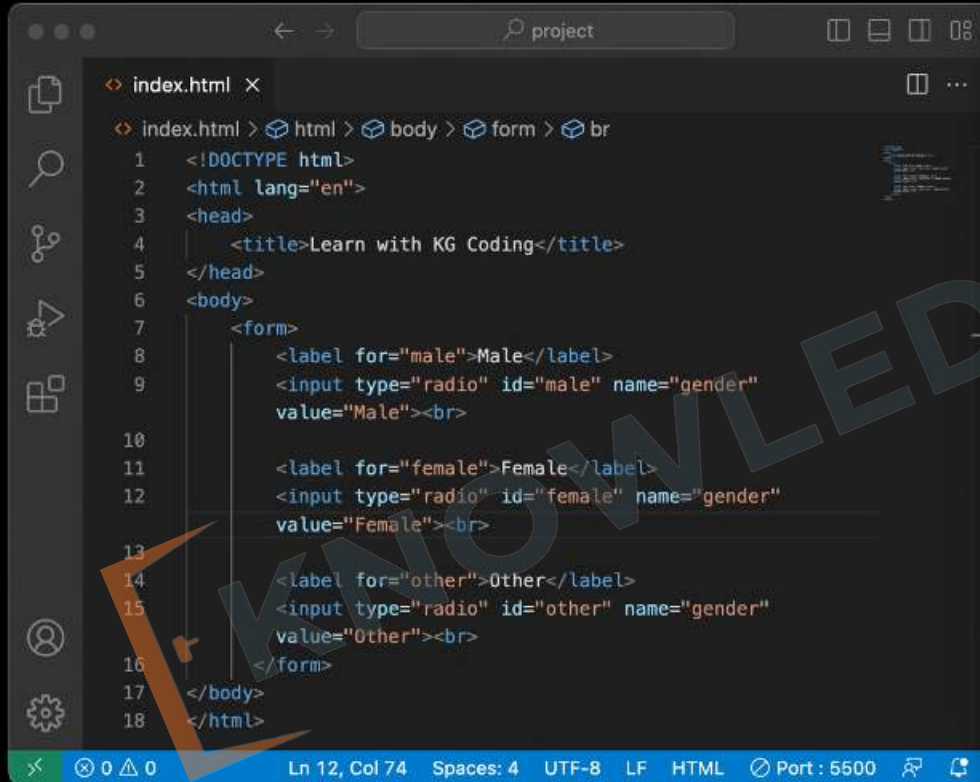

```
index.html X
< index.html > < html > < body > < form > < br >
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4    <title>Learn with KG Coding</title>
5  </head>
6  <body>
7    <form>
8      <label for="male">Male</label>
9      <input type="radio" id="male" name="gender"
      value="Male"><br>
10
11     <label for="female">Female</label>
12     <input type="radio" id="female" name="gender"
13     value="Female"><br>
14
15     <label for="other">Other</label>
16     <input type="radio" id="other" name="gender"
17     value="Other"><br>
18   </form>
19 </body>
20 </html>
```

Ln 12, Col 74 Spaces: 4 UTF-8 LF HTML Port : 5500

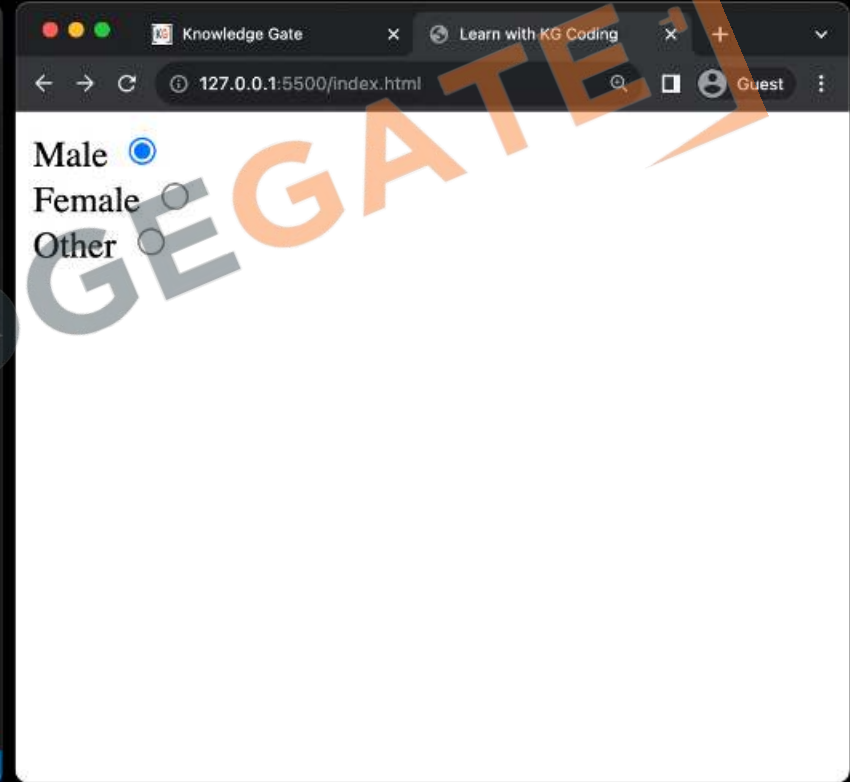


3.5 Input type: *Checkbox*



```
index.html > html > body
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <form>
8     <label for="apple">Apple</label>
9     <input type="checkbox" id="apple" name="fruit"
      value="Apple"><br>
10
11     <label for="banana">Banana</label>
12     <input type="checkbox" id="banana" name="fruit"
      value="Banana"><br>
13
14     <label for="cherry">Cherry</label>
15     <input type="checkbox" id="cherry" name="fruit"
      value="Cherry"><br>
16   </form>
17 </body>
18 </html>
```

A screenshot of a web browser window. The address bar shows the URL '127.0.0.1:5500/index.html'. The page content includes a form with three items: 'Apple' with a checked checkbox, 'Banana' with an unchecked checkbox, and 'Cherry' with an unchecked checkbox. A large, semi-transparent 'GATE' watermark is overlaid diagonally across the image.


3.5 Input type: *Select*

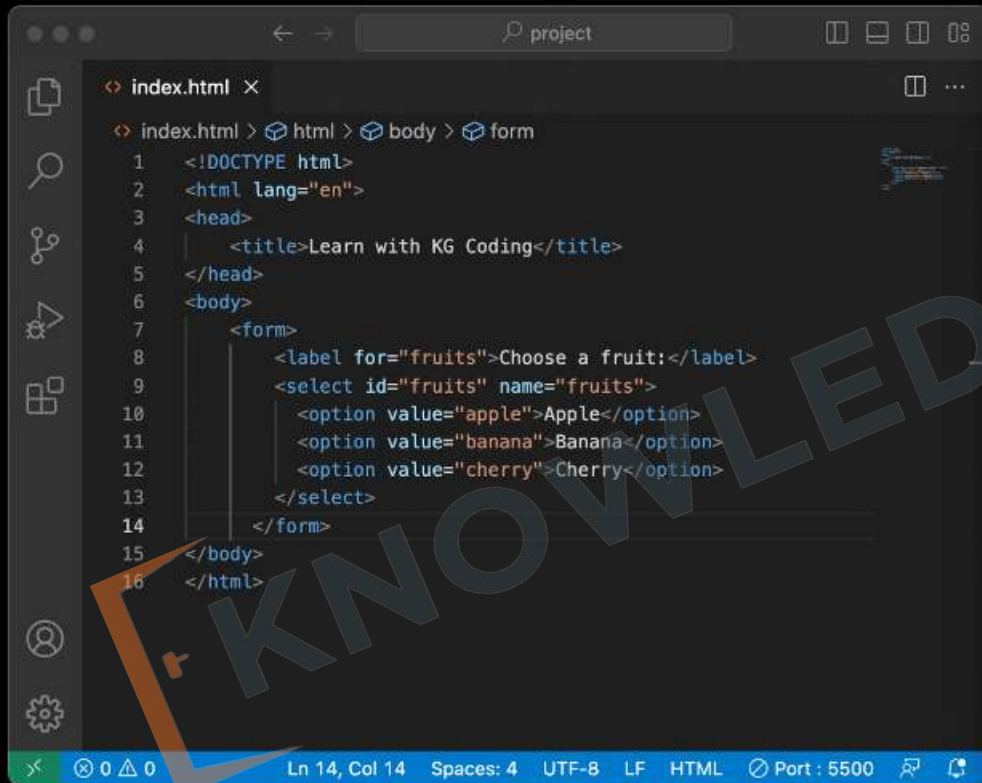


The screenshot shows a code editor with a dark theme. The file is named 'index.html'. The code is as follows:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <form>
8     <label for="fruits">Choose a fruit:</label>
9     <select id="fruits" name="fruits">
10      <option value="apple">Apple</option>
11      <option value="banana">Banana</option>
12      <option value="cherry">Cherry</option>
13    </select>
14  </form>
15 </body>
16 </html>
```

The status bar at the bottom indicates: Ln 14, Col 14 Spaces: 4 UTF-8 LF HTML Port : 5500.

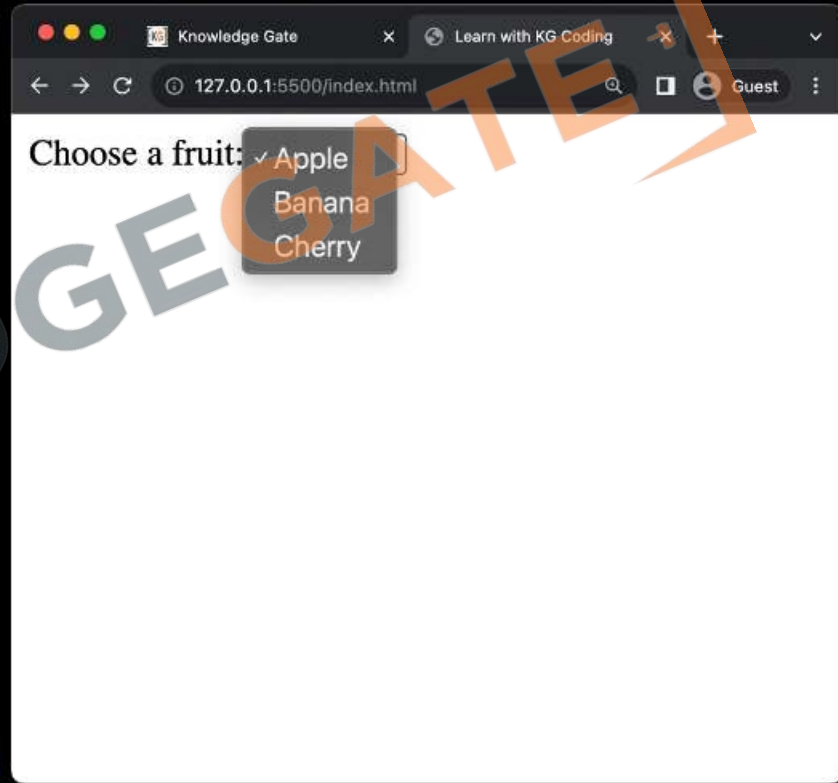


3.5 Input type: **TextArea**

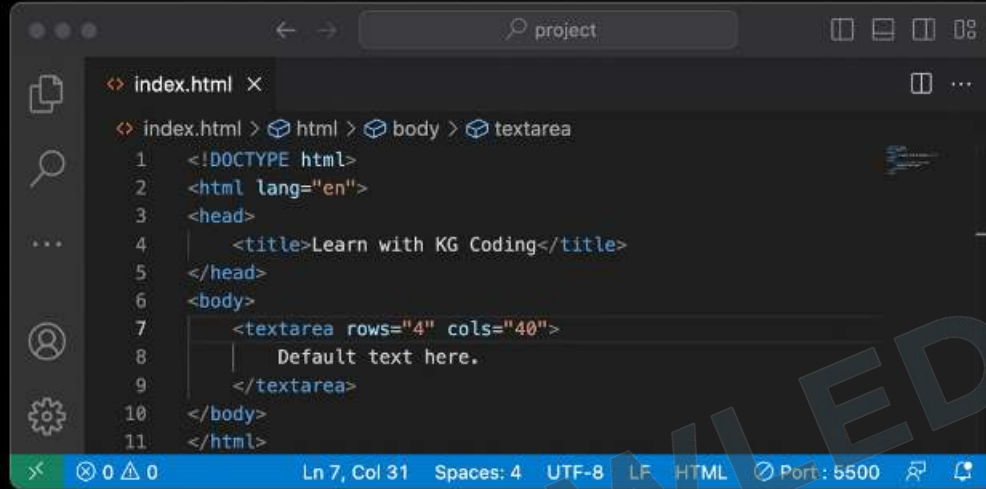

The screenshot shows a code editor with a file named 'index.html'. The code is as follows:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Learn with KG Coding</title>
5 </head>
6 <body>
7   <textarea rows="4" cols="40">
8     Default text here.
9   </textarea>
10 </body>
11 </html>
```

The status bar at the bottom indicates 'Ln 7, Col 31', 'Spaces: 4', 'UTF-8', 'LF', 'HTML', and 'Port: 5500'.

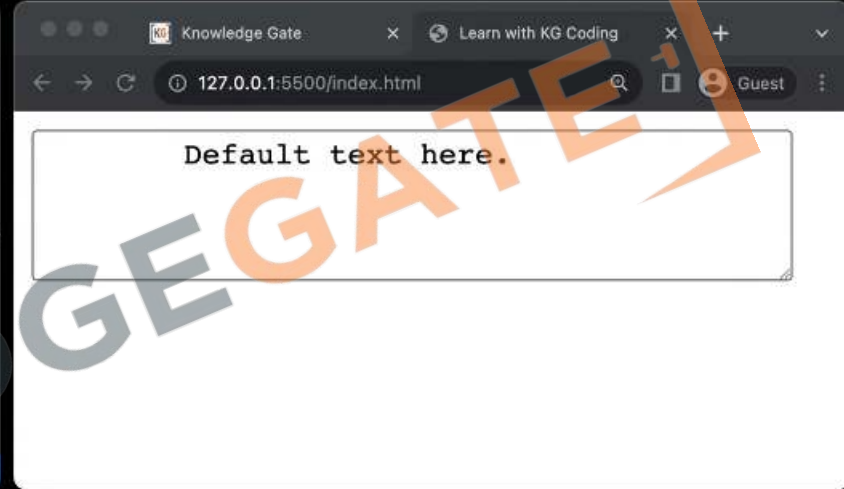


1. **Purpose:** `<textarea>` is used for multi-line text input in forms.
 1. **rows Property:** Specifies the visible number of lines in the textarea.
 2. **cols Property:** Sets the visible width measured in average character widths.
2. **Resizable:** Some browsers allow users to manually resize the textarea.

List, Tables & Forms


List, Tables & Forms



4.1 Using iFrames

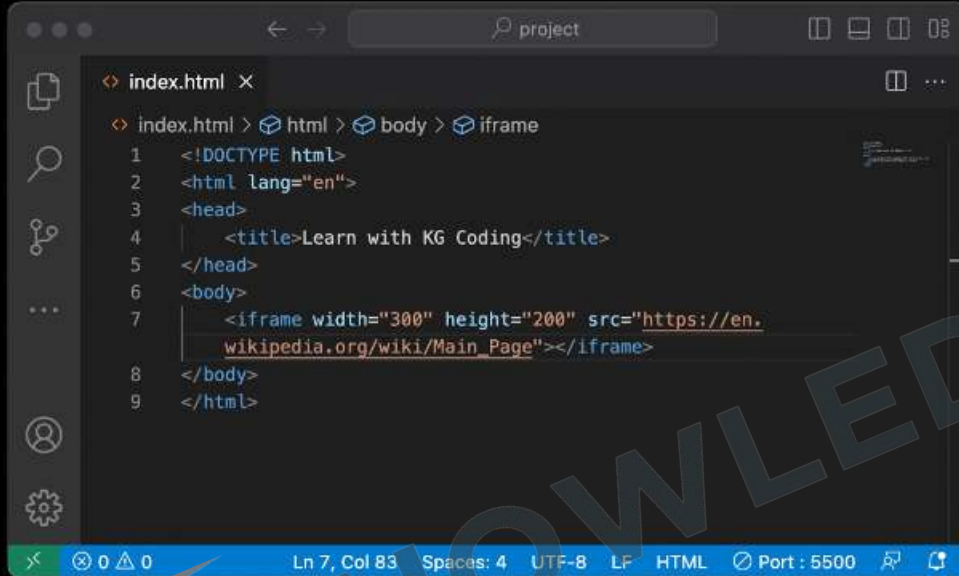

```
<?index.html X
<?index.html > html > body > iframe
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4  |   <title>Learn with KG Coding</title>
5  </head>
6  <body>
7  |   <iframe width="300" height="200" src="https://en.
   |   wikipedia.org/wiki/Main_Page"></iframe>
8  </body>
9  </html>
```

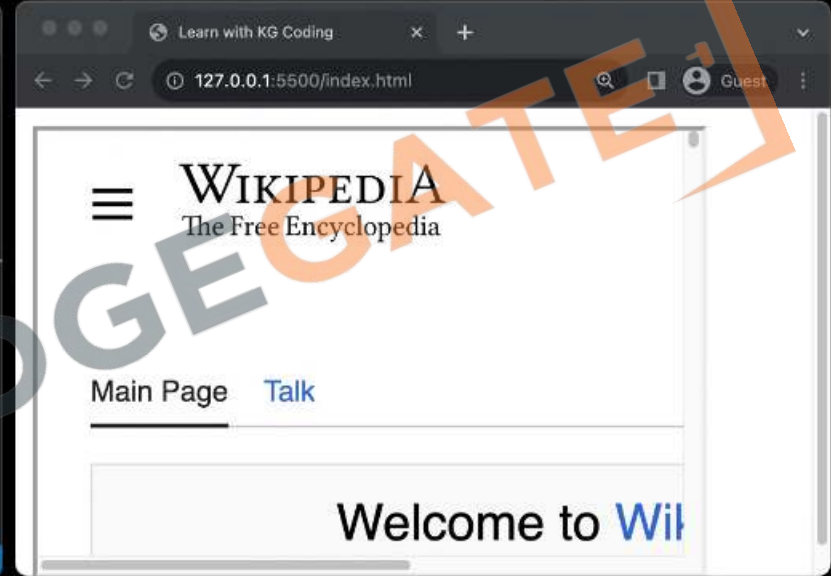

1. **Embedded Content:** Allows you to embed another webpage or multimedia content within a webpage.
2. **src Attribute:** Specifies the **URL** of the content to be embedded.
3. **Dimensions:** **Width** and **height** can be set using width and height attributes.

Level 5 Revision

List, Tables & Forms

1. List Tag

1. Ordered Lists
2. Types of Ordered Lists
3. Unordered Lists

2. Table Tag

1. `<tr>`, `<td>`, `<th>` tags
2. Captions
3. Col spans

3. Forms

1. Input tag
2. Action Attributes
3. Name and Value Property
4. Label Tag
5. Exploring Types

4. iFrame Tag


1. Using iFrames



Project Level 5

List, Tables & Forms

1. Create a **page** with all type of ordered list and one unordered list.
2. Create a **table** with headings, captions and a few rows. One of heading should take at least 3 columns.
3. Create a **contact me** form with relevant details for your resume website.
4. Use iFrame to **add this video** to your page.

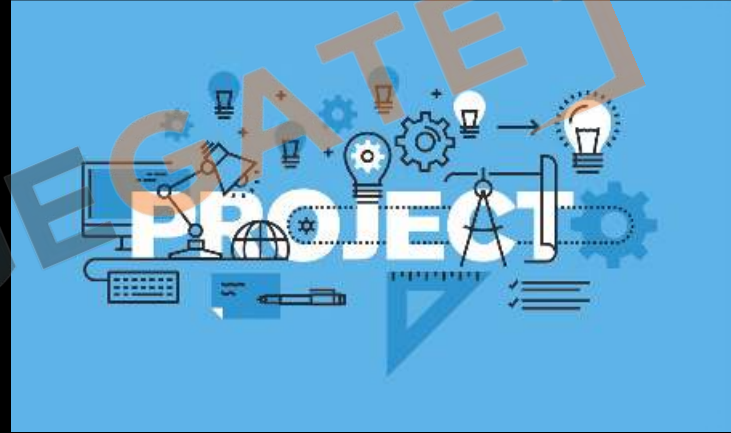

KG Coding

Some Other One shot Video Links:

- [Complete HTML](#)
- [Complete CSS](#)
- [Complete JavaScript](#)
- [Complete React and Redux](#)
- [One shot University Exam Series](#)



<http://www.kgcoding.in/>

Our  Channels

[KG Coding Android App](#)



[KG Coding](#)



[Knowledge GATE](#)



[KG Placement Prep](#)



[Sanchit Socket](#)

Level Bonus

Github Pages & CodeSpace

1. Github

1. What is Version Control
2. What is Git and GitHub
3. Account Creation
4. Creating a Repo
5. Creating a Codespace
6. Creating a Github page
7. Publishing our project

2. FrameWorks

1. React
2. Angular
3. Vue



Level Bonus


Github Pages & CodeSpace



1. GitHub

1.1 What is Version Control

1. **Definition:** A system to track changes in files over time.
2. **Types:** Centralized (like **SVN**) and Distributed (like **Git**).
3. **Purpose:** Helps in teamwork and fixes mistakes.
4. **Snapshots:** Each 'commit' saves a file version.
5. **Branching:** Lets you work on different tasks separately.
6. **Merge:** Combines changes from different people.
7. **Undo:** Easy to revert to older file versions.

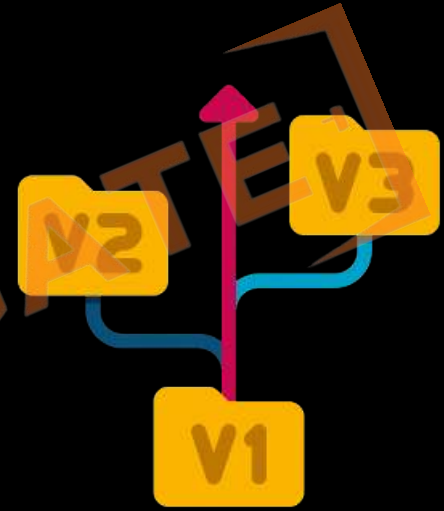

1.2 What is Git and GitHub

What is Git?

- **Definition:** A software tool that tracks changes in code, enabling collaboration and version control.
- **Commit:** Records a snapshot of file changes.
- **Branch:** Allows separate paths of development.
- **Merge:** Combines changes from different branches.




What is GitHub?

- **Definition:** A web service for hosting and collaborating on Git repositories.
- **Fork:** Creates a personal copy of another user's repository.
- **Pull Request:** A way to propose changes to existing code.
- **Issues:** Used for tracking bugs and feature ideas.



1.3 Account Creation

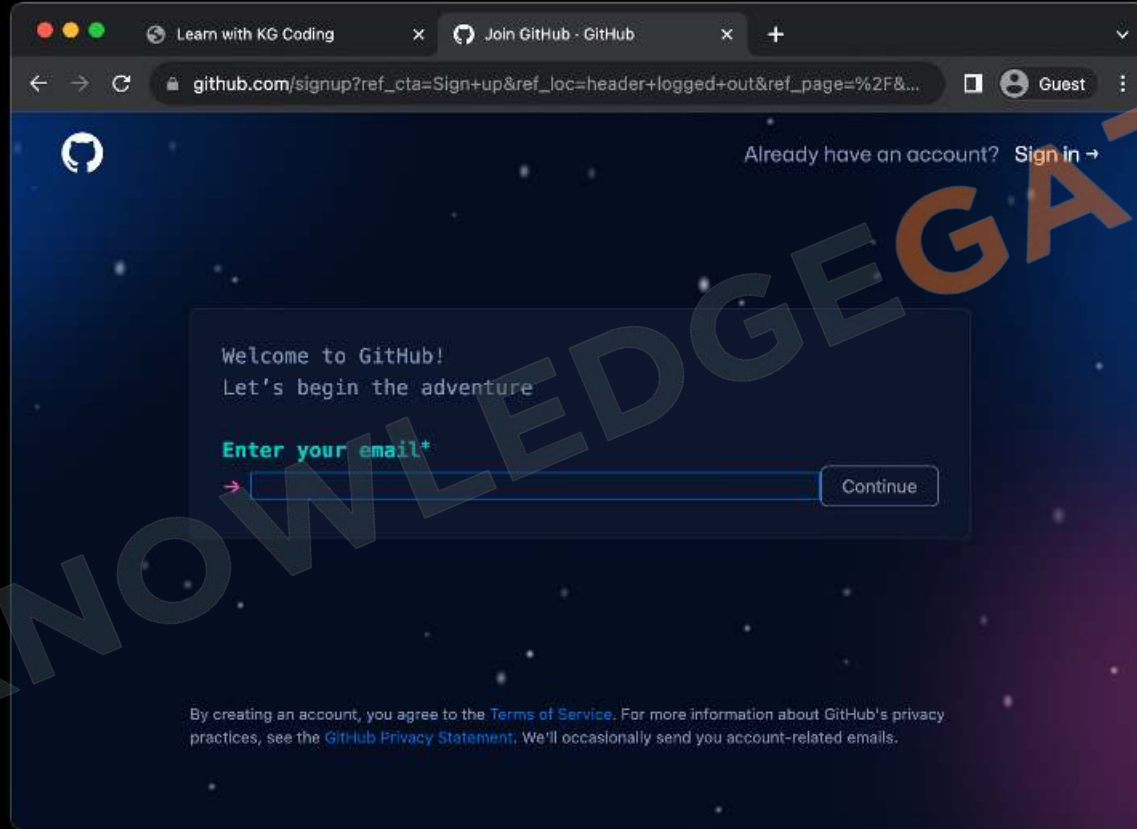

The screenshot shows a web browser window with two tabs: "Learn with KG Coding" and "Join GitHub - GitHub". The address bar shows the URL "github.com/signup?ref_cta=Sign+up&ref_loc=header+logged+out&ref_page=%2F&...". The page features the GitHub logo and a "Sign in" link for existing users. A central form titled "Welcome to GitHub! Let's begin the adventure" prompts the user to "Enter your email*" with a text input field and a "Continue" button. At the bottom, a disclaimer states that by creating an account, the user agrees to the Terms of Service and will receive occasional emails.

Learn with KG Coding x Join GitHub - GitHub +

github.com/signup?ref_cta=Sign+up&ref_loc=header+logged+out&ref_page=%2F&... Guest

Already have an account? [Sign in](#)

Welcome to GitHub!
Let's begin the adventure

Enter your email*

→ Continue

By creating an account, you agree to the [Terms of Service](#). For more information about GitHub's privacy practices, see the [GitHub Privacy Statement](#). We'll occasionally send you account-related emails.

1.4 Creating a Repo

github.com/new

Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository.](#)

Required fields are marked with an asterisk (*).

Owner * / Repository name *

Great repository names are short and memorable. Need inspiration? How about [upgraded-parakeet](#)?

Description (optional)

☒ **Public**
Anyone on the internet can see this repository. You choose who can commit.

☐ **Private**
You choose who can see and commit to this repository.

Initialize this repository with:

☐ **Add a README file**
This is where you can write a long description for your project. [Learn more about READMEs.](#)

☐ **Add .gitignore**
[gitignore template](#) [None](#)

Choose which files not to track from a list of templates. [Learn more about ignoring files.](#)


☐ **Choose a license**
[License](#) [None](#)

A license tells others what they can and can't do with your code. [Learn more about licenses.](#)


① You are creating a public repository in your personal account.

[Create repository](#)


1.5 Creating a CodeSpace

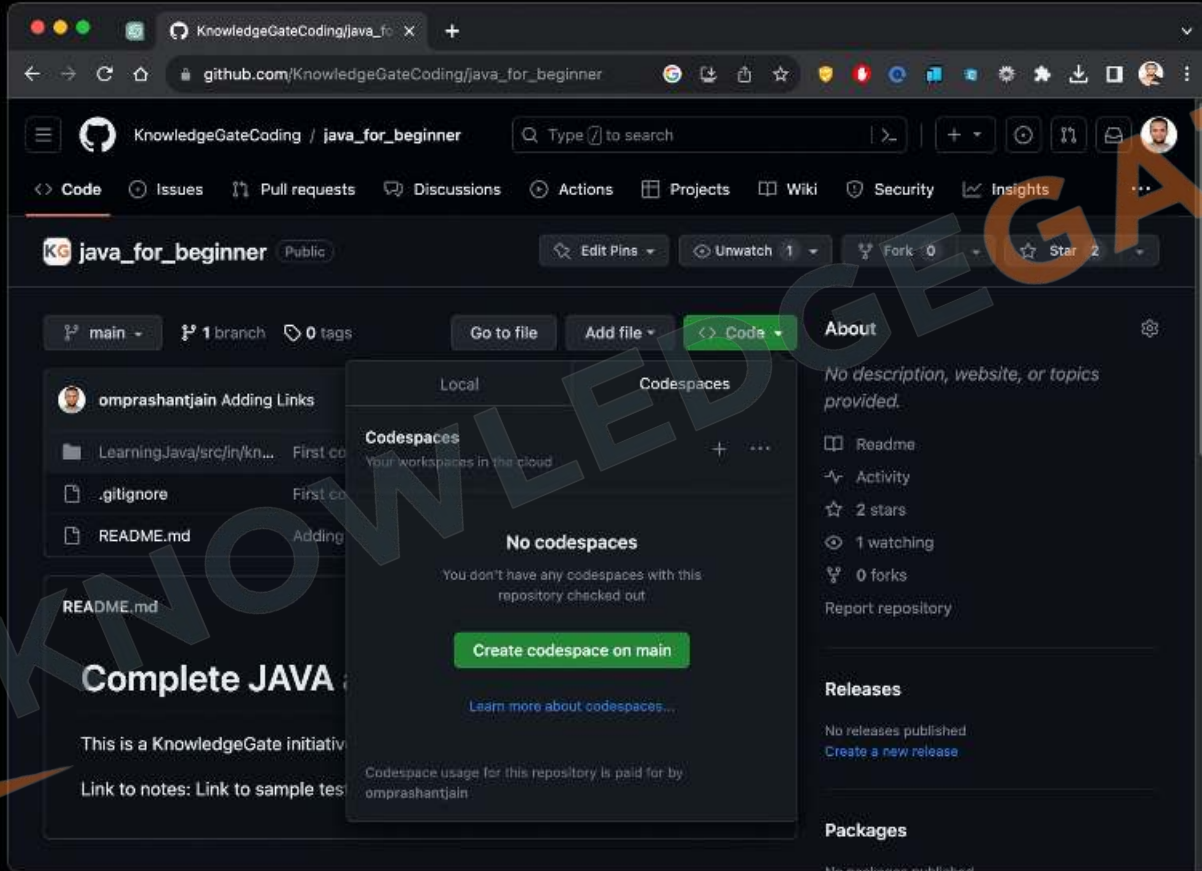

1.6 Creating a Github Page

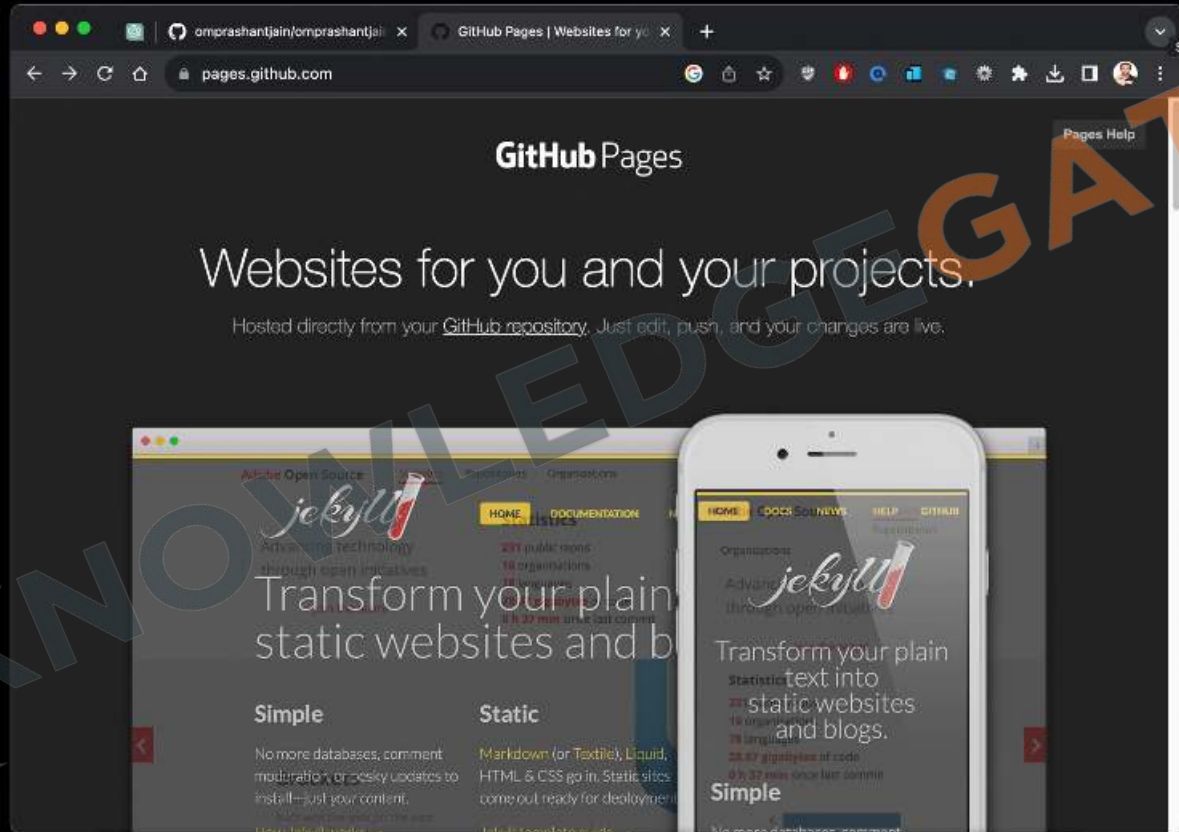

1.7 Publishing our Project

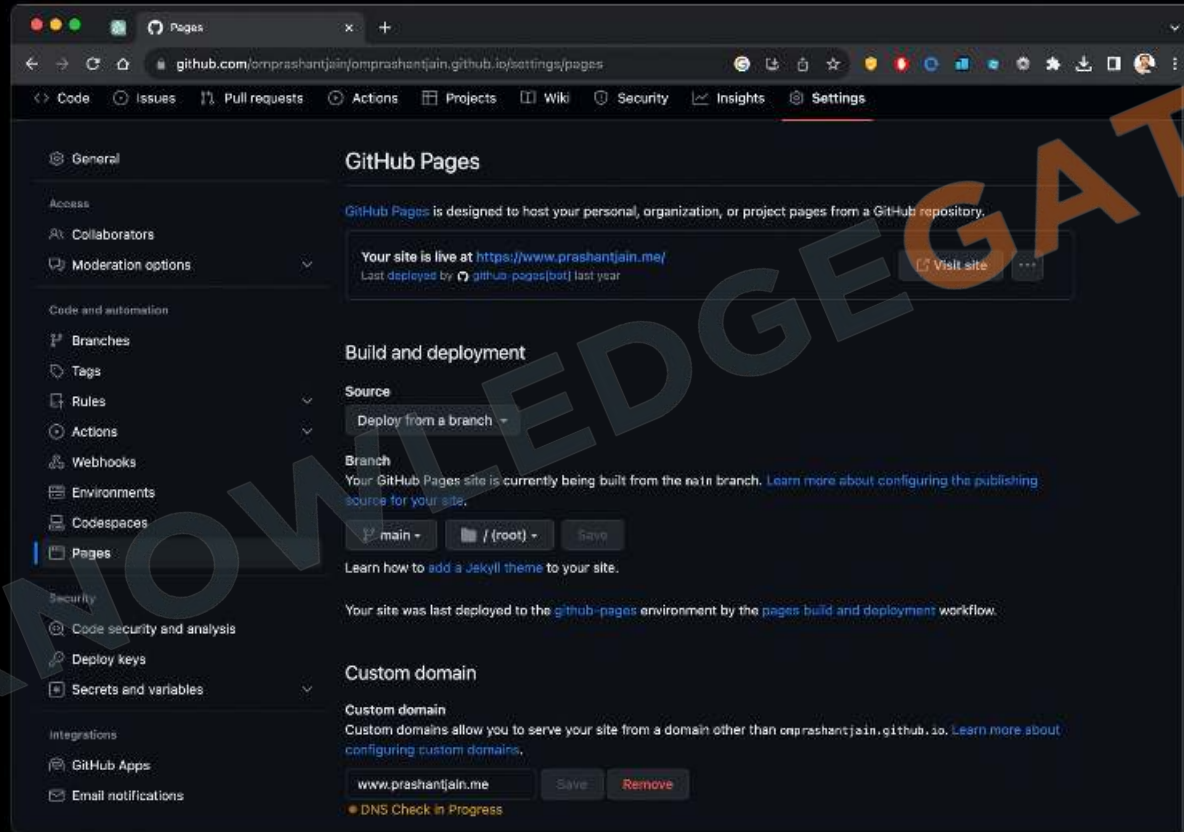

Level Bonus


Github Pages & CodeSpace



2.
Frameworks

3.1 ReactJS

1. **Definition:** A tool for making websites interactive.
2. **Components:** Reusable pieces for building a webpage.
3. **Virtual DOM:** Makes websites faster by updating only what's needed.
4. **JSX:** A special way to write code that looks like **HTML**.
5. **State:** Keeps track of changes on the webpage.
6. **Props:** Shares information between different parts of a webpage.

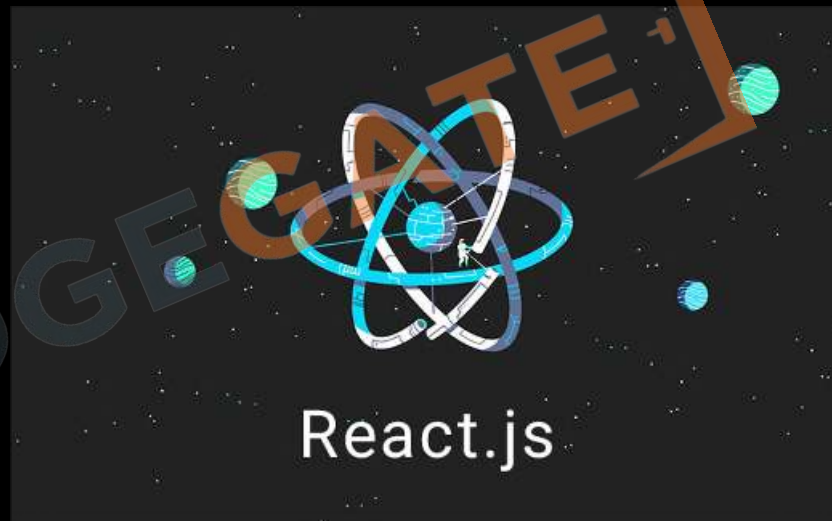

3.2 AngularJS

1. **Definition:** A framework for building web applications, developed by Google.
2. **Two-Way Data Binding:** Updates both the view and the model simultaneously.
3. **Directives:** Custom HTML tags for added functionality.
4. **Dependency Injection:** Automatically manages how parts of the app work together.
5. **Controllers:** Manages the data for a specific part of the webpage.
6. **SPA Support:** Good for Single Page Applications where the page doesn't reload.



ANGULAR

3.3 VueJS

1. **Definition:** A JavaScript framework for creating web interfaces.
2. **Components:** Small, reusable parts for building a website.
3. **Reactivity:** Automatically updates the webpage when data changes.
4. **Directives:** Special tokens in HTML for added functionality.
5. **Vuex:** Helps manage shared data across the site.
6. **Single-File Components:** Keeps template, script, and style in one file.



Level Bonus Revision

Github Pages & CodeSpace

1. Github

1. What is Version Control
2. What is Git and GitHub
3. Account Creation
4. Creating a Repo
5. Creating a Codespace
6. Creating a Github page
7. Publishing our project

2. FrameWorks


1. React
2. Angular
3. Vue



Level Bonus Project

Github Pages & CodeSpace

1. Create a Github account if you don't have one.
2. Create a repo for the project you have done till now.
3. Create a Codespace and make changes.
4. Publish it using Github pages.

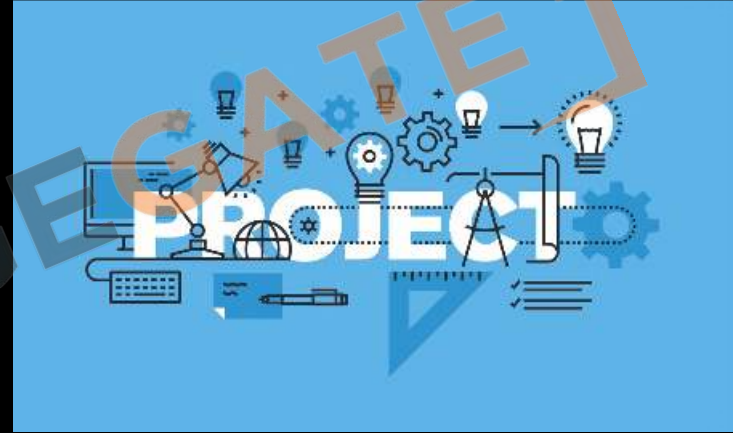

KG Coding

Some Other One shot Video Links:

- [Complete HTML](#)
- [Complete CSS](#)
- [Complete JavaScript](#)
- [Complete React and Redux](#)
- [One shot University Exam Series](#)



<http://www.kgcoding.in/>

Our  Channels

[KG Coding Android App](#)



[KG Coding](#)



[Knowledge GATE](#)



[KG Placement Prep](#)




[Sanchit Socket](#)

Major Project

Idea

1. Create your **Resume** or Portfolio website.
2. Create a repo in **Github**.
3. Publish it on **Github** pages.
4. Add the link to your **resume**.
5. Add the link in the **comment** section.

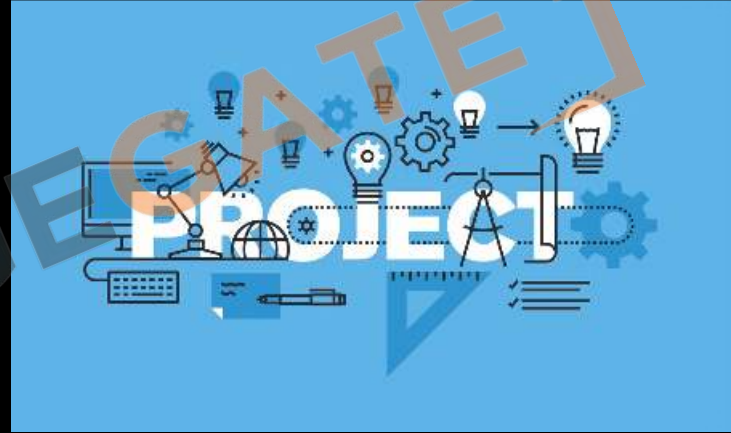

KG Coding

Some Other One shot Video Links:

- [Complete HTML](#)
- [Complete CSS](#)
- [Complete JavaScript](#)
- [Complete React and Redux](#)
- [One shot University Exam Series](#)



<http://www.kgcoding.in/>

Our  Channels

[KG Coding Android App](#)



[KG Coding](#)



[Knowledge GATE](#)



[KG Placement Prep](#)



[Sanchit Socket](#)