1) An EXACT copy of your source code used in **Run#2 ONLY**

```
; Extending the first single-server M1Q queuing model
; Kanageshwaran Dhakshinamoorthy
; CSC148 student, Fall 2025
; This model extends SAMPLE1.GPS: adds a second transaction for periodic
; cleaning and creates histograms of customer residence time and service queue length.
; Time unit (t.u.) = 1 minute
; Exact START command used: START 50
; Model termination condition: simulation ends when the 50th cleaning
; transaction completes, i.e., each TERMINATE 1 in Clean reduces tc by 1, and when tc
reaches 0 the run stops.

CLEAR

IAMEAN      EQU   10
IAHALF      EQU   4
SVCMEAN     EQU   9
SVCHALF     EQU   3
CLEANPER    EQU   960
CLEANDUR    EQU   120
SEED0 EQU   123457

RMULTSEED0


RESTIME     TABLE QT$CJW,5,5,20
WAITCOUNT   TABLE Q$CJCOUNT,0,1,15

; --- CUSTOMER TRANSACTION (Cj) ---
CJ      GENERATE    (EXPONENTIAL(1,0,IAMEAN))
        QUEUE CJW
        QUEUE CJCOUNT
        SEIZE BARBER
        TABULATE WAITCOUNT
        DEPART CJCOUNT
        ADVANCE SVCMEAN,SVCHALF
        TABULATE RESTIME
        DEPART CJW
        RELEASE BARBER
        TERMINATE

; --- CLEANING TRANSACTION ---
CLEAN       GENERATE CLEANPER,0,CLEANPER
```

ADVANCE CLEANDUR,0
TERMINATE 1


---


2) Filled-out **Table 1** (see below) with results from the 2 runs

Run #	RN1 seed (use any 6-digit unsigned integer)	max(LQ)	ρ where 0 <= ρ <= 1.0 i.e. fraction, not % (Labeled UTIL. in .rpt file)	avg(W)	Run finish time	Ai distribution THESE VALUES ARE PRE-DEFINED BY INSTRUCTOR
1	123457	4	0.894	11.555	48120.000	uniform in interval [6,14]
2	Same seed as Run#1	27	0.900	60.684	48120.000	exponential, mean 10

---

3) The 2 gpss-generated histogram bar charts corresponding to the QUEUE/DEPART pairs for Run#2 ONLY.

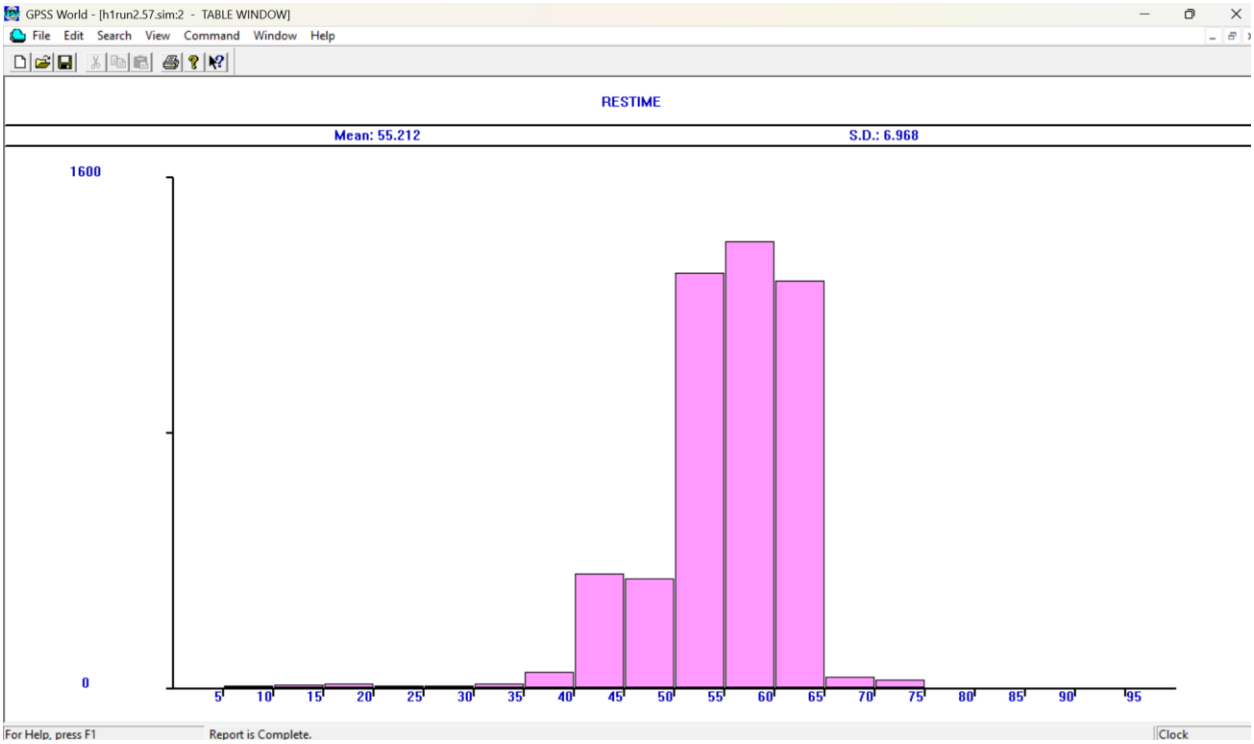

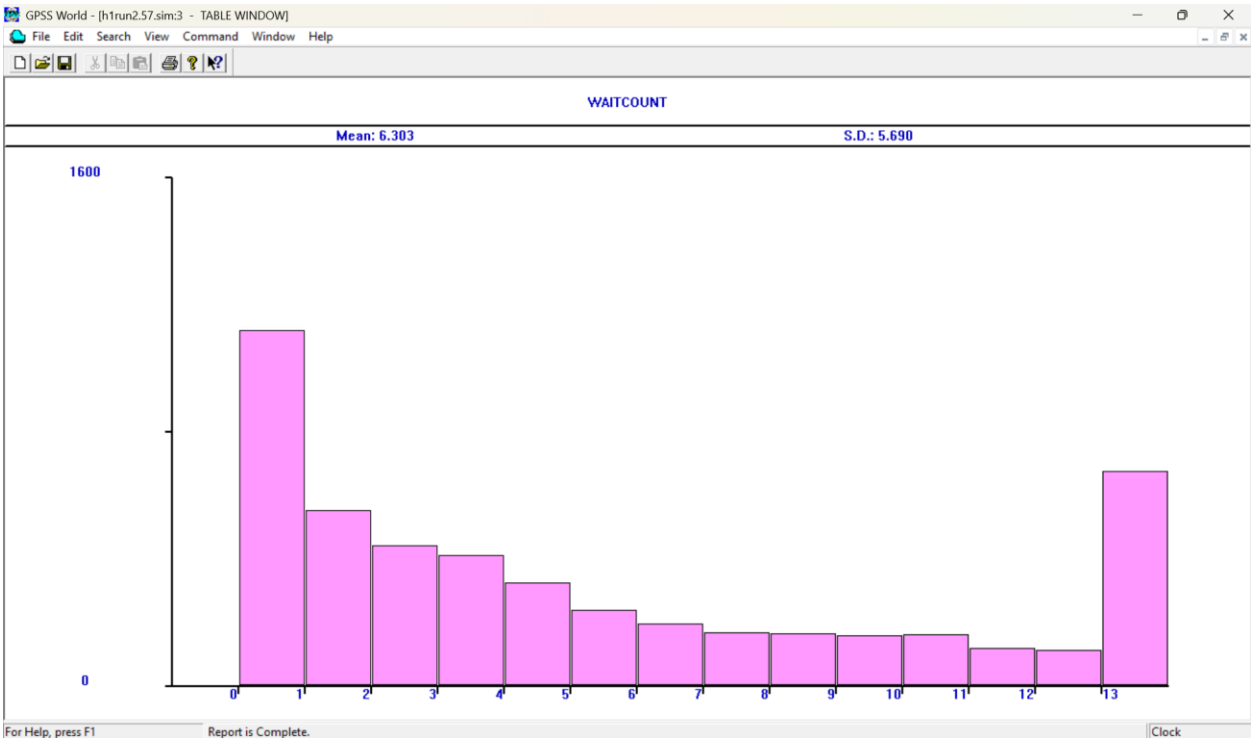
GPSS World - [h1run2.57.sim:3 - TABLE WINDOW]
File Edit Search View Command Window Help
WAITCOUNT
Mean: 6.303
S.D.: 5.690
1600
0
0 1 2 3 4 5 6 7 8 9 10 11 12 13
For Help, press F1
Report is Complete.
Clock