


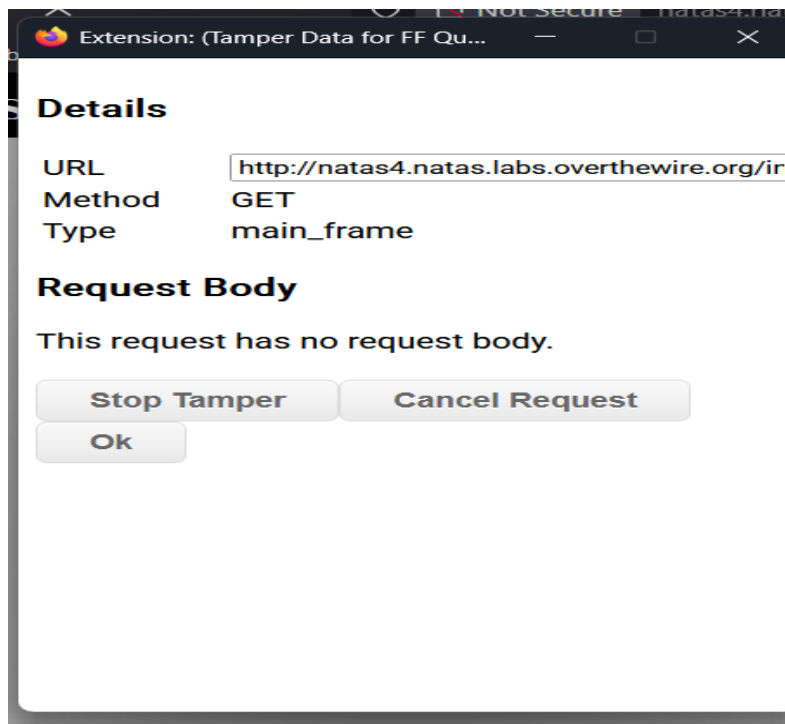

Details

URL
Method GET
Type main_frame

Headers

Name	Value
Host	natas4.natas.labs.overthev
User-Agent	Mozilla/5.0 (Windows NT 1
Accept	text/html,application/xhtmll
Accept-Language	en-US,en;q=0.5
Accept-Encoding	gzip, deflate
Authorization	Basic bmF0YXM0OIFyeVpY
Connection	keep-alive
Referer	http://natas4.natas.labs.ov
Upgrade-Insecure-Requests	1

Extension: (Tamper Data for FF Quantum) - Start Tamper Data — Mozilla Firefox

Listen for types

Type	Description
☐ beacon	Requests sent through the Beacon API.
☐ csp_report	Requests sent to the report-uri given in the Content-Security-Policy header, when an attempt to violate the policy is detected.
☐ font	Web fonts loaded for a @font-face CSS rule.
☐ image	Resources loaded to be rendered as image, except for imageset on browsers that support that type.
☐ imageset	Images loaded by a <picture> element or given in an element's srcset attribute.
☒ main_frame	Top-level documents loaded into a tab.
☐ media	Resources loaded by a <video> or <audio> element.
☐ object	Resources loaded by an <object> or <embed> element.
☐ object_subrequest	Requests sent by plugins.
☐ ping	Requests sent to the URL given in a hyperlink's ping attribute, when the hypelink is followed.
☐ script	Code that is loaded to be executed by a <script> element or running in a Worker.
☐ speculative	A TCP/TLS handshake made by the browser when it determines it will need the connection open soon.
☐ stylesheet	CSS stylesheets loaded to describe the representation of a document.
☐ sub_frame	Documents loaded into an <iframe> or <frame> element.
☐ web_manifest	Web App Manifests loaded for websites that can be installed to the homescreen.
☐ websocket	Requests initiating a connection to a server through the WebSocket API.
☐ xbl	XBL bindings loaded to extend the behavior of elements in a document.
☐ xml_dtd	DTDs loaded for an XML document.
☒ xmlhttprequest	Requests sent by an XMLHttpRequest object or through the Fetch API.
☐ xslt	XSLT stylesheets loaded for transforming an XML document.
☐ other	Resources that aren't covered by any other available type.

Tamper with requests who's URL matches: (.*?)

Tamper requests only from this tab: ☐

Start Tamper Data?