

# Programming Domains

---

- Scientific applications
  - Large numbers of floating point computations; use of arrays
  - Fortran
- Business applications
  - Produce reports, use decimal numbers and characters
  - COBOL
- Artificial intelligence
  - Symbols rather than numbers manipulated; use of linked lists
  - LISP
- Systems programming
  - Need efficiency because of continuous use
  - C
- Web Software
  - Eclectic collection of languages: markup (e.g., HTML), scripting (e.g., PHP), general-purpose (e.g., Java)

# Language Evaluation Criteria

---

- **Readability:** the ease with which programs can be read and understood
- **Writability:** the ease with which a language can be used to create programs
- **Reliability:** conformance to specifications (i.e., performs to its specifications)
- **Cost:** the ultimate total cost

# Evaluation Criteria: Readability

---

- Overall simplicity
  - A manageable set of features and constructs
  - Minimal feature multiplicity
  - Minimal operator overloading
- Orthogonality
  - A relatively small set of primitive constructs can be combined in a relatively small number of ways
  - Every possible combination is legal
- Data types
  - Adequate predefined data types
- Syntax considerations
  - Identifier forms: flexible composition
  - Special words and methods of forming compound statements
  - Form and meaning: self-descriptive constructs, meaningful keywords

# Evaluation Criteria: Writability

---

- Simplicity and orthogonality
  - Few constructs, a small number of primitives, a small set of rules for combining them
- Support for abstraction
  - The ability to define and use complex structures or operations in ways that allow details to be ignored
- Expressivity
  - A set of relatively convenient ways of specifying operations
  - Strength and number of operators and predefined functions

# Evaluation Criteria: Reliability

---

- Type checking
  - Testing for type errors
- Exception handling
  - Intercept run-time errors and take corrective measures
- Aliasing
  - Presence of two or more distinct referencing methods for the same memory location
- Readability and writability
  - A language that does not support “natural” ways of expressing an algorithm will require the use of “unnatural” approaches, and hence reduced reliability

# Evaluation Criteria: Cost

---

- Training programmers to use the language
- Writing programs (closeness to particular applications)
- Compiling programs
- Executing programs
- Language implementation system: availability of free compilers
- Reliability: poor reliability leads to high costs
- Maintaining programs

# Evaluation Criteria: Others

---

- Portability
  - The ease with which programs can be moved from one implementation to another
- Generality
  - The applicability to a wide range of applications
- Well-definedness
  - The completeness and precision of the language's official definition

# Influences on Language Design

---

- Computer Architecture
  - Languages are developed around the prevalent computer architecture, known as the *von Neumann* architecture
- Program Design Methodologies
  - New software development methodologies (e.g., object-oriented software development) led to new programming paradigms and by extension, new programming languages




# Computer Architecture Influence

---

- Well-known computer architecture: Von Neumann
- Imperative languages, most dominant, because of von Neumann computers
  - Data and programs stored in memory
  - Memory is separate from CPU
  - Instructions and data are piped from memory to CPU
  - Basis for imperative languages
    - Variables model memory cells
    - Assignment statements model piping
    - Iteration is efficient

# The von Neumann Architecture

---

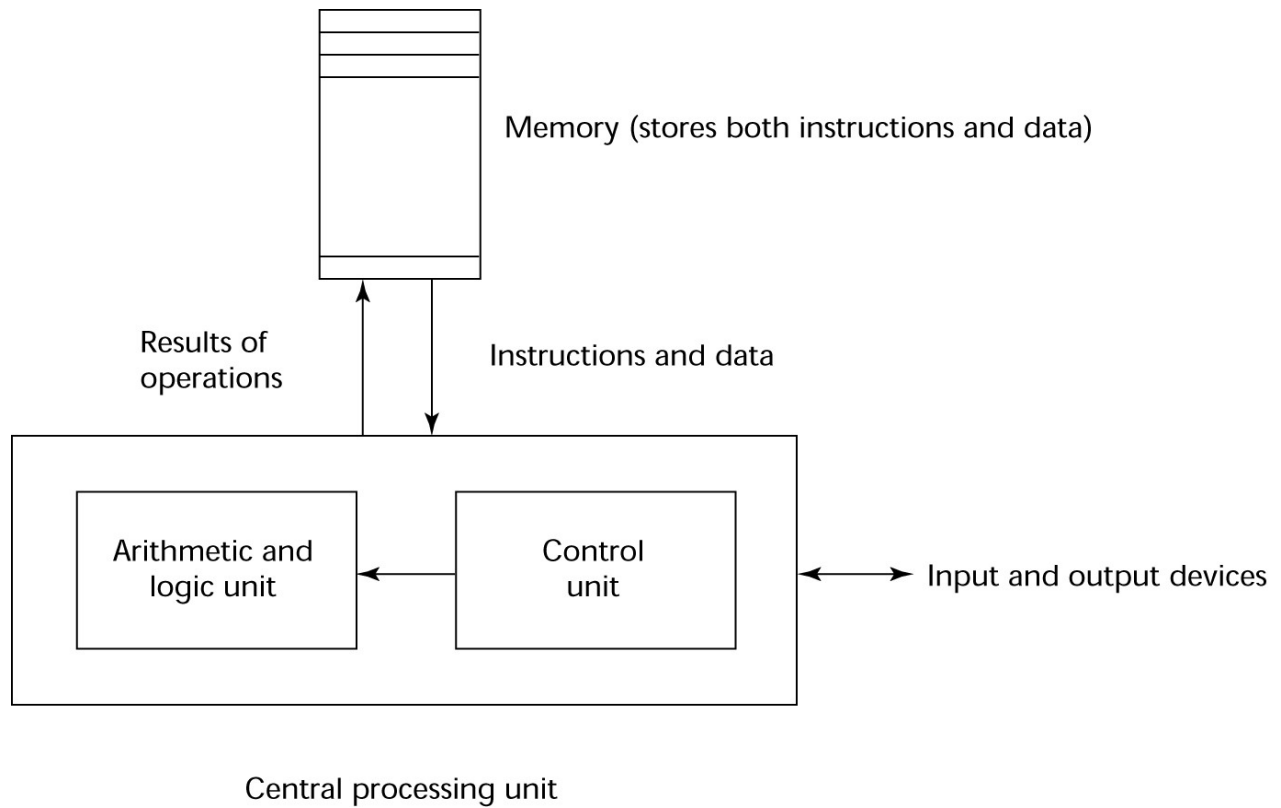

# The von Neumann Architecture

---

- Fetch–execute–cycle (on a von Neumann architecture computer)

```
initialize the program counter
```

```
repeat forever
```

```
    fetch the instruction pointed by the counter
```

```
    increment the counter
```

```
    decode the instruction
```

```
    execute the instruction
```

```
end repeat
```

# Language Categories

---

- Imperative
  - Central features are variables, assignment statements, and iteration
  - Include languages that support object-oriented programming
  - Include scripting languages
  - Include the visual languages
  - Examples: C, Java, Perl, JavaScript, Visual BASIC .NET, C++
- Functional
  - Main means of making computations is by applying functions to given parameters
  - Examples: LISP, Scheme, ML, F#
- Logic
  - Rule-based (rules are specified in no particular order)
  - Example: Prolog
- Markup/programming hybrid
  - Markup languages extended to support some programming
  - Examples: JSTL, XSLT

# Language Design Trade-Offs

---

- Reliability vs. cost of execution

- Example: Java demands all references to array elements be checked for proper indexing, which leads to increased execution costs

- Readability vs. writability

Example: APL provides many powerful operators (and a large number of new symbols), allowing complex computations to be written in a compact program but at the cost of poor readability

- Writability (flexibility) vs. reliability

- Example: C++ pointers are powerful and very flexible but are unreliable

# Implementation Methods

---

- **Compilation**
  - Programs are translated into machine language; includes JIT systems
  - Use: Large commercial applications
- **Pure Interpretation**
  - Programs are interpreted by another program known as an interpreter
  - Use: Small programs or when efficiency is not an issue
- **Hybrid Implementation Systems**
  - A compromise between compilers and pure interpreters
  - Use: Small and medium systems when efficiency is not the first concern

# Layered View of Computer

The operating system and language implementation are layered over machine interface of a computer

