

EXPERIMENT NO 7

Name: Kanhaiya Tyagi

PRN : 25070521157

7.1.1] Inverted Star Pattern

Algorithm

Step 1: Start

Step 2: Read an integer value n from the user.


Step 3: Initialize a loop from $i = n$ down to 1 (decreasing by 1 each time).

Step 4: For each value of i, print i number of * (stars).

Step 5: Repeat Step 4 until the loop ends (when i becomes 0).

Step 6: Stop

Flowchart

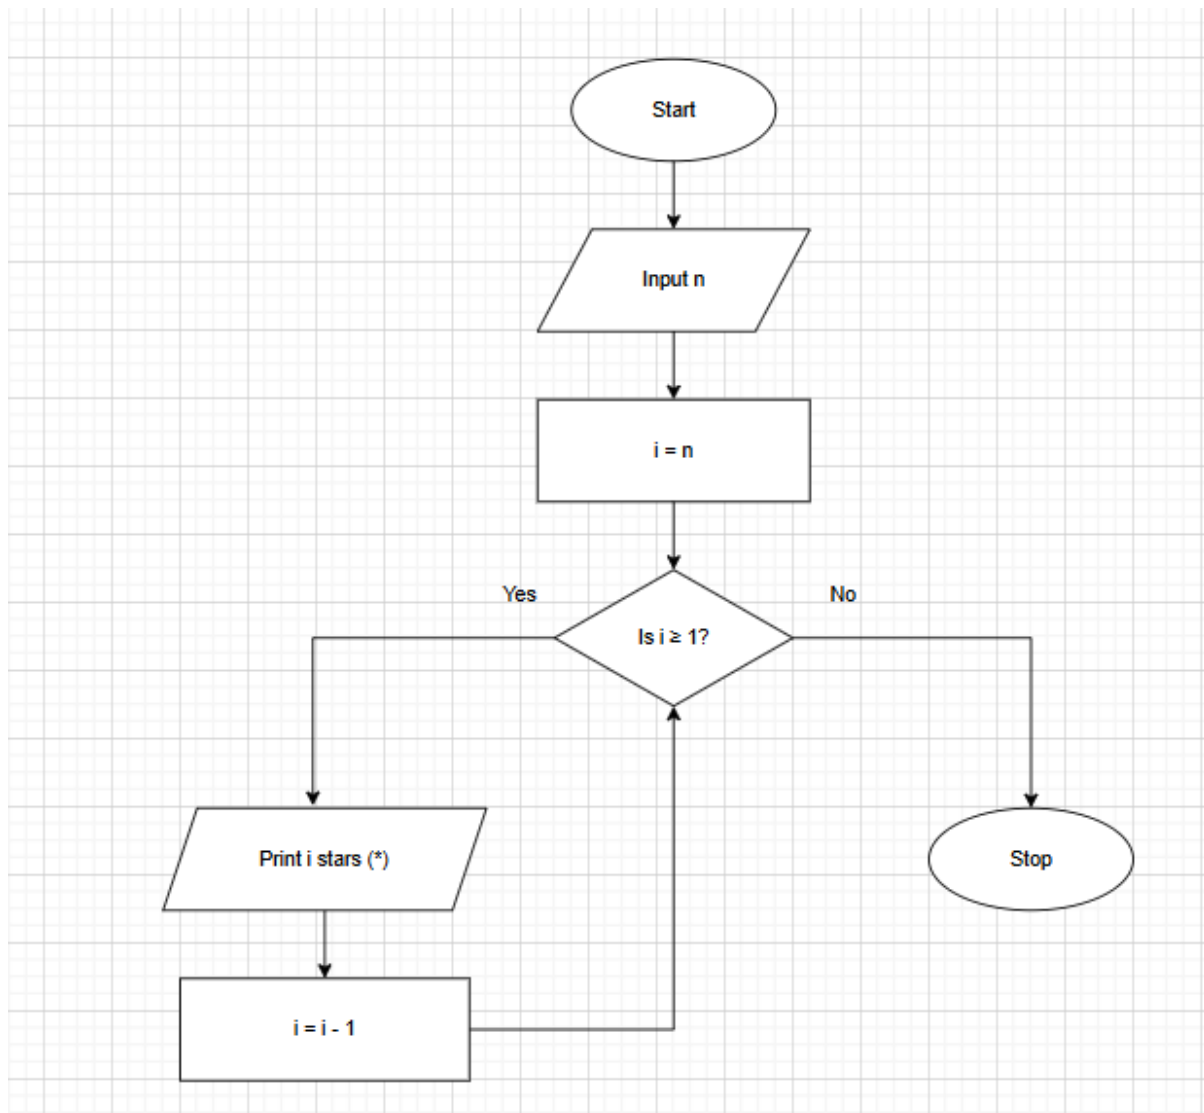

EXPERIMENT NO 7

PYTHON CODE

```
n = int(input())  
  
for i in range(n,0,-1):  
  
    print("*"*i)
```

EXCECUTION

The screenshot displays the CodeTANTRA web-based IDE interface. On the left, the problem description for '7.1.1. Inverted Star Pattern' is shown, including the task, constraints, and input format. The main editor on the right contains the Python code for printing the pattern. Below the code editor, the execution results are displayed, showing that 3 out of 3 test cases passed. The output for Test case 1 is shown as an inverted right-angled triangle of stars.

7.1.1. Inverted Star Pattern 05:14

Write a Python program to print an inverted right-angled triangle star pattern.

For a given number n , the program should print n rows of stars where the first row contains n stars, the second row contains $n - 1$ stars, and each subsequent row has one less star than the previous row, ending with 1 star in the last row.

All rows should be left-aligned with no spaces between the stars.

Input Format:

- Single line contains an integer n representing the number of rows

Sample Test Cases +

starPrint.py Submit

```
1 n = int(input())  
2  
3 for i in range(n, 0, -1):  
4     print('*' * i)
```

Average time: 0.008 s (8.00 ms) Maximum time: 0.014 s (14.00 ms)

3 out of 3 shown test case(s) passed
3 out of 3 hidden test case(s) passed

Test case 1 14 ms Debug

Expected output	Actual output
3 *** ** *	3 *** ** *

Test case 2 ...

Terminal Test cases

< Prev Reset Submit Next >